



(a) policies as paths: $V_t(A) = Q_t(A) + \max_{A'} \{V_{t-1}(A') - \lambda \kappa(A', A)\}$

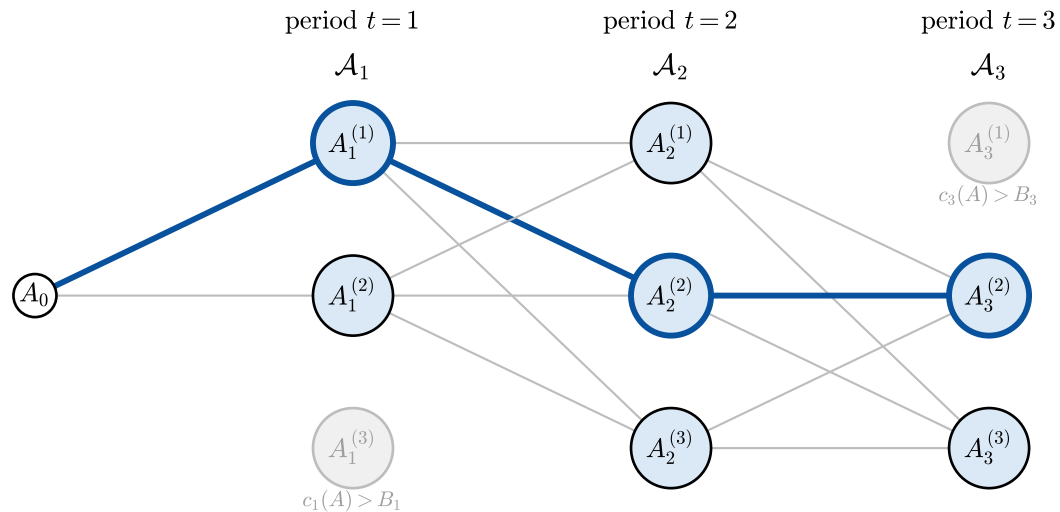

each edge carries weight $-\lambda \kappa(A_{t-1}, A_t)$; grey nodes are infeasible

(b) distance transform: n relaxations over $\{0, 1\}^n$

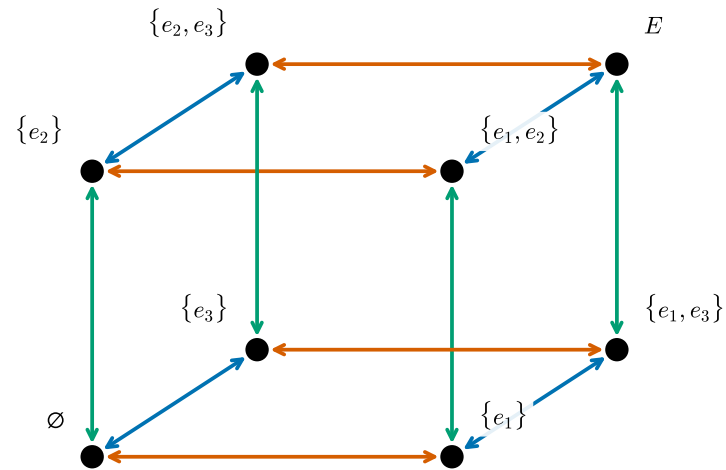

— pass $i = 1$: flip e_1 at cost $\lambda \kappa^\pm(e_1)$

— pass $i = 2$: flip e_2 at cost $\lambda \kappa^\pm(e_2)$

— pass $i = 3$: flip e_3 at cost $\lambda \kappa^\pm(e_3)$