

CONTENTS

[Callout Boxes](#)

[Regular callout](#)

[Warning callouts](#)

[Footnotes](#)

[Mermaid Diagrams](#)

[Default size](#)

[Height-capped diagram](#)

[Diagram with special characters](#)

[Syntax Highlighting](#)

[Tables](#)

[TOC Control](#)

[Inline Formatting](#)

[Nested Lists](#)

[Page Break](#)

[Section After Page Break](#)

Feature Test Document

This document exercises all features of md-to-pdf via front-matter configuration. Active front-matter: `toc: true` , `page_numbers: true` , `font_family: Georgia` , `code_font_family: Courier New` .

Callout Boxes

Regular callout

Note: This is a standard informational callout. Blue left border, light blue background.

Warning callouts

⚠ Warning: Triggered by the ⚠ symbol. Orange style.

Caution: Triggered by the word "Caution". Orange style.

Danger: Triggered by the word "Danger". Orange style.


Attention: Triggered by the word "Attention". Orange style.

Footnotes

This paragraph uses a footnote¹ . Multiple footnotes are supported² . They collect at the bottom with backlinks³ .

Mermaid Diagrams

Default size

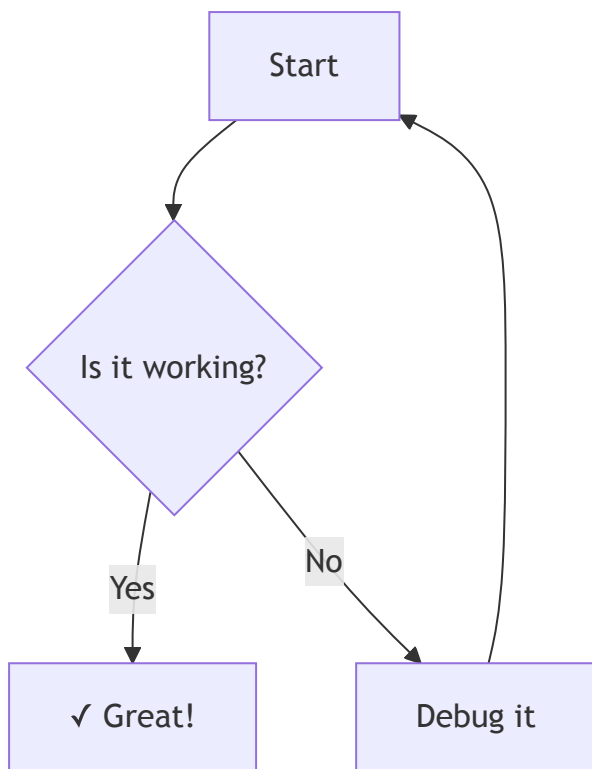

Height-capped diagram

The `height=60mm` attribute prevents this diagram from overflowing a page:

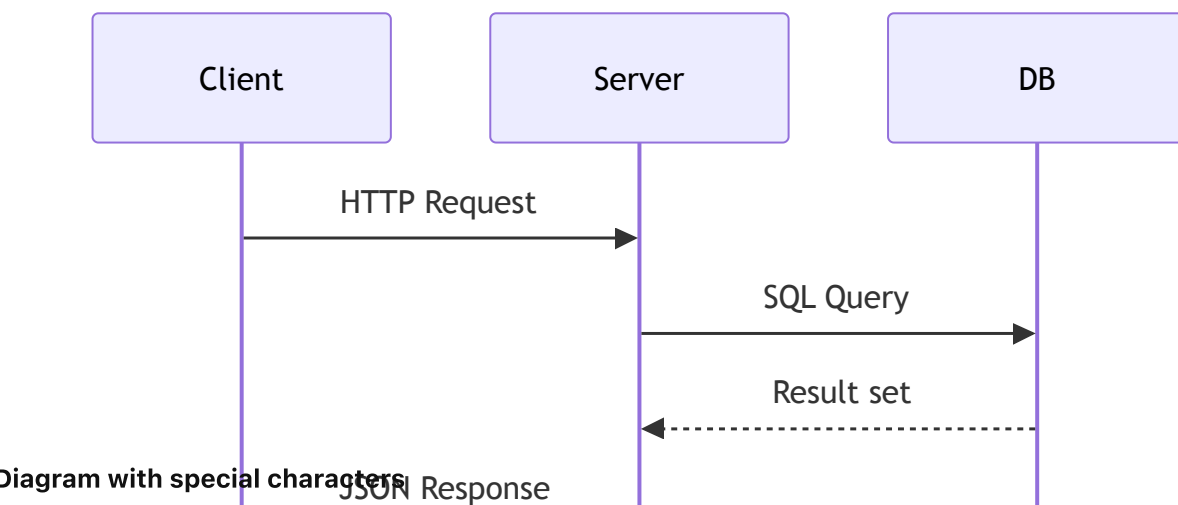


Diagram with special characters

Arrow labels with `>` and `<` "should render correctly" (HTML-unescape fix):



Syntax Highlighting

```

interface Config {
  font_family?: string;
  code_font_family?: string;
  toc?: boolean;
  page_numbers?: boolean;
}
  
```

```

}

const getHtml = (md: string, config: Config): string => {
  const { parse, headings } = getMarked(config);
  const body = parse(md);
  return `<!DOCTYPE html><body>${body}</body>`;
};

```

```

def slugify(text: str) -> str:
  return re.sub(r'\s+', '-', re.sub(r'[^w\s-]', '', text.lower()).strip())

```

Tables

Feature	CLI Flag	Front-matter	Default
Body font	<code>--font-family</code>	<code>font_family</code>	system-ui
Code font	<code>--code-font-family</code>	<code>code_font_family</code>	monospace
TOC force	<code>--toc</code>	<code>toc: true</code>	auto (≥4 headings)
TOC suppress	<code>--no-toc</code>	<code>toc: false</code>	—
Page numbers	<code>--page-numbers</code>	<code>page_numbers: true</code>	off

TOC Control

The TOC in this document is forced via `toc: true` in front-matter (there are 8 `##` headings, so auto-detection would trigger anyway, but this tests explicit control).

To suppress TOC: `md-to-pdf file.md --no-toc`

Inline Formatting

Text with **bold**, *italic*, ~~strikethrough~~, and `inline code`. Autolink: <https://github.com/simonhaenisch/md-to-pdf>

Nested Lists

- Item one
 - Nested A
 - Nested B
 - Deep nesting
- Item two
 1. First ordered
 2. Second ordered
 3. Third ordered

Page Break

Section After Page Break

This section starts on a new page due to the `<div class="page-break">` above.

This is a final regular callout on the second page.

The page number footer at the bottom is injected via `page_numbers: true` in front-matter — no manual `footerTemplate` required.

Footnotes

1. First footnote — appears at the bottom with a backlink arrow. [↩](#)
2. Second footnote — numbered automatically. [↩](#)
3. Third footnote — click ↩ to return to the reference. [↩](#)