

LAB

Use IBM Granite models for code generation and programming tasks

Contents

Introduction	2
Software requirements	2
Objective	2
Lab steps	2
Estimated duration to complete	2
Scenario.....	3
Background information	3
Challenge	3
Solution	3
Step 1: Create a GitHub account.....	4
Overview.....	4
Instructions.....	4
Step 2: Create a Replicate account	9
Overview.....	9
Instructions.....	9
Step 3: Sign up for Google Colab	15
Overview.....	15
Instructions.....	15
Step 4: Load the Jupyter notebook and initialize the model.....	19
Overview.....	19
Instructions.....	19
Step 5: Generate code using the IBM Granite model.....	27
Overview.....	27
Instructions.....	27
Conclusion.....	31

Introduction

In this lab, you'll use an IBM Granite model to generate Python code for a given scenario. You'll apply your knowledge of prompting techniques to define and execute prompts to generate code using IBM Granite.

Software requirements

To complete this lab, you'll need access to a Replicate account, which allows you to use AI models to perform tasks. You'll also need an API token from your Replicate account. An API token is like a digital key that lets the lab securely connect to your Replicate account. This token will be securely added to your Google Colab environment so the lab can run correctly.

While you don't need to know Python to follow along, familiarity with it might help you better understand the code created during the lab.

Objective

After completing this lab, you should be able to:

- Use IBM Granite models for code generation and programming tasks

Lab steps

This lab requires you to complete the following steps:

- Step 1: Create a GitHub account
- Step 2: Create a Replicate account
- Step 3: Sign up for Google Colab
- Step 4: Load the Jupyter notebook and initialize the model
- Step 5: Generate code using the IBM Granite model

Estimated duration to complete

30 minutes

Scenario

Background information

Reader's Verse is a local bookstore planning to build an online presence by creating a website that allows readers to search for and view its catalog and check availability before visiting the physical store. You are the web designer assigned to this project, and Reader's Verse is your client.

Challenge

The client expects you to complete the project quickly and requests a working prototype. You are already handling multiple projects and have limited time to work on this request. You have a basic understanding of programming and coding but lack the depth of expertise needed to create a website from a programming perspective.

Solution

You consider using IBM Granite models, which are designed for code generation, code explanation, and code editing tasks. These models are extensively trained with code written in 116 programming languages and are used for various code generation and related activities.


Step 1: Create a GitHub account

Overview


In this step, you'll set up a GitHub account to register for a Replicate account. GitHub is a platform that helps developers store, manage, and share code, while also supporting collaboration through tools like version control, bug tracking, and task management. This setup ensures you have access to the Replicate cloud environment needed to complete the lab efficiently.

Instructions

1. Go to the [GitHub](https://github.com) website to create a GitHub account and select **Sign up**.

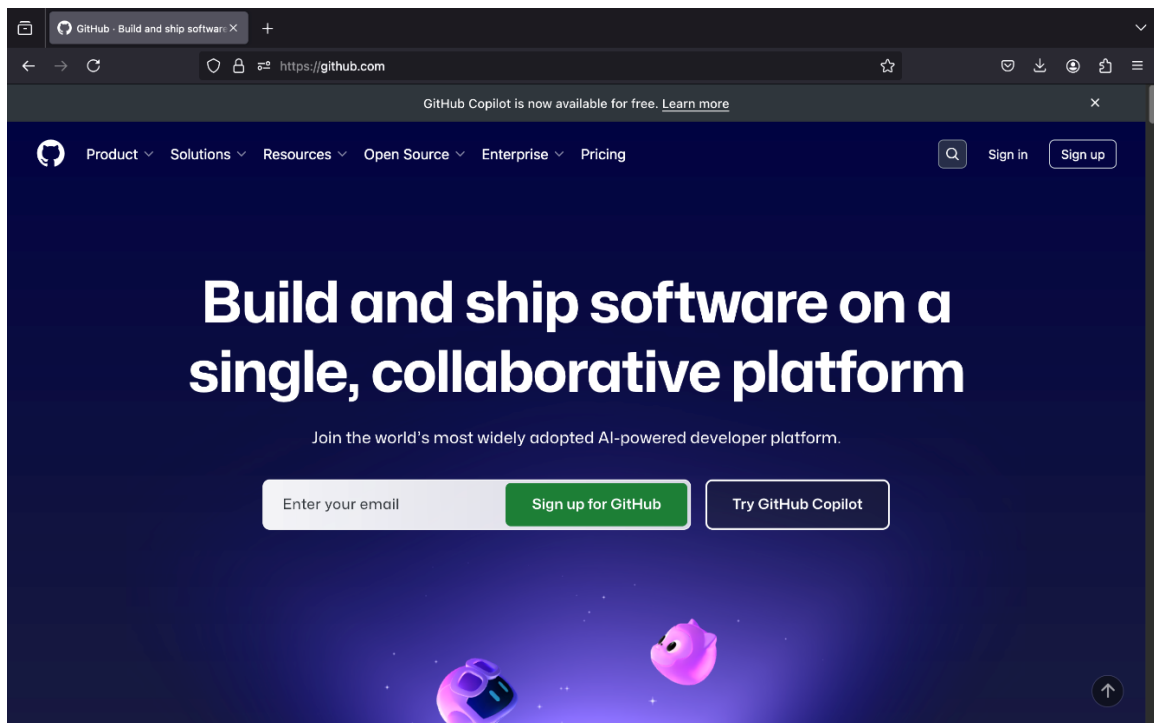


2. Type your details in the **Email**, **Password**, and **Username** fields. Then, select **Continue**.

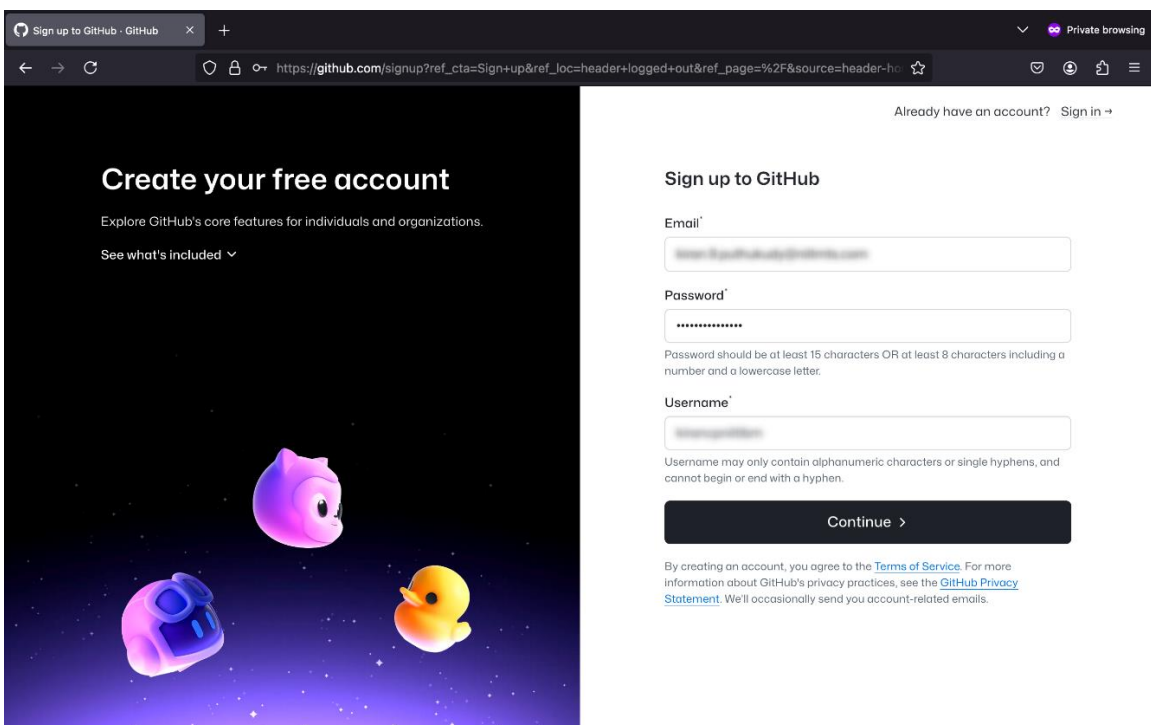


The screenshot shows the GitHub sign-up page in a browser. The left sidebar features the text "Create your free account" and "Explore GitHub's core features for individuals and organizations." The main content area is titled "Sign up to GitHub" and contains three input fields: "Email", "Password", and "Username". Below the "Password" field, there is a note: "Password should be at least 15 characters OR at least 8 characters including a number and a lowercase letter." Below the "Username" field, there is a note: "Username may only contain alphanumeric characters or single hyphens, and cannot begin or end with a hyphen." A "Continue" button is located below the form. At the bottom, there is a disclaimer: "By creating an account, you agree to the [Terms of Service](#). For more information about GitHub's privacy practices, see the [GitHub Privacy Statement](#). We'll occasionally send you account-related emails."

3. Select the **Visual puzzle** option to verify your account.

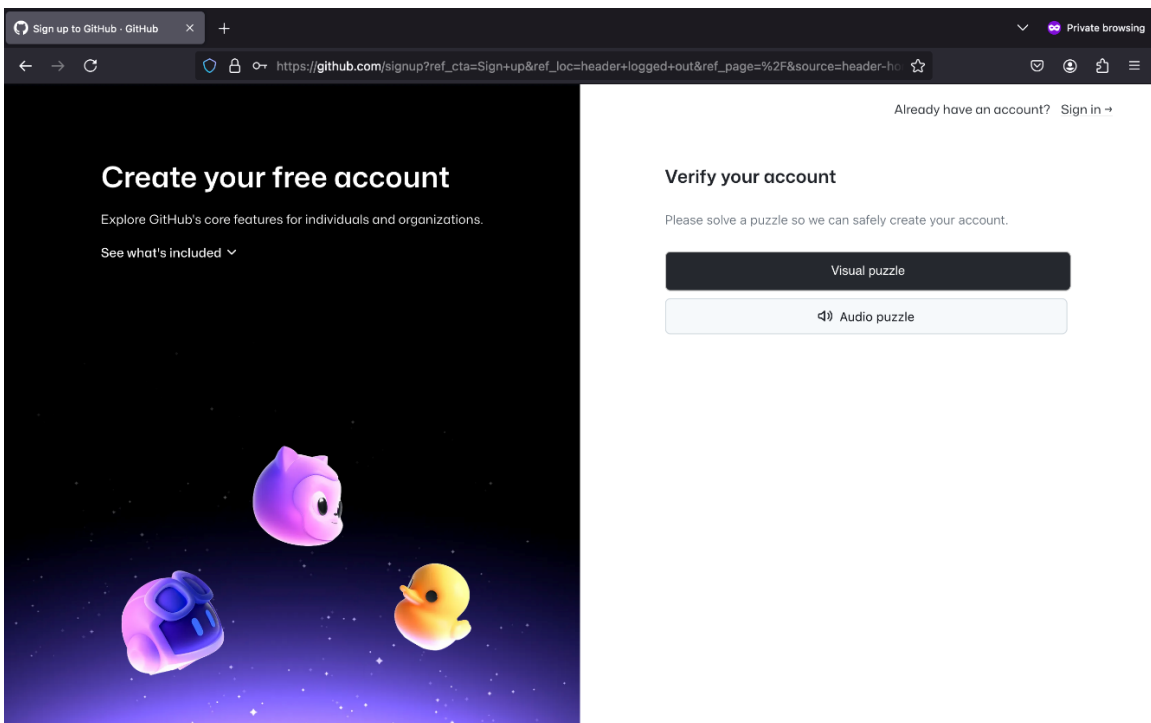


The screenshot shows the GitHub sign-up page in a browser. The left sidebar is identical to the previous screenshot. The main content area is titled "Verify your account" and contains the text "Please solve a puzzle so we can safely create your account." Below this text are two buttons: "Visual puzzle" and "Audio puzzle". The "Visual puzzle" button is highlighted.


4. Solve the puzzle to verify your account and select **Submit**.

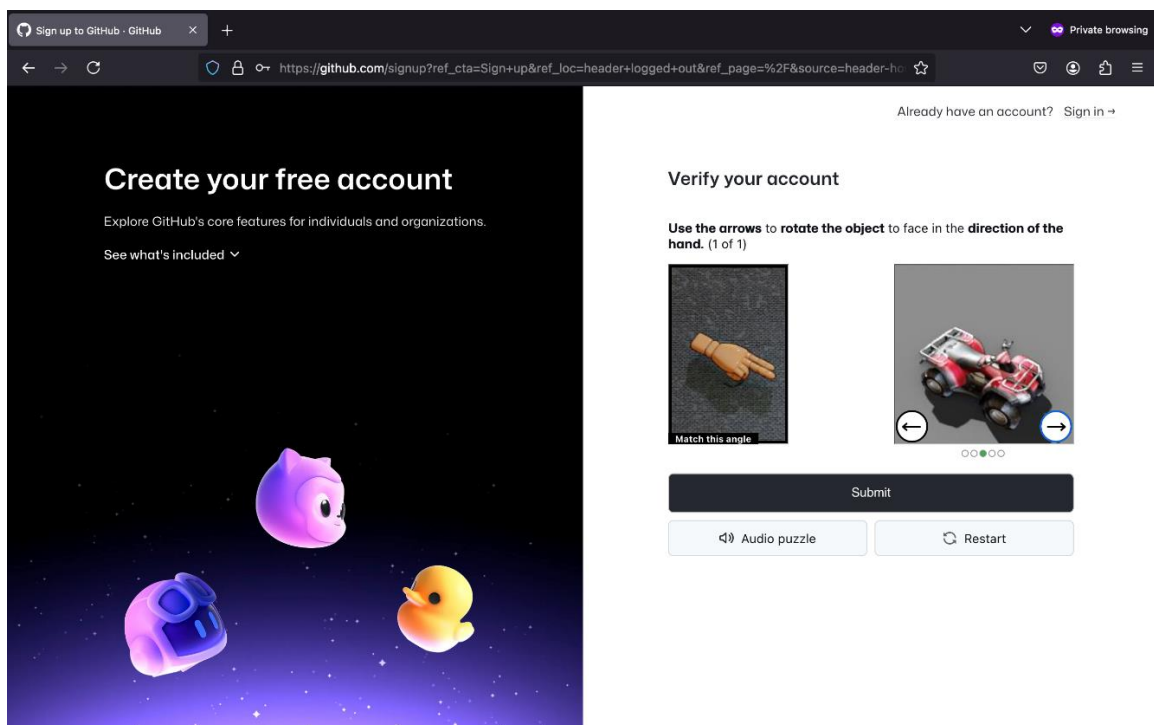


5. Type the confirmation code in the **Enter code** field to confirm your email ID and select **Continue**.

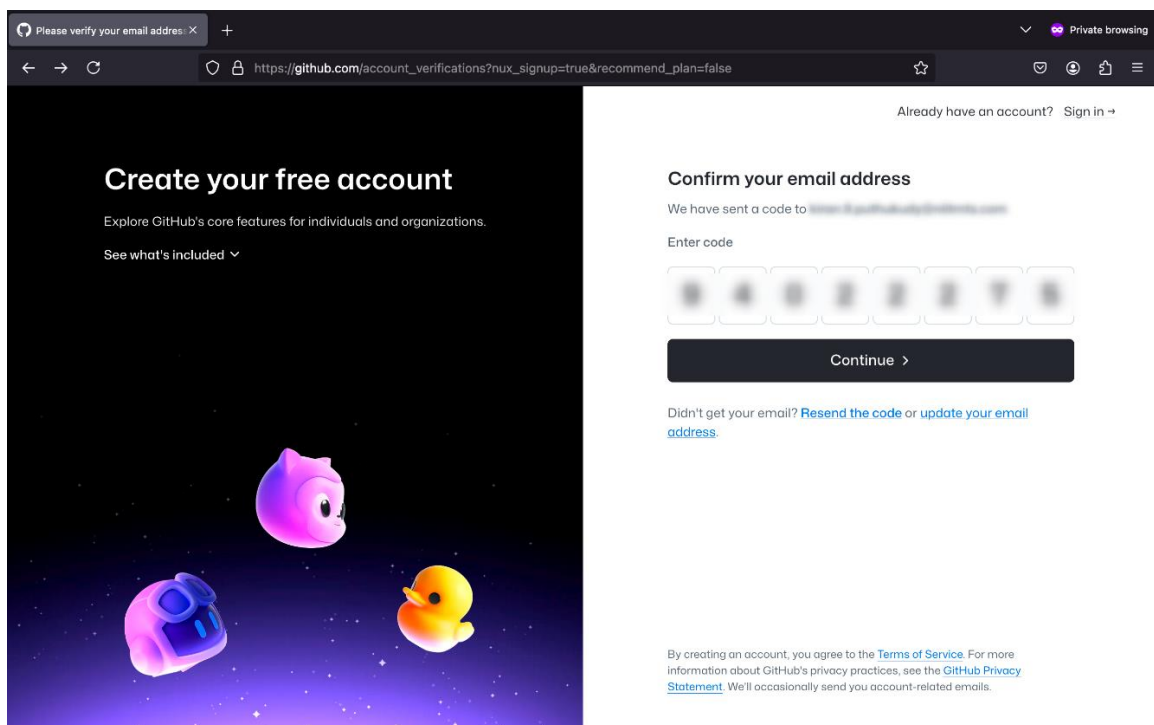


6. You'll see a confirmation message on successful completion of your GitHub account.

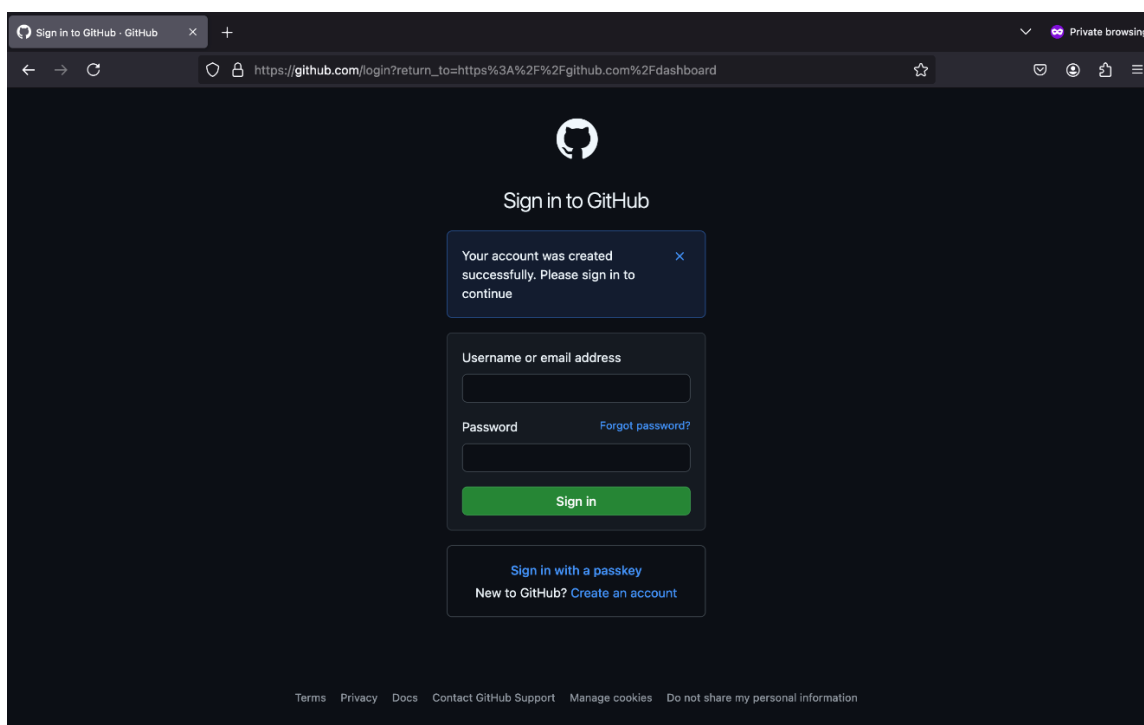

7. Type your credentials in the **Username or email address** and **Password** fields and select **Sign in**.

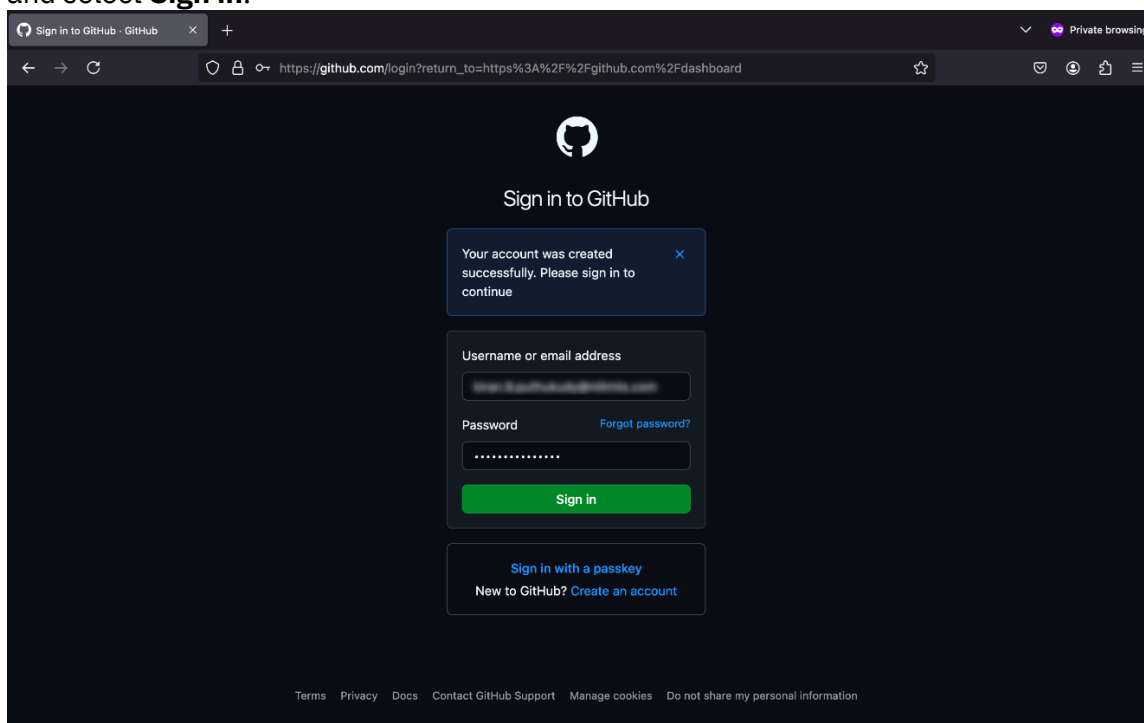

8. The GitHub dashboard displays to indicate that you have successfully logged in to your GitHub account.

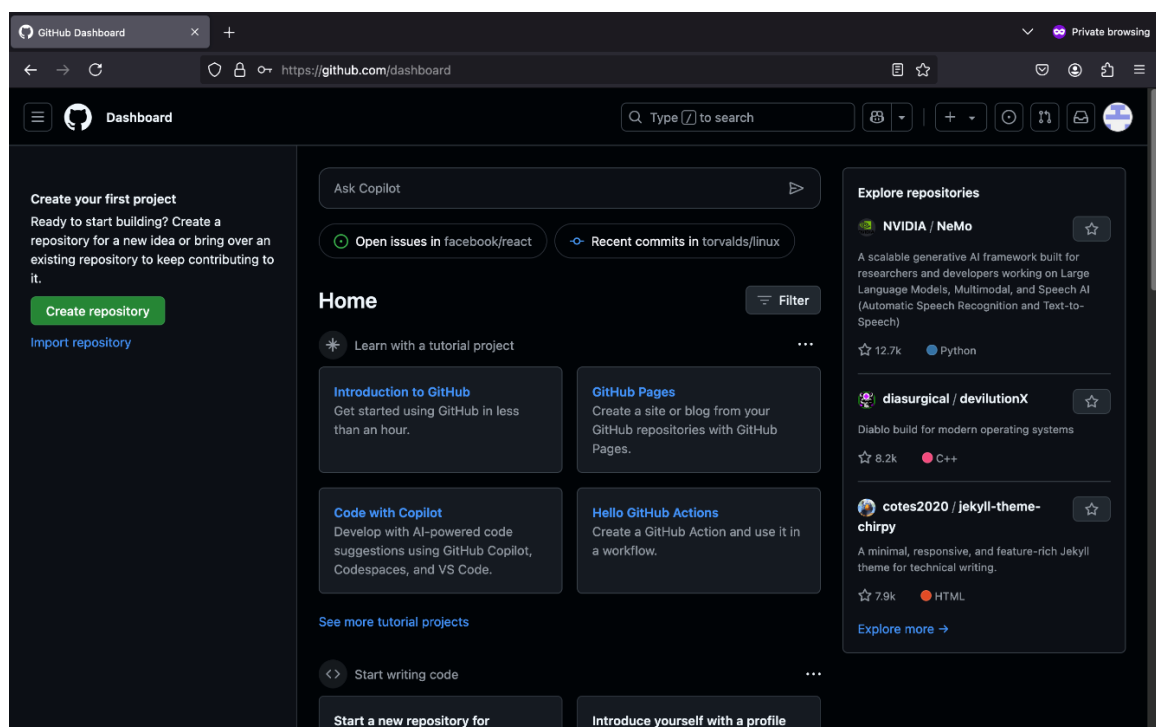


Step 2: Create a Replicate account

Overview

In this step, you will use your GitHub account to register for a Replicate account. Replicate is a cloud-based platform that lets you use AI models without needing complex hardware. As part of this step, you'll create a Replicate token. A token is like a secure digital key that allows the lab to connect to your Replicate account and access the tools needed to run the lab in Google Colaba.


Instructions

1. Go to the [Replicate](https://replicate.com) website and select **Get started**.

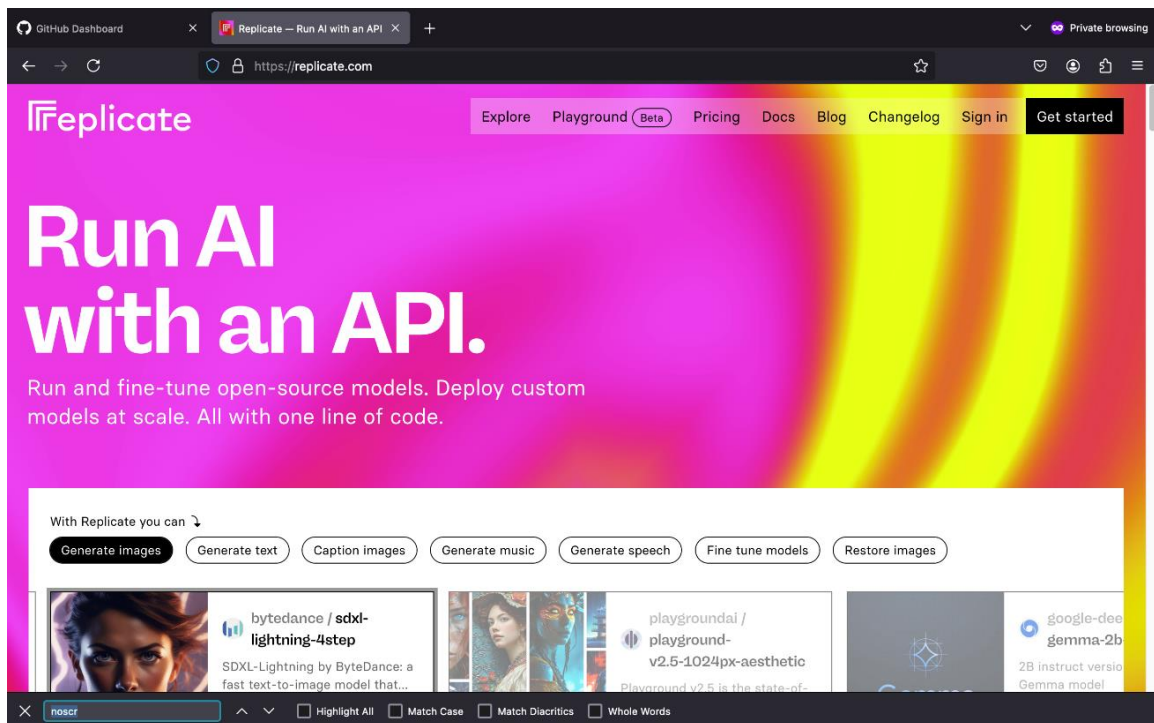


Use IBM Granite models for code generation and programming tasks


2. Select **Sign in with GitHub** on the Welcome to Replicate page.

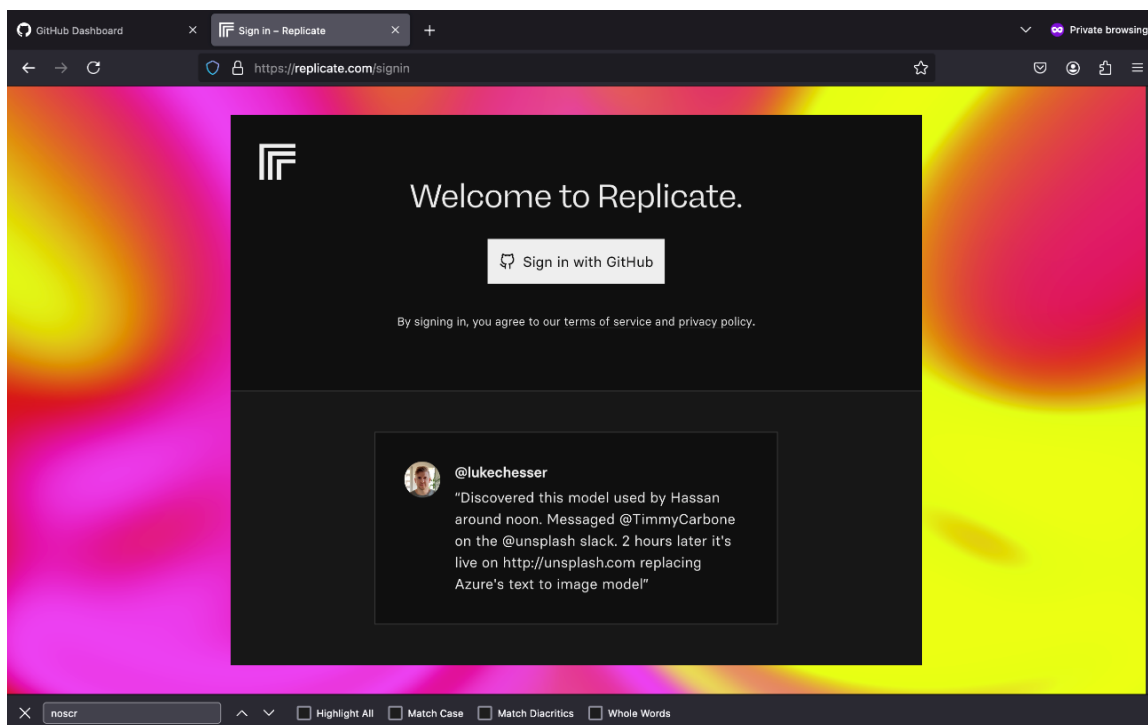

3. Select **Authorize replicate** to continue.

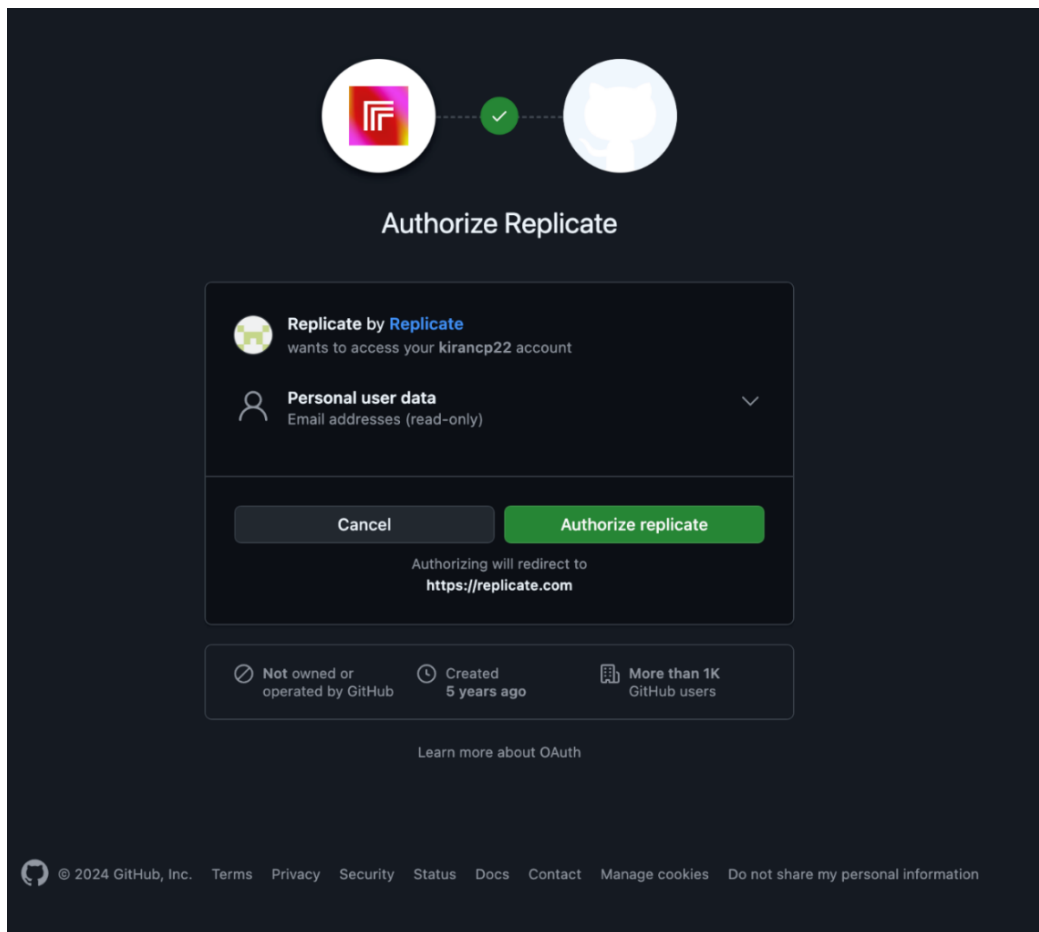


4. To create a Replicate token, select the **account settings** icon on the navigation bar.

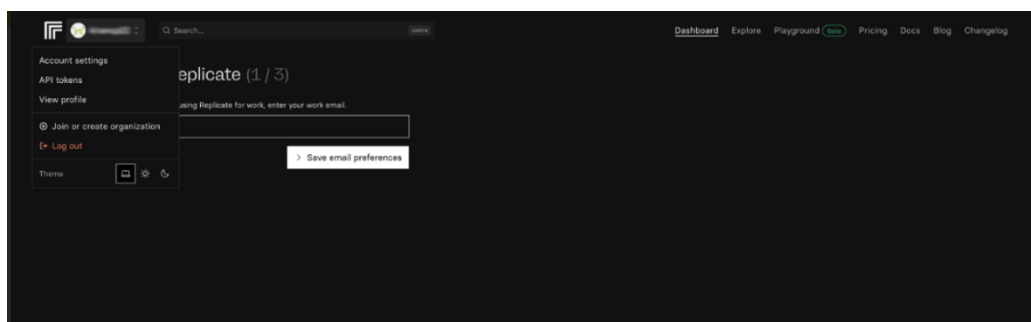


Use IBM Granite models for code generation and programming tasks

IBM SkillsBuild


5. Select **API tokens** on the “Account settings” menu.

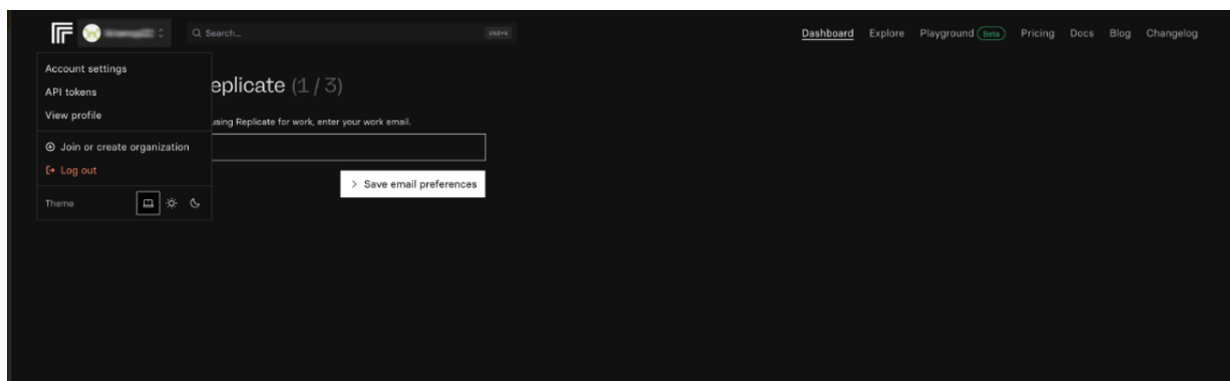

6. Type a name for the token in the **API tokens** field and select **Create token**.

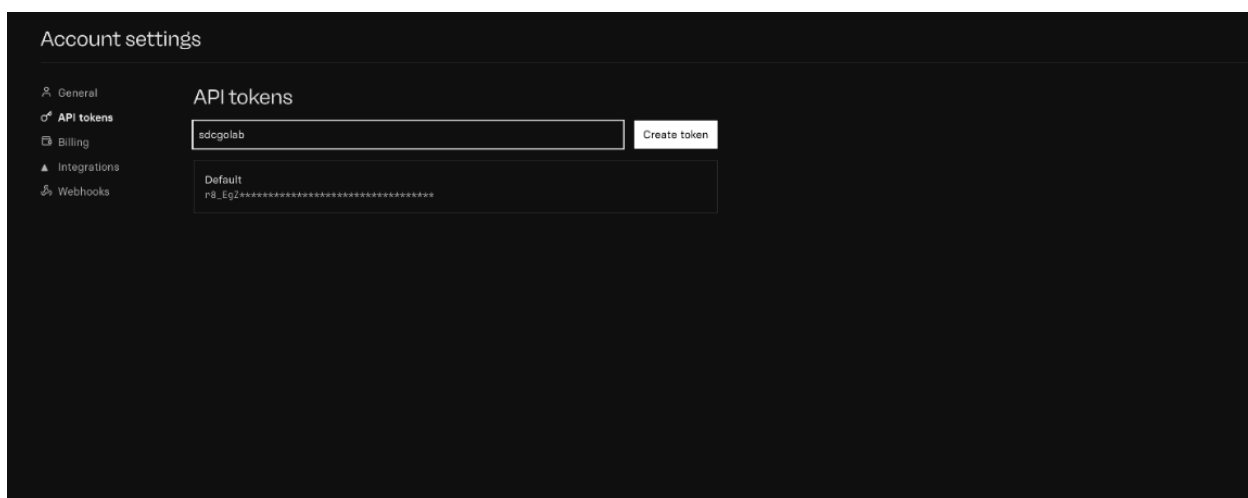


7. Your API token displays on the screen following the **API tokens** field.

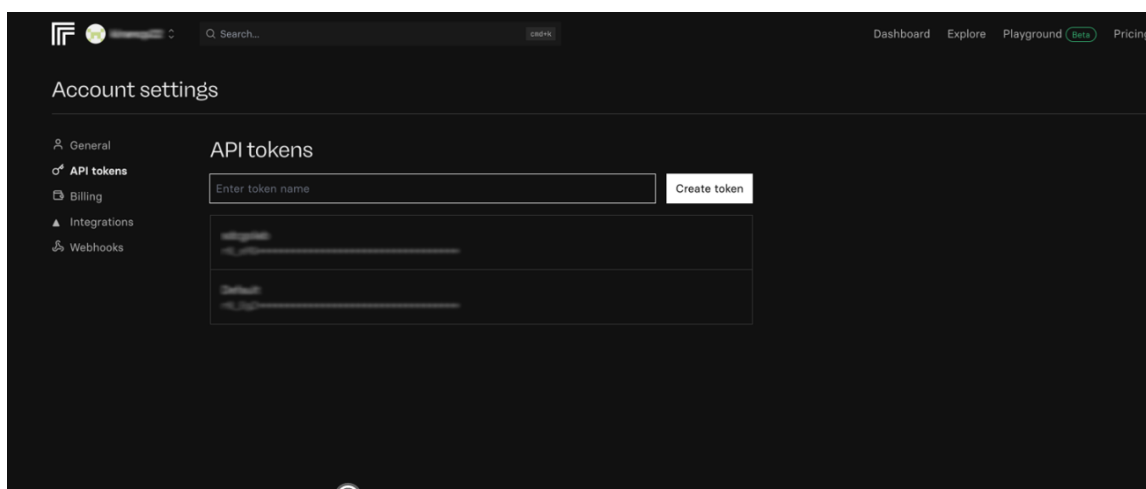


8. Select the **Copy token** icon to copy the Replicate API token.


Note: Save the Replicate token because you'll need the Replicate API token to run the Google Colab instance later in this lab.

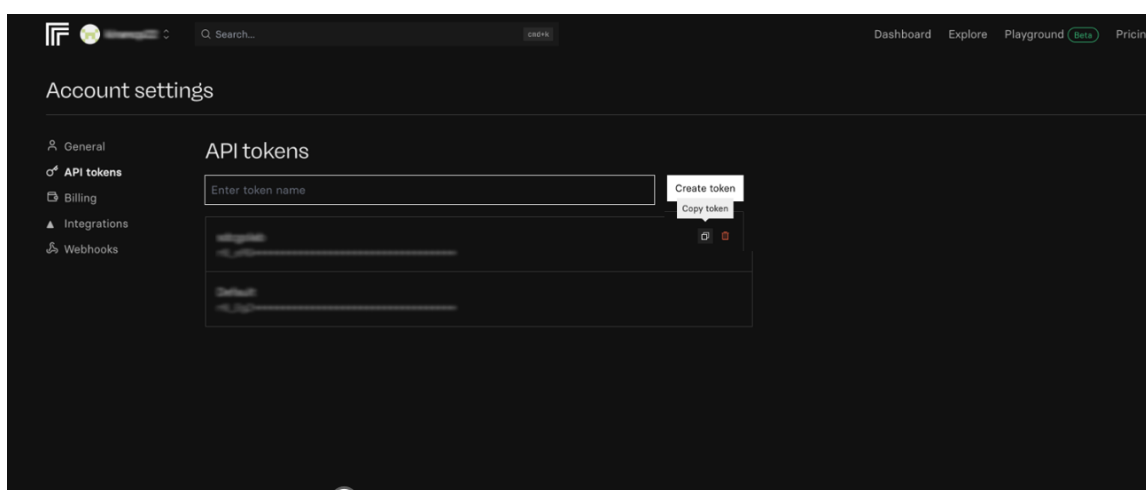

9. Go to the [Replicate invite](#) link to claim 50 cents in Replicate credits, which you'll use to run the lab. Select **Accept credit** to claim the credits.

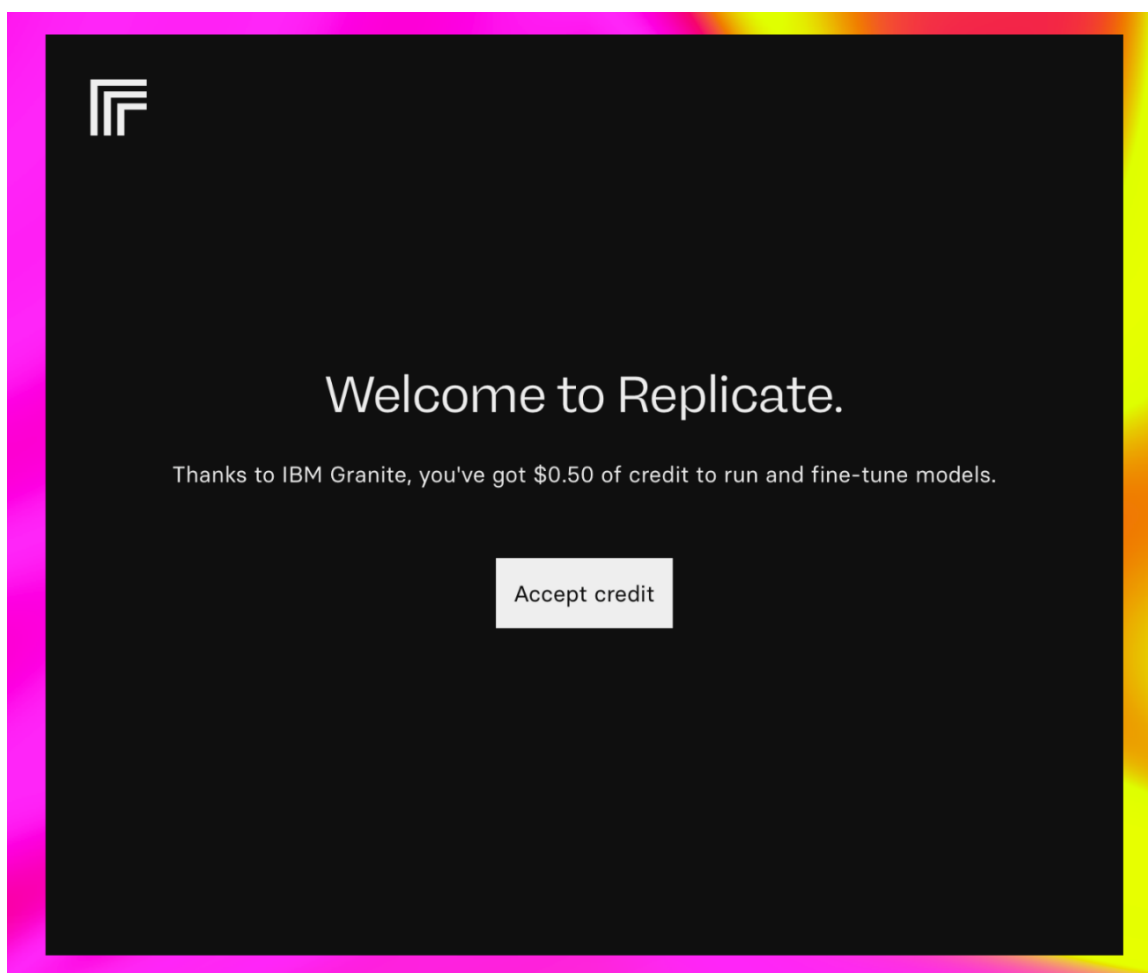

10. You will see a confirmation message indicating that 50 cents credit has been added to your Replicate account as follows.

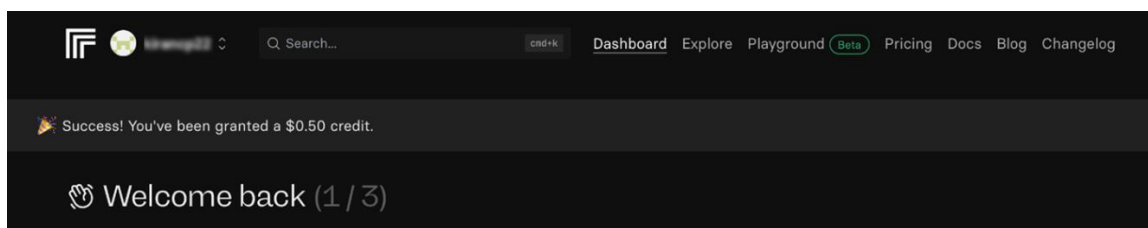


Step 3: Sign up for Google Colab

Overview


In this step, you will set up a Google Colab account. Google Colab is a free cloud platform that lets you run code in notebooks, which are commonly used for machine learning, data science, and AI tasks. This account will allow you to install and use the tools needed to complete the lab.

Instructions


1. Go to the [Google Colab](https://colab.research.google.com) website to sign up for a Google Colab account and select **Sign in**.

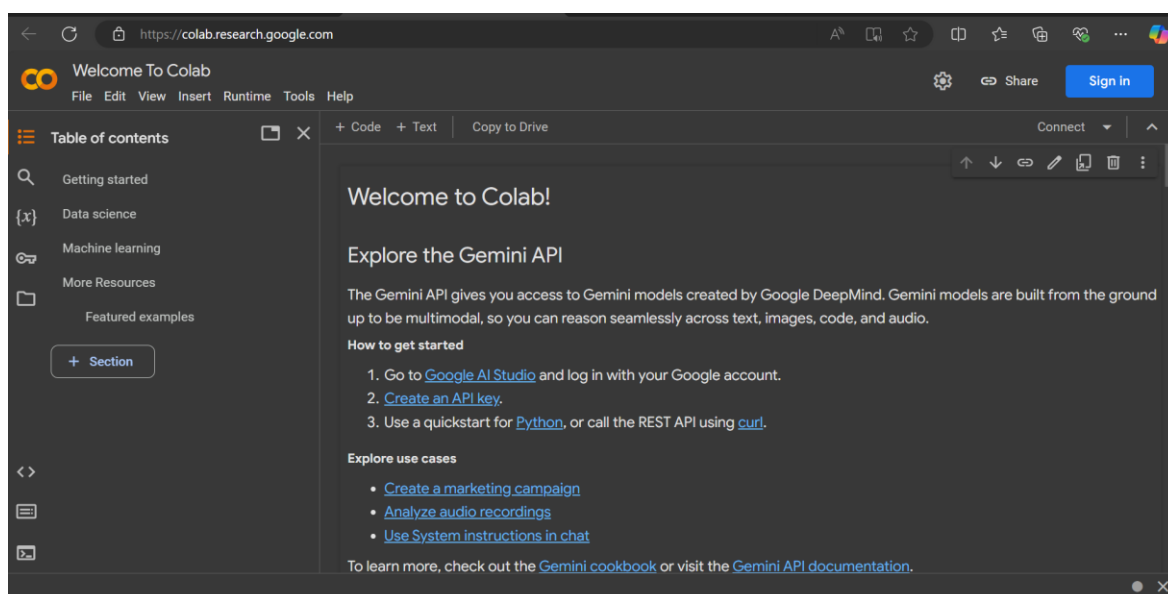


2. Type your Google email or phone number in the **Email or phone** field and select **Next**.


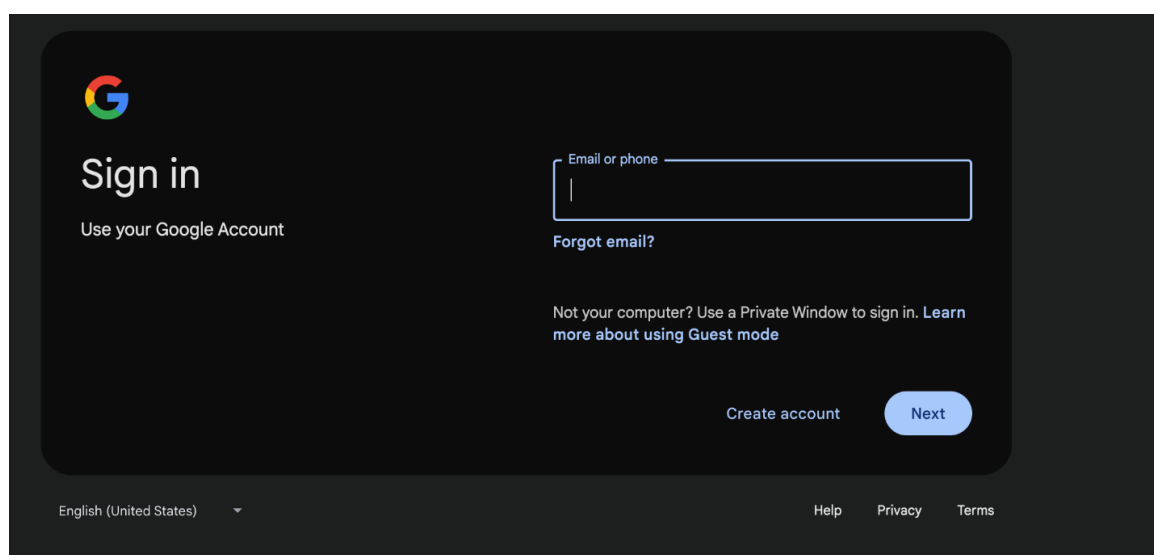


3. Type your password in the **Enter your password** field and select **Next**.

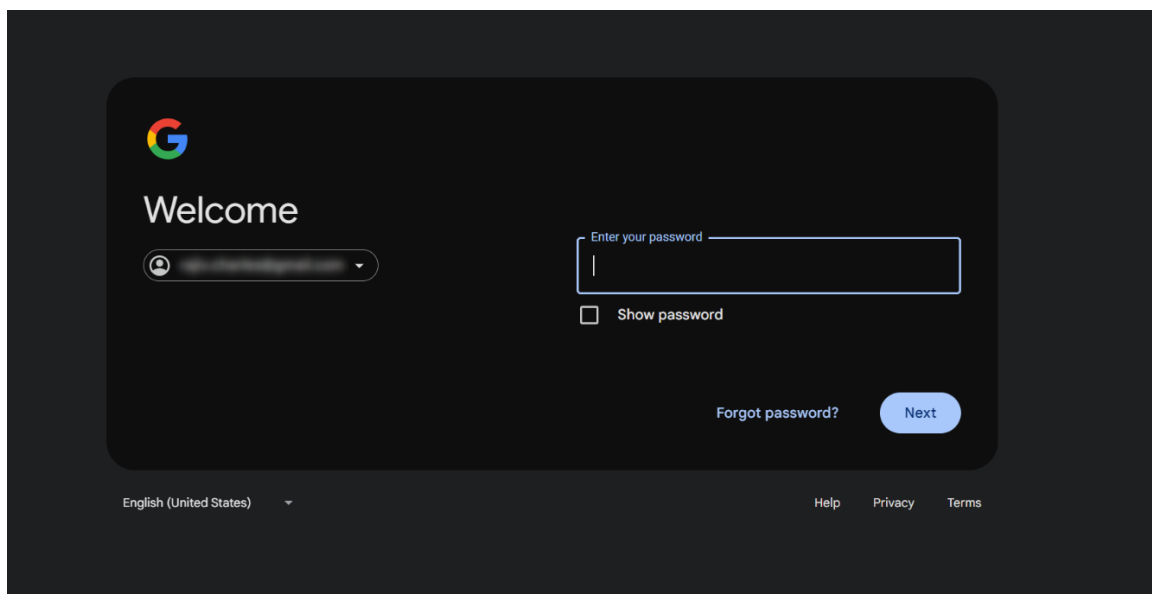


4. Next, select the **Key** icon on the **sidebar** menu of the Welcome to Colab homepage to store your Replicate API token in Google Colab secret.

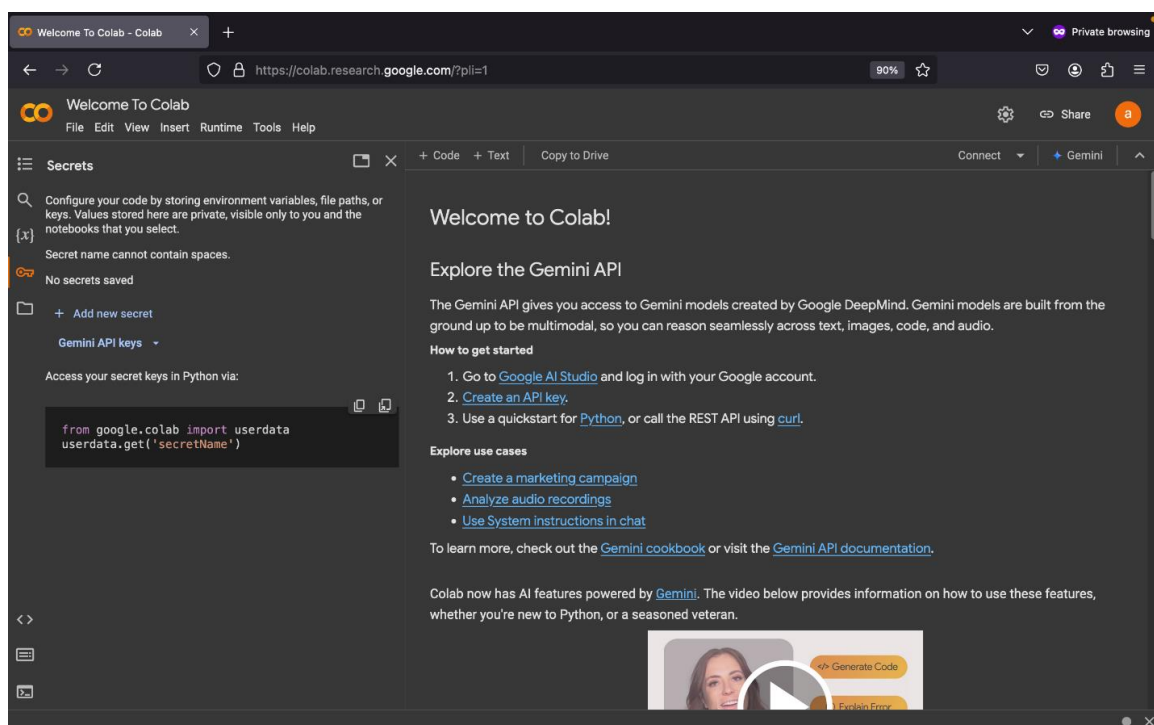


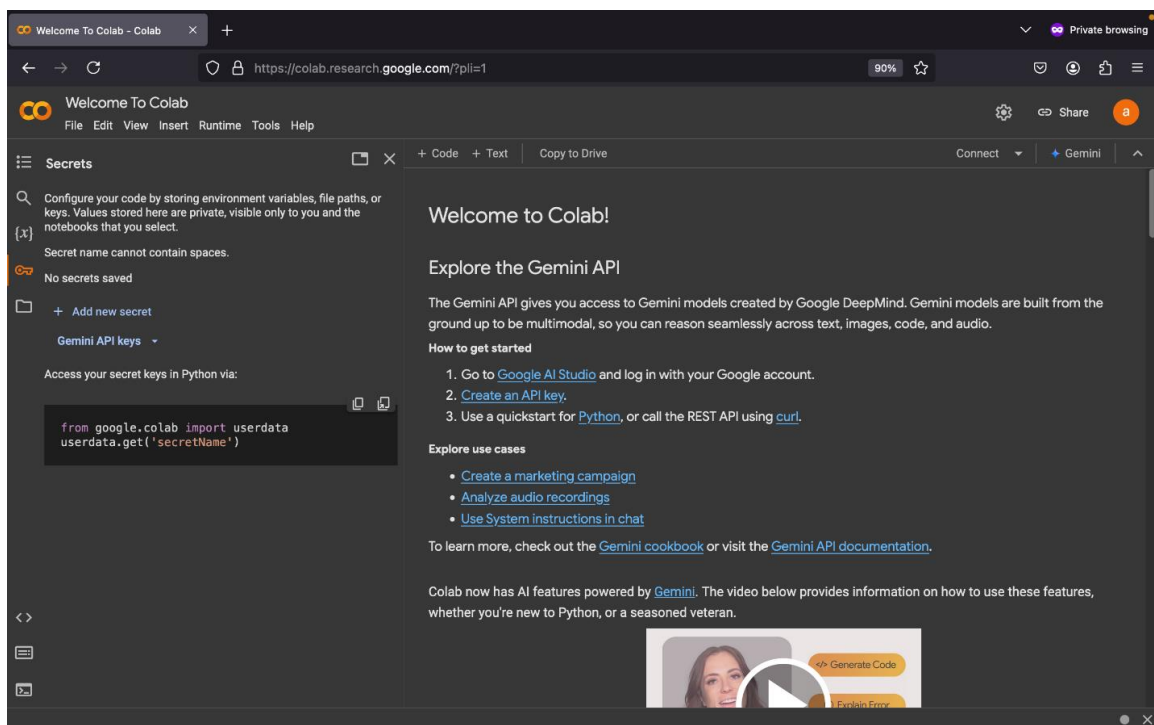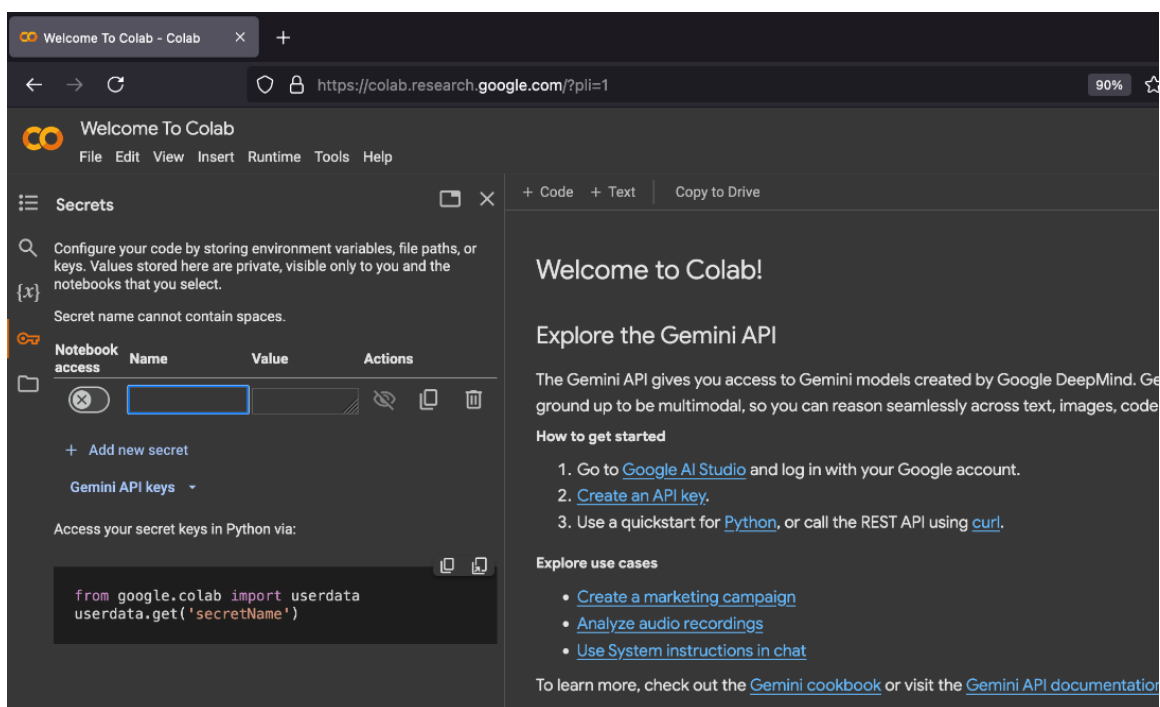5. Select **Add new secret**.6. Type **REPLICATE_API_TOKEN** in the **Name** field.

7. Paste your Replicate API token into the **Value** field.

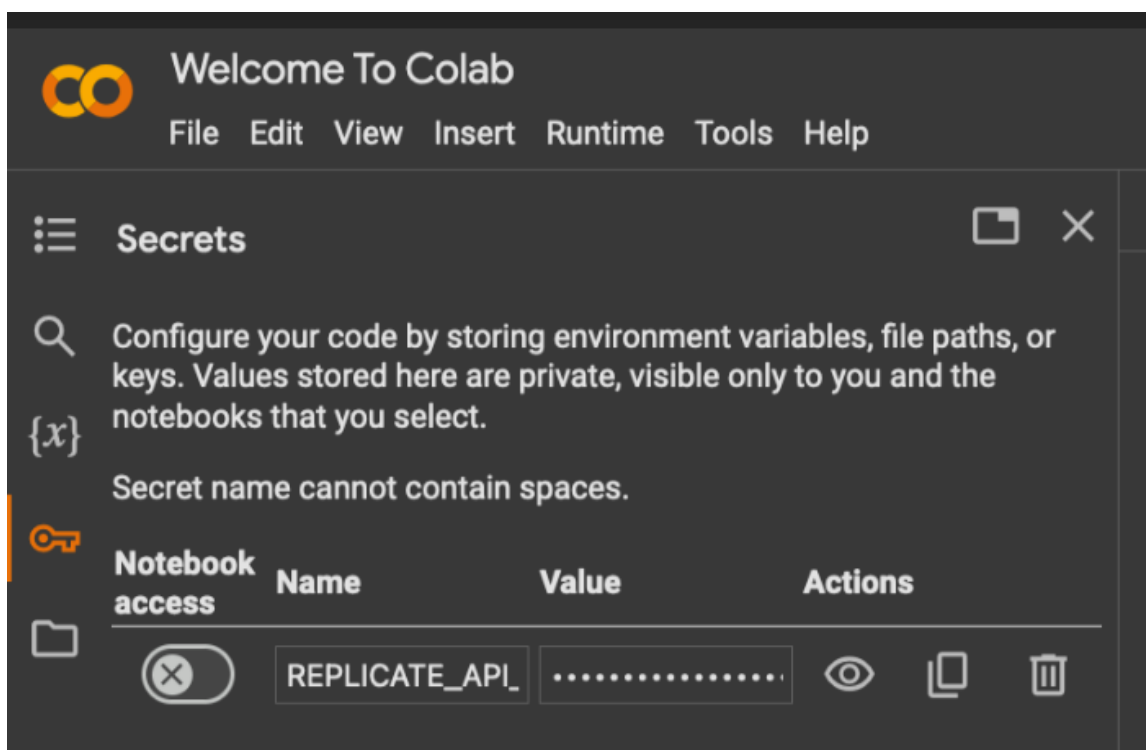

8. Select the **toggle** button to enable **Notebook access**. Next, select **Close** to exit the configuration.

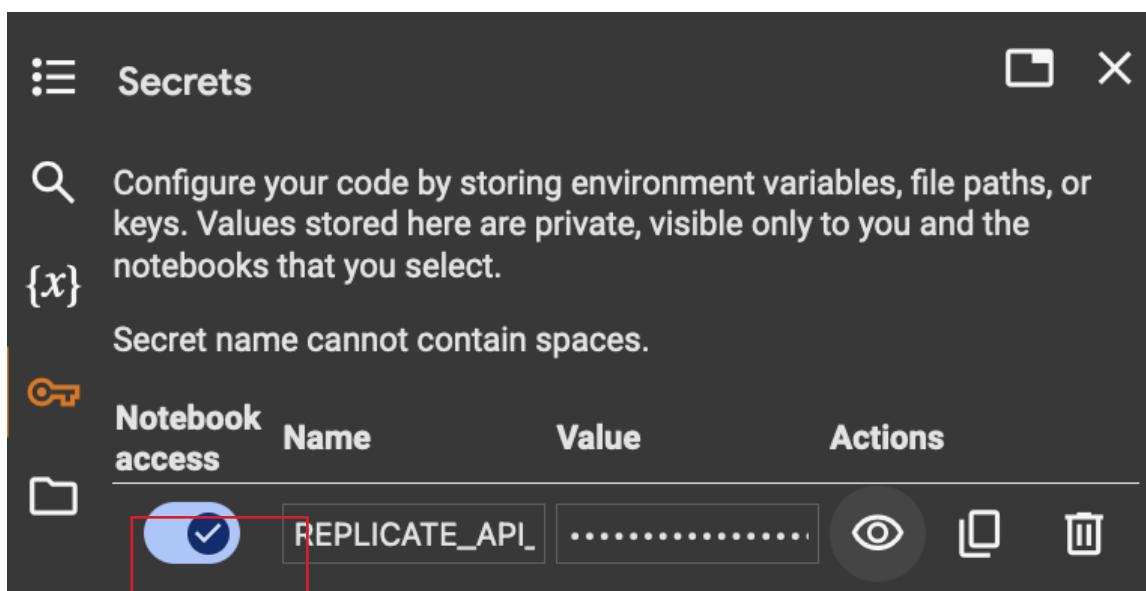


Step 4: Load the Jupyter notebook and initialize the model

Overview


In this step, you will load a Jupyter notebook containing the code required to perform this lab. A Jupyter notebook is a shareable document that combines computer code, plain language descriptions, data, and visualizations. You'll load a Jupyter notebook file from GitHub into Google Colab and initialize the IBM Granite model to generate code for the given scenario.

Instructions


1. In your Google Colab workspace, on the **File** menu, select **Open notebook**.

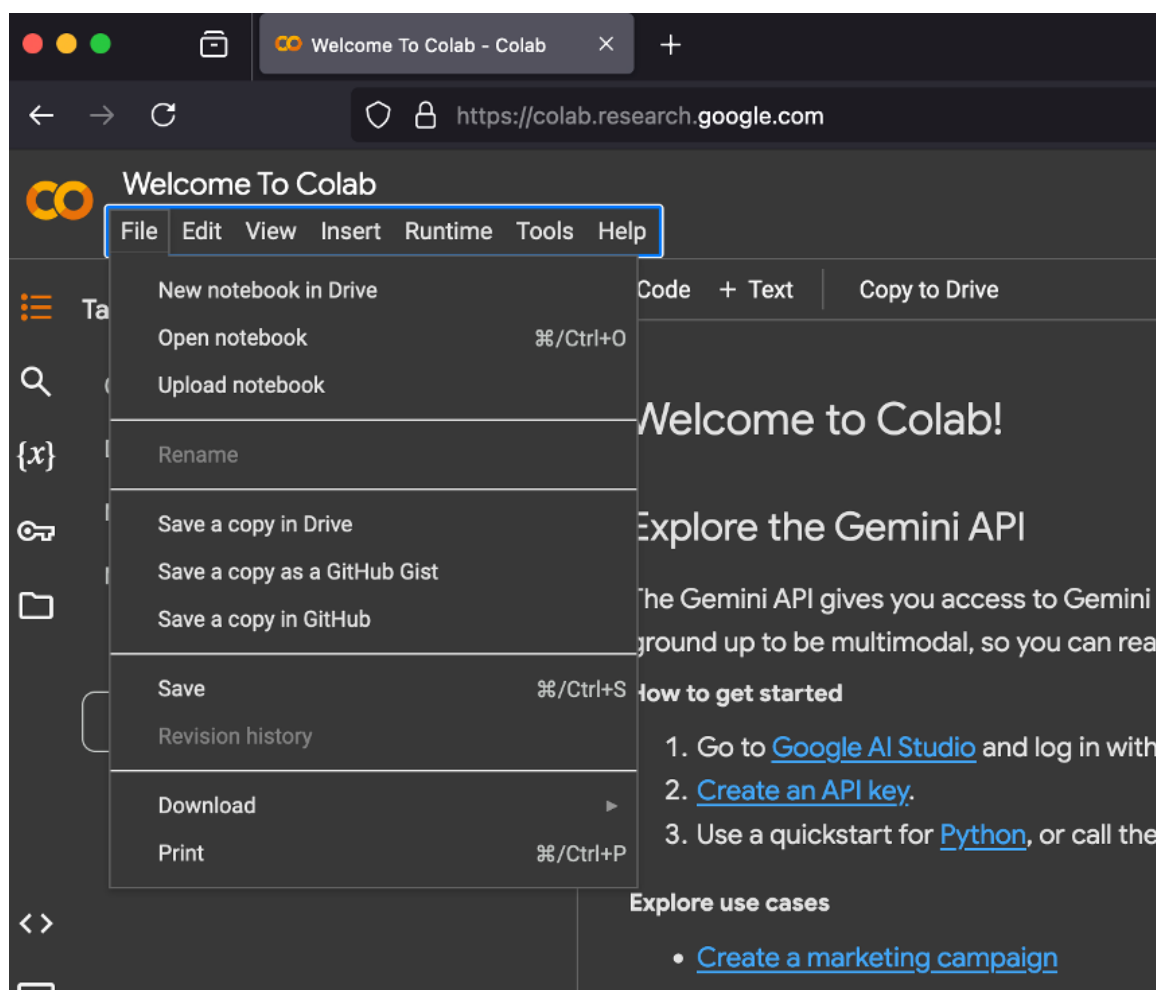


2. Select the **GitHub** tab.

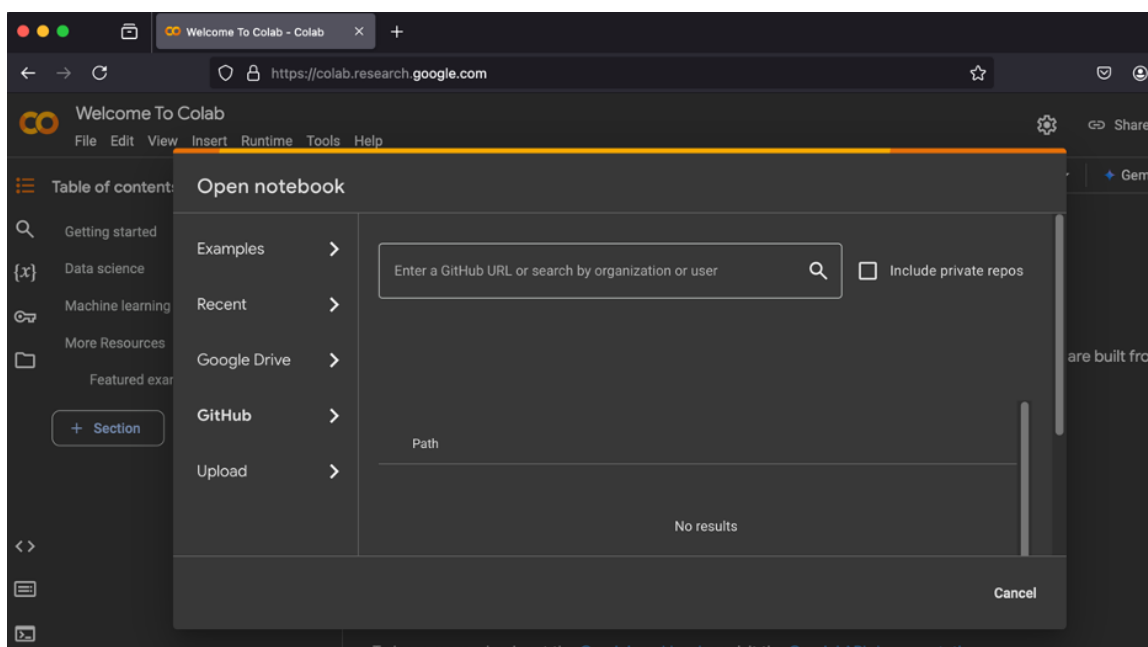


3. In the **Enter a GitHub URL or search by organization or user** field, copy the following URL: <https://github.com/niit-ibm/lp1-cgo-lab1> and select the **magnifying glass** icon.

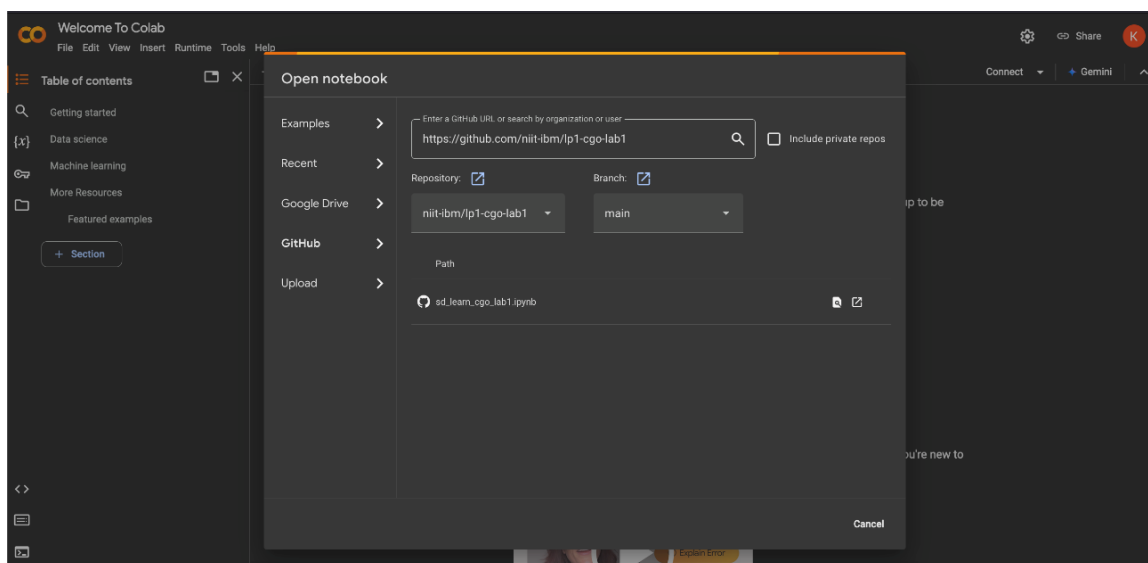

4. Select **main** in the **Branch** section.

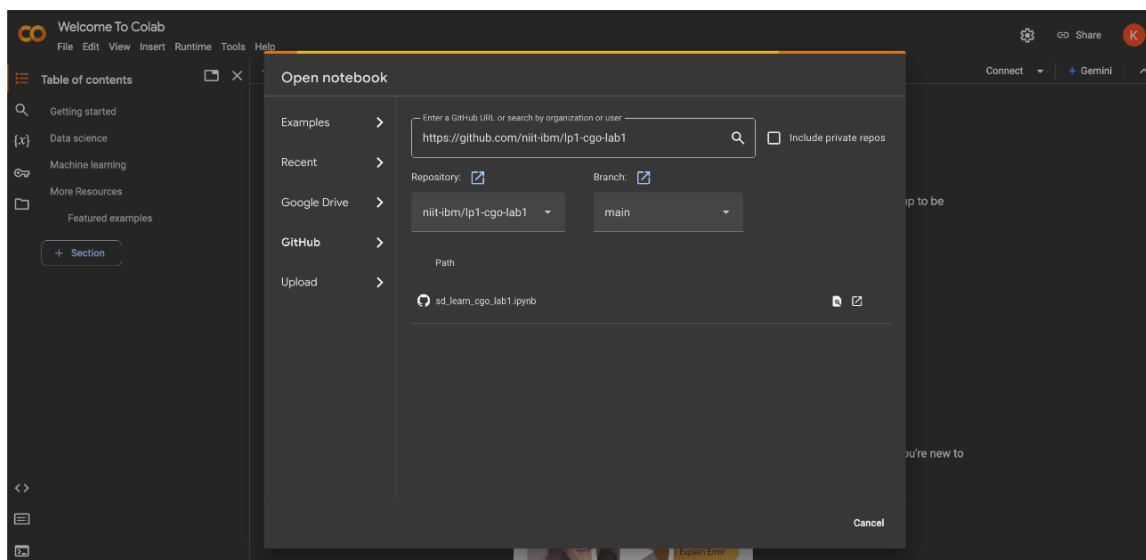


5. Select the **sd_learn_cgo_lab1.ipynb** notebook in the **Path** section to open the notebook in Colab.

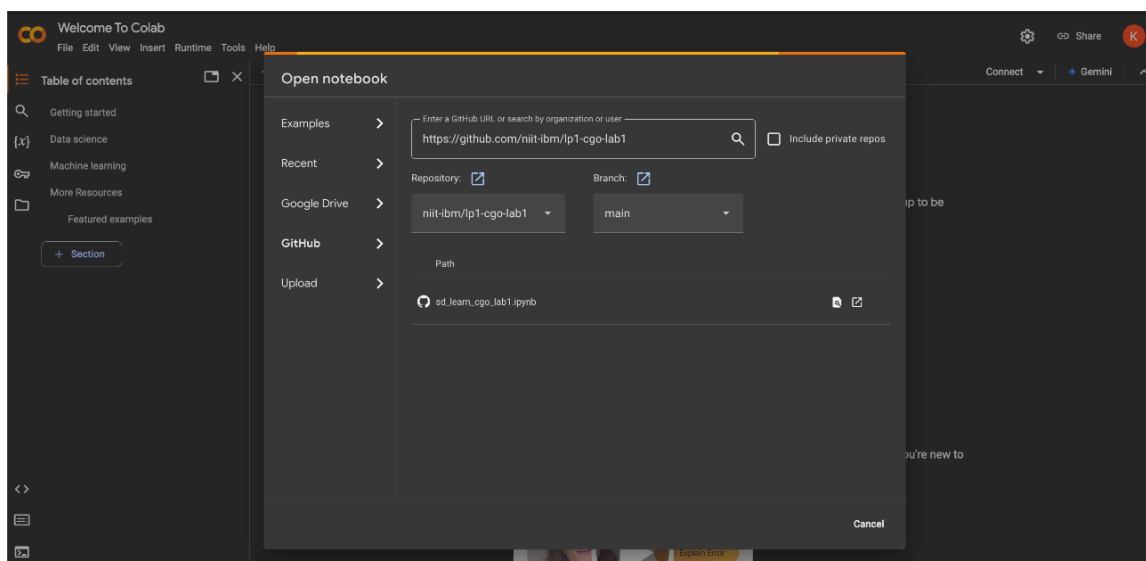

- You'll now have the `sd_learn_cgo_lab1` notebook opened in the Colab workspace.

Note that each row in the notebook is referred to as a **cell**. The cells in the notebook are not numbered. The notebook is organized in such a way that you'll need to run the code in each cell sequentially, beginning from the first cell, to complete this lab.

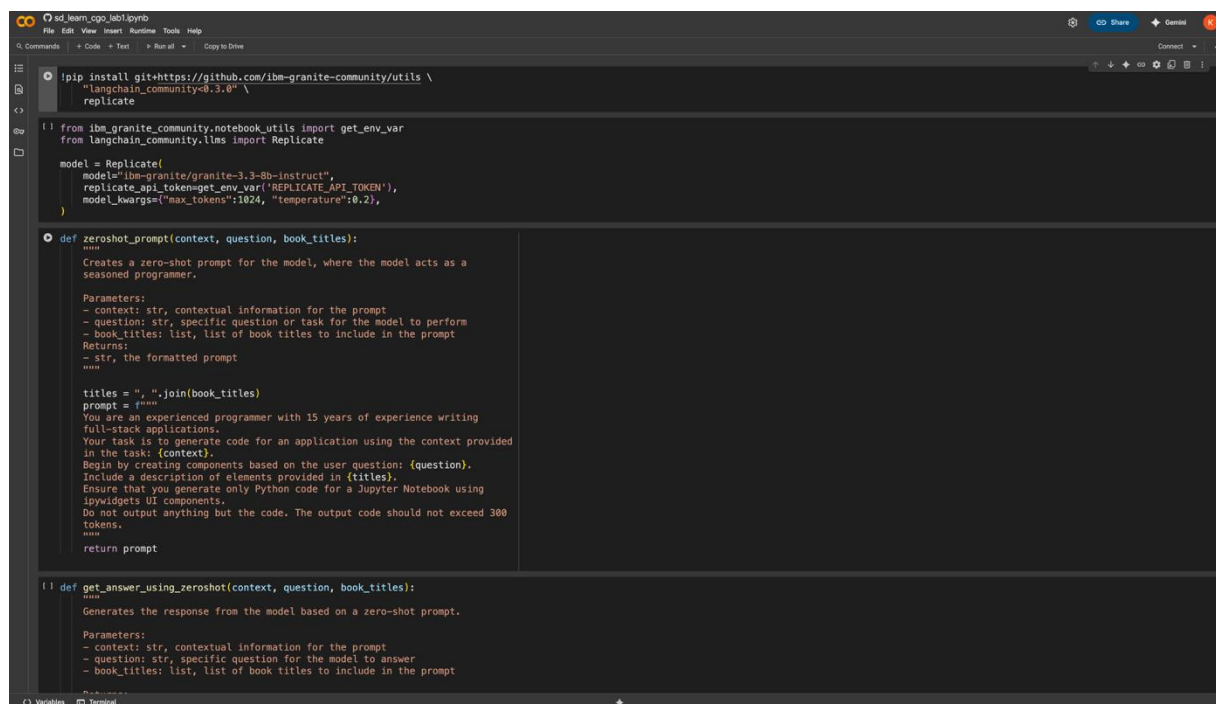

```
!pip install git+https://github.com/ibm-granite-community/utis \
"langchain_community<0.3.0" \
replicate

from ibm_granite_community.notebook_utils import get_env_var
from langchain_community.llms import Replicate

model = Replicate(
    model="ibm-granite/granite-3.3-8b-instruct",
    replicate_api_token=get_env_var('REPLICATE_API_TOKEN'),
    model_kwargs={"max_tokens":1024, "temperature":0.2},
)


def zeroshot_prompt(context, question, book_titles):
    """
    Creates a zero-shot prompt for the model, where the model acts as a
    seasoned programmer.

    Parameters:
    - context: str, contextual information for the prompt
    - question: str, specific question or task for the model to perform
    - book_titles: list, list of book titles to include in the prompt
    Returns:
    - str, the formatted prompt
    """
    titles = ". ".join(book_titles)
    prompt = f"""
    You are an experienced programmer with 15 years of experience writing
    full-stack applications.
    Your task is to generate code for an application using the context provided
    in the task: {context}.
    Begin by creating components based on the user question: {question}.
    Include a description of elements provided in {titles}.
    Ensure that you generate only Python code for a Jupyter Notebook using
    ipywidgets UI components.
    Do not output anything but the code. The output code should not exceed 300
    tokens.
    """
    return prompt

def get_answer_using_zeroshot(context, question, book_titles):
    """
    Generates the response from the model based on a zero-shot prompt.

    Parameters:
    - context: str, contextual information for the prompt
    - question: str, specific question for the model to answer
    - book_titles: list, list of book titles to include in the prompt
    """
```

- You'll need to start a new instance in the Google Colab runtime to run the code in the Jupyter notebook. Select **Connect** on the Google Colab navigation bar.

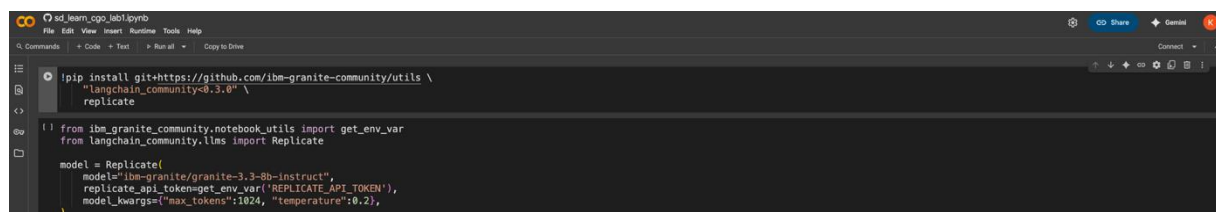

```
!pip install git+https://github.com/ibm-granite-community/utis \
"langchain_community<0.3.0" \
replicate

from ibm_granite_community.notebook_utils import get_env_var
from langchain_community.llms import Replicate

model = Replicate(
    model="ibm-granite/granite-3.3-8b-instruct",
    replicate_api_token=get_env_var('REPLICATE_API_TOKEN'),
    model_kwargs={"max_tokens":1024, "temperature":0.2},
)


def zeroshot_prompt(context, question, book_titles):
    """
    Creates a zero-shot prompt for the model, where the model acts as a
    seasoned programmer.

    Parameters:
    - context: str, contextual information for the prompt
    - question: str, specific question or task for the model to perform
    - book_titles: list, list of book titles to include in the prompt
    Returns:
    - str, the formatted prompt
    """
    titles = ". ".join(book_titles)
    prompt = f"""
    You are an experienced programmer with 15 years of experience writing
    full-stack applications.
    Your task is to generate code for an application using the context provided
    in the task: {context}.
    Begin by creating components based on the user question: {question}.
    Include a description of elements provided in {titles}.
    Ensure that you generate only Python code for a Jupyter Notebook using
    ipywidgets UI components.
    Do not output anything but the code. The output code should not exceed 300
    tokens.
    """
    return prompt


def get_answer_using_zeroshot(context, question, book_titles):
    """
    Generates the response from the model based on a zero-shot prompt.

    Parameters:
    - context: str, contextual information for the prompt
    - question: str, specific question for the model to answer
    - book_titles: list, list of book titles to include in the prompt
    """
```

8. Select **Connect to a hosted runtime** on the **Connect** menu.

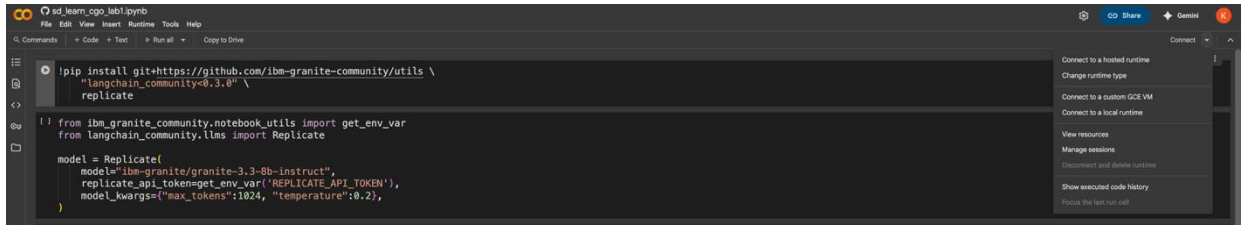

9. A green checkmark indicates that you have successfully connected to the hosted runtime.

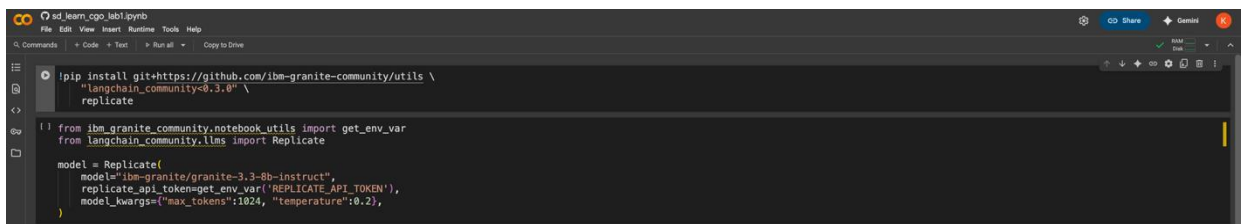


10. In the first cell of the notebook, select the **Play** button to install the required libraries from the Granite community.




Note: You'll need to run the cells sequentially beginning from the first cell in the notebook.

11. Select **Run anyway** to proceed loading the required libraries.

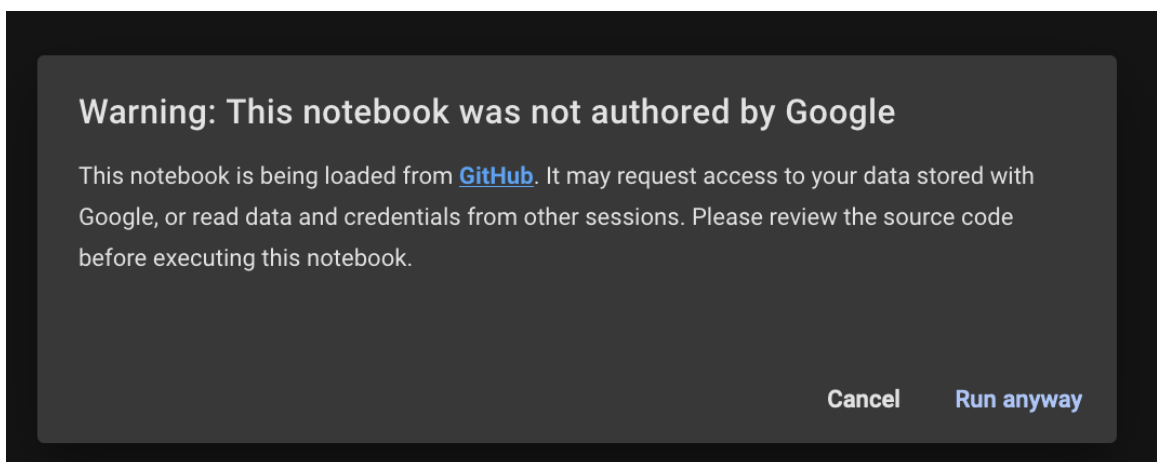

12. A green checkmark appears beside the **Play** button to indicate that the required libraries are successfully installed.

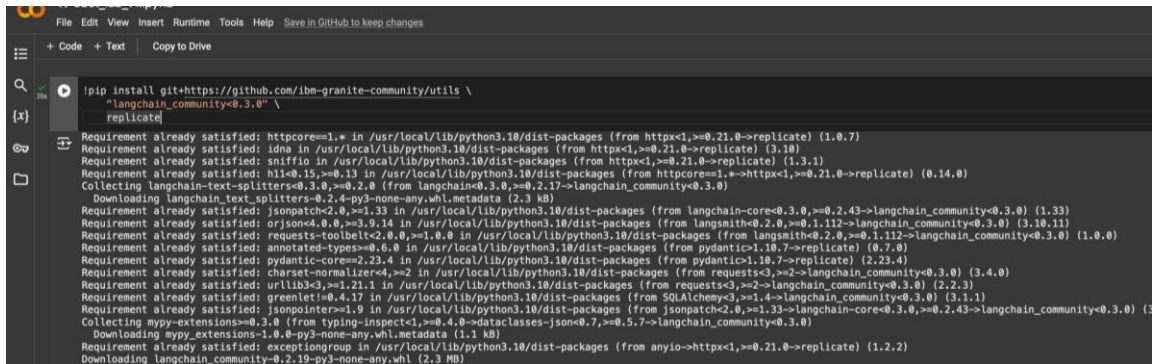


```
File Edit View Insert Runtime Tools Help Save in GitHub to keep changes
+ Code + Text Copy to Drive

!pip install git+https://github.com/ibm-granite-community/utis \
  "langchain_community<0.3.0" \
  replicate

Requirement already satisfied: httpcore<1.0 in /usr/local/lib/python3.10/dist-packages (from httpx<1.0.0.0.21.0-->replicate) (1.0.7)
Requirement already satisfied: idna in /usr/local/lib/python3.10/dist-packages (from httpx<1.0.0.21.0-->replicate) (3.10)
Requirement already satisfied: sniffio in /usr/local/lib/python3.10/dist-packages (from httpx<1.0.0.21.0-->replicate) (1.3.1)
Requirement already satisfied: h11<0.15.0 in /usr/local/lib/python3.10/dist-packages (from httpcore<1.0.0.21.0-->replicate) (0.14.0)
Collecting langchain-text-splitters<0.3.0,>=0.2.0 (from langchain<0.3.0,>=0.2.17-->langchain_community<0.3.0)
  Downloading langchain_text_splitters-0.2.4-py3-none-any.whl.metadata (2.3 kB)
Requirement already satisfied: jsonpatch<2.0,>=1.33 in /usr/local/lib/python3.10/dist-packages (from langchain-core<0.3.0,>=0.2.43-->langchain_community<0.3.0) (1.33)
Requirement already satisfied: orjson<4.0.0,>=3.9.14 in /usr/local/lib/python3.10/dist-packages (from langsmith<0.2.0,>=0.1.112-->langchain_community<0.3.0) (3.10.11)
Requirement already satisfied: requests-toolbelt<2.0.0,>=1.0.0 in /usr/local/lib/python3.10/dist-packages (from langsmith<0.2.0,>=0.1.112-->langchain_community<0.3.0) (1.0.0)
Requirement already satisfied: annotated-types<0.6.0 in /usr/local/lib/python3.10/dist-packages (from pydantic<1.10.7-->replicate) (0.7.0)
Requirement already satisfied: pydantic-core<2.23.4 in /usr/local/lib/python3.10/dist-packages (from pydantic<1.10.7-->replicate) (2.23.4)
Requirement already satisfied: charset-normalizer<4,>=2 in /usr/local/lib/python3.10/dist-packages (from requests<3,>=2-->langchain_community<0.3.0) (3.4.0)
Requirement already satisfied: urllib3<3,>=1.21.1 in /usr/local/lib/python3.10/dist-packages (from requests<3,>=2-->langchain_community<0.3.0) (2.2.3)
Requirement already satisfied: greenlet<0.4.17 in /usr/local/lib/python3.10/dist-packages (from SQLAlchemy<3,>=1.4-->langchain_community<0.3.0) (3.1.1)
Requirement already satisfied: jsonpointer<1.9 in /usr/local/lib/python3.10/dist-packages (from jsonpatch<2.0,>=1.33-->langchain-core<0.3.0,>=0.2.43-->langchain_community<0.3.0) (3.1.1)
Collecting mpy-extensions<0.3.0 (from typing-inspect<1,>=0.4.0-->dataclasses-json<0.7,>=0.5.7-->langchain_community<0.3.0)
  Downloading mpy_extensions-1.0.6-py3-none-any.whl.metadata (1.1 kB)
Requirement already satisfied: exceptiongroup in /usr/local/lib/python3.10/dist-packages (from anyio<httpx<1,>=0.21.0-->replicate) (1.2.2)
Downloading langchain_community-0.2.19-py3-none-any.whl (2.3 MB)
```

13. In the second cell of the notebook, select the **Play** button to initialize the IBM Granite model using Replicate for code generation.

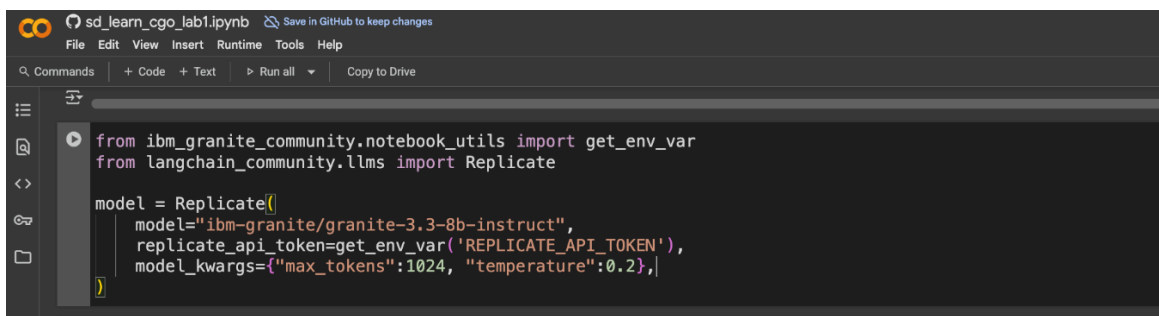


```
sd_learn_cgo_lab1.ipynb Save in GitHub to keep changes
File Edit View Insert Runtime Tools Help
Commands + Code + Text Run all Copy to Drive


from ibm_granite_community.notebook_utils import get_env_var
from langchain_community.llms import Replicate

model = Replicate(
    model="ibm-granite/granite-3.3-8b-instruct",
    replicate_api_token=get_env_var('REPLICATE_API_TOKEN'),
    model_kwargs={"max_tokens":1024, "temperature":0.2},
)
```

14. Select **Grant access** to proceed loading the model from Replicate.

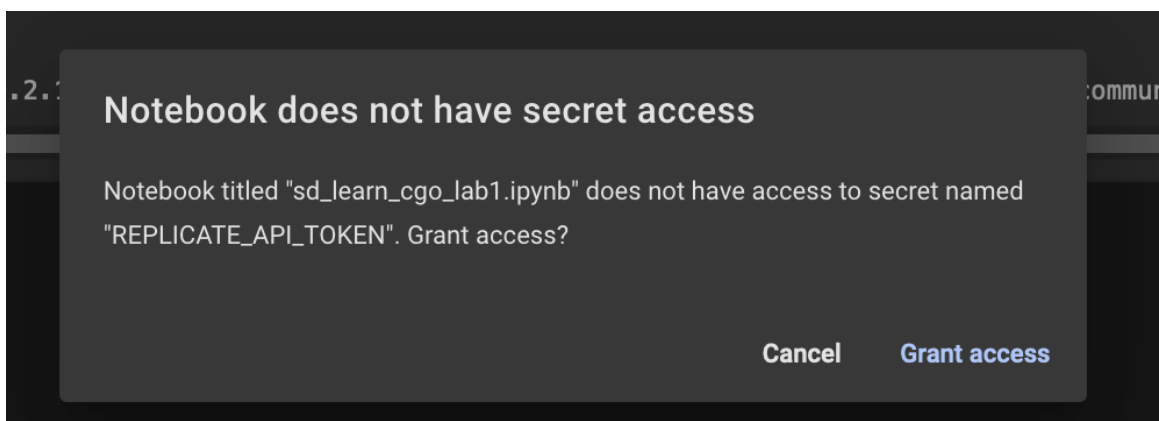

15. The following message displays at the bottom of the cell: REPLICATE_API_TOKEN loaded from Google Colab secret.

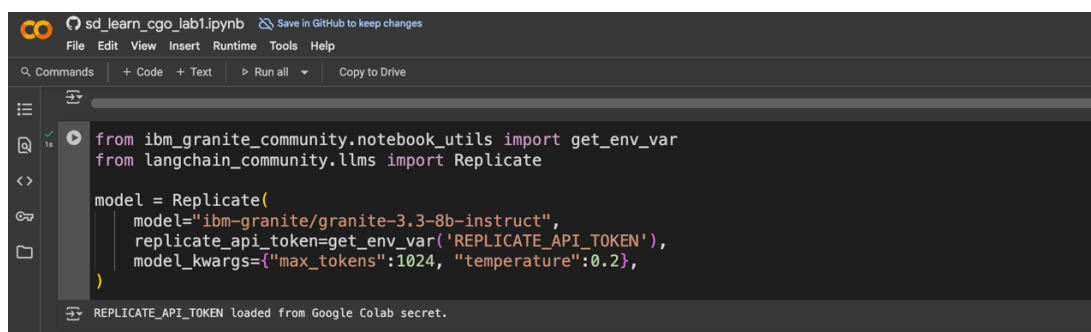


The screenshot shows a Jupyter Notebook interface with a dark theme. The notebook is titled 'sd_learn_cgo_lab1.ipynb'. The code cell contains the following Python code:

```
from ibm_granite_community.notebook_utils import get_env_var
from langchain_community.llms import Replicate

model = Replicate(
    model="ibm-granite/granite-3.3-8b-instruct",
    replicate_api_token=get_env_var('REPLICATE_API_TOKEN'),
    model_kwargs={"max_tokens":1024, "temperature":0.2},
)
```

Below the code, the output shows: 'REPLICATE_API_TOKEN loaded from Google Colab secret.'.

16. A green checkmark besides the **Play** button indicates that the IBM Granite model is initialized using Replicate. You are now ready to prompt the model to generate code for the given scenario.

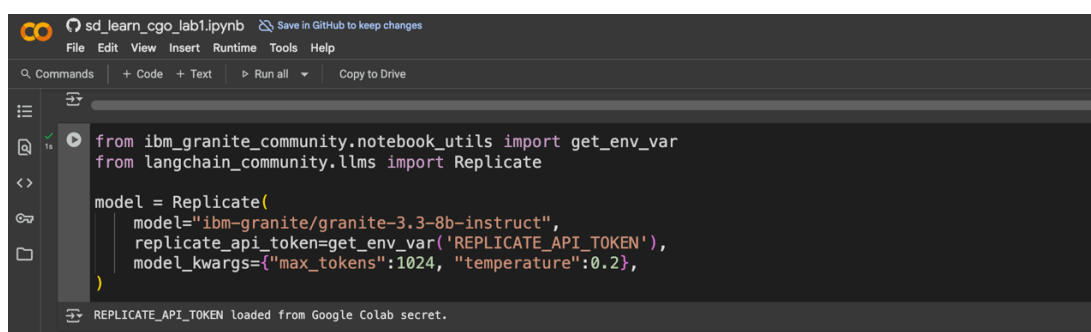

The screenshot shows the same Jupyter Notebook interface as in the previous image. The code cell contains the same Python code:

```
from ibm_granite_community.notebook_utils import get_env_var
from langchain_community.llms import Replicate

model = Replicate(
    model="ibm-granite/granite-3.3-8b-instruct",
    replicate_api_token=get_env_var('REPLICATE_API_TOKEN'),
    model_kwargs={"max_tokens":1024, "temperature":0.2},
)
```

Below the code, the output shows: 'REPLICATE_API_TOKEN loaded from Google Colab secret.'.

Step 5: Generate code using the IBM Granite model


Overview

In this step, you'll prompt the IBM Granite model to generate code for the landing page of the Reader's Verse website. You'll define a zero-shot prompt for the model and run the prompt to create the UI components for the landing page of the client's website.

Instructions

1. Define and execute a function that creates a zero-shot prompt for the model. A zero-shot prompt describes a task which a model needs to perform without providing examples to guide the model's output.

In the third cell of the notebook, select the **Play** button to define the **zeroshot_prompt** function containing a set of instructions that informs the model what output to generate. In this scenario, the instructions inform the model to generate code for the online bookstore based on the given parameters, which are context, question, and book titles.

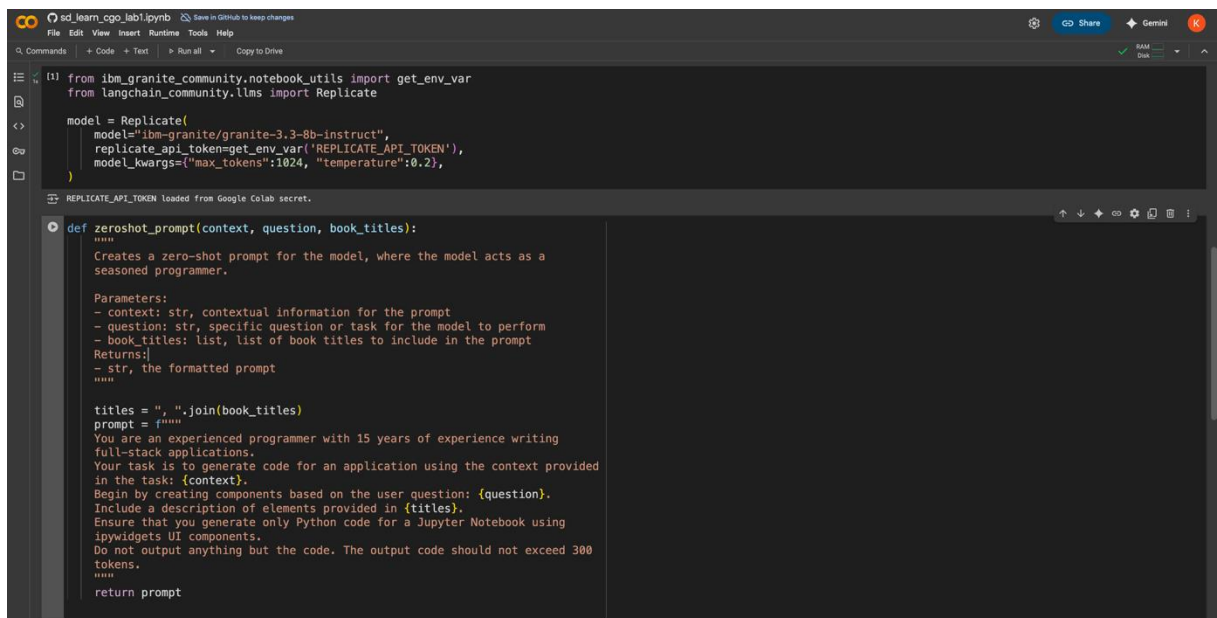

```
from ibm_granite_community.notebook_utils import get_env_var
from langchain_community.llms import Replicate

model = Replicate(
    model="ibm-granite/granite-3.3-8b-instruct",
    replicate_api_token=get_env_var('REPLICATE_API_TOKEN'),
    model_kwargs={"max_tokens":1024, "temperature":0.2},
)

REPLICATE_API_TOKEN loaded from Google Colab secret.

def zeroshot_prompt(context, question, book_titles):
    """
    Creates a zero-shot prompt for the model, where the model acts as a
    seasoned programmer.

    Parameters:
    - context: str, contextual information for the prompt
    - question: str, specific question or task for the model to perform
    - book_titles: list, list of book titles to include in the prompt
    Returns:
    - str, the formatted prompt
    """
    titles = ", ".join(book_titles)
    prompt = f"""
    You are an experienced programmer with 15 years of experience writing
    full-stack applications.
    Your task is to generate code for an application using the context provided
    in the task: {context}.
    Begin by creating components based on the user question: {question}.
    Include a description of elements provided in {titles}.
    Ensure that you generate only Python code for a Jupyter Notebook using
    ipywidgets UI components.
    Do not output anything but the code. The output code should not exceed 300
    tokens.
    """
    return prompt
```

Note: You won't see any output when you run this cell in the notebook.

- Next, create a function to generate a response from the model using the zero-shot prompt. You'll send the instructions defined in the zero-shot prompt to the model and prepare to get a response from the model.

In the fourth cell of the notebook, select the **Play** button to define the `get_answer_using_zeroshot` function.

```
def get_answer_using_zeroshot(context, question, book_titles):  
    """  
    Generates the response from the model based on a zero-shot prompt.  
  
    Parameters:  
    - context: str, contextual information for the prompt  
    - question: str, specific question for the model to answer  
    - book_titles: list, list of book titles to include in the prompt  
  
    Returns:  
    - str, the generated result from the model  
    """  
    prompt = zeroshot_prompt(context, question, book_titles)  
    result = model.invoke(prompt)  
  
    return result
```

Note: You won't see any output when you run this cell in the notebook.

- Next, you'll provide the required values for parameters defined in the zero-shot prompt, and then call the `get_answer_using_zeroshot` function to generate the code output. In this scenario, the values provided are as follows:
 - Context:** Prompts the model to design the UI with a minimalistic theme
 - Question:** Defines the attributes of the landing page of the website such as header and welcome message
 - Titles:** Defines the list of book titles to display on the landing page

In the fifth cell of the notebook, select the **Play** button to run the `get_answer_using_zeroshot` function. This generates and displays the Python code for the landing page UI of the online bookstore following the code cell.

```
context = "Design and develop an online bookstore UI components with  
minimalistic theme."  
question = "Create the landing page for users visiting my bookstore. The  
landing page should display a header 'Reader's Online Store', a welcome message  
'Welcome to Reader's Verse' along with a catalog of books titles as title.  
Vertically align the sections."  
book_titles = ["The Great Gatsby", "Pride and Prejudice", "The Hobbit", "The  
Lord of the Rings", "Animal Farm", "Brave New World"]  
  
# Generate and display the UI code for the landing page  
result = get_answer_using_zeroshot(context, question, book_titles)  
print(f"Generated Code:\n{result}")
```

- The generated output includes the Python code for creating UI elements such as a landing page and a catalog of books, using a native UI framework of Jupyter Notebook. This code will create the bookstore's landing page UI, including a title and a catalog of book titles.


Note: When you generate the code, it might be slightly different from the following code output. These minor differences are normal and will not affect the overall functionality or outcome of the lab.

```
context = "Design and develop an online bookstore UI components with minimalist theme."
question = "Create the landing page for users visiting my bookstore. The landing page should display a header 'Reader's Online Store', a welcome message 'Welcome to Reader's Verse' along with a catalog of books t
book_titles = ["The Great Gatsby", "Pride and Prejudice", "The Hobbit", "The Lord of the Rings", "Animal Farm", "Brave New World"]

# Generate and display the UI code for the landing page
result = get_answer_using_zeroshot(context, question, book_titles)
print(f"Generated Code:\n{result}")

Generated Code:
Here's the code for the landing page of the online bookstore using ipywidgets:
'''python
import ipywidgets as widgets
# Define the header
header = widgets.HTML("Reader's Online Store")
# Define the welcome message
welcome_message = widgets.HTML("Welcome to Reader's Verse")
# Define the book catalog
book_catalog = widgets.HTML("Catalog of Books:")
# Define the book titles and descriptions
book_titles = ["The Great Gatsby", "Pride and Prejudice", "The Hobbit", "The Lord of the Rings", "Animal Farm", "Brave New World"]
book_descriptions = ["P. Scott Fitzgerald's classic novel set in the Roaring Twenties, following the decadent lifestyle of Jay Gatsby and his wife Daisy Buchanan.",
"The story follows the romantic exploits of the Bennet sisters, Mary and Elizabeth, as they navigate the social norms of the Regency era in England.",
"The Hobbit is a fantasy novel by J. R. R. Tolkien. It was published in 1937 and is the first book of The Lord of the Rings.",
"The Lord of the Rings is an epic high-fantasy novel written by J. R. R. Tolkien.",
"Animal Farm is a novella by George Orwell. It was published in 1945 and is a political satire of the Soviet Union.",
"Brave New World is a 1932 novel by Aldous Huxley, published by Secker & Warburg as The Doors of Perception, and is regarded by many critics as one of the greatest novels of the 20th century."]
# Create a list of book descriptions
book_desc_list = []
for i in range(len(book_titles)):
    book_desc_list.append(widgets.HTML(f"{book_titles[i]}: {book_descriptions[i]}"))
# Create a vertical box layout for the landing page
landing_page = widgets.VBox([header, welcome_message, book_catalog] + book_desc_list)
# Display the landing page
landing_page
```

5. For ease of execution, the output code is pre-populated in a new cell of the Jupyter notebook. Select the **Play** button in the sixth cell of the notebook to validate the Python code output generated by the IBM Granite model for the given scenario.

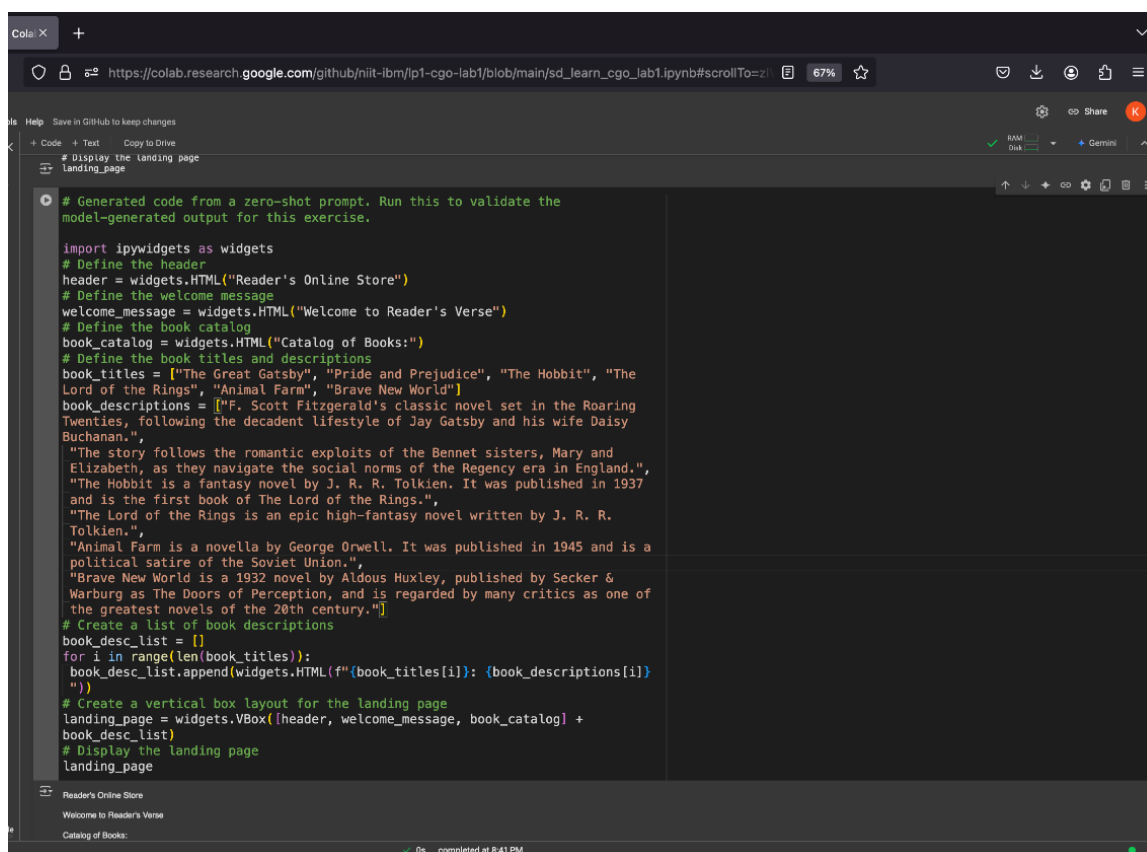

The screenshot shows a Google Colab notebook interface. The top bar includes the Colab logo, a plus sign for adding new cells, and a URL: https://colab.research.google.com/github/nit-ibm/p1-cgo-lab1/blob/main/sd_learn_cgo_lab1.ipynb#scrollTo=z1. The notebook has a sidebar with a file explorer showing 'Landing_page'. The main area contains a code cell with the following Python code:


```
# Generated code from a zero-shot prompt. Run this to validate the
model-generated output for this exercise.

import ipywidgets as widgets
# Define the header
header = widgets.HTML("Reader's Online Store")
# Define the welcome message
welcome_message = widgets.HTML("Welcome to Reader's Verse")
# Define the book catalog
book_catalog = widgets.HTML("Catalog of Books:")
# Define the book titles and descriptions
book_titles = ["The Great Gatsby", "Pride and Prejudice", "The Hobbit", "The
Lord of the Rings", "Animal Farm", "Brave New World"]
book_descriptions = ["F. Scott Fitzgerald's classic novel set in the Roaring
Twenties, following the decadent lifestyle of Jay Gatsby and his wife Daisy
Buchanan.",
"The story follows the romantic exploits of the Bennet sisters, Mary and
Elizabeth, as they navigate the social norms of the Regency era in England.",
"The Hobbit is a fantasy novel by J. R. R. Tolkien. It was published in 1937
and is the first book of The Lord of the Rings.",
"The Lord of the Rings is an epic high-fantasy novel written by J. R. R.
Tolkien.",
"Animal Farm is a novella by George Orwell. It was published in 1945 and is a
political satire of the Soviet Union.",
"Brave New World is a 1932 novel by Aldous Huxley, published by Secker &
Warburg as The Doors of Perception, and is regarded by many critics as one of
the greatest novels of the 20th century."]
# Create a list of book descriptions
book_desc_list = []
for i in range(len(book_titles)):
    book_desc_list.append(widgets.HTML(f"{book_titles[i]}: {book_descriptions[i]}
"))
# Create a vertical box layout for the landing page
landing_page = widgets.VBox([header, welcome_message, book_catalog] +
book_desc_list)
# Display the landing page
landing_page
```

The output of the code cell shows the rendered UI components:

```
Reader's Online Store
Welcome to Reader's Verse
Catalog of Books:
The Great Gatsby: F. Scott Fitzgerald's classic novel set in the Roaring Twenties, following the decadent lifestyle of Jay Gatsby and his wife Daisy Buchanan.
Pride and Prejudice: The story follows the romantic exploits of the Bennet sisters, Mary and Elizabeth, as they navigate the social norms of the Regency era in England.
The Hobbit: The Hobbit is a fantasy novel by J. R. R. Tolkien. It was published in 1937 and is the first book of The Lord of the Rings.
The Lord of the Rings: The Lord of the Rings is an epic high-fantasy novel written by J. R. R. Tolkien.
Animal Farm: Animal Farm is a novella by George Orwell. It was published in 1945 and is a political satire of the Soviet Union.
Brave New World: Brave New World is a 1932 novel by Aldous Huxley, published by Secker & Warburg as The Doors of Perception, and is regarded by many critics as one of the greatest novels of the 20th century.
```

6. The output should display the bookstore's landing page UI following the code cell, featuring the following components:
- A title: "Welcome to Reader's Verse!"
 - A catalog grid displaying book titles, authors, and descriptions

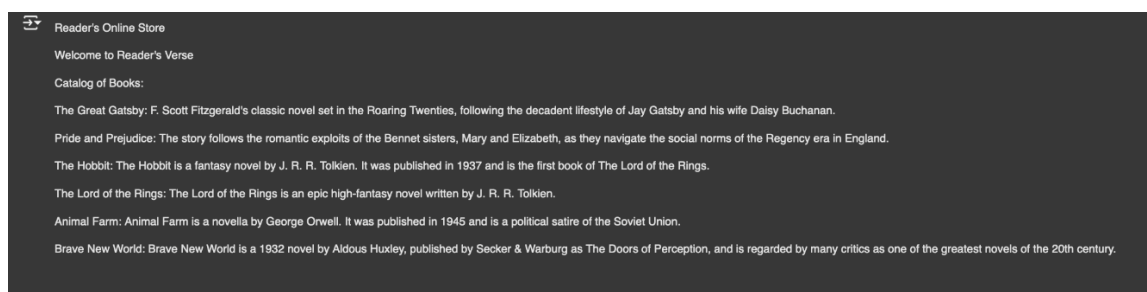

Conclusion

You have used an IBM Granite model to generate code for creating the landing page of a website for Reader's Verse, an online bookstore. The client is delighted with how fast you developed a working prototype of the UI for the website's welcome page. You have also successfully defined a zero-shot prompt to generate Python code output from the IBM Granite model and validated the AI-generated code to ensure that it correctly renders the expected output.

© Copyright IBM Corporation 2025.

The information contained in these materials is provided for informational purposes only and is provided AS IS without warranty of any kind, express or implied. IBM shall not be responsible for any damages arising out of the use of, or otherwise related to, these materials. Nothing contained in these materials is intended to, nor shall have the effect of, creating any warranties or representations from IBM or its suppliers or licensors, or altering the terms and conditions of the applicable license agreement governing the use of IBM software. References in these materials to IBM products, programs, or services do not imply that they will be available in all countries in which IBM operates. This information is based on current IBM product plans and strategy, which are subject to change by IBM without notice. Product release dates and/or capabilities referenced in these materials may change at any time at IBM's sole discretion based on market opportunities or other factors, and are not intended to be a commitment to future product or feature availability in any way.

IBM, the IBM logo and ibm.com are trademarks of International Business Machines Corp., registered in many jurisdictions worldwide. Other product and service names might be trademarks of IBM or other companies. A current list of IBM trademarks is available on the Web at "Copyright and trademark information" at www.ibm.com/legal/copytrade.shtml.



Please Recycle
