Despliegue Aplicaciones Web

CFGS Desarrollo de Aplicaciones Web

2º curso

Sistema Control De Versiones

Josep Revidiego

Usuario1

En primer lugar, debemos clonar el repositorio.

```
Rai@DESKTOP-V7R3N9P UCRT64 ~
$ git clone https://github.com/revidiegojosep/SistemaControlVersiones.git
Cloning into 'SistemaControlVersiones'...
remote: Enumerating objects: 3, done.
remote: Counting objects: 100% (3/3), done.
remote: Total 3 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
Receiving objects: 100% (3/3), done.

Rai@DESKTOP-V7R3N9P UCRT64 ~
```

Iniciamos GitFlow:

```
Rai@DESKTOP-V7R3N9P MSYS ~/SistemaControlVersiones
$ git flow init

How to name your supporting branch prefixes?
Feature branches? [feature/]
Bugfix branches? [bugfix/]
Release branches? [release/]
Hotfix branches? [hotfix/]
Support branches? [support/]
Version tag prefix? []
Hooks and filters directory? [/home/Rai/SistemaControlVersiones/.git/hooks]
```

Creamos los archivos a subir:

```
Rai@DESKTOP-V7R3N9P MSYS ~/SistemaControlVersiones
$ nano index.html

Rai@DESKTOP-V7R3N9P MSYS ~/SistemaControlVersiones
$ mkdir css

Rai@DESKTOP-V7R3N9P MSYS ~/SistemaControlVersiones
$ cd css/

Rai@DESKTOP-V7R3N9P MSYS ~/SistemaControlVersiones/css
$ nano estilos.css
```


Posteriormente, subiremos los cambios al repositorio. Vamos a simular ser el Usuario1:

```
Rai@DESKTOP-V7R3N9P MSYS ~/SistemaControlVersiones/css
$ git add .

Rai@DESKTOP-V7R3N9P MSYS ~/SistemaControlVersiones/css
$ git commit -m "Usuario 1: crea estructura inicial de la página"
[develop 24f51a5] Usuario 1: crea estructura inicial de la página
 1 file changed, 28 insertions(+)
 create mode 100644 css/estilos.css
```

```
Rai@DESKTOP-V7R3N9P MSYS ~/SistemaControlVersiones/css
$ git push origin develop
Enumerating objects: 5, done.
Counting objects: 100% (5/5), done.
Delta compression using up to 12 threads
Compressing objects: 100% (3/3), done.
Writing objects: 100% (4/4), 584 bytes | 292.00 KiB/s, done.
Total 4 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
remote:
remote: Create a pull request for 'develop' on GitHub by visiting:
remote:      https://github.com/revidiegojosep/SistemaControlVersiones/pull/new/develop
remote:
To https://github.com/revidiegojosep/SistemaControlVersiones.git
 * [new branch]      develop -> develop
```

Vemos que los cambios se han subido correctamente:

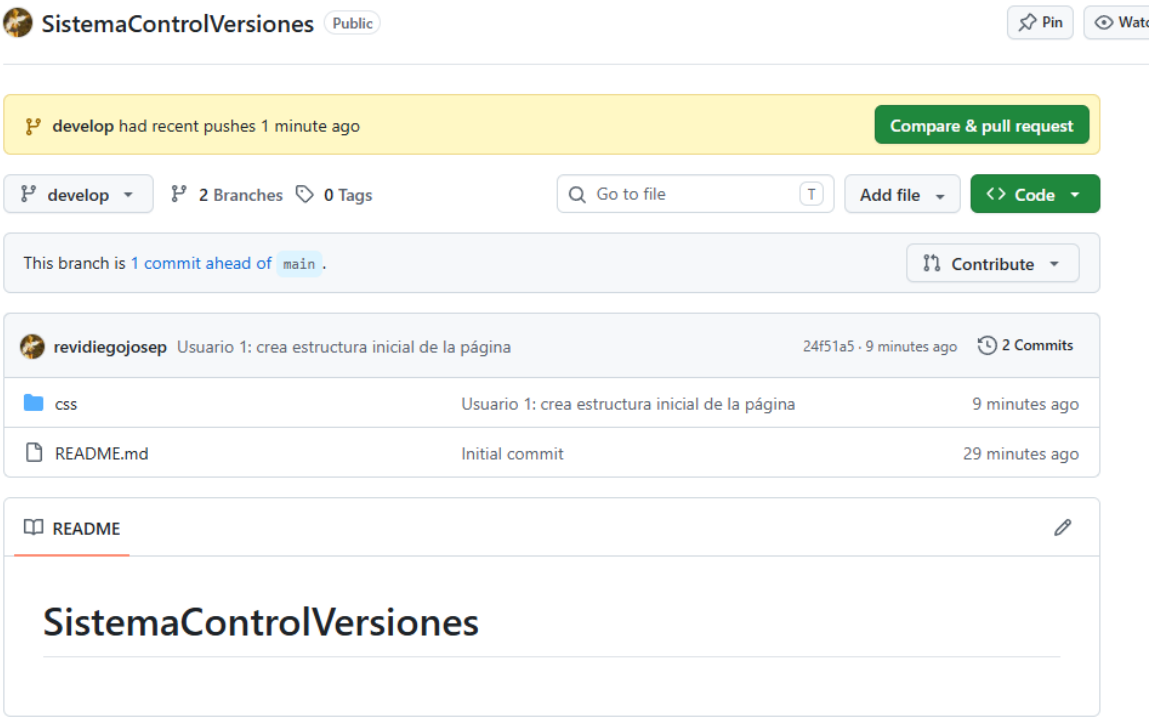

Usuario2

Ahora simularemos ser el Usuario2. Crearemos una nueva feature y editaremos el archivo HTML.

```
Rai@DESKTOP-V7R3N9P MSYS ~/SistemaControlVersiones
$ git flow feature start contenidoHTML
Switched to a new branch 'feature/contenidoHTML'

Summary of actions:
- A new branch 'feature/contenidoHTML' was created, based on 'develop'
- You are now on branch 'feature/contenidoHTML'

Now, start committing on your feature. When done, use:

     git flow feature finish contenidoHTML


Rai@DESKTOP-V7R3N9P MSYS ~/SistemaControlVersiones
```

Editamos el index.html y añadiremos un archivo js

```
Rai@DESKTOP-V7R3N9P MSYS ~/SistemaControlVersiones
$ nano index.html

Rai@DESKTOP-V7R3N9P MSYS ~/SistemaControlVersiones
$ mkdir js

Rai@DESKTOP-V7R3N9P MSYS ~/SistemaControlVersiones
$ cd js/

Rai@DESKTOP-V7R3N9P MSYS ~/SistemaControlVersiones/js
$ nano contenido.js
```

Hacemos el commit

```
Rai@DESKTOP-V7R3N9P MSYS ~/SistemaControlVersiones
$ git add .
git commit -m "Usuario 2: añade modificación de contenido HTML"
[feature/contenidoHTML 5205ccf] Usuario 2: añade modificación de contenido HTML
 2 files changed, 61 insertions(+)
 create mode 100644 index.html
 create mode 100644 js/contenido.js
```

Por último, vamos a terminar la feature y subiremos los cambios al repositorio.


```
Rai@DESKTOP-V7R3N9P MSYS ~/SistemaControlVersiones
$ git flow feature finish contenidoHTML
Switched to branch 'develop'
Updating 24f51a5..5205ccf
Fast-forward
 index.html       | 57 ++++++
```

Terminamos la feature y hacemos el pus

```
Rai@DESKTOP-V7R3N9P MSYS ~/SistemaControlVersiones
$ git flow feature finish atributosHTML
Switched to branch 'develop'
Merge made by the 'ort' strategy.
 index.html      | 23 ++++++++++++++++++++--
 js/atributos.js |  6 ++++++
 2 files changed, 27 insertions(+), 2 deletions(-)
 create mode 100644 js/atributos.js
Deleted branch feature/atributosHTML (was 55ab485).

Summary of actions:
- The feature branch 'feature/atributosHTML' was merged into 'develop'
- Feature branch 'feature/atributosHTML' has been locally deleted
- You are now on branch 'develop'


Rai@DESKTOP-V7R3N9P MSYS ~/SistemaControlVersiones
$ git push origin develop
Enumerating objects: 11, done.
Counting objects: 100% (11/11), done.
Delta compression using up to 12 threads
Compressing objects: 100% (8/8), done.
Writing objects: 100% (8/8), 1.26 KiB | 647.00 KiB/s, done.
Total 8 (delta 3), reused 0 (delta 0), pack-reused 0 (from 0)
remote: Resolving deltas: 100% (3/3), completed with 2 local objects.
To https://github.com/revidiegojosep/SistemaControlVersiones.git
   5205ccf..5ced65b  develop -> develop
```

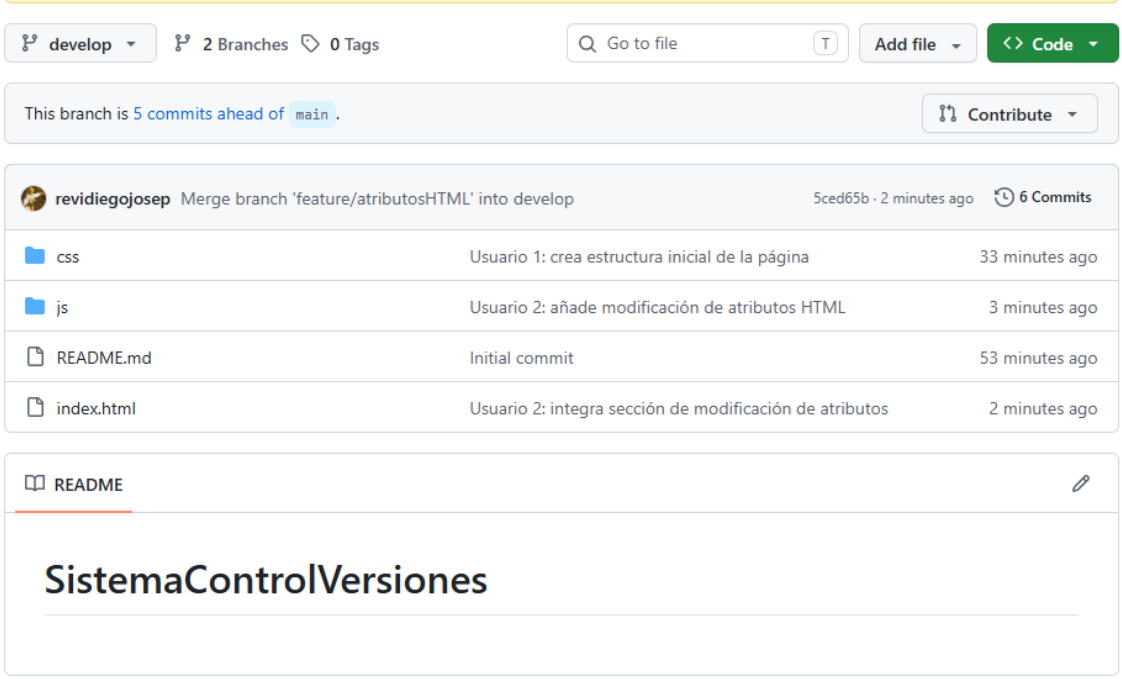

Usuario3

Ahora simularemos el trabajo del usuario3. En primer lugar, creamos la feature.

```
Rai@DESKTOP-V7R3N9P MSYS ~/SistemaControlVersiones
$ git flow feature start estilosCSS
Switched to a new branch 'feature/estilosCSS'

Summary of actions:
- A new branch 'feature/estilosCSS' was created, based on 'develop'
- You are now on branch 'feature/estilosCSS'

Now, start committing on your feature. When done, use:

     git flow feature finish estilosCSS
```

Realizamos cambios en los archivos

```
Rai@DESKTOP-V7R3N9P MSYS ~/SistemaControlVersiones
$ nano index.html

Rai@DESKTOP-V7R3N9P MSYS ~/SistemaControlVersiones
$ cd js/

Rai@DESKTOP-V7R3N9P MSYS ~/SistemaControlVersiones/js
$ ls
atributos.js  contenido.js

Rai@DESKTOP-V7R3N9P MSYS ~/SistemaControlVersiones/js
$ nano estilos.js
```

Realizamos el commit

```
Rai@DESKTOP-V7R3N9P MSYS ~/SistemaControlVersiones/js
$ git add .
```

```
Rai@DESKTOP-V7R3N9P MSYS ~/SistemaControlVersiones
$ git add index.html
git commit -m "Usuario 3: añade sección de estilos CSS"
[feature/estilosCSS f9401df] Usuario 3: añade sección de estilos CSS
 1 file changed, 15 insertions(+)
```

Y terminamos la feature, para después subir el contenido con un push.

```
Rai@DESKTOP-V7R3N9P MSYS ~/SistemaControlVersiones
$ git flow feature finish estilosCSS
Switched to branch 'develop'
Merge made by the 'ort' strategy.
 index.html    | 15 +++++++++++++++
 js/estilos.js | 14 ++++++++++++++
 2 files changed, 29 insertions(+)
 create mode 100644 js/estilos.js
Deleted branch feature/estilosCSS (was f9401df).

Summary of actions:
- The feature branch 'feature/estilosCSS' was merged into 'develop'
- Feature branch 'feature/estilosCSS' has been locally deleted
- You are now on branch 'develop'


Rai@DESKTOP-V7R3N9P MSYS ~/SistemaControlVersiones
$ git push origin develop
Enumerating objects: 11, done.
Counting objects: 100% (11/11), done.
Delta compression using up to 12 threads
Compressing objects: 100% (8/8), done.
Writing objects: 100% (8/8), 1.21 KiB | 618.00 KiB/s, done.
Total 8 (delta 3), reused 0 (delta 0), pack-reused 0 (from 0)
remote: Resolving deltas: 100% (3/3), completed with 2 local objects.
To https://github.com/revidiegojosep/SistemaControlVersiones.git
   5ced65b..4a4aaed  develop -> develop
```

Ahora con el usuario3 crearemos la versión release.

```
Rai@DESKTOP-V7R3N9P MSYS ~/SistemaControlVersiones
$ git flow release start 1.0
Switched to a new branch 'release/1.0'

Summary of actions:
- A new branch 'release/1.0' was created, based on 'develop'
- You are now on branch 'release/1.0'

Follow-up actions:
- Bump the version number now!
- Start committing last-minute fixes in preparing your release
- When done, run:

     git flow release finish '1.0'
```

Podemos modificar o no el contenido antes de hacer el commit.

```
Rai@DESKTOP-V7R3N9P MSYS ~/SistemaControlVersiones
$ nano index.html

Rai@DESKTOP-V7R3N9P MSYS ~/SistemaControlVersiones
$ ^Z^C

Rai@DESKTOP-V7R3N9P MSYS ~/SistemaControlVersiones
$ git add .

Rai@DESKTOP-V7R3N9P MSYS ~/SistemaControlVersiones
$ git commit -m "Usuario 3: prepara release v1.0"
[release/1.0 ccc2d7a] Usuario 3: prepara release v1.0
 1 file changed, 1 insertion(+), 1 deletion(-)
```

Terminamos la feature una vez se hagan los cambios deseados.


```
Rai@DESKTOP-V7R3N9P MSYS ~/SistemaControlVersiones
$ git flow release finish 1.0
Switched to branch 'main'
Your branch is up to date with 'origin/main'.
Merge made by the 'ort' strategy.
 css/estilos.css | 28 ++++++++++++++++++++
 index.html      | 91 ++++++++++++++++++++
```

Subimos los cambios al repositorio.

```
Rai@DESKTOP-V7R3N9P MSYS ~/SistemaControlVersiones
$ git push origin main
Enumerating objects: 7, done.
Counting objects: 100% (7/7), done.
Delta compression using up to 12 threads
Compressing objects: 100% (4/4), done.
Writing objects: 100% (4/4), 529 bytes | 264.00 KiB/s, done.
Total 4 (delta 2), reused 0 (delta 0), pack-reused 0 (from 0)
remote: Resolving deltas: 100% (2/2), completed with 1 local object.
To https://github.com/revidiegojosep/SistemaControlVersiones.git
   aa85c9b..ffe86fa  main -> main

Rai@DESKTOP-V7R3N9P MSYS ~/SistemaControlVersiones
$ git push origin develop
Enumerating objects: 1, done.
Counting objects: 100% (1/1), done.
Writing objects: 100% (1/1), 247 bytes | 123.00 KiB/s, done.
Total 1 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
To https://github.com/revidiegojosep/SistemaControlVersiones.git
   4a4aaed..1b30900  develop -> develop

Rai@DESKTOP-V7R3N9P MSYS ~/SistemaControlVersiones
$ git push origin --tags
Enumerating objects: 1, done.
Counting objects: 100% (1/1), done.
Writing objects: 100% (1/1), 171 bytes | 171.00 KiB/s, done.
Total 1 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
To https://github.com/revidiegojosep/SistemaControlVersiones.git
 * [new tag]         1.0 -> 1.0
```

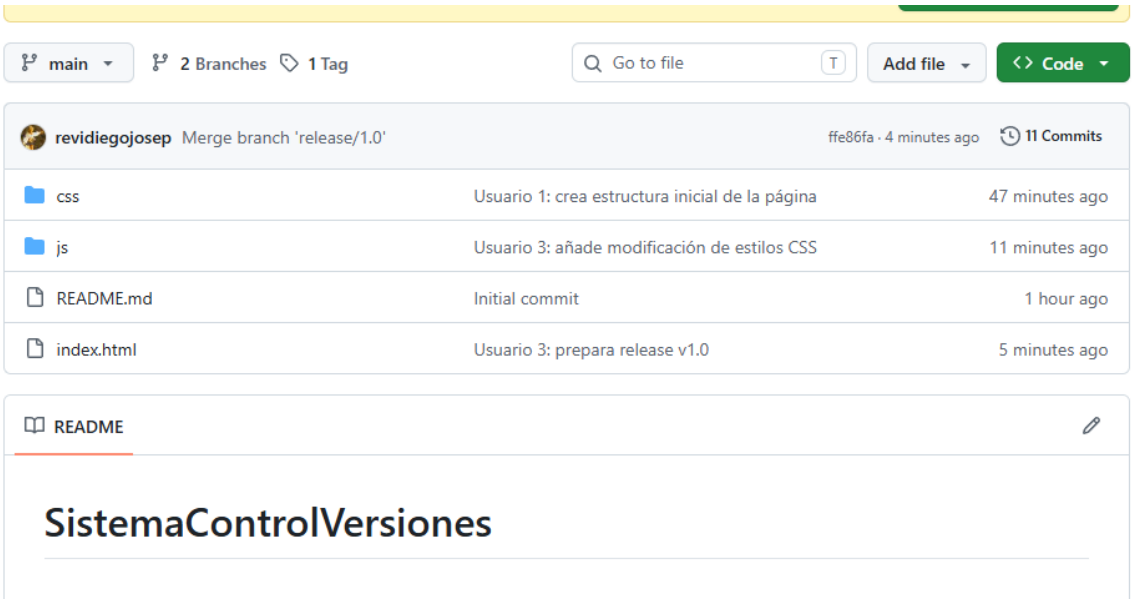

Usuario1: Hot Fix

Vamos a simular una mejora por Usuario1.

Primero iniciamos el hot fix:

```
Rai@DESKTOP-V7R3N9P MSYS ~/SistemaControlVersiones
$ git flow hotfix start mejorasV_1_0
Switched to a new branch 'hotfix/mejorasV_1_0'

Summary of actions:
- A new branch 'hotfix/mejorasV_1_0' was created, based on 'main'
- You are now on branch 'hotfix/mejorasV_1_0'

Follow-up actions:
- Start committing your hot fixes
- Bump the version number now!
- When done, run:

     git flow hotfix finish 'mejorasV_1_0'
```

Vamos a realizar un cambio en un fichero js.

```
Rai@DESKTOP-V7R3N9P MSYS ~/SistemaControlVersiones/js
$ cat contenido.js
function cambiarTexto() {
    document.getElementById("texto").innerHTML =
        "El contenido ha sido modificado mediante JavaScript";
}
```

Modificamos el archivo:

```
Rai@DESKTOP-V7R3N9P MSYS ~/SistemaControlVersiones/js
$ nano contenido.js

Rai@DESKTOP-V7R3N9P MSYS ~/SistemaControlVersiones/js
$ cat contenido.js
function cambiarTexto() {

    let texto = document.getElementById("texto");

    texto.innerHTML =
        "Contenido modificado correctamente mediante JavaScript";

    texto.style.color = "green";
}
```

Hacemos un commit con el cambio realizado

```
Rai@DESKTOP-V7R3N9P MSYS ~/SistemaControlVersiones/js
$ git add .

Rai@DESKTOP-V7R3N9P MSYS ~/SistemaControlVersiones/js
$ git commit -m "Usuario 1: mejora la sección de contenido HTML"
[hotfix/mejorasV_1_0 d0682c1] Usuario 1: mejora la sección de contenido HTML
 1 file changed, 7 insertions(+), 2 deletions(-)
```

Y terminamos la feature:

```
Rai@DESKTOP-V7R3N9P MSYS ~/SistemaControlVersiones
$ git flow hotfix finish mejorasV_1_0
Switched to branch 'main'
Your branch is up to date with 'origin/main'.
Merge made by the 'ort' strategy.
 js/contenido.js | 9 +++++++--
 1 file changed, 7 insertions(+), 2 deletions(-)
Switched to branch 'develop'
Merge made by the 'ort' strategy.
 js/contenido.js | 9 +++++++--
 1 file changed, 7 insertions(+), 2 deletions(-)
Deleted branch hotfix/mejorasV_1_0 (was d0682c1).

Summary of actions:
- Hotfix branch 'hotfix/mejorasV_1_0' has been merged into 'main'
- The hotfix was tagged 'mejorasV_1_0'
- Hotfix tag 'mejorasV_1_0' has been back-merged into 'develop'
- Hotfix branch 'hotfix/mejorasV_1_0' has been locally deleted
- You are now on branch 'develop'
```

Subimos los cambios al repositorio

```
Rai@DESKTOP-V7R3N9P MSYS ~/SistemaControlVersiones
$ git push origin main
Enumerating objects: 8, done.
Counting objects: 100% (8/8), done.
Delta compression using up to 12 threads
Compressing objects: 100% (5/5), done.
Writing objects: 100% (5/5), 658 bytes | 329.00 KiB/s, done.
Total 5 (delta 2), reused 0 (delta 0), pack-reused 0 (from 0)
remote: Resolving deltas: 100% (2/2), completed with 1 local object.
To https://github.com/revidiegojosep/SistemaControlVersiones.git
   ffe86fa..acf916f  main -> main

Rai@DESKTOP-V7R3N9P MSYS ~/SistemaControlVersiones
$ git push origin develop
Enumerating objects: 1, done.
Counting objects: 100% (1/1), done.
Writing objects: 100% (1/1), 246 bytes | 246.00 KiB/s, done.
Total 1 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
To https://github.com/revidiegojosep/SistemaControlVersiones.git
   1b30900..33e9200  develop -> develop

Rai@DESKTOP-V7R3N9P MSYS ~/SistemaControlVersiones
$ git push origin --tags
Enumerating objects: 1, done.
Counting objects: 100% (1/1), done.
Writing objects: 100% (1/1), 172 bytes | 172.00 KiB/s, done.
Total 1 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
To https://github.com/revidiegojosep/SistemaControlVersiones.git
 * [new tag]         mejorasV_1_0 -> mejorasV_1_0

Rai@DESKTOP-V7R3N9P MSYS ~/SistemaControlVersiones
$
```