


Nama : Muhammad Faris Rasyid Raharjo

Kelas : 1IA23

NPM : 51422041

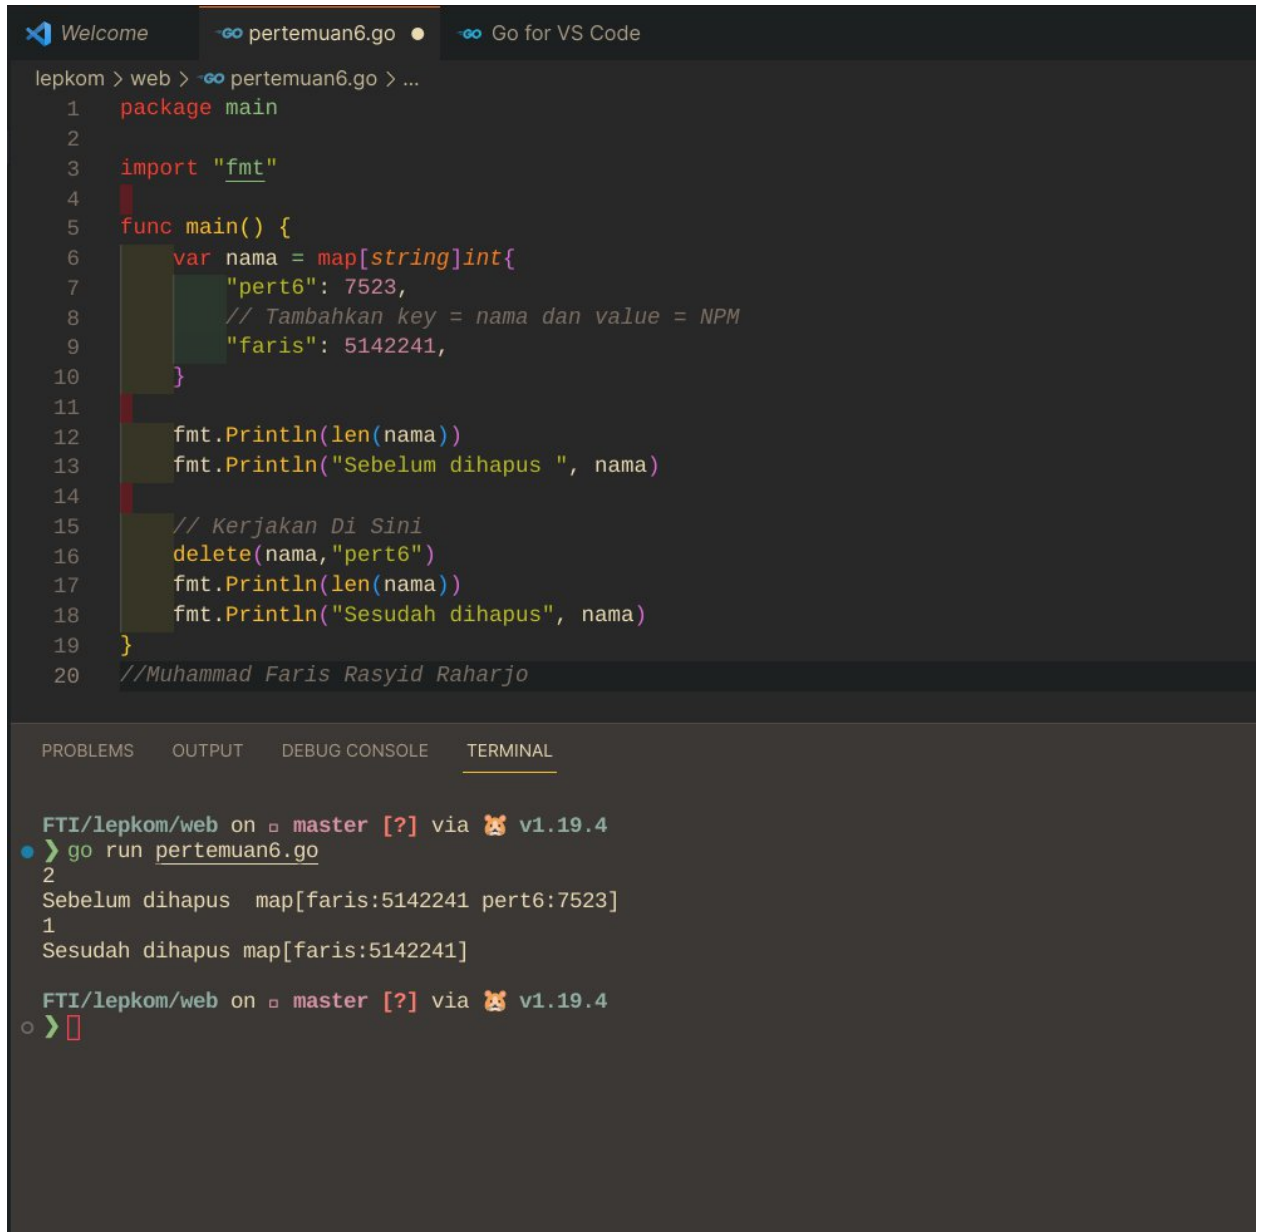

The image shows a screenshot of a Visual Studio Code editor window. The top bar shows the file name 'pertemuan6.go' and a 'Go for VS Code' button. The editor displays a Go program that uses a map to store data and then deletes an element from it. The terminal at the bottom shows the execution of the program, which prints the map before and after deletion.

```
lepkom > web > pertemuan6.go > ...
1  package main
2
3  import "fmt"
4
5  func main() {
6      var nama = map[string]int{
7          "pert6": 7523,
8          // Tambahkan key = nama dan value = NPM
9          "faris": 5142241,
10     }
11
12     fmt.Println(len(nama))
13     fmt.Println("Sebelum dihapus ", nama)
14
15     // Kerjakan Di Sini
16     delete(nama, "pert6")
17     fmt.Println(len(nama))
18     fmt.Println("Sesudah dihapus", nama)
19 }
20 //Muhammad Faris Rasyid Raharjo
```

PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL

```
FTI/lepkom/web on master [?] via v1.19.4
● > go run pertemuan6.go
2
Sebelum dihapus map[faris:5142241 pert6:7523]
1
Sesudah dihapus map[faris:5142241]

FTI/lepkom/web on master [?] via v1.19.4
○ > 
```