

NPR COLLEGE OF ENGINEERING & TECHNOLOGY
NATHAM - 624 401



NAME :

REGISTER NUMBER :

DEPARTMENT : **COMPUTER SCIENCE AND ENGINEERING**

YEAR & SEM : **II & IV**

SUBJECT : **CS3481 DATABASE MANAGEMENT SYSTEMS
LABORATORY**

**NPR COLLEGE OF ENGINEERING AND TECHNOLOGY NATHAM,
DINDIGUL -624 401**



Name:.....

Year:.....Semester.....Branch.....

University Register No

CERTIFIED that this a Bonafide Record work done by the above

Student in the..... Laboratory

during the year 20 - 20

Signature of Lab. In-charge

Signature of Head of the Department

Submitted for practical examination held on

Internal Examiner

External Examiner

CONTENTS

S.No	Date of Experiment	Name of The Experiment	PageNo	Date of Submission	Remarks
1.	03.02.23	DATA DEFINITION IN SQL (DDL)	10		
2.	03.02.23	DATA MANIPULATION IN SQL (DML)	13		
3.	10.02.23	DATA CONTROL IN SQL (DCL)	16		
4.	10.02.23	CONSTRAINTS	21		
5.	03.03.23	JOINS	29		
6.	03.03.23	VIEWS	32		
7.	10.03.23	NESTED QUERIES	35		
8.	10.03.23	AGGREGATE FUNCTIONS	38		
9.	17.03.23	SET OPERATIONS	46		
10.	17.03.23	CURSORS	49		
11.	24.03.23	PROCEDURES	52		
12.	24.03.23	FUNCTIONS	54		
13.	31.03.23	CONTROL STRUCTURES	56		
14.	31.03.23	TRIGGERS	61		
15.	28.04.23	XML DATABASE	66		
16.	28.04.23	DOCUMENT BASED DATA USING NOSQL DATABASE TOOLS	68		
17.	05.05.23	BANKING SYSTEM	70		

NPR COLLEGE OF ENGINEERING & TECHNOLOGY, NATHAM

VISION

- ◆ To develop students with intellectual curiosity and technical expertise to meet the global needs

MISSION

- ◆ To achieve academic excellence by offering quality technical education using best teaching techniques
- ◆ To improve Industry – Institute interactions and expose industrial atmosphere.
- ◆ To develop interpersonal skills along with value based education in a dynamic learning environment
- ◆ To explore solutions for real time problems in the society.

NPR COLLEGE OF ENGINEERING & TECHNOLOGY, NATHAM

DEPARTMENT OF COMPUTER SCIENCE AND ENGINEERING

VISION

- ◆ To produce globally competent technical professionals for digitized society.

MISSION

- ◆ To establish conducive academic environment by imparting quality education and value added training.
- ◆ To encourage students to develop innovative projects to optimally resolve the challenging social problems.

PROGRAM EDUCATIONAL OBJECTIVES

Graduates of Computer Science and Engineering Program will be able to:

- ◆ Develop into the most knowledgeable professional to pursue higher education and research or have a successful carrier in industries.
- ◆ Successfully carry forward domain knowledge in computing and allied areas to solve complex and real world engineering problems.
- ◆ Meet the technological revolution they are continuously upgraded with the technical knowledge.
- ◆ Serve the humanity with social responsibility combined with ethics

OBJECTIVES:

- To learn and implement important commands in SQL.
- To learn the usage of nested and joint queries.
- To understand functions, procedures and procedural extensions of databases.
- To understand design and implementation of typical database applications.
- To be familiar with the use of a frontend tool for GUI based application development.

LIST OF EXPERIMENTS:

1. Create a database table, add constraints (primary key, unique, check, Not null), insert rows, update and delete rows using SQL DDL and DML commands.
2. Create a set of tables, add foreign key constraints and incorporate referential integrity.
3. Query the database tables using different 'where' clause conditions and also implement aggregate functions.
4. Query the database tables and explore sub queries and simple join operations.
5. Query the database tables and explore natural, equi and outer joins.
6. Write user defined functions and stored procedures in SQL.
7. Execute complex transactions and realize DCL and TCL commands.
8. Write SQL Triggers for insert, delete, and update operations in a database table.
9. Create View and index for database tables with a large number of records.
10. Create an XML database and validate it using XML schema.
11. Create Document, column and graph-based data using NOSQL database tools.
12. Develop a simple GUI based database application and incorporate all the above-mentioned features
13. Case Study using any of the real-life database applications from the following list
 - a) Inventory Management for a EMart Grocery Shop
 - b) Society Financial Management
 - c) Cop Friendly App – Eseva
 - d) Property Management – eMall
 - e) Star Small and Medium Banking and Finance
 - Build Entity Model diagram. The diagram should align with the business and functional goals stated in the application
 - Apply Normalization rules in designing the tables in scope.
 - Prepared applicable views, triggers (for auditing purposes), functions for enabling enterprise grade features.
 - Build PL SQL / Stored Procedures for Complex Functionalities, ex EOD Batch Processing for calculating the EMI for Gold Loan for each eligible Customer.
 - Ability to showcase ACID Properties with sample queries with appropriate settings

List of Equipments:(30 Students per Batch)

MYSQL / SQL : 30 Users

OUTCOMES:

At the end of this course, the students will be able to:

CO1: Create databases with different types of key constraints.

CO2: Construct simple and complex SQL queries using DML and DCL commands.

CO3: Use advanced features such as stored procedures and triggers and incorporate in GUI based application development.

CO4: Create an XML database and validate with meta-data (XML schema).

CO5: Create and manipulate data using NOSQL database.

CS3481 DATABASE MANAGEMENT SYSTEMS LABORATORY

Course Outcomes

After completion of the course, Students are able to learn the listed Course Outcomes.

Cos	Course Code	Course Outcomes	Knowledge Level
CO1	C217.1	Create databases with different types of key constraints.	K4
CO2	C217.2	Construct simple and complex SQL queries using DML and DCL commands.	K3
CO3	C217.3	Use advanced features such as stored procedures and triggers and incorporate in GUI based application development	K3
CO4	C217.4	Create an XML database and validate with meta-data (XML schema).	K3
CO5	C217.5	Create and manipulate data using NOSQL database.	K3

List of Experiments with COs, POs and PSOs

Exp.No.	Name of the Experiment	COs	POs	PSOs
1.	DATA DEFINITION IN SQL (DDL)	CO1,2	PO1,2,3	PSO1,2
2.	DATA MANIPULATION IN SQL (DML)	CO1,2	PO1,2,3	PSO1,2
3.	DATA CONTROL IN SQL (DCL)	CO1,2	PO1,2,3	PSO1,2
4.	CONSTRAINTS	CO1,2	PO1,2,3	PSO1,2
5.	JOINS	CO1,2	PO1,2,3	PSO1,2
6.	VIEWS	CO1,2	PO1,2,3	PSO1,2
7.	NESTED QUERIES	CO1,2	PO1,2,3	PSO1,2

8.	AGGREGATE FUNCTIONS	CO1,2	PO1,2,3	PSO1,2
9.	SET OPERATIONS	CO1,2	PO1,2,3	PSO1,2
10.	CURSORS	CO1,2	PO1,2,3	PSO1,2
11.	PROCEDURES	CO3	PO1,2,3	PSO1,2
12.	FUNCTIONS	CO3	PO1,2,3	PSO1,2
13.	CONTROL STRUCTURES	CO3	PO1,2,3	PSO1,2
14.	TRIGGERS	CO3	PO1,2,3	PSO1,2
15	XML DATABASE	CO4	PO1,2,3	PSO1,2
16	DOCUMENT DATA USING NOSQL DATABASE TOOLS	CO5	PO5	PSO1,2
17	BANKING SYSTEM	CO1,2,3	PO1,2,3,4	PSO1,2

Program Outcomes

- | | |
|---|------------------------------------|
| 1. Engineering Knowledge | 7. Environment and Sustainability |
| 2. Problem Analysis | 8. Ethics |
| 3. Design/Development of Solutions | 9. Individual and Team Work |
| 4. Conduct Investigations of Complex Problems | 10. Communication |
| 5. Modern Tool Usage | 11. Project Management and Finance |
| 6. The Engineer and Society | 12. Life-long Learning |

Program Specific Outcomes

At the end of the program students will be able to

- Deal with real time problems by understanding the evolutionary changes in computing, applying standard practices and strategies in software project development using open-ended programming environments.
- Employ modern computer languages, environments and platforms in creating innovative career paths by inculcating moral values and ethics.
- Achieve additional expertise through add-on and certificate programs.

SQL – AN INTRODUCTION

What is Database?

A database is a separate application that stores a collection of data. Each database has one or more distinct application programming interfaces (API) for creating, accessing, managing, searching and replicating the data it holds.

Other kinds of data stores can be used, such as files on the file system or large hash tables in memory but data fetching and writing would not be so fast and easy with those types of systems.

So nowadays, we use relational database management systems (RDBMS) to store and manage huge volume of data. This is called relational database because all the data is stored into different tables and relations are established using primary keys or other keys known as foreign keys.

A Relational DataBase Management System (RDBMS) is a software that:

- Enables you to implement a database with tables, columns and indexes.
- Guarantees the Referential Integrity between rows of various tables.
- Updates the indexes automatically.
- Interprets an SQL query and combines information from various tables.

RDBMS Terminology:

Before we proceed to explain SQL database system, let's revise few definitions related to database.

- **Database:** A database is a collection of tables, with related data
- **Table:** A table is a matrix with data. A table in a database looks like a simple spreadsheet
- **Column:** One column (data element) contains data of one and the same kind, for example the column postcode
- **Row:** A row (= tuple, entry or record) is a group of related data, for example the data of one subscription
- **Redundancy:** Storing data twice, redundantly to make the system faster
- **Primary Key:** A primary key is unique. A key value cannot occur twice in one table. With a key, you can find at most one row
- **Foreign Key:** A foreign key is the linking pin between two tables.
- **Compound Key:** A compound key (composite key) is a key that consists of multiple columns, because one column is not sufficiently unique.
- **Index:** An index in a database resembles an index at the back of a book.
- **Referential Integrity:** Referential Integrity makes sure that a foreign key value always points to an existing row.

TABLES:

In relational database systems (DBS) data are represented using tables (relations). A query issued against the DBS also results in a table.

A table has the following structure:

Column 1	Column 2	...	Column n
...

← Tuple (or Record)

A table is uniquely identified by its name and consists of rows that contain the stored information, each row containing exactly one tuple (or record). A table can have one or more columns.

A column is made up of a column name and a data type, and it describes an attribute of the tuples. The structure of a table, also called relation schema, thus is defined by its attributes. The type of information to be stored in a table is defined by the data types of the attributes at table creation time.

SQL uses the terms table, row, and column for relation, tuple, and attribute, respectively.

SQL offers the following basic data types:

- **char(n):** Fixed-length character data (string), n characters long. The maximum size for n is 255 bytes (2000 in Oracle8). Note that a string of type char is always padded on right with blanks to full length of n. (+ can be memory consuming).

Example: char(40)

- **varchar2(n):** Variable-length character string. The maximum size for n is 2000 (4000 in Oracle8). Only the bytes used for a string require storage.

Example: varchar2(80)

- **number(o, d):** Numeric data type for integers and reals. o = overall number of digits, d = number of digits to the right of the decimal point.

Maximum values: o = 38, d = -84 to +127. Examples: number(8), number(5,2)

- **Date** data type for storing Date and time.

The default format for a Date is: 'YYYY-MM-DD'. Examples: '1997-10-10';

- **Long:** Character data up to a length of 2GB. Only one long column is allowed per table.

Further properties of tables are:

- the order in which tuples appear in a table is not relevant (unless a query requires an explicit sorting).

- a table has no duplicate tuples (depending on the query, however, duplicate tuples can appear in the query result).

A database schema is a set of relation schemas. The extension of a database schema at database run-time is called a database instance or database.

EX.NO:1
03.02.23

DATA DEFINITION IN SQL (DDL)

AIM:

To implement data definition commands using SQL.

DESCRIPTION:

Creating Tables

The SQL command for creating an empty table has the following form:

```
create table <table> (  
<column 1><data type> [not null] [unique] [<column constraint>],  
.....  
<column n><data type> [not null] [unique] [<column constraint>],  
[<table constraint(s)>]  
);
```

For each column, a name and a data type must be specified and the column name must be unique within the table definition. Column definitions are separated by comma. There is no difference between names in lower case letters and names in upper case letters. In fact, the only place where upper and lower case letters matter are strings comparisons.

A **not null** constraint is directly specified after the data type of the column and the constraint requires defined attribute values for that column, different from null.

Unless the condition not null is also specified for this column, the attribute value null is allowed and two tuples having the attribute value null for this column do not violate the constraint.

The keyword **unique** specifies that no two tuples can have the same attribute value for this column.

Checklist for Creating Tables

The following provides a small checklist for the issues that need to be considered before creating a table.

- What are the attributes of the tuples to be stored? What are the data types of the attributes? Should varchar2 be used instead of char?
- Which columns build the primary key?
- Which columns do (not) allow null values? Which columns do (not) allow duplicates?
- Are there default values for certain columns that allow null values?

Modifying Table and Column Definitions:

It is possible to modify the structure of a table (the relation schema) even if rows have already been inserted into this table.

A column can be added using the alter table command

```
alter table <table>  
add(<column><data type> [default <value>] [<column constraint>]);
```

If more than only one column should be added at one time, respective add clauses need to be separated by colons. A table constraint can be added to a table using

```
alter table <table> add (<table constraint>);
```

Note:

A column constraint is a table constraint, too. not null and primary key constraints can only be added to a table if none of the specified columns contains a null value. Table definitions can be modified in an analogous way. This is useful, e.g., when the size of strings that can be stored needs to be increased. The syntax of the command for modifying a column is

```
alter table <table>
modify(<column> [<data type>] [default <value>] [<column constraint>]);
```

Note:

In earlier versions of Oracle it is not possible to delete single columns from a table definition. A workaround is to create a temporary table and to copy respective columns and rows into this new table.

Renaming a Table

A table can be renamed using the rename command.

```
rename <old table name> to <new table name>;
```

Deleting a Table

A table and its rows can be deleted by issuing the command

```
drop table <table> [cascade constraints];
```

OUTPUT:**Data Definition Language (DDL)****1. Creating Tables**

```
SQL> create table student(sno number(9), stu_name varchar(9) not null, rollno number(9) not null
dob date, phone_no number(10) );
```

Table created.

Table description

```
SQL> desc student;
```

Name	Null?	Type
-----	-----	-----
SNO		NUMBER(9)
STU_NAME	NOT NULL	VARCHAR2(9)
ROLLNO	NOT NULL	NUMBER(9)
DOB		DATE
PHONE_NO		NUMBER(10)

Modifying Table and Column Definitions

```
SQL> alter table student add address varchar(9);
```

Table altered.

Table description

```
SQL> desc student;
```

Name	Null?	Type
-----	-----	-----
SNO		NUMBER(9)
STU_NAME	NOT NULL	VARCHAR2(9)
ROLLNO	NOT NULL	NUMBER(9)
DOB		DATE
PHONE_NO		NUMBER(10)
ADDRESS		VARCHAR2(9)

MODIFY:

SQL> alter table student modify stu_name varchar(20);

Table altered.

Table description

SQL> desc student;

Name	Null?	Type
-----	-----	-----
SNO		NUMBER(9)
STU_NAME	NOT NULL	VARCHAR2(20)
ROLLNO	NOT NULL	NUMBER(9)
DOB		DATE
PHONE_NO		NUMBER(10)
ADDRESS		VARCHAR2(9)

Renaming a Table

SQL> rename student to studentdetail;

Table renamed.

SQL> desc student;

ERROR:

ORA-04043: object student does not exist

Table description

SQL> desc studentdetail;

Name	Null?	Type
-----	-----	-----
SNO		NUMBER(9)
STU_NAME	NOT NULL	VARCHAR2(20)
ROLLNO	NOT NULL	NUMBER(9)
DOB		DATE
PHONE_NO		NUMBER(10)
ADDRESS		VARCHAR2(9)

Deleting a Table:

SQL> drop table studentdetail;

Table dropped.

Table description:

SQL> desc studentdetail;

ERROR:

ORA-04043: object studentdetail does not exist

RESULT:

Thus the data definition commands have been used to create , alter , and drop table using SQL queries.

EX NO:2
03.02.23

DATA MANIPULATION IN SQL(DML)

AIM:

To implement data manipulation using SQL queries.

DESCRIPTION:

After a table has been created using the create table command, tuples can be inserted into the table, or tuples can be deleted or modified.

Insertions

The most simple way to insert a tuple into a table is to use the insert statement

```
insert into <table> [(<column i, . . . , column j>)]  
values (<value i, . . . , value j>);
```

For each of the listed columns, a corresponding (matching) value must be specified. Thus an insertion does not necessarily have to follow the order of the attributes as specified in the create table statement. If a column is omitted, the value null is inserted instead. If no column list is given, however, for each column as defined in the create table statement a value must be given.

If there are already some data in other tables, these data can be used for insertions into a new table. For this, we write a query whose result is a set of tuples to be inserted. Such an insert statement has the form

```
insert into <table> [(<column i, . . . , column j>)] <query>
```

UpDates

For modifying attribute values of (some) tuples in a table, we use the upDate statement:

```
upDate<table> set  
<column i> = <expression i>, . . . , <column j> = <expression j>  
[where <condition>];
```

An expression consists of either a constant (new value), an arithmetic or string operation, or an SQL query.

Note: that the new value to assign to <column i> must a matching data type.

An upDate statement without a where clause results in changing respective attributes of all tuples in the specified table. Typically, however, only a (small) portion of the table requires an upDate.

Deletions

All or selected tuples can be deleted from a table using the delete command:

```
delete from <table> [where <condition>];
```

If the where clause is omitted, all tuples are deleted from the table. An alternative command for deleting all tuples from a table is the truncate table <table> command. However, in this case, the deletions cannot be undone.

Output:

```
SQL> create table EMP (EMPNO number(4) not null, ENAME varchar2(30) not null,  
JOB varchar2(10), MGR number(4), HIREDATE Date, SAL number(7,2), DEPTNO number(2));
```

Table created.

INSERT

Type 1

```
SQL> insert into emp (empno,ename,job,mgr,hireDate,sal,deptno)values (3737,'Priya','Analyst','7777','07-mar-2022',34000,07);
```

1 row created.

Type 2

```
SQL> insert into emp values (2323,'Anitha','Programmer',5454,'09-jan-23',42000,09);
```

1 row created.

```
SQL> insert into emp values (7575,'Karthi','Developer',3337,'07-jul-2022',72000,07);
```

1 row created.

```
SQL> insert into emp values (5352,'Retish','Secretary',5555,'09-jun-2022',20000,08);
```

1 row created.

```
SQL> insert into emp values (5332,'Rocky','Assistant',5555,'08-jan-2020',13000,07);
```

1 row created.

```
SQL> select * from emp;
```

EMPNO	ENAME	JOB	MGR	HIREDATE	SAL	DEPTNO
3737	Priya	Analyst	7777	07-MAR-22	34000	7
2323	Anitha	Programmer	5454	09-JAN-23	42000	9
7575	Karthi	Developer	3337	07-JUL-22	72000	7
5352	Retish	Secretary	5555	09-JUN-22	20000	8
5332	Rocky	Assistant	5555	08-JAN-20	13000	7

TUPLE UPDATE

```
SQL> update emp set job = 'Manager', deptno=20, sal = sal +3000 where ename = 'Karthi';
```

1 row updated.

```
SQL> select * from emp;
```

EMPNO	ENAME	JOB	MGR	HIREDATE	SAL	DEPTNO
3737	Priya	Analyst	7777	07-MAR-22	34000	7
2323	Anitha	Programmer	5454	09-JAN-23	42000	9
7575	Karthi	Manager	3337	07-JUL-22	75000	20
5352	Retish	Secretary	5555	09-JUN-22	20000	8
5332	Rocky	Assistant	5555	08-JAN-20	13000	7

ROW UPDATE

```
SQL> update emp set sal = sal * 1.5 where deptno = 7;
```

2 rows updated.

TUPLE DELETION

```
SQL> delete from emp where empno=2323;
```

1 row deleted.

SQL> select * from emp;

EMPNO	ENAME	JOB	MGR	HIREDATE	SAL	DEPTNO
3737	Priya	Analyst	7777	07-MAR-22	51000	7
7575	Karthi	Manager	3337	07-JUL-23	75000	20
5352	Retish	Secretary	5555	09-JUN-22	20000	8
5332	Rocky	Assistant	5555	08-JAN-20	19500	7

RESULT:

Thus data manipulation language queries have been implemented and verified using SQL.

EX.NO:3
10.02.23

DATA CONTROL IN SQL (DCL)

AIM:

To implement data control language using SQL.

DESCRIPTION:

Selections

Selecting Columns

The columns to be selected from a table are specified after the keyword select. This operation is also called *projection*.

The query

```
select <column i, . . . , column j> from <table>;
```

lists only the attribute values of specified columns for each tuple from the denoted relation.

If all columns should be selected, the asterisk symbol “*” can be used to denote all attributes.

The query

```
select * from <table>;
```

retrieves all tuples with all columns from the table.

Instead of an attribute name, the select clause may also contain arithmetic expressions involving arithmetic operators etc.

The query

```
Select <column I >* 1.55 from <table>;
```

retrieves all tuples with column specified as a product with the specified number from the table.

For the different data types supported in Oracle, several operators and functions are provided:

- for numbers: abs, cos, sin, exp, log, power, mod, sqrt, +, -, _, /, . . .
- for strings: chr, concat(string1, string2), lower, upper, replace(string, search string, replacement string), translate, substr(string, m, n), length, to Date, . . .
- for the Date data type: add month, month between, next day, to char, . . .

Inserting the keyword *distinct* after the keyword select, duplicate result tuples are automatically eliminated.

```
Select distinct <column i> from <table>;
```

Order by

It is also possible to specify a sorting order in which the result tuples of a query are displayed. For this the *order by clause* is used and which has one or more attributes listed in the select clause as parameter, *desc* specifies a descending order and *asc* specifies an ascending order (this is also the default order).

The query

```
Select <column i, . . . , column j>  
From <table>  
Order by <column i> [asc], <column j> desc;
```

displays the result in an ascending order by the attribute <column i>. If two tuples have the same attribute value, the sorting criteria is a descending order by the attribute values of <column j>.

Selection of Tuples

Where

To conditionally select the datas from a table, we use the *where* keyword.

The syntax is as follows:

```
Select <column name>
From <table>
Where "condition"
```

And Or

the where keyword can be used to conditionally select data from a table. This condition can be a simple condition (like the one presented in the previous section), or it can be a compound condition. Compound conditions are made up of multiple simple conditions connected by **AND** or **OR**. There is no limit to the number of simple conditions that can be present in a single SQL statement.

The syntax for a compound condition is as follows:

```
Select "column_name"
From "table_name"
Where "simple condition"
{[AND|OR] "simple condition"}+
```

The { }+ means that the expression inside the bracket will occur one or more times. Note that **AND** and **OR** can be used interchangeably. In addition, we may use the parenthesis sign () to indicate the order of the condition.

In

The **IN** keyword, when used with where in this context, we know exactly the value of the returned values we want to see for at least one of the columns. The syntax for using the **IN** keyword is as follows:

```
Select <column name>
From <table>
Where <column name> IN ('value1', 'value2' ...)
```

The number of values in the parenthesis can be one or more, with each values separated by comma. Values can be numerical or characters. If there is only one value inside the parenthesis, this command is equivalent to

```
Where <column name> = 'value1'
```

Also

```
Select <column name>
From <table>
Where <column name> NOT IN ('value1', 'value2' ...)
```

Between

Whereas the IN keyword help people to limit the selection criteria to one or more discrete values, the *BETWEEN* keyword allows for selecting a range.

The syntax for the BETWEEN clause is as follows:

```
Select <column name>
From <table>
Where <column name> BETWEEN 'value1' AND 'value2'
```

This will select all rows whose column has a value between 'value1' and 'value2'.

For all data types, the comparison operators =, != or <>, <, >, <=, >= are allowed in the conditions of a where clause.

For a tuple to be selected there must (not) exist a defined value for this column.

```
value: <column> is [not] null
```

Note: The operations = null and != null are not defined!

Domain conditions: <column> [not] between<lower bound> and <upper bound

OUTPUT: **SELECT**

SQL> select * from emp;

EMPNO	ENAME	JOB	MGR	HIREDATE	SAL	DEPTNO
3737	Priya	Analyst	7777	07-MAR-22	51000	7
2323	Anitha	Programmer	5454	09-JAN-23	42000	9
7575	Karthi	Manager	3337	07-JUL-22	75000	20
5352	Retish	Secretary	5555	09-JUN-22	20000	8
5332	Rocky	Assistant	5555	08-JAN-20	19500	7

SQL> select ename from emp;

ENAME

Priya
Anitha
Karthi
Retish
Rocky

SQL> select sal * 2 from emp;

SAL*2

102000
84000
150000
40000
39000

SQL> select ename,sal * 2 from emp;

ENAME	SAL*2
Priya	102000
Anitha	84000
Karthi	150000
Retish	40000
Rocky	39000

SQL> select mgr from emp;
MGR

```
-----
7777
5454
3337
5555
5555
```

DISTINCT

SQL> select distinct mgr from emp;
MGR

```
-----
3337
5454
5555
7777
```

ORDER BY

SQL> select * from emp order by ename;

EMPNO	ENAME	JOB	MGR	HIREDATE	SAL	DEPTNO
2323	Anitha	Programmer	5454	09-JAN-23	42000	9
7575	Karthi	Manager	3337	07-JUL-22	75000	20
3737	Priya	Analyst	7777	07-MAR-22	51000	7
5352	Retish	Secretary	5555	09-JUN-22	20000	8
5332	Rocky	Assistant	5555	08-JAN-20	19500	7

SQL> select * from emp order by ename asc;

EMPNO	ENAME	JOB	MGR	HIREDATE	SAL	DEPTNO
2323	Anitha	Programmer	5454	09-JAN-23	42000	9
7575	Karthi	Manager	3337	07-JUL-22	75000	20
3737	Priya	Analyst	7777	07-MAR-22	51000	7
5352	Retish	Secretary	5555	09-JUN-22	20000	8
5332	Rocky	Assistant	5555	08-JAN-20	19500	7

SQL> select * from emp order by ename desc;

EMPNO	ENAME	JOB	MGR	HIREDATE	SAL	DEPTNO
5332	Rocky	Assistant	5555	08-JAN-20	19500	7
5352	Retish	Secretary	5555	09-JUN-22	20000	8
3737	Priya	Analyst	7777	07-MAR-22	51000	7
7575	Karthi	Manager	3337	07-JUL-07	75000	20
2323	Anitha	Programmer	5454	09-JAN-23	42000	9

SQL> select * from emp order by ename desc, empno asc;

EMPNO	ENAME	JOB	MGR	HIREDATE	SAL	DEPTNO
5332	Rocky	Assistant	5555	08-JAN-20	19500	7
5352	Retish	Secretary	5555	09-JUN-22	20000	8
3737	Priya	Analyst	7777	07-MAR-22	51000	7
7575	Karthi	Manager	3337	07-JUL-22	75000	20
2323	Anitha	Programmer	5454	09-JAN-23	42000	9

SQL> select * from emp order by empno desc, ename;

EMPNO	ENAME	JOB	MGR	HIREDATE	SAL	DEPTNO
7575	Karthi	Manager	3337	07-JUL-22	75000	20
5352	Retish	Secretary	5555	09-JUN-22	20000	8
5332	Rocky	Assistant	5555	08-JAN-20	19500	7
3737	Priya	Analyst	7777	07-MAR-22	51000	7
2323	Anitha	Programmer	5454	09-JAN-23	42000	9

OR

SQL> select ename from emp where (mgr = 5555 or deptno = 07);

ENAME

Priya
Retish
Rocky

AND

SQL> select ename from emp where (mgr = 5555 and deptno = 07);

ENAME

Rocky

IN

SQL> select ename,sal from emp where empno in (2323,5555);

ENAME SAL

Anitha 42000

SQL> select ename,sal from emp where empno in (2323,7575);

ENAME SAL

Anitha 42000
Karthi 75000

BETWEEN

SQL> select ename,sal from emp where sal between 25000 and 50000;

ENAME SAL

Anitha 42000

RESULT:

Thus data query languages have been implemented and verified using SQL.

EX.NO:4
10.02.23

CONSTRAINTS

AIM:

To implement various types of constraints using SQL.

DESCRIPTION:

Constraints are used to limit the type of data that can go into a table. Such constraints can be specified when the table is first created via the **CREATE TABLE** statement, or after the table is already created via the **ALTER TABLE** statement.

Common types of constraints include the following:

- **NOT NULL Constraint:** Ensures that a column cannot have NULL value.
- **DEFAULT Constraint:** Provides a default value for a column when none is specified.
- **UNIQUE Constraint:** Ensures that all values in a column are different.
- **CHECK Constraint:** Makes sure that all values in a column satisfy certain criteria.
- **PRIMARY KEY Constraint:** Used to uniquely identify a row in the table.
- **FOREIGN KEY Constraint:** Used to ensure referential integrity of the data.

NOT NULL Constraint

By default, a column can hold NULL. If you not want to allow NULL value in a column, you will want to place a constraint on this column specifying that NULL is now not an allowable value.

The syntax to be used is

```
Create table <table> (  
<column 1><data type> [NOT NULL] [<column constraint>],  
.....  
<column n><data type> [NOT NULL] [<column constraint>],  
);
```

DEFAULT Constraint

The DEFAULT constraint provides a default value to a column when the INSERT INTO statement does not provide a specific value.

The syntax used is

```
Create table <table> (  
<column 1><data type>,  
.....  
<column n><data type>,  
<column n><data type> DEFAULT value  
);
```

UNIQUE Constraint

The UNIQUE constraint ensures that all values in a column are distinct.

The syntax used is

```
Create table <table> (  
<column 1><data type> UNIQUE,  
.....  
<column n><data type>  
);
```


CHECK Constraint

The CHECK constraint ensures that all values in a column satisfy certain conditions. Once defined, the database will only insert a new row or upDate an existing row if the new value satisfies the CHECK constraint. The CHECK constraint is used to ensure data quality.

The syntax used is

```
Create table <table> (  
<column 1><data type> CHECK <condition>,  
.....  
<column n><data type>  
);
```

PRIMARY KEY Constraint

A primary key is used to uniquely identify each row in a table. It can either be part of the actual record itself, or it can be an artificial field (one that has nothing to do with the actual record). A primary key can consist of one or more fields on a table. When multiple fields are used as a primary key, they are called a composite key.

Primary keys can be specified either when the table is created (using **CREATE TABLE**) or by changing the existing table structure (using **ALTER TABLE**).

The syntax used is

```
Create table <table> (  
<column 1><data type> PRIMARY KEY,  
.....  
<column n><data type>  
);
```

Or

```
Create table <table> (  
<column 1><data type>,  
.....  
<column n><data type>  
);
```

```
Alter table Customer ADD PRIMARY KEY <column name>;
```

Note: Before using the ALTER TABLE command to add a primary key, you'll need to make sure that the field is defined as 'NOT NULL' -- in other words, NULL cannot be an accepted value for that field.

FOREIGN KEY Constraint

A foreign key is a field (or fields) that points to the primary key of another table. The purpose of the foreign key is to ensure referential integrity of the data. In other words, only values that are supposed to appear in the database are permitted.

The syntax used is

```
Create table <table> (  
<column 1><data type> PRIMARY KEY,  
.....  
<column n><data type>  
);
```

```
Create table <table1> (  
<column 1><data type> PRIMARY KEY,  
.....
```

```
<column m><data type> REFERENCES <table>
);
```

Or

```
Create table <table> (
<column 1><data type> PRIMARY KEY,
.....
<column n><data type>
);
```

```
Create table <table1> (
<column 1><data type> PRIMARY KEY,
.....
<column m><data type>
);
```

```
Alter table <table1>
ADD (CONSTRAINT fk_<table1>)FOREIGN KEY <column m>REFERENCES <table>(column n);
```

OUTPUT: **CONSTRAINTS**

UNIQUE

```
SQL> CREATE TABLE Customer
```

```
2 (SID integer Unique,
3 Last_Name varchar (30),
4 First_Name varchar(30));
```

Table created.

```
SQL> insert into customer values ('23','rad','ree');
1 row created.
```

```
SQL> insert into customer ('24','ram','pri');
1 row created.
```

```
SQL> insert into customer values ('23','kek','kak');
*ERROR at line 1:
ORA-00001: unique constraint (SCOTT.SYS_C00600) violated
```

NOT NULL

```
SQL> CREATE TABLE Customer
```

```
2 (SID integer NOT NULL,
3 Last_Name varchar (30) NOT NULL,
4 First_Name varchar(30));
```

Table created.

```
SQL> desc customer;
```

Name	Null?	Type
SID	NOT NULL	NUMBER(38)
LAST_NAME	NOT NULL	VARCHAR2(30)
FIRST_NAME		VARCHAR2(30)

SQL> insert into customer values(23333,'ram','priya');
1 row created.

SQL> insert into customer values(12222,"','jai');
insert into customer values(12222,"','jai')
ERROR at line 1:
ORA-01400: cannot insert NULL into ("SCOTT"."CUSTOMER"."LAST_NAME")

SQL> insert into customer values(12222,'raj','');
1 row created.

SQL> select * from customer;

SID	LAST_NAME	FIRST_NAME
23333	ram	priya
12222	raj	

CHECK

SQL> CREATE TABLE Customer
2 (SID integer CHECK (SID > 100),
3 Last_Name varchar (30),
4 First_Name varchar(30));
Table created.

SQL> insert into customer values ('244','ram ','pri');
1 row created.

SQL> insert into customer values ('23','uma','ram');
ERROR at line 1:
ORA-02290: check constraint (SCOTT.SYS_C00601) violated

PRIMARY KEY

SQL> CREATE TABLE Customer (SID integer, Last_Name varchar(30), First_Name varchar(30),
PRIMARY KEY (SID));
Table created.

SQL> desc customer

Name	Null?	Type
SID	NOT NULL	NUMBER(38)
LAST_NAME		VARCHAR2(30)
FIRST_NAME		VARCHAR2(30)

SQL> insert into customer values('34','ram','pri');
1 row created.

SQL> insert into customer values('54','oop','raj');
1 row created.

SQL> insert into customer values('54','tem','temp');
ERROR at line 1:
ORA-00001: unique constraint (SCOTT.SYS_C00602) violated
SQL> insert into customer values("','trim','trimi');
*ERROR at line 1:
ORA-01400: cannot insert NULL into ("SCOTT"."CUSTOMER"."SID")

PRIMARY KEY USING ALTER

```
SQL> CREATE TABLE Customer
  2  (SID integer,
  3   Last_Name varchar(30),
  4   First_Name varchar(30));
Table created.
```

```
SQL> desc customer;
Name                Null?   Type
-----
SID                  NUMBER(38)
LAST_NAME            VARCHAR2(30)
FIRST_NAME           VARCHAR2(30)
```

```
SQL> ALTER TABLE Customer ADD PRIMARY KEY (SID);
Table altered.
```

```
SQL> desc customer;
Name                Null?   Type
-----
SID                  NOT NULL NUMBER(38)
LAST_NAME            VARCHAR2(30)
FIRST_NAME           VARCHAR2(30)
```

FOREIGN KEY

```
SQL> desc customer;
Name                Null?   Type
-----
SID                  NOT NULL NUMBER(38)
LAST_NAME            VARCHAR2(30)
FIRST_NAME           VARCHAR2(30)
```

```
SQL> CREATE TABLE ORDERS (Order_ID integer primary key, Order_DateDate, Customer_SID
integer references CUSTOMER(SID), amount number(8,2));
Table created.
```

```
SQL> desc orders;
Name                Null?   Type
-----
ORDER_ID            NOT NULL NUMBER(38)
ORDER_DATE           DATE
CUSTOMER_SID         NUMBER(38)
AMOUNT               NUMBER(8,2)
```

```
SQL> insert into orders values('545','30-sep-2021','567','9000');
1 row created.
```

```
SQL> insert into orders values ('506','11-aug-2020','', '3000');
1 row created.
```

```
SQL> insert into orders values('555','19-nov-2022','789','3000');
*ERROR at line 1:
ORA-02291: integrity constraint (SCOTT.SYS_C00623) violated - parent key not found
```

SQL> select * from orders;

ORDER_ID	ORDER_DAT	CUSTOMER_SID	AMOUNT
501	12-JAN-19	234	5000
502	13-MAR-19	345	4550
504	11-JUN-19	234	2300
506	11-AUG-20		3000
545	30-SEP-21	567	9000

SQL> select * from customer;

SID	LAST_NAME	FIRST_NAME
234	ram	priya
345	raj	ram
456	sam	veer
567		josh

SQL> delete from customer where last_name='sam';
1 row deleted.

SQL> select * from customer;

SID	LAST_NAME	FIRST_NAME
234	ram	priya
345	raj	ram
567		josh

SQL> delete from customer where last_name='raj';
delete from customer where last_name='raj'
*

ERROR at line 1:

ORA-02292: integrity constraint (SCOTT.SYS_C00623) violated - child record found

SQL> delete from orders where CUSTOMER_SID=345;

1 row deleted.

SQL> select * from orders;

ORDER_ID	ORDER_DAT	CUSTOMER_SID	AMOUNT
501	12-JAN-19	234	5000
504	11-JUN-19	234	2300
506	11-AUG-20		3000
545	30-SEP-21	567	9000

SQL> select * from customer;

SID	LAST_NAME	FIRST_NAME
234	ram	priya
345	raj	ram
567		josh

SQL> delete from customer where last_name='raj';

1 row deleted.

SQL> select * from customer;

SID	LAST_NAME	FIRST_NAME
234	ram	priya
567		josh

ON DELETE CASCADE

SQL> desc customer

Name	Null?	Type
SID	NOT NULL	NUMBER(38)
LAST_NAME		VARCHAR2(30)
FIRST_NAME		VARCHAR2(30)

SQL> select * from customer;

SID	LAST_NAME	FIRST_NAME
234	ram	priya
678	raz	riya
789	rai	rishi
567	rai	josh
123	patel	prem

SQL> CREATE TABLE ORDERS1

- 2 (Order_ID integer,
- 3 Order_DateDate,
- 4 Customer_SID integer,
- 5 amount number(8,2),
- 6 Primary Key (Order_ID),
- 7 Foreign Key (Customer_SID) references CUSTOMER(SID) on delete cascade);

Table created.

SQL> desc orders1;

Name	Null?	Type
ORDER_ID	NOT NULL	NUMBER(38)
ORDER_DATE		DATE
CUSTOMER_SID		NUMBER(38)
AMOUNT		NUMBER(8,2)

SQL> select * from orders1;

ORDER_ID	ORDER_DAT	CUSTOMER_SID	AMOUNT
5001	12-JUN-22	123	5990
5002	04-JUL-22	234	5677
5432	13-AUG-22	234	6900
5009	31-DEC-22	789	4350

SQL> delete from orders1 where amount < 5000;

1 row deleted.

SQL> select * from orders1;

ORDER_ID	ORDER_DAT	CUSTOMER_SID	AMOUNT
5001	12-JUN-22	123	5990
5002	04-JUL-22	234	5677
5432	13-AUG-22	234	6900

SQL> delete from customer where last_name='raz';

1 row deleted.

SQL> select * from customer;

SID	LAST_NAME	FIRST_NAME
234	ram	priya
789	rai	rishi
567	rai	josh
123	patel	prem

SQL> delete from orders1 where customer_sid=123;

1 row deleted.

SQL> select * from orders1;

ORDER_ID	ORDER_DAT	CUSTOMER_SID	AMOUNT
5002	04-JUL-22	234	5677
5432	13-AUG-22	234	6900

SQL> delete from customer where sid=234;

delete from customer where sid=234

*

ERROR at line 1:

ORA-02292: integrity constraint (SCOTT.SYS_C00623) violated - child record found

SQL> select * from customer;

SID	LAST_NAME	FIRST_NAME
234	ram	priya
789	rai	rishi
567	rai	josh
123	patel	prem

RESULT:

Thus, various types of constraints have been implemented and verified using SQL.

EX.NO:5
03.03.23

JOINS

AIM:

To implement joins using SQL.

DESCRIPTION:

This is a binary operation that allows two relations to combine certain selections and cartesian product into one resulting relation.

TYPES OF JOIN

- Inner join
- Outer join

INNER - JOIN

Here, join operation forms a cartesian product of two relation's arguments, performs a selection forcing equality on those attributes that appear in both relation schemes and finally removes duplicate attributes. Also, this is referred as inner join.

The query

```
Select *  
From <table1>,<table2>  
Where table1.column i = table2.column i;
```

OUTER – JOIN

The outer-join operation is an extension of the join operation to deal with missing information.

There are three forms of outer – join

- Left outer – join
- Right outer – join
- Full outer – join

Left Outer – Join

This takes all tuples in the left relation that did not match with any tuple in the right relation, pads the tuples with null values for all other attributes from the right relation and adds them to the result of the join operation.

The query

```
Select *  
From <table1>,<table2>  
Where table1.column i(+) = table2.column i;
```

Right Outer – Join

This takes all tuples in the right relation that did not match with any tuple in the left relation, pads the tuples with null values for all other attributes from the left relation and adds them to the result of the join operation.


```
Select *
From <table1>,<table2>
Where table1.column i = table2.column i(+);
```

Full Outer – Join

This pads tuples from the left relation that did not match any from the right relation, as well as tuples from the right relation that did not match any from the left relation and adds them to the resultant relation.

Note

The syntax for performing an outer join in SQL is database-dependent.

In Oracle, we will place an "(+)" in the **WHERE** clause on the other side of the table for which we want to include all the rows.

OUTPUT:

JOINS

Table description

```
SQL> desc table1;
```

Name	Null?	Type
ID		VARCHAR2(9)
NAME		VARCHAR2(9)

Table values

```
SQL> select *from table1;
```

ID	NAME
1	riyaz
2	parveen
3	vasu
5	mathi

Table description

```
SQL> desc table2;
```

Name	Null?	Type
ID		VARCHAR2(9)
SALARY		NUMBER(9)

Table values

```
SQL> select *from table2;
```

ID	SALARY
5	650000
3	670000
2	870000

INNER JOIN

```
SQL> select *from table1,table2 where table1.id=table2.id;
```

ID	NAME	ID	SALARY
2	parveen	2	870000
3	vasu	3	670000
5	mathi	5	

```
SQL> select table1.name,table2.salary from table1,table2 where table1.id=table2.id;
```

NAME	SALARY
parveen	870000
vasu	670000
mathi	650000

OUTER JOIN **LEFT OUTER JOIN**

SQL> select * from table1,table2 where table1.id(+)=table2.id;

ID	NAME	ID	SALARY
2	parveen	2	870000
3	vasu	3	670000
5	mathi	5	650000

SQL> select table1.name,table2.salary from table1,table2 where table1.id(+)=table2.id;

NAME	SALARY
parveen	870000
vasu	670000
mathi	650000

RIGHT OUTER JOIN

SQL> select * from table1,table2 where table1.id=table2.id(+);

ID	NAME	ID	SALARY
1	riyaz		
2	parveen	2	870000
3	vasu	3	670000
5	mathi	5	650000

SQL> select table1.name,table2.salary from table1,table2 where table1.id=table2.id(+);

NAME	SALARY
riyaz	
parveen	870000
vasu	670000
mathi	650000

RESULT:

Thus joins have been implemented and verified using SQL.

AIM:

To implement views using SQL.

DESCRIPTION:

A view is a virtual table. A view consists of rows and columns just like a table. The difference between a view and a table is that views are definitions built on top of other tables (or views), and do not hold data themselves. If data is changing in the underlying table, the same change is reflected in the view. A view can be built on top of a single table or multiple tables. It can also be built on top of another view.

Views are allowed to use one of the following constructs in the view definition:

- Joins
- Aggregate function such as sum, min, max etc.
- Set-valued subqueries (in, any, all) or test for existence (exists)
- Group by clause or distinct clause

Views are classified as

- Read – Only views
- Updatable views

Read – Only Views

These views are created from multiple relations.

Updatable Views

These views are created from individual relation.

Views offer the following advantages:

- 1. Ease of use:** A view hides the complexity of the database tables from end users. Essentially we can think of views as a layer of abstraction on top of the database tables.
- 2. Space savings:** Views takes very little space to store, since they do not store actual data.
- 3. Additional data security:** Views can include only certain columns in the table so that only the non-sensitive columns are included and exposed to the end user. In addition, some databases allow views to have different security settings, thus hiding sensitive data from prying eyes.

CREATE VIEW

A view can be created using command create.

The syntax

```
CREATE VIEW view_name AS  
SELECT column_name(s)  
FROM table_name  
WHERE condition
```

DELETE VIEW

A view can be deleted using the command drop.

The syntax

Drop view <view-name>;

OUTPUT: **VIEW**

SQL> desc emp;

Name	Null?	Type
EMPNO	NOT NULL	NUMBER(4)
ENAME	NOT NULL	VARCHAR2(30)
JOB		VARCHAR2(10)
MGR		NUMBER(4)
HIREDATE		
SAL		NUMBER(7,2)
DEPTNO		NUMBER(2)

SQL> select * from emp;

EMPNO	ENAME	JOB	MGR	HIREDATE	SAL	DEPTNO
3737	Priya	Officer	7777	07-MAR-19	51000	7
4545	Priyasri	secretary	3337	09-JUN-21	21000	20
7575	Karthi	Manager	3337	07-JUL-22	75000	2
5352	Retish	secretary	5555	09-JUN-22	20000	8
5332	Rocky	assit	5555	08-JAN-22	19500	7
6544	santh	Officer	3337	23-JUN-22	19000	8

6 rows selected.

SQL> desc empp;

Name	Null?	Type
EMPNO		NUMBER(4)
PH_NO		NUMBER(10)

SQL> select * from empp;

EMPNO	PH_NO
3737	9988225301
4545	9988485565
6544	9988789663
7575	9988896652
6555	9988987777

CREATE VIEW

View created from more than one table leading to 'Read Only' view.

SQL> create view view1 as select emp.ename,empp.ph_no from emp,empp where emp.empno=empp.empno;

View created.

SQL> select * from view1;

ENAME	PH_NO
Priya	9988225301
Priyasri	9988485565
santh	9988789663
Karthi	9988896652

View created from single relation known as 'Updatable' view.

SQL> create view view2 asselect ename,sal from emp;

View created.

SQL> select * from view2;

ENAME	SAL
Priya	51000
Priyasri	21000
Karthi	75000
Retish	20000
Rocky	19500
santh	19000

6 rows selected.

View can be upDated only on the updatable views.

SQL> upDate view2 set sal=23000 where ename='santh';

1 row upDated.

SQL> select * from view2;

ENAME	SAL
Priya	51000
Priyasri	21000
Karthi	75000
Retish	20000
Rocky	19500
santh	23000

6 rows selected.

DELETE VIEW

SQL> drop view view1;

View dropped.

SQL> select * from view1;

ERROR at line 1:

ORA-00942: table or view does not exist

RESULT:

Thus views have been implemented and verified using SQL.

EX.NO:7
10.03.23

NESTED QUERIES

AIM:

To implement the nested query using SQL.

DESCRIPTION:

A query result can also be used in a condition of a where clause. In such a case the query is called a subquery and the complete select statement is called a nested query.

A respective condition in the where clause then can have one of the following forms:

1. Set-valued subqueries

<expression> [not] in (<subquery>)
<expression><comparison operator> [any|all] (<subquery>)

An <expression> can either be a column or a computed value.

2. Test for (non)existence

[not] exists (<subquery>)

In a where clause conditions using sub queries can be combined arbitrarily by using the logical connectives and and or. Conditions of the form <expression><comparison operator> [any|all] <subquery> are used to compare a given <expression> with each value selected by <subquery>.

- For the clause any, the condition evaluates to true if there exists at least one row selected by the subquery for which the comparison holds. If the subquery yields an empty result set, the condition is not satisfied.

- For the clause all, in contrast, the condition evaluates to true if for all rows selected by the subquery the comparison holds. In this case the condition evaluates to true if the subquery does not yield any row or value.

For all and any, the following equivalences hold:

in , = any

not in , <> all or != all

Often a query result depends on whether certain rows do (not) exist in (other) tables. Such type of queries is formulated using the exists operator.

OUTPUT:

NESTED QUERY (SUB QUERY)

Table Description

SQL> SELECT * FROM EMP;

EMPNO	ENAME	JOB	MGR	HIREDATE	SAL	DEPTNO
3737	Priya	Officer	7777	07-MAR-19	51000	7
4545	Priyasri	secretary	3337	09-JUN-21	21000	20
7575	Karthi	Manager	3337	07-JUL-22	75000	20
5352	Retish	secretary	5555	09-JUN-22	20000	8
5332	Rocky	assit	5555	08-JAN-22	19500	7
6544	santh	Officer	3337	23-JUN-22	23000	8

6 rows selected.

SQL> select * from empp;

EMPNO	PH_NO
3737	9988225301
4545	9988485565
6544	9988789663
7575	9988896652
6555	9988987777

SUBQUERY USING IN

SQL> select * from EMP E1 where DEPTNO in (select DEPTNO from EMP E where E.DEPTNO =7);

EMPNO	ENAME	JOB	MGR	HIREDATE	SAL	DEPTNO
3737	Priya	Officer	7777	07-MAR-19	51000	7
5332	Rocky	assit	5555	08-JAN-22	19500	7

SUBQUERY USING ANY

SQL> select * from EMP where SAL >= any (select SAL from EMP where DEPTNO =8);

EMPNO	ENAME	JOB	MGR	HIREDATE	SAL	DEPTNO
3737	Priya	Officer	7777	07-MAR-19	51000	7
4545	Priyasri	secretary	3337	09-JUN-21	21000	20
7575	Karthi	Manager	3337	07-JUL-22	75000	20
5352	Retish	secretary	5555	09-JUN-22	20000	8
6544	santh	Officer	3337	23-JUN-22	23000	8

SQL> select * from EMP where SAL >= any (select SAL from EMP where DEPTNO =8)
and DEPTNO = 7;

EMPNO	ENAME	JOB	MGR	HIREDATE	SAL	DEPTNO
3737	Priya	Officer	7777	07-MAR-19	51000	7

SUBQUERY USING ALL

SQL> select * from EMP where SAL > all (select SAL from EMP where DEPTNO = 7)
and DEPTNO <> 15;

EMPNO	ENAME	JOB	MGR	HIREDATE	SAL	DEPTNO
7575	Karthi	Manager	3337	07-JUL-22	75000	20

SUBQUERY USING EXISTS

SQL> select * from empp where exists (select * from EMP where emp.empno=empp.empno);

EMPNO	PH_NO
3737	9988225301
4545	9988485565
6544	9988789663
7575	9988896652

SUBQUERY USING NOT EXISTS

SQL> select * from empp where not exists (select * from EMP where emp.empno=empp.empno);

EMPNO	PH_NO
6555	9988987777

RESULT:

Thus, the nested queries using SQL has been implemented and verified.

EX.NO:8
10.03.23

AGGREGATE FUNCTIONS

AIM:

To implement various aggregate functions using SQL.

DESCRIPTION:

Aggregate functions are statistical functions such as count, min, max etc. They are used to compute a single value from a set of attribute values of a column.

AVG Function

SQL uses the AVG function to calculate the average of a column.

The syntax for using this function is,

```
Select AVG <column name>  
from <table>
```

SUM Function

The SUM function is used to calculate the total for a column.

The syntax is,

```
Select SUM<column name>  
from <table>
```

MIN Function

SQL uses the MIN function to find the maximum value in a column.

The syntax for using the MIN function is,

```
Select MIN<column name>  
from <table>
```

MAX Function

SQL uses the MAX function to find the maximum value in a column.

The syntax for using the MAX function is,

```
Select MAX <column name>  
from <table>
```

COUNT Function

Another arithmetic function is COUNT. This allows us to COUNT up the number of row in a certain table.

The syntax is,

```
Select COUNT <column name>  
from <table>
```

VARIANCE Function

SQL uses the VARIANCE function to find the variance value of a column.

The syntax for using the VARIANCE function is,

```
Select VARIANCE <column name>
from <table>
```

STANDARD DEVIATION Function

SQL uses the STDDEV function to find the standard deviation of a column.

The syntax for using the STDDEV function is,

```
Select STDDEV <column name>
from <table>
```

GROUP BY Function

Often applications require grouping rows that have certain properties and then applying an aggregate function on one column for each group separately. For this, SQL provides the clause *group by <group column(s)>*. This clause appears after the where clause and must refer to columns of tables listed in the from clause.

The syntax for using the GROUP BY function is,

```
select <column(s)>
from <table(s)>
where <condition>
group by <group column(s)>;
```

HAVING CLAUSE

The **HAVING** clause, which is reserved for aggregate functions. The **HAVING** clause is typically placed near the end of the SQL statement, and a SQL statement with the **HAVING** clause may or may not include the **GROUP BY** clause.

```
select <column(s)>
from <table(s)>
where <condition>
group by <group column(s)>
[having <group condition(s)>];
```

OUTPUT:

AGGREGATE FUNCTIONS

SQL> desc emp;

Name	Null?	Type
EMPNO	NOT NULL	NUMBER(4)
ENAME	NOT NULL	VARCHAR2(30)
JOB		VARCHAR2(10)
MGR		NUMBER(4)
HIREDATE		
SAL		NUMBER(7,2)
DEPTNO		NUMBER(2)

SQL> select * from emp;

EMPNO	ENAME	JOB	MGR	HIREDATE	SAL	DEPTNO
3737	Priya	Officer	7777	07-MAR-19	51000	7
4545	Priyasri	secretary	3337	09-JUN-21	21000	20
7575	Karthi	Manager	3337	07-JUL-22	75000	20
5352	Retish	secretary	5555	09-JUN-22	20000	8
5332	Rocky	assit	5555	08-JAN-22	19500	7
6544	santh	Officer	3337	23-JUN-22	23000	8

6 rows selected.

AVG

SQL> select avg(sal) from emp;

AVG(SAL)

34916.667

SUM

SQL> select sum(sal) total_salary from emp;

TOTAL_SALARY

209500

MIN

SQL> select min(ename) from emp;

MIN(ENAME)

Karthi

MAX

SQL> select max(hireDate) from emp;

MAX(HIRED

09-JUN-09

COUNT

SQL> select count(mgr) from emp;

COUNT(MGR)

6

VARIANCE

SQL> select variance(sal) from emp;

VARIANCE(SAL)

532241667

STANDARD DEVIATION

SQL> select stddev(sal) from emp;

STDDEV(SAL)

23070.363

SQL> select avg(sal),sum(sal),min(sal),max(sal),count(sal) from emp where deptno=20;

AVG(SAL)	SUM(SAL)	MIN(SAL)	MAX(SAL)	COUNT(SAL)
48000	96000	21000	75000	2

GROUP BY

SQL> select job,sum(sal) from emp group by (job);

JOB	SUM(SAL)
Manager	75000
Officer	74000
assit	19500
secretary	41000

HAVING CLAUSE

SQL> select job,sum(sal) from emp group by (job) having sum(sal) > 70000;

JOB	SUM(SAL)
Manager	75000
Officer	74000

CHARACTER STRING

These are special commands to work on characters.

SQL> select * from emp;

EMPNO	ENAME	JOB	MGR	HIREDATE	SAL	DEPTNO
3737	Priya	Officer	7777	07-MAR-19	51000	7
4545	Priyasri	secretary	3337	09-JUN-21	21000	20
7575	Karthi	Manager	3337	07-JUL-22	75000	20
5352	Retish	secretary	5555	09-JUN-22	20000	8
5332	Rocky	assit	5555	08-JAN-22	19500	7
6544	santh	Officer	3337	23-JUN-22	23000	8

6 rows selected.

INSTR

SQL> select ename,instr(ename,'a') from emp;

ENAME	INSTR(ENAME,'A')
Priya	5
priya	5
Karthi	2
Retish	0
Rocky	0
santh	2

6 rows selected.

LENGTH

```
SQL> select ename,length(ename) from emp;  
ENAME                LENGTH(ENAME)
```

```
-----  
Priya                5  
priya                5  
Karthi               6  
Retish               6  
Rocky                5  
santh                5
```

6 rows selected.

RPAD

```
SQL> select rpad(ename,12,'*') from emp;  
RPAD(ENAME,1
```

```
-----  
Priya*****  
priya*****  
Karthi*****  
Retish*****  
Rocky*****  
santh*****
```

6 rows selected.

LPAD

```
SQL> select lpad(ename,12,'*') from emp;  
LPAD(ENAME,1
```

```
-----  
*****Priya  
*****priya  
*****Karthi  
*****Retish  
*****Rocky  
*****santh
```

6 rows selected.

REPLACE

```
SQL> select replace(ename,'ya','thi') from emp;  
REPLACE(ENAME,'YA','THI')
```

```
-----  
Prithi  
prithi  
Karthi  
Retish  
Rocky  
santh
```

6 rows selected.

ASCII

```
SQL> select ASCII('priya') from emp where empno=4545;  
ASCII('PRIYA')
```

```
-----  
112
```

|| Function

```
SQL> select 'santh' || 'ini' from emp where ename='santh';  
'SANTH'
```

```
-----  
Santhini
```

UPPER

```
SQL> select upper(ename) from emp;
```

```
UPPER(ENAME)
```

```
-----  
PRIYA  
PRIYA  
KARTHI  
RETISH  
ROCKY  
SANTH
```

6 rows selected.

LOWER

```
SQL> select lower(ename) from emp;
```

```
LOWER(ENAME)
```

```
-----  
priya  
priya  
karthi  
retish  
rocky  
santh
```

6 rows selected.

SUBSTR

```
SQL> select ename,substr(ename,3,3) from emp;
```

ENAME	SUB
Priya	iya
priya	iya
Karthi	rth
Retish	tis
Rocky	cky
santh	nth

6 rows selected.

TRANSLATE

```
SQL> select ename,translate(ename,'a','e') from emp;
```

ENAME	TRANSLATE(ENAME,'A','E')
Priya	Priye
priya	priye
Karthi	Kerthi
Retish	Retish
Rocky	Rocky
santh	senth

6 rows selected.

STRING OPERATION

These are special commands to work on strings.

SQL> select ename from emp;

ENAME

Priya

Priyasri

Karthi

Retish

Rocky

santh

6 rows selected.

SQL> select ename from emp where ename like 'pri%';

no rows selected.

SQL> select ename from emp where ename like 'Pri%';

ENAME

Priya

Priyasri

SQL> select ename from emp where ename like 'Pri__';

ENAME

Priya

SQL> select ename from emp where ename like 'Pri__%';

ENAME

Priya

Priyasri

SQL> select ename from emp where ename like '%th';

ENAME

Santh

SQL> select ename from emp where ename like '%th_';

ENAME

Karthi

SQL> select ename from emp where ename like '____th';

ENAME

santh

SQL> select ename from emp where ename like '____th%';

ENAME

Karthi

santh

SQL> select ename from emp where ename like '____r%';

ENAME

Karthi

SQL> select ename from emp where ename like '____a%';

ENAME

Karthi

Santh

SQL> select ename from emp where ename like '_a_th';

ENAME

santh

SQL> select ename from emp where ename like '_a_th%';

ENAME

Karthi

santh

RESULT:

Thus the various aggregate functions using SQL has been implemented and verified.

EX.NO:9
17.03.23

SET OPERATIONS

AIM:

To implement set operations using SQL.

DESCRIPTION:

Sometimes it is useful to combine query results from two or more queries into a single result.

SQL supports three set operators which have the pattern:
<query 1><set operator><query 2>

The set operators are:

- union [all] returns a table consisting of all rows either appearing in the result of <query1> or in the result of <query 2>.
Duplicates are automatically eliminated unless the clause all is used.
- intersect returns all rows that appear in both results <query 1> and <query 2>.
- minus returns those rows that appear in the result of <query 1> but not in the result of <query 2>.

OUTPUT:

SET OPERATIONS

SQL> desc tab1;

Name	Null?	Type
ROLLNO		NUMBER(4)
NAME		VARCHAR2(10)

SQL> select * from tab1;

ROLLNO	NAME
3444	raj
5666	das
6777	kak
6788	riya
2333	ram

SQL> desc tab2;

Name	Null?	Type
ROLLNO		NUMBER(4)
MARKS		NUMBER(3)

SQL> select * from tab2;

ROLLNO	MARKS
3444	78
6777	45
2333	87
8779	98
5665	65

UNION

SQL> select rollno from tab1 union select rollno from tab2;

ROLLNO
2333
3444
5665
5666
6777
6788
8779

7 rows selected.

UNION ALL

SQL> select rollno from tab1 union all select rollno from tab2;

ROLLNO
3444
5666
6777
6788
2333
3444
6777
2333
8779
5665

10 rows selected.

INTERSECT

SQL> select rollno from tab1 intersect select rollno from tab2;

ROLLNO
2333
3444
6777

MINUS

SQL> select rollno from tab1 minus select rollno from tab2;

ROLLNO

5666
6788

CARTESIAN PRODUCT

SQL> select tab1.rollno,tab2.rollno from tab1,tab2;

ROLLNO ROLLNO

3444 3444
5666 3444
6777 3444
6788 3444
2333 3444
3444 6777
5666 6777
6777 6777
6788 6777
2333 6777
3444 2333
5666 2333
6777 2333
6788 2333
2333 2333
3444 8779
5666 8779
6777 8779
6788 8779
2333 8779
3444 5665
5666 5665
6777 5665
6788 5665
2333 5665

25 rows selected.

RESULT:

Thus, the set operations using SQL has been implemented and verified.

EX.NO:10
17.03.23

CURSORS

AIM:

To execute PL/SQL code using cursor.

DESCRIPTION:

A cursor is a SELECT statement that is defined within the *declaration* section of your PL/SQL code. We'll take a look at three different syntaxes for cursors.

A cursor must be declared and opened before it can be used, and it must be closed to deactivate it after it is no longer required. Once the cursor has been opened, the rows of the query result can be retrieved one at a time using a FETCH statement.

DECLARE CURSOR

The DECLARE CURSOR statement defines the specific SELECT to be performed and associates a cursor name with the query.

Cursor without parameters

The basic syntax for a cursor without parameters is:

```
CURSOR cursor_name  
IS  
SELECT_statement;
```

Cursor with parameters

The basic syntax for a cursor with parameters is:

```
CURSOR cursor_name (parameter_list)  
IS  
SELECT_statement;
```

OPEN CURSOR

The OPEN statement executes the query and identifies all the rows that satisfy the query search condition, and positions the cursor before the first row of this result table.

Syntax

```
OPEN <cursor name>;
```

FETCH CURSOR

The FETCH statement retrieves the next row of the active set. Syntax

```
FETCH <cursor name>  
  
INTO {host variable [indicator var i],[]}
```

CLOSE CURSOR

The CLOSE statement is used to close the cursor that is currently open.

Syntax

```
CLOSE <cursor name>
```

OUTPUT: CURSORS

SQL> desc salary

Name	Null?	Type
EMP_NO	NOT NULL	NUMBER(1)
EMP_NAME		VARCHAR2(10)
DESIGNATION		VARCHAR2(10)
DEPARTMENT		VARCHAR2(10)
BASIC		NUMBER(5)
DA_PERCENT		NUMBER(5,2)
MA		NUMBER(6,2)
OTHER_ALLOWANCES		NUMBER(5,2)
DEDUCTION		NUMBER(6,2)

SQL> select * from salary;

EMP_NO	EMP_NAME	DESIGNATIO	DEPARTMENT	BASIC	DA_PERCENT	MA
OTHER_ALLOWANCES	DEDUCTION					
1 priya	manager	Marketing	6000	45	200	250
2 ram	As.manager	Accounts	4000	45	200	200
3 krish	Steno	sales	2000	45	100	50
7 karthi	manager	Accounts	6000	45	200	250

SQL> set serverout on;

SQL> declare

```
2 e_no number(6);
3 e_name varchar2(10);
4 net_salary number(8,2);
5 cursor cur_salary is select emp_no,
6 emp_name,basic+da_percent*basic/100+ma+other_allowances-deduction from salary;
7 begin
8 dbms_output.put_line('Emp no '|| Name '|| Net salary');
9 dbms_output.put_line('-----');
10 open cur_salary;
11 loop
12 fetch cur_salary into e_no,e_name,net_salary;
13 exit when cur_salary%notfound;
14 dbms_output.put_line(rpad(e_no,5,' ')||rpad(e_name,10,' ')||net_salary);
15 end loop;
16 close cur_salary;
17 end;
18 /
```

Emp no	Name	Net salary
--------	------	------------

1	priya	7649.25
2	ram	5000
3	krish	2850
7	karthi	7649.25

PL/SQL procedure successfully completed.

RESULT:

Thus the cursors using PL/SQL has been implemented and verified.

EX.NO:11
24.03.23

PROCEDURES

AIM:

To execute PL/SQL program with procedure.

DESCRIPTION:

The syntax for a procedure is:

```
CREATE [OR REPLACE] PROCEDURE procedure name
[ (parameter [,parameter]) ]
IS
[declaration_section]
BEGIN
executable_section
[EXCEPTION
exception_section]
END [procedure_name];
```

When you create a procedure or function, you may define parameters. There are three types of parameters that can be declared:

1. **IN** - The parameter can be referenced by the procedure or function. The value of the parameter can not be overwritten by the procedure or function.
2. **OUT** - The parameter can not be referenced by the procedure or function, but the value of the parameter can be overwritten by the procedure or function.
3. **IN OUT** - The parameter can be referenced by the procedure or function and the value of the parameter can be overwritten by the procedure or function.

The optional clause or replace re-creates the procedure. A procedure can be deleted using the command drop procedure <procedure name>.

OUTPUT:

PROCEDURES

```
SQL> CREATE OR REPLACE PROCEDURE greetings
2 AS
3 BEGIN
4 dbms_output.put_line('Hello World!');
5 END;
6 /
```

Procedure created.

```
SQL> set serverout on;
```

```
SQL> BEGIN
```

```
2 greetings;
3 END;
4 /
```

Hello World!

PL/SQL procedure successfully completed.

```
SQL> DECLARE
```

```
2 a number;
3 b number;
4 c number;
5 PROCEDURE findMin(x IN number, y IN number, z OUT number)IS
6 BEGIN
7 IF x < y THEN
8 z:= x;
9 ELSE
10 z:= y;
```

```
11 END IF;
12 END;
13 BEGIN
14 a:=&a;
15 b:=&b;
16 findMin(a, b, c);
17 dbms_output.put_line(' Minimum of'||a||'and'||b||'is'||c);
18 end;
19 /
```

Enter value for a: 5

old 14: a:=&a;

new 14: a:=5;

Enter value for b: 2

old 15: b:=&b;

new 15: b:=2;

Minimum of5and2is2

PL/SQL procedure successfully completed.

RESULT:

Thus, the procedure using PL/SQL has been implemented and verified.

EX.NO:12
24.03.23

FUNCTIONS

AIM:

To execute PL/SQL program with function.

DESCRIPTION:

The syntax for a function is:

```
CREATE [OR REPLACE] FUNCTION function_name
  [ (parameter [,parameter]) ]
  RETURN return_datatype
IS | AS
  [declaration_section]
BEGIN
  executable_section
[EXCEPTION
  exception_section]
END [function_name]
```

When you create a procedure or function, you may define parameters. There are three types of parameters that can be declared:

1. **IN** - The parameter can be referenced by the procedure or function. The value of the parameter can not be overwritten by the procedure or function.
2. **OUT** - The parameter can not be referenced by the procedure or function, but the value of the parameter can be overwritten by the procedure or function.
3. **IN OUT** - The parameter can be referenced by the procedure or function and the value of the parameter can be overwritten by the procedure or function.

The optional clause or replace re-creates the function. A function can be deleted using the command drop function <function name>.

OUTPUT:

FUNCTIONS

SQL> desc phonebook;

Name	Null?	Type
PHONE_NO	NOT NULL	NUMBER(6)
USERNAME		VARCHAR2(13)
DOORNO		VARCHAR2(5)
STREET		VARCHAR2(13)
PLACE		VARCHAR2(13)
PINCODE		CHAR(6)

SQL> select * from phonebook;

PHONE_NO	USERNAME	DOORN	STREET	PLACE	PINCOD
25301	priya	390	main street	SIT colony	659002
25401	murthy	39D9	MS bhavan	sai nagar	689002
25701	karthi	7	jay nagar	chennai	600002

```
SQL> create or replace function findAddress(phone in number) return varchar2 as address varchar2(100);
2  begin
3  select username||','||doorno ||','||street ||','||place||','||pincode into address from phonebook
4  where phone_no=phone;
5  return address;
```

```
6 exception
7 when no_data_found then return 'address not found';
8 end;
9 /
```

Function created.

```
SQL> declare
2 address varchar2(100);
3 begin
4 address:=findaddress(25301);
5 dbms_output.put_line(address);
6 end;
7 /
```

priya,390,main street,SIT colony,659002

PL/SQL procedure successfully completed.

```
SQL> declare
2 address varchar2(100);
3 begin
4 address:=findaddress(25601);
5 dbms_output.put_line(address);
6 end;
7 /
```

address not found

PL/SQL procedure successfully completed.

RESULT:

Thus the functions has been implemented and verified using PL/SQL.

EX.NO:13
31.03.23

CONTROL STRUCTURES

AIM:

To implement control structures using PL/SQL.

DESCRIPTION:

IF STATEMENTS

The structure of the PL/SQL IF statement is similar to the structure of IF statements in other procedural languages. It allows PL/SQL to perform actions selectively based on conditions.

There are three forms of IF statements:

- IF-THEN-END IF

Syntax:

```
IF condition THEN
    Statements;
END IF;
```

- IF-THEN-ELSE-END IF

Syntax:

```
IF condition THEN
    Statement 1;
ELSE
    Statement 2;
END IF;
```

- IF-THEN-ELSIF-END IF

Syntax:

```
IF condition THEN
    Statement 1;
[ELSIF condition THEN
    Statement 2;]
.....
[ELSIF
    Statements n;]
END IF;
```

If the condition is FALSE or NULL, PL/SQL ignores the statements in the IF block. In either case, control resumes at the next statement in the program following the END IF.

FOR LOOP

FOR loops have the general structure as the basic loop. In addition they have a control statement before the LOOP keyword to determine the number of iterations that PL/SQL performs.

The syntax for the for loop is

```
FOR counter IN [REVERSE]
    Lower_bound.....upper_bound LOOP
    Statement 1;
    Statement 2;
```

```
END LOOP;
```

COUNTER – An explicitly declared integer whose value automatically increases by 1 on each iteration of the loop until the upper or lower bound is reached.

REVERSE – Causes the counter to decrement with each iteration from the upper bound to the lower bound.

LOWER_BOUND – The lower bound for the range of counter values.

UPPER_BOUND – The upper bound for the range of counter values.

WHILE LOOP

The WHILE loop is used to repeat a sequence of statements until the controlling condition is no longer true.

The condition is evaluated at the start of each iteration. The loop terminates when the condition is false. If

the condition is false at the start of the loop, then no further iterations are performed.

The syntax for while loop is

```
WHILE condition LOOP
```

```
    Statement 1;
```

```
    Statement 2;
```

```
END LOOP;
```

OUTPUT:

CONTROL STRUCTURES

```
SQL> set serveroutput on;
```

```
SQL> declare
```

```
2 a number;
```

```
3 b number;
```

```
4 c number;
```

```
5 begin
```

```
6 a:=&a;
```

```
7 b:=&b;
```

```
8 c:=a+b;
```

```
9 dbms_output.put_line('sum of'||a||'and'||b||'is'||c);
```

```
10 end;
```

```
11 /
```

Enter value for a: 34

old 6: a:=&a;

new 6: a:=34;

Enter value for b: 56

old 7: b:=&b;

new 7: b:=56;

sum of34and56is90

PL/SQL procedure successfully completed.

IF.....THEN.....ENDIF

```
SQL> set serveroutput on;
```

```
SQL> declare
```

```
2 a number;
```

```
3 b number;
```

```
4 begin
```

```
5 a := &a;
```

```
6 if a > 40 then
```

```
7 b := a - 40;
```

```

8 dbms_output.put_line('Calculated value :: ' || b);
9 end if;
10 end;
11 /
Enter value for a: 45
old 5: a := &a;
new 5: a := 45;
Calculated value :: 5
PL/SQL procedure successfully completed.

```

```

SQL> /
Enter value for a: 23
old 5: a := &a;
new 5: a := 23;
PL/SQL procedure successfully completed.

```

IF.....THEN.....ELSE.....ENDIF

```

SQL> set serveroutput on;

SQL> declare
2 a number;
3 b number;
4 begin
5 a := &a;
6 if a > 40 then
7 b := a - 40;
8 dbms_output.put_line('Calculated value :: ' || b);
9 else
10 dbms_output.put_line('No calculated value');
11 end if;
12 end;
13 /
Enter value for a: 67
old 5: a := &a;
new 5: a := 67;
Calculated value :: 27

PL/SQL procedure successfully completed.

```

```

SQL> /
Enter value for a: 34
old 5: a := &a;
new 5: a := 34;
No calculated value

```

PL/SQL procedure successfully completed.

ELSIF LADDER

```

SQL> set serveroutput on;
SQL> declare
2 a number;
3 b number;
4 c number;
5 d number;
6 begin
7 a:=&a;
8 b:=&b;
9 c:=&b;

```

```

10 if(a>b)and(a>c) then
11  dbms_output.put_line('A is maximum');
12 elsif(b>a)and(b>c)then
13  dbms_output.put_line('B is maximum');
14 else
15  dbms_output.put_line('C is maximum');
16 end if;
17 end;
18 /

```

Enter value for a: 34

old 7: a:=&a;

new 7: a:=34;

Enter value for b: 56

old 8: b:=&b;

new 8: b:=56;

Enter value for b: 45

old 9: c:=&b;

new 9: c:=45;

B is maximum

PL/SQL procedure successfully completed.

FOR LOOP

SQL> set serveroutput on;

SQL> declare

2 n number;

3 sum1 number default 0;

4 endvalue number;

5 begin

6 endvalue:=&endvalue;

7 n:=1;

8 for n in 1..endvalue

9 loop

10 if mod(n,2)=1

11 then

12 sum1:=sum1+n;

13 end if;

14 end loop;

15 dbms_output.put_line('sum ='||sum1);

16 end;

17 /

Enter value for endvalue: 5

old 6: endvalue:=&endvalue;

new 6: endvalue:=5;

sum =9

PL/SQL procedure successfully completed.

SQL> /

Enter value for endvalue: 56

old 6: endvalue:=&endvalue;

new 6: endvalue:=56;

sum =784

PL/SQL procedure successfully completed.

WHILE.....LOOP

```
SQL> set serveroutput on;
SQL> declare
  2 n number;
  3 sum1 number default 0;
  4 endvalue number;
  5 begin
  6 endvalue:=&endvalue;
  7 n:=1;
  8 while(n<endvalue)
  9 loop
 10 sum1:=sum1+n;
 11 n:=n+2;
 12 end loop;
 13 dbms_output.put_line('sum of odd no. between 1 and' ||endvalue||'is'||sum1);
 14 end;
 15 /
Enter value for endvalue: 50
old  6: endvalue:=&endvalue;
new  6: endvalue:=50;
sum of odd no. between 1 and50is625
```

PL/SQL procedure successfully completed.

RESULT:

Thus, the control structures has been implemented using PL/SQL.

AIM:

To implement PL/SQL program using triggers.

DESCRIPTION:

Complex integrity constraints that refer to several tables and attributes (as they are known as assertions in the SQL standard) cannot be specified within table definitions.

Triggers, in contrast, provide a procedural technique to specify and maintain integrity constraints. Triggers even allow users to specify more complex integrity constraints since a trigger essentially is a PL/SQL procedure. Such a procedure is associated with a table and is automatically called by the database system whenever a certain modification (event) occurs on that table. Modifications on a table may include insert, update, and delete operations.

Structure of Triggers

A trigger definition consists of the following (optional) components:

- trigger name

create [or replace] trigger <trigger name>

- trigger time point

before | after

- triggering event(s)

insert or update [of <column(s)>] or delete on <table>

- trigger type (optional)

for each row

- trigger restriction (only for each row triggers !)

when (<condition>)

- trigger body

<PL/SQL block>

Below is the syntax for creating a trigger in Oracle

```
CREATE [OR REPLACE] TRIGGER <trigger_name>

{ BEFORE|AFTER } { INSERT|DELETE|UPDATE } ON <table_name>

[REFERENCING [NEW AS <new_row_name>] [OLD AS <old_row_name>]]

[FOR EACH ROW [WHEN (<trigger condition>)]]

<trigger_body>
```

Some important points to note:

- You can create only BEFORE and AFTER triggers for tables. (INSTEAD OF triggers are only available for views; typically they are used to implement view updates.)
- You may specify up to three triggering events using the keyword OR. Furthermore, UPDATE can be optionally followed by the keyword OF and a list of attribute(s) in <table_name>. If present, the OF clause defines the event to be only an update of the attribute(s) listed after OF.

Here are some examples:

```
... INSERT ON R ...
... INSERT OR DELETE OR UPDATE ON R ...
... UPDATE OF A, B OR INSERT ON R ...
```

- If FOR EACH ROW option is specified, the trigger is row-level; otherwise, the trigger is statement-level.
-

- Only for row-level triggers:

- The special variables NEW and OLD are available to refer to new and old tuples respectively.

Note: In the trigger body, NEW and OLD must be preceded by a colon (":"), but in the WHEN clause, they do not have a preceding colon! See example below.

- The REFERENCING clause can be used to assign aliases to the variables NEW and OLD.
- A trigger restriction can be specified in the WHEN clause, enclosed by parentheses. The trigger restriction is a SQL condition that must be satisfied in order for Oracle to fire the trigger. This condition cannot contain subqueries. Without the WHEN clause, the trigger is fired for each row.
- <trigger_body> is a PL/SQL block, rather than sequence of SQL statements. Oracle has placed certain restrictions on what you can do in <trigger_body>, in order to avoid situations where one trigger performs an action that triggers a second trigger, which then triggers a third, and so on, which could potentially create an infinite loop. The restrictions on <trigger_body> include:
 - You cannot modify the same relation whose modification is the event triggering the trigger.
 - You cannot modify a relation connected to the triggering relation by another constraint such as a foreign-key constraint.

The clause replace re-creates a previous trigger definition having the same <trigger name>.

The clause replace re-creates a previous trigger definition having the same <trigger name>. The name of a trigger can be chosen arbitrarily, but it is a good programming style to use a trigger name that reflects the table and the event(s), e.g., upd ins EMP. A trigger can be invoked before or after the triggering event. The triggering event specifies before (after) which operations on the table <table> the trigger is executed. A single event is an insert, an update, or a delete; events can be combined using the logical connective or. If for an update trigger no columns are specified, the trigger is executed after (before) <table> is updated. If the trigger should only be executed when certain columns are upDated, these columns must be specified after the event update.

OUTPUT: **TRIGGERS**

SQL> desc empa

Name	Null?	Type
ID		NUMBER(3)
NAME		VARCHAR2(10)
INCOME		NUMBER(4)
EXPENCE		NUMBER(3)
SAVINGS		NUMBER(3)

SQL> select * from empa;

ID	NAME	INCOME	EXPENCE	SAVINGS
2	kumar	2500		650
3	venky	5000	900	950
4	karthi	7777	777	777
5	priya	3455	342	900
7	nandhu	6544	567	345

TRIGGER AFTER UPDATE

SQL> set serverout on;

```
SQL> CREATE OR REPLACE TRIGGER TRIG1
2 AFTER UPDATE OR INSERT OR DELETE ON EMPA
3 FOR EACH ROW
4 BEGIN
5 IF UPDATING THEN
6 DBMS_OUTPUT.PUT_LINE('TABLE UPDATED');
7 ELSIF INSERTING THEN
8 DBMS_OUTPUT.PUT_LINE('TABLE INSERTED');
9 ELSIF DELETING THEN
10 DBMS_OUTPUT.PUT_LINE('TABLE DELETED');
11 END IF;
12 END;
13 /
```

Trigger created.

```
SQL> insert into empa values(9,'ram',9000,900,909);
TABLE INSERTED
1 row created.
```

```
SQL> select * from empa;
  ID NAME      INCOME  EXPENCE  SAVINGS
-----
  2 kumar      2500      150     650
  3 venky      5000      900     950
  4 karthi     7777      777     777
  5 priya      3455      342     900
  7 nandhu     6544      567     345
  9 ram        9000      900     909
6 rows selected.
```

```
SQL> update empa set savings=800 where name='nandhu';
TABLE UPDATED
```

1 row updated.

```
SQL> select * from empa;
  ID NAME      INCOME  EXPENCE  SAVINGS
-----
  2 kumar      2500      150     650
  3 venky      5000      900     950
  4 karthi     7777      777     777
  5 priya      3455      342     900
  7 nandhu     6544      567     800
  9 ram        9000      900     909
6 rows selected.
```

```
SQL> delete from empa where name='kumar';
TABLE DELETED
1 row deleted.
```

SQL> select * from empa;

ID	NAME	INCOME	EXPENCE	SAVINGS
3	venky	5000	900	950
4	karthi	7777	777	777
5	priya	3455	342	900
7	nandhu	6544	567	800
9	ram	9000	900	909

TRIGGER BEFORE UPDATE

SQL> select * from empa;

ID	NAME	INCOME	EXPENCE	SAVINGS
3	venky	5000	900	950
4	karthi	7777	777	777
5	priya	3455	342	900
7	nandhu	6544	567	800
9	ram	9000	900	909

SQL> set serverout on;

SQL> CREATE OR REPLACE TRIGGER TRIG2

2 BEFORE UPDATE OR INSERT OR DELETE ON EMPA

3 FOR EACH ROW

4 BEGIN

5 IF UPDATING THEN

6 DBMS_OUTPUT.PUT_LINE('TABLE UPDATED');

7 ELSIF INSERTING THEN

8 DBMS_OUTPUT.PUT_LINE('TABLE INSERTED');

9 ELSIF DELETING THEN

10 DBMS_OUTPUT.PUT_LINE('TUPLE DELETED');

11 END IF;

12 END;

13 /

Trigger created.

SQL> insert into empa values (1,'valli',9999,980,800);

TABLE INSERTED

1 row created.

SQL> select * from empa;

ID	NAME	INCOME	EXPENCE	SAVINGS
3	venky	5000	900	950
4	karthi	7777	777	777
1	valli	9999	980	800
5	priya	3455	342	900
7	nandhu	6544	567	800
9	ram	9000	900	909

6 rows selected.

```
SQL> update empa set expence=100 where name='valli';  
TABLE UPDATED
```

1 row updated.

```
SQL> select * from empa;
```

ID NAME	INCOME	EXPENCE	SAVINGS
3 venky	5000	900	950
4 karthi	7777	777	777
1 valli	9999	100	800
5 priya	3455	342	900
7 nandhu	6544	567	800
9 ram	9000	900	909

6 rows selected.

```
SQL> delete from empa where name='venky';  
TUPLE DELETED
```

1 row deleted.

```
SQL> select * from empa;
```

ID NAME	INCOME	EXPENCE	SAVINGS
4 karthi	7777	777	777
1 valli	9999	100	800
5 priya	3455	342	900
7 nandhu	6544	567	800
9 ram	9000	900	909

RESULT:

Thus, the triggers has been implemented using PL/SQL.

AIM:

To study the XML database and its types

XML

XML stands for **Extensible Markup Language** and is a text-based markup language derived from Standard Generalized Markup Language (SGML).

XML tags identify the data and are used to store and organize the data, rather than specifying how to display it like HTML tags, which are used to display the data. XML is not going to replace HTML in the near future, but it introduces new possibilities by adopting many successful features of HTML.

There are three important characteristics of XML that make it useful in a variety of systems and solutions –

XML is extensible – XML allows you to create your own self-descriptive tags, or language, that suits your application.

XML carries the data, does not present it – XML allows you to store the data irrespective of how it will be presented.

XML is a public standard – XML was developed by an organization called the World Wide Web Consortium (W3C) and is available as an open standard.

XML Database is used to store huge amount of information in the XML format. As the use of XML is increasing in every field, it is required to have a secured place to store the XML documents. The data stored in the database can be queried using **XQuery**, serialized, and exported into a desired format.

XML Database Types

There are two major types of XML databases –

- XML- enabled
- Native XML (NXD)

XML - Enabled Database

XML enabled database is nothing but the extension provided for the conversion of XML document. This is a relational database, where data is stored in tables consisting of rows and columns. The tables contain set of records, which in turn consist of fields.

Native XML Database

Native XML database is based on the container rather than table format. It can store large amount of XML document and data. Native XML database is queried by the **XPath**-expressions.

Native XML database has an advantage over the XML-enabled database. It is highly capable to store, query and maintain the XML document than XML-enabled database.

Example

Following example demonstrates XML database –

```
<?xml version = "1.0"?><contact-info>
<contact1>
  <name>Thivagar </name>
  <company>TCS</company>
  <phone>(011) 123-4567</phone>
</contact1>
<contact2>
  <name>Manisha </name>
  <company>Infosys</company>
  <phone>(011) 789-4567</phone>
```

```
</contact2></contact-info>
```

Here, a table of contacts is created that holds the records of contacts (contact1 and contact2), which in turn consists of three entities – *name*, *company* and *phone*.

XML Schema is commonly known as **XML Schema Definition (XSD)**. It is used to describe and validate the structure and the content of XML data. XML schema defines the elements, attributes and data types. Schema element supports Namespaces. It is similar to a database schema that describes the data in a database.

Syntax

You need to declare a schema in your XML document as follows –

Example

The following example shows how to use schema –

```
<?xml version = "1.0" encoding = "UTF-8"?><xs:schema xmlns:xs =  
"http://www.w3.org/2001/XMLSchema">  
  <xs:element name = "contact">  
    <xs:complexType>  
      <xs:sequence>  
        <xs:element name = "name" type = "xs:string" />  
        <xs:element name = "company" type = "xs:string" />  
        <xs:element name = "phone" type = "xs:int" />  
      </xs:sequence>  
    </xs:complexType>  
  </xs:element></xs:schema>
```

The basic idea behind XML Schemas is that they describe the legitimate format that an XML document can take.

Conclusion :

Thus the XML database and its types were studied.

28.04.23

AIM : To study the creation of document based data using Nosql Database Tools

Document based data

A document database is a type of nonrelational database that is designed to store and query data as JSON-like documents. Document databases make it easier for developers to store and query data in a database by using the same document-model format they use in their application code. The flexible, semistructured, and hierarchical nature of documents and document databases allows them to evolve with applications' needs. The document model works well with use cases such as catalogs, user profiles, and content management systems where each document is unique and evolves over time. Document databases enable flexible indexing, powerful ad hoc queries, and analytics over collections of documents.

In the following example, a JSON-like document describes a book.

```
[
{
  "year" : 2013,
  "title": "Turn It Down, Or Else!",
  "info": {
    "directors": [ "Alice Smith", "Bob Jones"],
    "release_date": "2013-01-18T00:00:00Z",
    "rating" : 6.2,
    "genres" : ["Comedy", "Drama"],
    "image_url" "http://ia.media-imdb.com/images/N/09ERWAU7FS797AJ7LUSHN09AMUP908RL105JF90EWR7LJKQ7@@.\_V1\_SX400\_.jpg",
  }
}
```

"plot" "A rock band plays their music at high volumes, annoying the neighbors.",

```
"actors": ["David Matthewman", "Jonathan G: Neff"]
}
}
```

```
{
"year": 2015,
"title": "The Big New Movie",
"info": {
}
"plot": "Nothing happens at all.",
"rating": 0
}
}
}
```

The following is an example of a document that might appear in a document database like MongoDB. This sample document represents a company contact card, describing an employee called Sammy:

```
{
  "_id": "sammyshark",
  "firstName": "Sammy",
  "lastName": "Shark",
  "email": "sammy.shark@digitalocean.com",
}
```

```
"department": "Finance"  
}
```

Notice that the document is written as a JSON object. JSON is a human-readable data format that has become quite popular in recent years. While many different formats can be used to represent data within a document database, such as XML or YAML, JSON is one of the most common choices. For example, MongoDB adopted JSON as the primary data format to define and manage data.

All data in JSON documents are represented as field-and-value pairs that take form of field: value. In the previous example, the first line shows an `_id` field with the value `sammyshark`. The example also includes fields for the employee's first and last names ,their email address as well as as what department they work in.

Field names allow us to understand what kind of data is held within a document just a glance. Documents in document databases are self-describing, which means they contain both the data values as well as the information on what kind of data is being stored. When retrieving a document from the database, we always get the whole picture.

Conclusion :

Thus the document based data using Nosql Database Tools were studied.

AIM:

To design and implement any one of the module of Banking system with visual basic as front end and sql plus as back end.

PROCEDURE :**1. Setup an ODBC Data source**

- Choose the **Administrative Tools** icon from the Windows **Control Panel**.
- Choose the **Data Sources** shortcut.
- In the **ODBC Data Source Administrator** dialog box, click **Add**, then select the oracle provider for OLEDB and choose **OK**.
- In the **Setup** dialog box, set option values as necessary and choose **OK**.

2. Creating an ADO Data Control**PROGRAM :**

```
Private Sub Command1_Click()  
Adodc1.Recordset.AddNew  
End Sub
```



```
Private Sub Command2_Click()  
Adodc1.Recordset.Update  
MsgBox ("Updated")  
End Sub
```

```
Private Sub Command3_Click()  
Adodc1.Recordset.Delete  
MsgBox ("Deleted")  
End Sub
```

```
Private Sub Command4_Click()  
End  
End Sub
```

OUTPUT :

The screenshot displays a Visual Basic application window titled "account". The main form, titled "BANKING SYSTEM", contains four text input fields with the following labels and values: "ACCOUNTNUMBER : 2014234567", "BRANCHNAME : IOB", "PLACE : TRICHY", and "BALANCE : 200000". Below these fields is a button labeled "USE ME TO VIEW THE DATABASE" with navigation arrows on either side. At the bottom of the form are four buttons: "ADDNEW", "UPDATE", "DELETE", and "EXIT". The Windows taskbar at the bottom shows the Start button, "Oracle SQL*Plus", "Project1 - Microsoft V...", and the "account" application window. The system clock in the bottom right corner shows 2:08 PM.

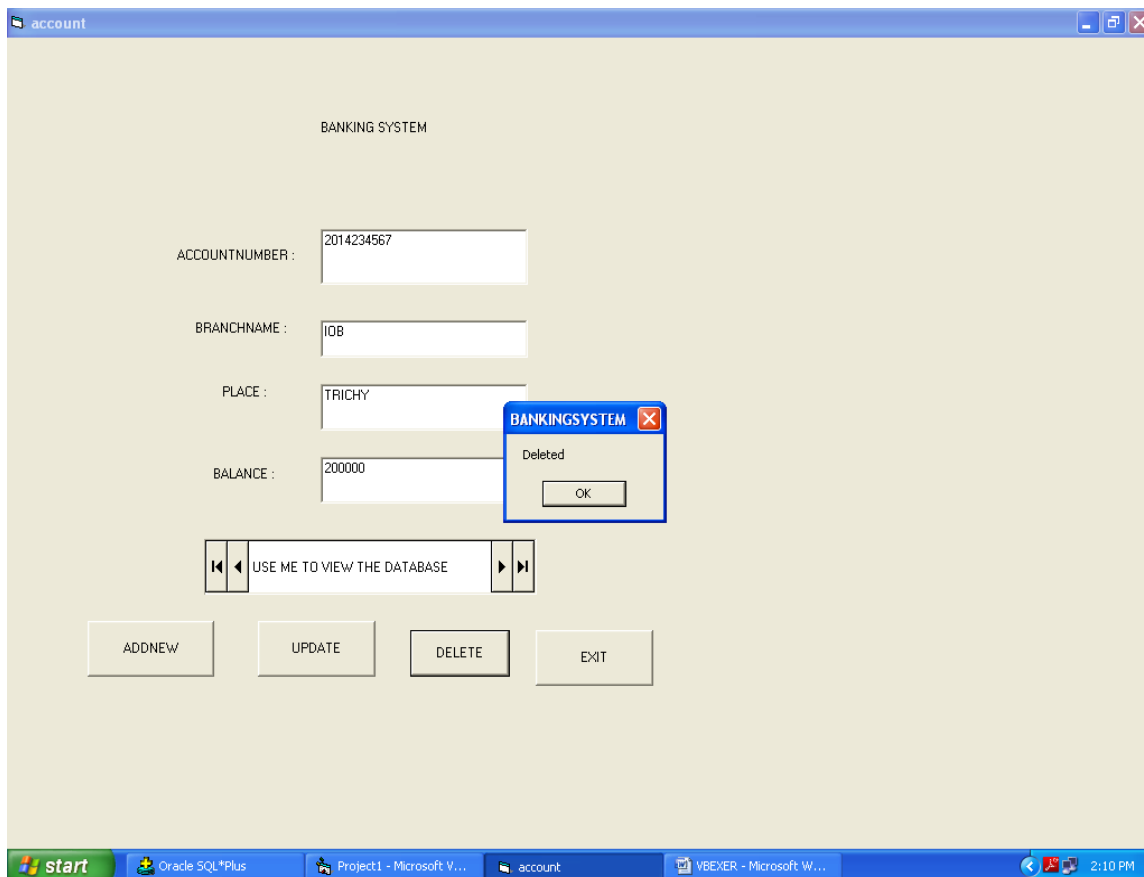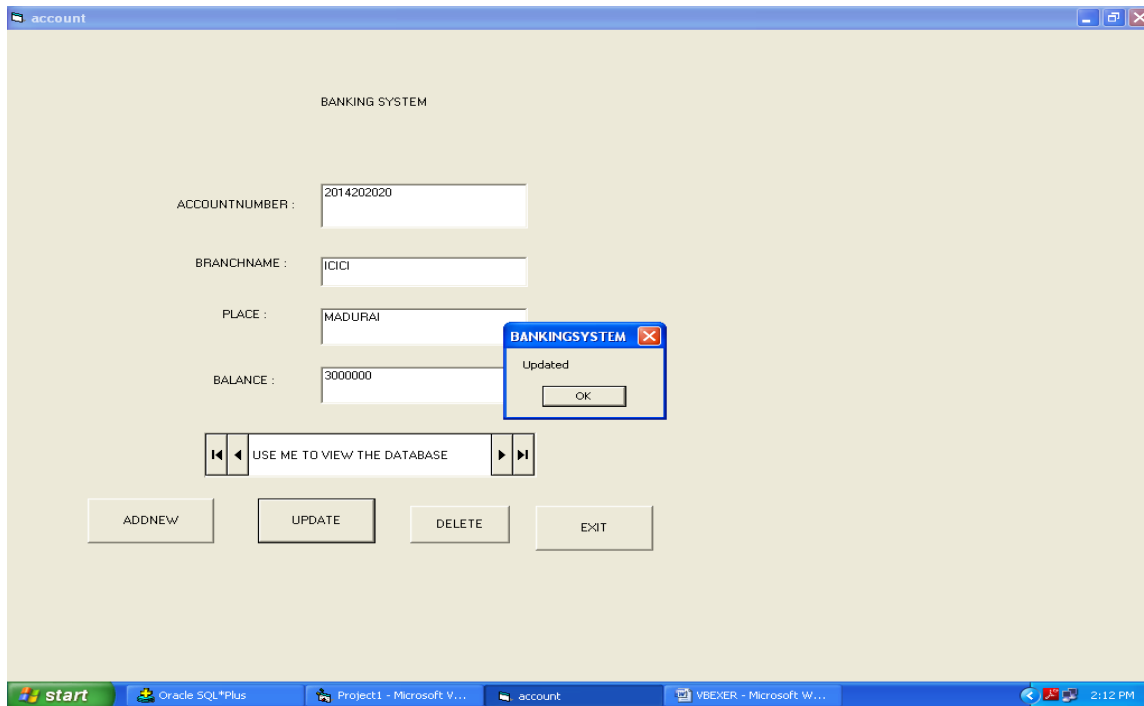

CONCLUSION :

Thus the application program for banking system is done successfully using visual basic as front end and sql plus as back end.