Responsibly deploy AI in Quantitative Social Research

As a part of module Social Research Methods

Rongxin Ouyang*


* PhD Candidate in Computational Communication, National University of Singapore
Email: rongxin@u.nus.edu / Website: https://rongxin.me
Using causal and computational methods to evaluate societal and political impacts of digital information technologies

November 5, 2026

The goal of this session

(... lower barrier (of computational skills) ... redistribution of expertise ...)

"For students, the question is no longer whether they can code, but whether they can audit, critique, adapt, and responsibly deploy AI-assisted methods without mistaking convenience" (Zhou et al., 2026)

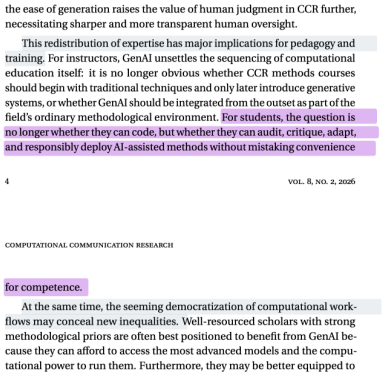

the ease of generation raises the value of human judgment in CCR further, necessitating sharper and more transparent human oversight.

This redistribution of expertise has major implications for pedagogy and training. For instructors, GenAI unsettles the sequencing of computational education itself: it is no longer obvious whether CCR methods courses should begin with traditional techniques and only later introduce generative systems, or whether GenAI should be integrated from the outset as part of the field's ordinary methodological environment. For students, the question is no longer whether they can code, but whether they can audit, critique, adapt, and responsibly deploy AI-assisted methods without mistaking convenience

4 VOL. 8, NO. 2, 2026

COMPUTATIONAL COMMUNICATION RESEARCH

for competence.

At the same time, the seeming democratization of computational workflows may conceal new inequalities. Well-resourced scholars with strong methodological priors are often best positioned to benefit from GenAI because they can afford to access the most advanced models and the computational power to run them. Furthermore, they may be better equipped to

Source: Zhou et al. (2026)


Introduction

1.1 What Is artificial intelligence?

- Computational agents that act intelligently

  (Poole & Mackworth, 2023)


- But what is intelligence – see Figure

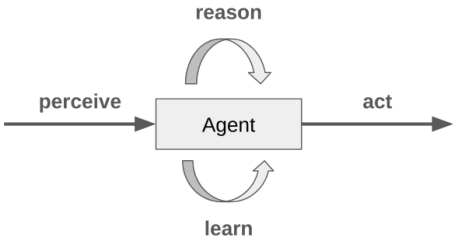

Source: Stanford CS221, Percy Liang

1.1 What Is artificial intelligence?

- Computational agents that act intelligently (Poole & Mackworth, 2023);
- But what is intelligence – see Figure
- More importantly, please be ware of the differences ...



1.2 A simplified history of LLMs

- * Artificial intelligence is an old field developed decades ago (see Poole & Mackworth, 2023);
- * Pre-LLMs, early tools mainly classified, clustered, or predicted from human-produced traces (Zhou et al., 2026). [a]
- * Birth of LLMs, Transformers (Vaswani et al., 2017), a model structure to parallelize training enabling large datasets and model sizes
- Post-LLMs, we focus on the LLM era post-2020 (marked by GPT-3; F. Xu et al., 2026) and its implications for computational social science research; with just a brief tutorical of text classficiation using bert

[a] Likewise, Percy Liang uses 2016, 2018, and Today to divide three time periods, see https://cs336.stanford.edu/lectures/?trace=lecture_01

Recurrent models typically factor computation along the symbol positions of the input and output sequences. Aligning the positions to steps in computation time, they generate a sequence of hidden states h_t, as a function of the previous hidden state h_{t-1} and the input for position t. This inherently sequential nature precludes parallelization within training examples, which becomes critical at longer sequence lengths, as memory constraints limit batching across examples. Recent work has achieved significant improvements in computational efficiency through factorization tricks [18] and conditional computation [26], while also improving model performance in case of the latter. The fundamental constraint of sequential computation, however, remains.

Attention mechanisms have become an integral part of compelling sequence modeling and transduction models in various tasks, allowing modeling of dependencies without regard to their distance in the input or output sequences [2, 16]. In all but a few cases [22], however, such attention mechanisms are used in conjunction with a recurrent network.

In this work we propose the Transformer, a model architecture eschewing recurrence and instead relying entirely on an attention mechanism to draw global dependencies between input and output. The Transformer allows for significantly more parallelization and can reach a new state of the art in translation quality after being trained for as little as twelve hours on eight P100 GPUs.

2 Background

The goal of reducing sequential computation also forms the foundation of the Extended Neural GPU [20], ByteNet [15] and ConvS2S [8], all of which use convolutional neural networks as basic building block, computing hidden representations in parallel for all input and output positions. In these models, the number of operations required to relate signals from two arbitrary input or output positions grows in the distance between positions, linearly for ConvS2S and logarithmically for ByteNet. This makes it more difficult to learn dependencies between distant positions [11]. In the Transformer this is reduced to a constant number of operations, albeit at the cost of reduced effective resolution due to averaging attention-weighted positions, an effect we counteract with Multi-Head Attention as described in section 3.2.

Self-attention, sometimes called intra-attention is an attention mechanism relating different positions of a single sequence in order to compute a representation of the sequence. Self-attention has been used successfully in a variety of tasks including reading comprehension, abstractive summarization, textual entailment and learning task-independent sentence representations [4, 22, 23, 19].


End-to-end memory networks are based on a recurrent attention mechanism instead of sequence-aligned recurrence and have been shown to perform well on simple-language question answering and

Excerpt from Vaswani et al. (2017)

Pre-LLMs AI

2.1 The use of AI in social science before LLMs

- Social science research often leverages machine learning for various tasks, according to the typology in Grimmer et al. (2021):
  - Discovery; e.g., text classification (Tutorial I)
  - Measurement; e.g.,
  - Causal Inference; e.g.,
  - Prediction; e.g.,
- Take FIN528 Machine Learning for Finance / Advanced MachineLearning at PHBS if interested

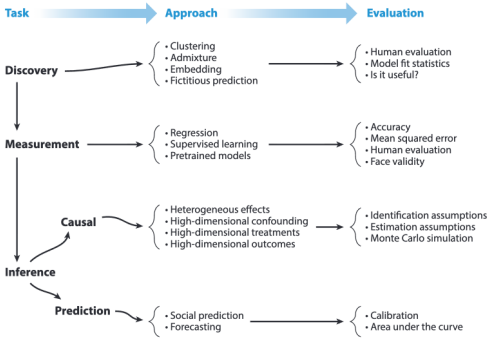

Source: Grimmer et al. (2021) (p.23)

TUT1

Binary classification of sentiment using RoBERTa

LLMs

4.1 Roles of LLMs in Computational Social Science

- Large language models (LLMs) are language models roughly with no less than 1 billion parameters (Percy Liang; e.g., GPT, Claude)[1]
- A recent review article suggests four roles of LLMs in computational social science: Subject, assistant, collaborator, evaluator

Table 1 | Representative recent work leveraging LLMs in social scientific study, organized by the research roles they have


Research role	Description	Example works
Research subjects	Generating survey responses	Refs. 32,43,48
	Simulating behaviour sequences	Refs. 52,53,55
	Simulating social interaction	Ref. 61,63,65,67
Research assistants	Interviewing human participants	Refs. 44,73,74,76
	Supporting experiments	Refs. 81–83
	Analysing textual content	Refs. 85,93,99,102
	Mining social networks	Refs. 107–109
Research collaborators	Reviewing literature	Refs. 117,120,122
	Proposing hypotheses	Refs. 126–128
	Designing research protocols	Refs. 129,130
Research evaluators	Evaluating research protocols	Refs. 132,133,137,140
	Critiquing research outcomes	Refs. 141,142,144

Source: F. Xu et al. (2026)

[1] We are not a CS class, so it should be fine to use this definition.

4.1 Roles of LLMs in Computational Social Science


- From more perspectives, we may propose a comprehensive categorization of LLM roles in CSS; to be elaborated in the following slides

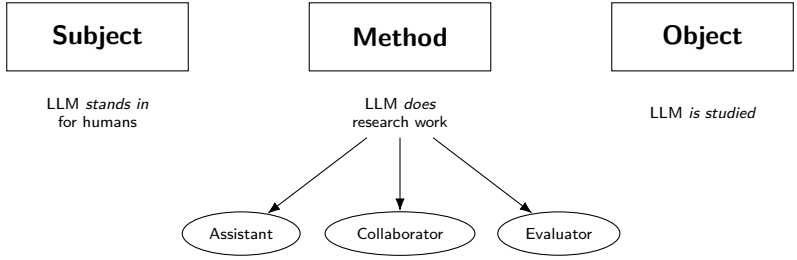

Source: Four roles (subjects, assistants, collaborators, evaluators) categorized in F. Xu et al. (2026); four categories in Hai Liang (2026); and two roles (a research tool, an object of inquiry) adapted from Zhou et al. (2026)

4.2 LLMs as Subjects: Categories


- LLMs serve as research subjects, according to F. Xu et al. (2026):
  - Generate survey responses (Dillion et al., 2023; Dominguez-Olmedo et al., 2024; Hämäläinen et al., 2023; Y. Xie & Xie, 2025)
  - Simulating behavior sequences (Park, O'Brien, et al., 2023; L. Wang et al., 2025; Yan et al., 2024)
  - Simulating social interactions (Ashery et al., 2025; Gao et al., 2025; C. Xie et al., 2024; Zhang et al., 2024)

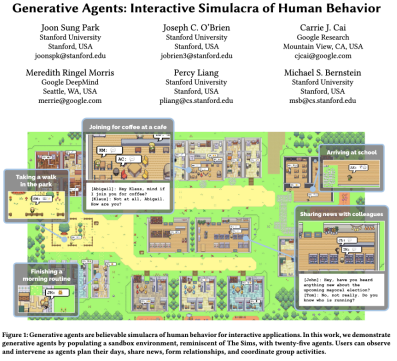

Generative agents in a simulated town; Park, O'Brien, et al. (2023)

4.3 LLMs as Subjects: Pros and Cons


- **Pros:**
  - Successfully replicate human responses in surveys (Argyle et al., 2023)
  - Produce believable individual and emergent social behaviors (Park, O'Brien, et al., 2023)
  - Replicate emergence of social conventions (Ashery et al., 2025)
  - etc.

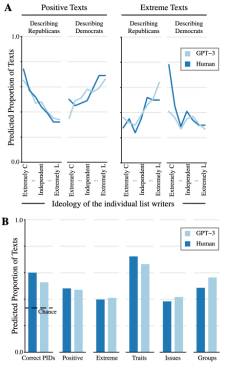

Analysis of GPT-3 and human responses from the Lucid su; Fig 3 in Argyle et al. (2023)

4.3 LLMs as Subjects: Pros and Cons


- **Cons:**
  - Poorly refelcting "hard-to-reach populations" (Bollen et al., 2026); fail to capture experiential and cultural depth (Pataranutaporn et al., 2025)
  - Reflect certain partisan (Santurkar et al., 2023) or cultural biases (Tao et al., 2024)
  - Closed to averages but less variation (Bisbee et al., 2024); have strong, varying biases and have low-variance in opinnion or attitudinal research(Boelaert et al., 2025); likely to both misportray and flatten demographic representations (A. Wang et al., 2025); and tend to compress heterogeneity into simplified typological structures (Y. Xie & Xie, 2025)

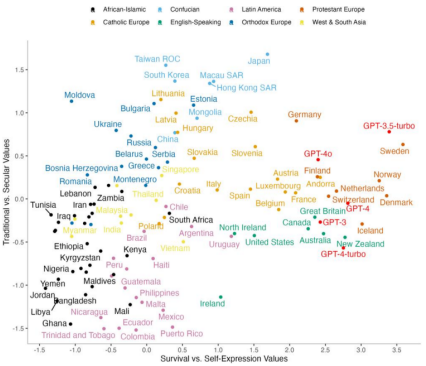

Deviated LLM-generated answers related to values compared with different countries; Fig 1 in Tao et al. (2024)

4.3 LLMs as Subjects: Pros and Cons


- **Cons:**
  - Poorly refelcting "hard-to-reach populations" (Bollen et al., 2026); fail to capture experiential and cultural depth (Pataranutaporn et al., 2025)
  - Reflect certain partisan (Santurkar et al., 2023) or cultural biases (Tao et al., 2024)
  - Closed to averages but less variation (Bisbee et al., 2024); have strong, varying biases and have low-variance in opinnion or attitudinal research(Boelaert et al., 2025); likely to both misportray and flatten demographic representations (A. Wang et al., 2025); and tend to compress heterogeneity into simplified typological structures (Y. Xie & Xie, 2025)



Failing to capture the dispersion of real-world distribution; Fig 3 in Y. Xie & Xie (2025)

4.4 LLMs as Subjects: Evaluation

- *Validity* and *reliability* remain concerns (Zhou et al., 2026); please refer to previous lectures by Prof. Ye

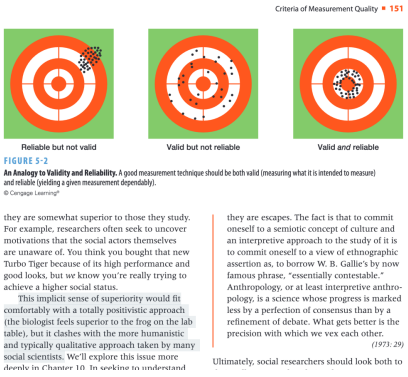
Criteria of Measurement Quality ■ 151

Reliable but not valid | Valid but not reliable | Valid *and* reliable

FIGURE 5-2

An Analogy to Validity and Reliability. A good measurement technique should be both valid (measuring what it is intended to measure) and reliable (yielding a given measurement dependably).

© Cengage Learning®

they are somewhat superior to those they study. For example, researchers often seek to uncover motivations that the social actors themselves are unaware of. You think you bought that new Turbo Tiger because of its high performance and good looks, but we know you're really trying to achieve a higher social status.

This implicit sense of superiority would fit comfortably with a totally positivistic approach (the biologist feels superior to the frog on the lab table), but it clashes with the more humanistic and typically qualitative approach taken by many social scientists. We'll explore this issue more deeply in Chapter 10. In seeking to understand


they are escapes. The fact is that to commit oneself to a semiotic concept of culture and an interpretive approach to the study of it is to commit oneself to a view of ethnographic assertion as, to borrow W. B. Gallie's by now famous phrase, "essentially contestable." Anthropology, or at least interpretive anthropology, is a science whose progress is marked less by a perfection of consensus than by a refinement of debate. What gets better is the precision with which we vex each other. *(1973: 29)*

Ultimately, social researchers should look both to

Validity and reliability; in Babbie (2021)

4.5 LLMs as Subjects: Improvement

- *Validity* and *reliability* remain concerns (Zhou et al., 2026)
- Three strategies to improve
  - Alignment (pre-use): Adjusting model outputs; mostly done by companies and in computer science studies
  - Optimization (in-use): **Fine-tuning or prompting** strategies to improve performance on specific tasks (e.g., Kolluri et al., 2025; Tao et al., 2024; Y. Xie & Xie, 2025)
  - Correction (post-use): Post-processing corrections ; an emerging promise in econometric and machine learning literature (e.g., Chernozhukov et al., 2018; Egami et al., 2024)

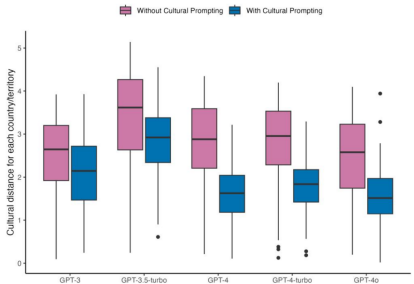

Prompting mitigates cultural biases; Source: Fig 2 in Tao et al. (2024)

4.6 LLMs as Methods: Assistant

- Writing, debugging, and translating analysis code
- Searching and summarizing literature
- Editing and polishing prose
- Data cleaning and wrangling

The researcher specifies the task; the LLM speeds up execution

4.7 LLMs as Methods: Collaborator

- Brainstorming research questions and hypotheses
- Critiquing research designs and identification strategies
- Proposing measures, robustness checks, and alternative explanations
- Agentic workflows: multi-step analysis with researcher oversight

The LLM contributes ideas; the researcher remains accountable

4.8 LLMs as Methods: Evaluator


- **Annotation**: zero- and few-shot text classification at scale
- **LLM-as-judge**: scoring quality, stance, or similarity
- **Review**:
- **Replication**: To scale up reproducibility of empirical work (Y. Xu & Yang, 2026)

4.9 LLMs as Methods: Choose the Right Tool

- Consider a model as a function, $f(data, algo, object)$, the differences in each part would substantially shape their in-domain capabilities (like better coding or writing)
- In this sense, we may need to choose different models for different tasks, depending on their strengths and limitations

4.9 LLMs as Methods: Choose the Right Tool


- For example, you may expect Gemini Carbon to excel in writing tasks whereas Claude Opus 5.5 outperforms in engineering

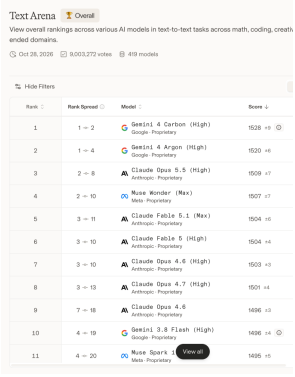

Source: https://arena.ai/leaderboard/chat/text (Nov 3, 2026)

4.9 LLMs as Methods: Choose the Right Tool

- For example, you may expect Gemini Carbon to excel in writing tasks whereas Claude Opus 5.5 outperforms in engineering
- In general, model labs have different commercialization models, for business model optimized for engineering tasks may prioritize coding capabilities (e.g., Anthropic); please check benchmarks / review the literature / do a pilot test before using a model

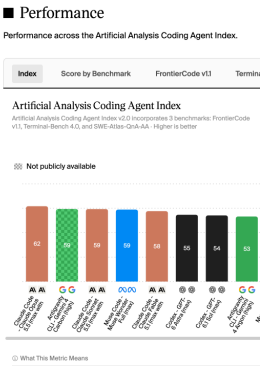

Source: https://artificialanalysis.ai/agents/coding-agents#coding-agents-index (Nov 3, 2026)

4.10 LLMs as Objects

- **Auditing models**: political slant, social bias, and value alignment
- **Effects on people**: persuasion, learning, labor, and well-being
- **Effects on information ecosystems**: AI-generated content and search

Limitations

5.1 Limitations

1. **Validity.** Outputs may not measure what we intend
2. **Reproducibility.** Closed models, silent updates, and stochastic outputs
3. **Bias.** Training data over-represent some groups and languages
4. **Hallucination.** Fabricated facts and citations
5. **Ethics.** Privacy, consent, and data sent to third parties
6. **Over-reliance.** Deskilling and unexamined defaults


Takeaways

6.1 Takeaways

- AI models (which includes LLMs) can be subjects, objects, and methods in quantitative social research
- As methods, they are expected to be used in a responsible way in which validity, reproducibility, bias, hallucination, ethics, and over-reliance are carefully considered
- Like any other methods, they evolve in a quick (and potentially quicker pace), but our tastes of good questions remain relatively central to research (and industrial jobs; trust me)

6.1 Takeaways

- Last word: "... Be skeptic... don't panic!" (Angrist & Pischke, 2009)

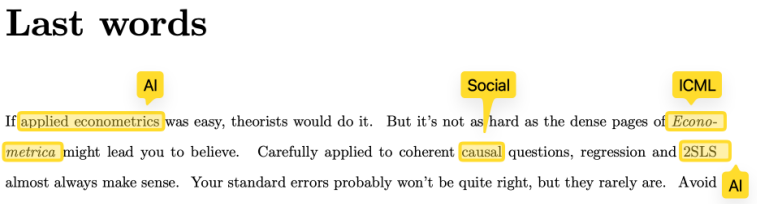

Last words

AI Social ICML

If applied econometrics was easy, theorists would do it. But it's not as hard as the dense pages of *Econometrica* might lead you to believe. Carefully applied to coherent causal questions, regression and 2SLS almost always make sense. Your standard errors probably won't be quite right, but they rarely are. Avoid embarrassment by being your own best skeptic - and, especially, Don't Panic!

AI

Source: Angrist & Pischke (2009)

Resources

7.1 Resources

- **Locate the most appropriate AI model for your task**
  - Artificial analysis https://artificialanalysis.ai/
  - Arena.ai, blind benchmarking for AI models https://arena.ai/leaderboard/
- **Find problems in your manuscript**
  - Refine, publication-level technical review; adopted by AEA https://www.refine.ink/
  - OpenAIReview, opensource solution of multi-agent manuscript review by UChicago HAI https://github.com/ChicagoHAI/OpenAIReview
- **Doublecheck references and citations**
  - CiteVerify, "a local tool for verifying references in research papers", https://github.com/cuihuash/CiteVerify
  - Chat with frontier models would also help

7.1 Resources

- **Organize multiple AI models and services**
  - For macOS, magpie, local AI router management for mac https://github.com/yetone/magpie
  - For other platforms, cc-switch, https://github.com/farion1231/cc-switch
- **Read scientific literature using your own language**
  - PDFMathTranslate, read scientific PDFs in your language https://github.com/PDFMathTranslate/PDFMathReader (Ouyang et al., 2025)

References

8.1 References I

Angrist, J. D., & Pischke, J.-S. (2009). *Mostly harmless econometrics: An empiricist's companion*. Princeton university press.

Argyle, L. P., Busby, E. C., Fulda, N., Gubler, J. R., Rytting, C., & Wingate, D. (2023). Out of One, Many: Using Language Models to Simulate Human Samples. *Political Analysis*, *31*(3), 337–351. https://doi.org/10.1017/pan.2023.2

Ashery, A. F., Aiello, L. M., & Baronchelli, A. (2025). Emergent social conventions and collective bias in LLM populations. *Science Advances*, *11*(20), eadu9368. https://doi.org/10.1126/sciadv.adu9368

Babbie, E. R. (2021). *The practice of social research* (15th ed.). Cengage.

Bisbee, J., Clinton, J. D., Dorff, C., Kenkel, B., & Larson, J. M. (2024). Synthetic Replacements for Human Survey Data? The Perils of Large Language Models. *Political Analysis*, *32*(4), 401–416. https://doi.org/10.1017/pan.2024.5

Boelaert, J., Coavoux, S., Ollion, É., Petev, I., & Präg, P. (2025). Machine Bias. How Do Generative Language Models Answer Opinion Polls?1. *Sociological Methods & Research*, *54*(3), 1156–1196. https://doi.org/10.1177/00491241251330582

Bollen, P., Higton, J., & Sands, M. (2026). Nationally Representative, Locally Misaligned: The Biases of Generative Artificial Intelligence in Neighborhood Perception. *Political Analysis*, *34*(3), 479–487. https://doi.org/10.1017/pan.2025.10022

Chernozhukov, V., Chetverikov, D., Demirer, M., Duflo, E., Hansen, C., Newey, W., & Robins, J. (2018). Double/debiased machine learning for treatment and structural parameters. *The Econometrics Journal*, *21*(1), C1–C68. https://doi.org/10.1111/ectj.12097

Dillion, D., Tandon, N., Gu, Y., & Gray, K. (2023). Can AI language models replace human participants? *Trends in Cognitive Sciences*, *27*(7), 597–600. https://doi.org/10.1016/j.tics.2023.04.008

Dominguez-Olmedo, R., Hardt, M., & Mendler-Dünner, C. (2024, December 9). *Questioning the Survey Responses of Large Language Models*. arXiv: 2306.07951 [cs.CL]. https://doi.org/10.48550/arXiv.2306.07951

Egami, N., Hinck, M., Stewart, B. M., & Wei, H. (2024). Using large language model annotations for the social sciences: A general framework of using predicted variables in downstream analyses. *Preprint from November*, *17*, 2024. Retrieved May 12, 2026, from https://naokiegami.com/paper/dsl_ss.pdf

Gao, C., Lan, X., Lu, Z., Mao, J., Piao, J., Wang, H., Jin, D., & Li, Y. (2025, June 3). *S^3: Social-network Simulation System with Large Language Model-Empowered Agents*. arXiv: 2307.14984 [cs.SI]. https://doi.org/10.48550/arXiv.2307.14984

Grimmer, J., Roberts, M. E., & Stewart, B. M. (2021). Machine Learning for Social Science: An Agnostic Approach. *Annual Review of Political Science*, *24*, 395–419. https://doi.org/10.1146/annurev-polisci-053119-015921

Hai Liang. (2026). *A Computational Approach to Human - AI Communication*. Singapore. www.dropbox.com/scl/fi/nlq3k73akoln87ebkkxsr/NUS.pdf?rlkey=0kzml5htrvthlhvqa6m6w9ee2&e=1&dl=0

8.1 References II

Hämäläinen, P., Tavast, M., & Kunnari, A. (2023). Evaluating Large Language Models in Generating Synthetic HCI Research Data: A Case Study. *Proceedings of the 2023 CHI Conference on Human Factors in Computing Systems*, 1–19. https://doi.org/10.1145/3544548.3580688

Kolluri, A., Wu, S., Park, J. S., & Bernstein, M. S. (2025). Finetuning LLMs for Human Behavior Prediction in Social Science Experiments. In C. Christodoulopoulos, T. Chakraborty, C. Rose, & V. Peng (Eds.), *Proceedings of the 2025 Conference on Empirical Methods in Natural Language Processing* (pp. 30096–30111). Association for Computational Linguistics. https://doi.org/10.18653/v1/2025.emnlp-main.1530

Ouyang, R., Chu, C., Xin, Z., & Ma, X. (2025). PDFMathTranslate: Scientific document translation preserving layouts. In I. Habernal, P. Schulam, & J. Tiedemann (Eds.), *Proceedings of the 2025 Conference on Empirical Methods in Natural Language Processing: System Demonstrations* (pp. 918–924). Association for Computational Linguistics. https://doi.org/10.18653/v1/2025.emnlp-demos.71

Park, J. S., O'Brien, J., Cai, C. J., Morris, M. R., Liang, P., & Bernstein, M. S. (2023). Generative Agents: Interactive Simulacra of Human Behavior. *Proceedings of the 36th Annual ACM Symposium on User Interface Software and Technology*, 1–22. https://doi.org/10.1145/3586183.3606763

Park, J. S., O'Brien, J. C., Cai, C. J., Morris, M. R., Liang, P., & Bernstein, M. S. (2023, August 6). *Generative Agents: Interactive Simulacra of Human Behavior*. arXiv: 2304.03442 [cs.HC]. https://doi.org/10.48550/arXiv.2304.03442

Pataranutaporn, P., Powdthavee, N., Archiwaranguprok, C., & Maes, P. (2025). Simulating human well-being with large language models: Systematic validation and misestimation across 64,000 individuals from 64 countries. *Proceedings of the National Academy of Sciences*, *122*(48), e2519394122. https://doi.org/10.1073/pnas.2519394122

Poole, D. L., & Mackworth, A. K. (2023, July 13). *Artificial Intelligence: Foundations of Computational Agents*. Cambridge University Press. https://doi.org/10.1017/9781009258227

Santurkar, S., Durmus, E., Ladhak, F., Lee, C., Liang, P., & Hashimoto, T. (2023). Whose Opinions Do Language Models Reflect? *Proceedings of the 40th International Conference on Machine Learning*, 29971–30004. Retrieved November 3, 2026, from https://proceedings.mlr.press/v202/santurkar23a.html

Tao, Y., Viberg, O., Baker, R. S., & Kizilcec, R. F. (2024). Cultural bias and cultural alignment of large language models (M. Muthukrishna, Ed.). *PNAS Nexus*, *3*(9), pgae346. https://doi.org/10.1093/pnasnexus/pgae346

Vaswani, A., Shazeer, N., Parmar, N., Uszkoreit, J., Jones, L., Gomez, A. N., Kaiser, Ł., & Polosukhin, I. (2017). Attention is all you need. *Advances in Neural Information Processing Systems*, *30*. https://papers.nips.cc/paper/7181-attention-is-all-you-need

8.1 References III

Wang, A., Morgenstern, J., & Dickerson, J. P. (2025). Large language models that replace human participants can harmfully misportray and flatten identity groups. *Nature Machine Intelligence*, *7*(3), 400–411. https://doi.org/10.1038/s42256-025-00986-z

Wang, L., Zhang, J., Yang, H., Chen, Z.-Y., Tang, J., Zhang, Z., Chen, X., Lin, Y., Sun, H., Song, R., Zhao, X., Xu, J., Dou, Z., Wang, J., & Wen, J.-R. (2025). User Behavior Simulation with Large Language Model-based Agents. *ACM Transactions on Information Systems*, *43*(2), 55:1–55:37. https://doi.org/10.1145/3708985

Xie, C., Chen, C., Jia, F., Ye, Z., Lai, S., Shu, K., Gu, J., Bibi, A., Hu, Z., Jurgens, D., Evans, J., Torr, P., Ghanem, B., & Li, G. (2024, November 1). *Can Large Language Model Agents Simulate Human Trust Behavior?* arXiv: 2402.04559 [cs.AI]. https://doi.org/10.48550/arXiv.2402.04559

Xie, Y., & Xie, Y. (2025, March 2). *Variance reduction in output from generative AI*. arXiv: 2503.01033 [cs.CY]. https://doi.org/10.48550/arXiv.2503.01033

Xu, F., Shao, C., Chen, L., Zeng, Q., Chen, Z., Sukiennik, N., Wang, J., Gao, C., Wang, H., Lian, J., Meng, Q., Xie, X., Li, Y., & Evans, J. (2026). Large language models for computational social science. *Nature Human Behaviour*. https://doi.org/10.1038/s41562-026-02539-9

Xu, Y., & Yang, L. Y. (2026, June 1). *Scaling Reproducibility: An AI-Assisted Workflow for Large-Scale Replication and Reanalysis*. arXiv: 2602.16733 [econ.EM]. https://doi.org/10.48550/arXiv.2602.16733

Yan, Y., Zeng, Q., Zheng, Z., Yuan, J., Feng, J., Zhang, J., Xu, F., & Li, Y. (2024, October 11). *OpenCity: A Scalable Platform to Simulate Urban Activities with Massive LLM Agents*. arXiv: 2410.21286 [cs.MA]. https://doi.org/10.48550/arXiv.2410.21286

Zhang, J., Xu, X., Zhang, N., Liu, R., Hooi, B., & Deng, S. (2024). Exploring Collaboration Mechanisms for LLM Agents: A Social Psychology View. In L.-W. Ku, A. Martins, & V. Srikumar (Eds.), *Proceedings of the 62nd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)* (pp. 14544–14607). Association for Computational Linguistics. https://doi.org/10.18653/v1/2024.acl-long.782

Zhou, A., Mukerjee, S., Maslowska, E., Duan, Z., Jaidka, K., Lukito, J., Shugars, S., Smith, M. A., Trilling, D., & Yang, T. (2026). Be Careful What You Prompt For: Generative AI in Computational Communication Research. *Computational Communication Research*, *8*(2), 1–34. https://doi.org/10.5117/CCR2026.2.1.ZHOU