

Preparation all three sets

SWaT process data

51 variables, 1 s

Representation

varied

All 51 variables

PCA, 5 or 24 comp.

Autoencoder

Feature selection

ground truth

Windowing

scaled to $[-1, 1]$


$60 \times d$ windows, step 1

$w = 60$ fixed (60 s context)

d features

(a) Training earlier normal + attack data

all four networks trained

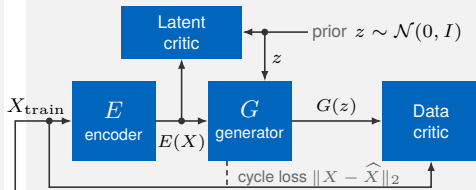

Training objective

two Wasserstein terms
plus the cycle loss

Selection on validation data

representation, settings,
threshold

ground truth

X_{val}

(b) Scoring later test data, 393,679 timestamps

