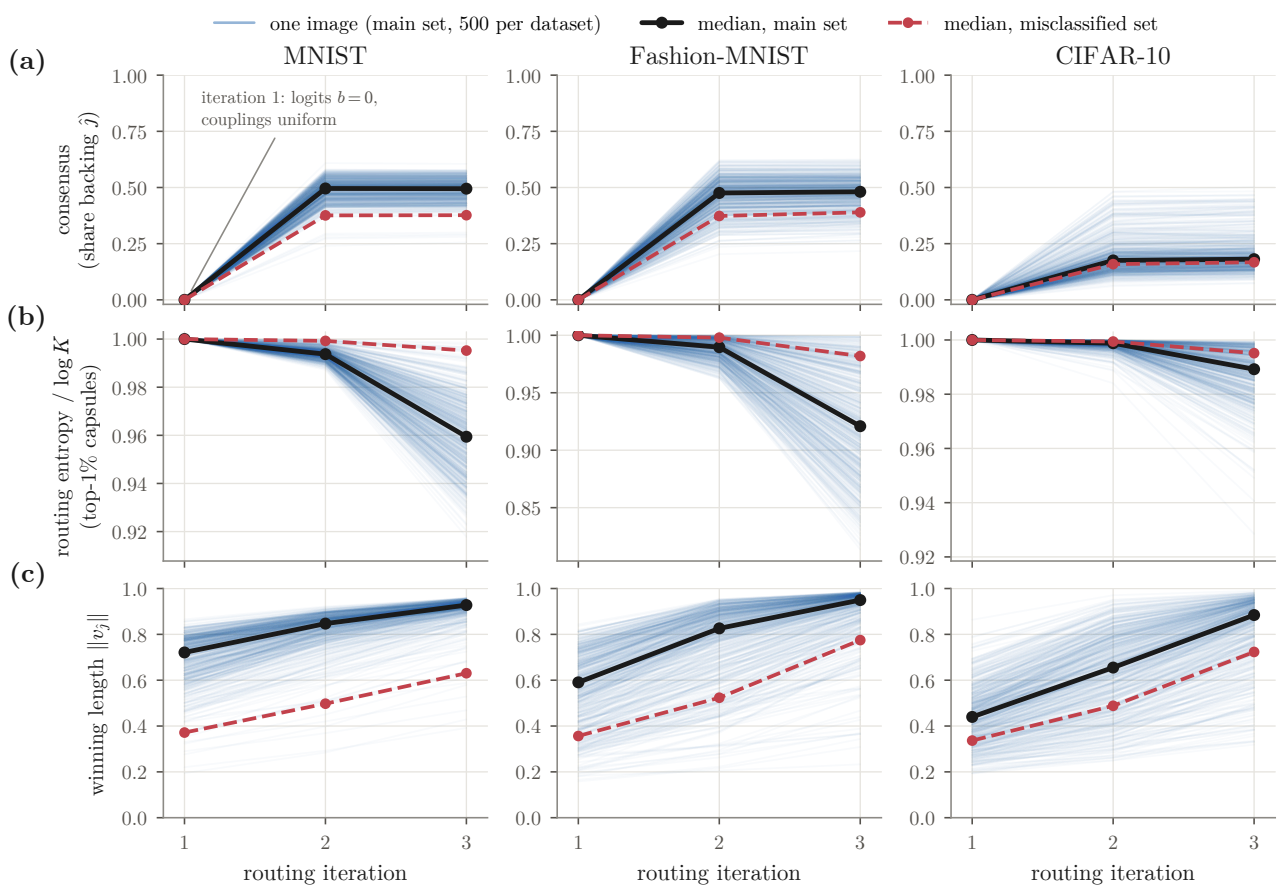

one image (main set, 500 per dataset)
median, main set
median, misclassified set
(a)
(b)
(c)
MNIST
Fashion-MNIST
CIFAR-10
iteration 1: logits $b = 0$,
couplings uniform
consensus
(share backing $\hat{j}$)
routing entropy / $\log K$
(top-1% capsules)
winning length $\|v_j\|$
routing iteration