
Technical Data	STK SERIES ANTENNA	QUALITY PRODUCT of INDIA
Nomenclature: ANTENNA 8 PORT 50 Ohm		Page No. 1 of 1

STK-587894131307	ANTENNA 8 PORT 50 Ohm

OUTLINE DRAWING

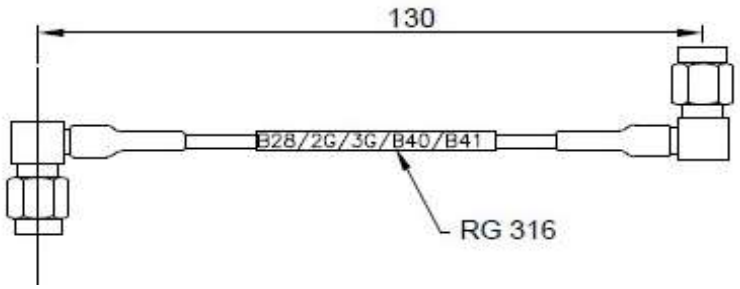

TECHNICAL DATA

ELECTRICAL DATA

Half-Power beam width(°)	Hor > 75±5°, Ver >45±5°
Polarization	Vertical
Front-to-back ratio(dB)	≥ 10
Isolation(dB)	>20
Impedance(Ω)	50
VSWR	≤ 3
Maximum Input Power(W)	50
Lightning protection	DC Ground

MECHANICAL INFORMATION

CONNECTOR	8 X SMA- FEMALE
CONNECTOR POSITION	BOTTOM
SIZE (mm)	535.1 x 265.2 x 37.5
WIND LOADING AREA (m²)	≤0.2
RATED WIND VELOCITY (m/s)	36.9
operating temperature (*C)	(- 10*C TO +55*C)
CABLE ASSEMBLY	SMA (M) RA TO SMA (M) RA
CABLE TYPE	RG316 AND RG 402
QUANTITY	8 NOS
radome material colour	aluminium

Originated	Date	Approved	Date	Rev	Amend	Name	Date
Sang	27.10.25	Krishnamurthy	-	0	-	-	-

Synergy Telecom P Ltd,

WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India

Synergy Telecom Pvt Ltd
Defence & Aerospace Division

Email: sales.blr@rfconnector.in

This document is the property of Synergy Telecom P Ltd- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from Defense & Aerospace division. This document and al it copies shall be returned to Synergy Telecom P Ltd on demand.

www.rfconnector.in