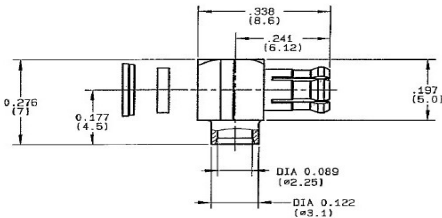


Technical Data	STK SERIES CONNECTOR	
-----------------------	-----------------------------	---

Nomenclature: RIGHT ANGLE PLUG SOLDER TYPE CABLE .085	Page No.
	1 of 1

STK-571182291240	RIGHT ANGLE PLUG SOLDER TYPE CABLE .085
-------------------------	---

OUTLINE DRAWING

	
--	--

TECHNICAL DATA

ELECTRICAL DATA

Impedance	50 Ω
Frequency range	0-6 Ghz
Temperature Rating	Minus -55 to +155 deg C
V.S.W.R	1.05 + .075 x F(GHz) Maxi
Dielectric Withstanding Voltage	750 VEF MINI
Insulation Resistance	≥1000MΩ
Voltage Rating	250 VEF MAX
Mechanical Durability	500 Cycles
Weight	0.8 gr
RF Insertion loss	0.5 √F(GHz) dB Maxi

MATERIAL INFORMATION

CONNECTOR PARTS	MATERIAL	FINISH
Connector Body	Brass	Gold 0.2 Over Nickel 2
Outer contact	Beryllium Copper	Gold 0.5 Over Nickel 2
Center conductor	Brass	Gold 1.3 Over Nickel 2
Insulator	PTFE	

Originated	Date	Approved	Date	Rev	Amend	Name	Date	
Sang	11.10.25	Krishnamurthy	-	0	-	-	-	
Synergy Telecom P Ltd,				-	-	-	-	
WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India				-	-	-	-	



Email: sales.blr@rfconnector.in

This document is the property of Synergy Telecom P Ltd- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from Defense & Aerospace division. This document and al it copies shall be returned to Synergy Telecom P Ltd on demand.

www.rfconnector.in