


Technical Data	STK SERIES ANTENNA	
----------------	--------------------	---

Nomenclature: CONN RF 50 SMP ADAPTOR FEMALEFEMALE	Page No. 1 of 1
---	--------------------

STK-571623721556	CONN RF 50 SMP ADAPTOR FEMALEFEMALE
------------------	-------------------------------------

OUTLINE DRAWING

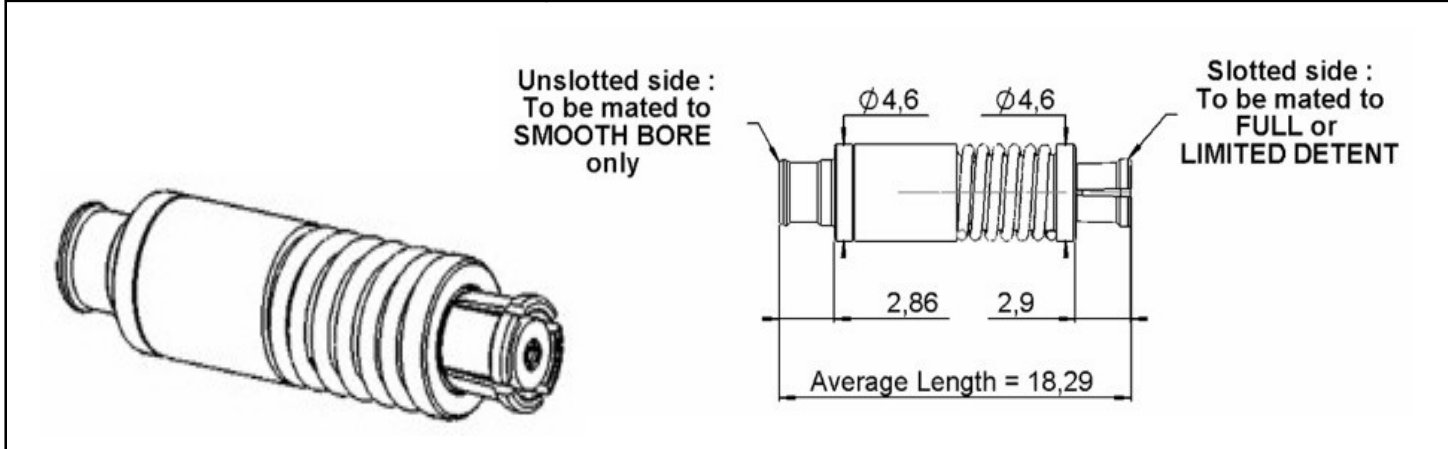

TECHNICAL DATA

ELECTRICAL DATA

Impedance	50Ω
Frequency	0-18 GHz
VSWR	1.35* + 0,0000 x F(GHz) Maxi
Insertion loss	0.12 √F(GHz) dB Maxi
RF leakage	- (NA - F(GHz)) dB Maxi
Voltage rating	335 Veff Maxi
Dielectric withstanding voltage	500 Veff mini
Insulation resistance	5000 MΩ mini

MECHANICAL INFORMATION

Axial force – Mating end	6.7 N mini
Axial force – Opposite end	6.7 N mini
Torque	NA N.cm mini
Mating	NA N.cm
Panel nut	NA N.cm
Mating life	1000 Cycles mini
Weight	1,3000 g

DIMENSION

COMPONENTS	MATERIALS	FINISH
HOUSING	STAINLESS STEEL	Polished/Passivated
CenterContact	BerylliumCopper	Gold plated
Insulators	PEIorPEI&PTFE	

Originated	Date	Approved	Date	Rev	Amend	Name	Date	 Synergy Telecom Pvt Ltd Defence & Aerospace Division
Sang	27.10.25	Krishnamurthy	-	0	-	-	-	
Synergy Telecom P Ltd,				-	-	-	-	
WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India				-	-	-	-	Email: sales.blr@rfconnector.in

This document is the property of Synergy Telecom P Ltd- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from Defense & Aerospace division. This document and al it copies shall be returned to Synergy Telecom P Ltd on demand.

www.rfconnector.in