

BERTIN MATRICES

AN IMPLEMENTATION

GÜNTHER SAWITZKI
STATLAB HEIDELBERG

in preparation

CONTENTS

1. Bertin Plots	1
2. Bertin Matrices	2
3. Work flow	6
4. Scores	7
4.1. Ranks	8
4.2. z Scores	9
4.3. Range Scores	10
5. Permutation, Seriation, Arrangement	10
6. Colour, perception and pitfalls	12
7. Coordinate System and Conventions	24
8. Test matrices	25
8.1. Random Matrices	25
8.2. Pure Vanilla	25
8.3. Vanilla	28
8.4. Test matrices with IEEE specials	33
References	37

1. BERTIN PLOTS

Among the rich material on graphical presentation of information, in (Bertin, 1977) (engl. (Bertin, 1999)) J. Bertin discusses the presentation of data matrices, with a particular view to seriation. (de Falguerolles et al., 1997) gives an appraisal of this aspect of Bertin's work. The methods illustrated in (de Falguerolles et al., 1997) have been first implemented in the Voyager system (Sawitzki, 1996). They have

Date: Aug. 2010.

Revised: August 2011

Typeset, with minor revisions: September 16, 2011 from SVN *Revision* : 37.

Key words and phrases. statistical computing, S programming language, R programming, data analysis, exploratory statistics, residual diagnostics, R language.

URL: <http://bertin-forge.r-project.org/>.

been partially re-implemented in R, and this paper gives an introduction to the R-implementation.

The R-implementation can be downloaded as a package *bertin* from <http://bertin.r-forge.r-project.org/>. (de Falguerolles et al., 1997) is included in the documentation section of the package.

Bertin uses a small data set on hotel occupancy data to illustrate his ideas.

	Jan	Fev	Mars	Avril	May	Juin	Juil	Aout	Sept	Oct	Nov	Dec
ClienteleFeminine	26	21	26	28	20	20	20	20	20	40	15	40
Locale	69	70	77	71	37	36	39	39	55	60	68	72
USA	7	6	3	6	23	14	19	14	9	6	8	8
AmerSud	0	0	0	0	8	6	6	4	2	12	0	0
Europe	20	15	14	15	23	27	22	30	27	19	19	17
MOrientAfrique	1	0	0	8	6	4	6	4	2	1	0	1
Asie	3	10	6	0	3	13	8	9	5	2	5	2
Business	78	80	85	86	85	87	70	76	87	85	87	80
Touristes	22	20	15	14	15	13	30	24	13	15	13	20
ResDirecte	70	70	78	74	69	68	74	75	68	68	64	75
ResAgents	20	18	19	17	27	27	19	19	26	27	21	15
EquipageAeriens	10	12	6	9	4	5	7	6	6	5	15	10
MoinsDe20	2	2	4	2	2	1	1	2	2	4	2	5
De20a55	25	27	37	35	25	25	27	28	24	30	24	30
De35a55	48	49	42	48	54	55	53	51	55	46	55	43
PlusDe55	25	22	17	15	19	19	19	19	19	20	19	22
Prix	163	167	166	174	152	155	145	170	157	174	165	156
Duree	1.65	1.71	1.65	1.91	1.9	2	1.54	1.6	1.73	1.82	1.66	1.44
Occupation	67	82	70	83	74	77	56	62	90	92	78	55
Foires	0	0	0	1	1	1	0	0	1	1	1	1

TABLE 1. Bertin's hotel data

2. BERTIN MATRICES

To repeat from (de Falguerolles et al., 1997): In abstract terms, a Bertin matrix is a matrix of displays. Bertin matrices allow rearrangements to transform an initial matrix to a more homogeneous structure. The rearrangements are row or column permutations, and groupings of rows or columns. To fix ideas, think of a data matrix, variable by case, with real valued variables. For each variable, draw a bar chart of variable value by case. Highlight all bars representing a value above some sample threshold for that variable. See Figure 1.




FIGURE 1. Display of one variable. Observations above average are highlighted.

Variables are collected in a matrix to display the complete data set. Figure 2. By convention, Bertin shows variables in rows and cases in columns. To make periodic structures more visible, Bertin repeats the data cyclically.

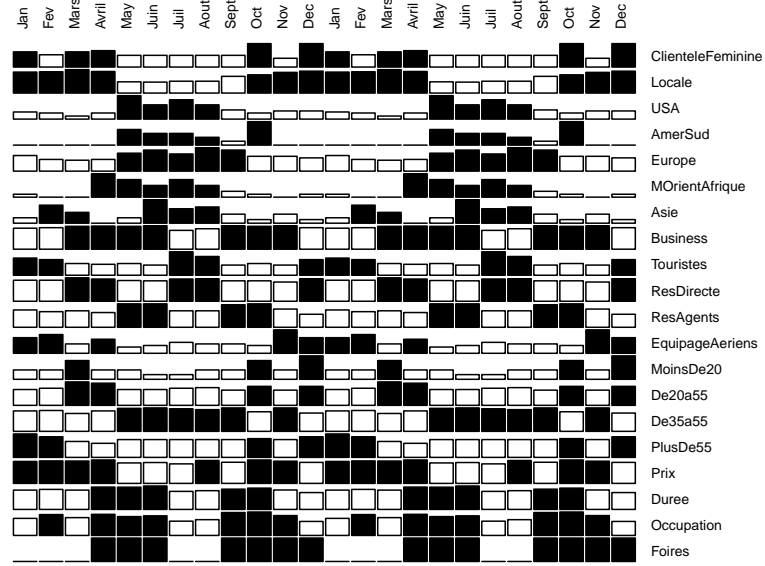


FIGURE 2. Display of a data matrix: Hotel data. Variables are shown as rows. To make periodic structures more visible, time is duplicated.

As Bertin points out, the indexing used is arbitrary. You can rearrange rows and/or columns to reveal the information of interest. If you run a hotel, of course the percentage of hotel occupation and the duration of the visits are most interesting for you. Move these variables to the top of the display, and rearrange the other variables by similarity or dissimilarity to these target variables. See Figure 3. Time points have a natural order. No rearrangement is used here.

As a second example, we use the the *USJudgeRatings* data set (Figure 4). The data is in Table 2 (page 5).

Both cases (the judges) and variables (the qualities) allow for a rearrangement. Just sorting for row and column averages gives a more informative picture (Figure 6). The number of contacts stands out - it has a different structure than the other variables. After all, this is not a rating variable at all, but ancillary information. There is little reason why it should go along with the rating variables. Judge G. A. Saden seems to be special. Most variables would rank him to the upper group, be his worth of retention is below average. The esteem of his integrity and demeanour go along with this. Overall, there is a very clear separation into an upper and a lower group.

We remove the variable *CONT* and re-run the analysis. Of course this changes the average scores per judge, and the arrangement changes.

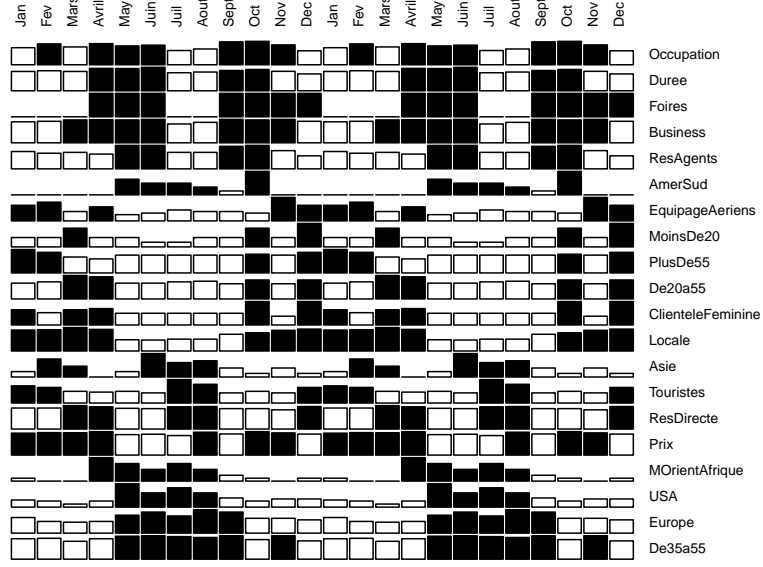


FIGURE 3. Display of a data matrix: Hotel data. Variables are rearranged by similarity to occupation and duration.

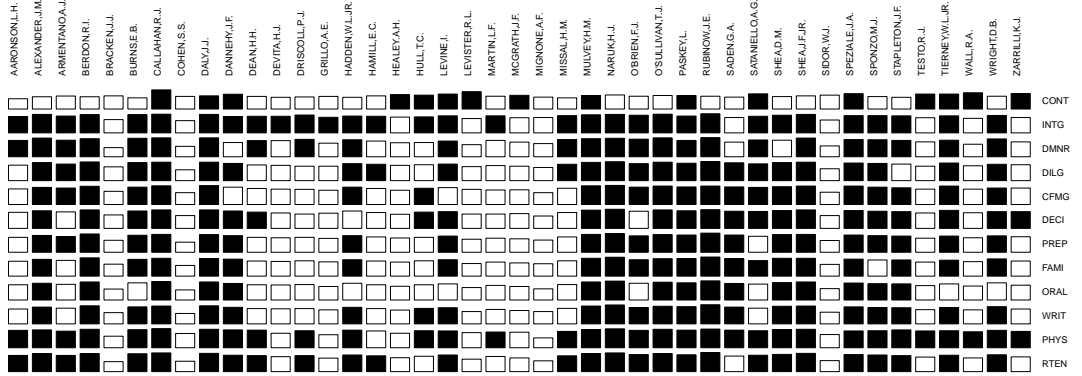


FIGURE 4. Display of a data matrix: USJudgeRatings data. Lawyers' ratings of state judges in the US Superior Court.

At this early point, let us put Bertin's work in place. Visualising information is but one aspect. In statistics, as we see it today, visualisation may be one part of an analysis. The outcome will be a decision leading to an action, and then there is a loss (or gain) depending on the action taken on the one hand, and the "true" state

	CONT	INTG	DMNR	DILG	CFMG	DECI	PREP	FAMI	ORAL	WRIT	PHYS	RTEN
AARONSON,L.H.	5.70	7.90	7.70	7.30	7.10	7.40	7.10	7.10	7.10	7.00	8.30	7.80
ALEXANDER,J.M.	6.80	8.90	8.80	8.50	7.80	8.10	8.00	8.00	7.80	7.90	8.50	8.70
ARMENTANO,A.J.	7.20	8.10	7.80	7.80	7.50	7.60	7.50	7.50	7.30	7.40	7.90	7.80
BERDON,R.I.	6.80	8.80	8.50	8.80	8.30	8.50	8.70	8.70	8.40	8.50	8.80	8.70
BRACKEN,J.J.	7.30	6.40	4.30	6.50	6.00	6.20	5.70	5.70	5.10	5.30	5.50	4.80
BURNS,E.B.	6.20	8.80	8.70	8.50	7.90	8.00	8.10	8.00	8.00	8.00	8.60	8.60
CALLAHAN,R.J.	10.60	9.00	8.90	8.70	8.50	8.50	8.50	8.50	8.60	8.40	9.10	9.00
COHEN,S.S.	7.00	5.90	4.90	5.10	5.40	5.90	4.80	5.10	4.70	4.90	6.80	5.00
DALY,J.J.	7.30	8.90	8.90	8.70	8.60	8.50	8.40	8.40	8.40	8.50	8.80	8.80
DANNEHY,J.F.	8.20	7.90	6.70	8.10	7.90	8.00	7.90	8.10	7.70	7.80	8.50	7.90
DEAN,H.H.	7.00	8.00	7.60	7.40	7.30	7.50	7.10	7.20	7.10	7.20	8.40	7.70
DEVITA,H.J.	6.50	8.00	7.60	7.20	7.00	7.10	6.90	7.00	7.00	7.10	6.90	7.20
DRISCOLL,P.J.	6.70	8.60	8.20	6.80	6.90	6.60	7.10	7.30	7.20	7.20	8.10	7.70
GRILLO,A.E.	7.00	7.50	6.40	6.80	6.50	7.00	6.60	6.80	6.30	6.60	6.20	6.50
HADDEN,W.L.JR.	6.50	8.10	8.00	8.00	7.90	8.00	7.90	7.80	7.80	7.80	8.40	8.00
HAMILLE,E.C.	7.30	8.00	7.40	7.70	7.30	7.30	7.30	7.20	7.10	7.20	8.00	7.60
HEALEY,A.H.	8.00	7.60	6.60	7.20	6.50	6.50	6.80	6.70	6.40	6.50	6.90	6.70
HULL,T.C.	7.70	7.70	6.70	7.50	7.40	7.50	7.10	7.30	7.10	7.30	8.10	7.40
LEVINE,I.	8.30	8.20	7.40	7.80	7.70	7.70	7.70	7.80	7.50	7.60	8.00	8.00
LEVISTER,R.L.	9.60	6.90	5.70	6.60	6.90	6.60	6.20	6.00	5.80	5.80	7.20	6.00
MARTIN,L.F.	7.10	8.20	7.70	7.10	6.60	6.60	6.70	6.70	6.80	6.80	7.50	7.30
MCGRATH,J.F.	7.60	7.30	6.90	6.80	6.70	6.80	6.40	6.30	6.30	6.30	7.40	6.60
MIGNONE,A.F.	6.60	7.40	6.20	6.20	5.40	5.70	5.80	5.90	5.20	5.80	4.70	5.20
MISSAL,H.M.	6.20	8.30	8.10	7.70	7.40	7.30	7.30	7.30	7.20	7.30	7.80	7.60
MULVEY,H.M.	7.50	8.70	8.50	8.60	8.50	8.40	8.50	8.50	8.40	8.40	8.70	8.70
NARUK,H.J.	7.80	8.90	8.70	8.90	8.70	8.80	8.90	9.00	8.80	8.90	9.00	9.00
O'BRIEN,F.J.	7.10	8.50	8.30	8.00	7.90	7.90	7.80	7.80	7.80	7.70	8.30	8.20
O'SULLIVAN,T.J.	7.50	9.00	8.90	8.70	8.40	8.50	8.40	8.30	8.30	8.30	8.80	8.70
PASKEY,L.	7.50	8.10	7.70	8.20	8.00	8.10	8.20	8.40	8.00	8.10	8.40	8.10
RUBINOW,J.E.	7.10	9.20	9.00	9.00	8.40	8.60	9.10	9.10	8.90	9.00	8.90	9.20
SADEN,G.A.	6.60	7.40	6.90	8.40	8.00	7.90	8.20	8.40	7.70	7.90	8.40	7.50
SATANIELLO,A.G.	8.40	8.00	7.90	7.90	7.80	7.80	7.60	7.40	7.40	7.40	8.10	7.90
SHEA,D.M.	6.90	8.50	7.80	8.50	8.10	8.20	8.40	8.50	8.10	8.30	8.70	8.30
SHEA,J.F.JR.	7.30	8.90	8.80	8.70	8.40	8.50	8.50	8.50	8.40	8.40	8.80	8.80
SIDOR,W.J.	7.70	6.20	5.10	5.60	5.60	5.90	5.60	5.60	5.30	5.50	6.30	5.30
SPEZIALE,J.A.	8.50	8.30	8.10	8.30	8.40	8.20	8.20	8.10	7.90	8.00	8.00	8.20
SPONZO,M.J.	6.90	8.30	8.00	8.10	7.90	7.90	7.90	7.70	7.60	7.70	8.10	8.00
STAPLETON,J.F.	6.50	8.20	7.70	7.80	7.60	7.70	7.70	7.70	7.50	7.60	8.50	7.70
TESTO,R.J.	8.30	7.30	7.00	6.80	7.00	7.10	6.70	6.70	6.70	6.70	8.00	7.00
TIERNEY,W.L.JR.	8.30	8.20	7.80	8.30	8.40	8.30	7.70	7.60	7.50	7.70	8.10	7.90
WALL,R.A.	9.00	7.00	5.90	7.00	7.00	7.20	6.90	6.90	6.50	6.60	7.60	6.60
WRIGHT,D.B.	7.10	8.40	8.40	7.70	7.50	7.70	7.80	8.20	8.00	8.10	8.30	8.10
ZARRILLI,K.J.	8.60	7.40	7.00	7.50	7.50	7.70	7.40	7.20	6.90	7.00	7.80	7.10

TABLE 2. US judge ratings

of the world on the other. Statistics has formulated a few standard problems, and given a suggestion to handle these. In our example, the problem can be seen as a prediction problem: find a prediction model to predict occupation and duration, based on the other variables. This is a control problem, and the statistical contribution is to find a regression model for occupation and duration, based on the other variables. The visualisation can be seen as one way to hint at a regression model. There are few classical problems. Regression is one of them, and prediction is closely related. Classification and clustering is another, closely related pair of problems, and their relation to Bertin matrices should be obvious. The USJudgeRatings can be looked at as a classification problem.

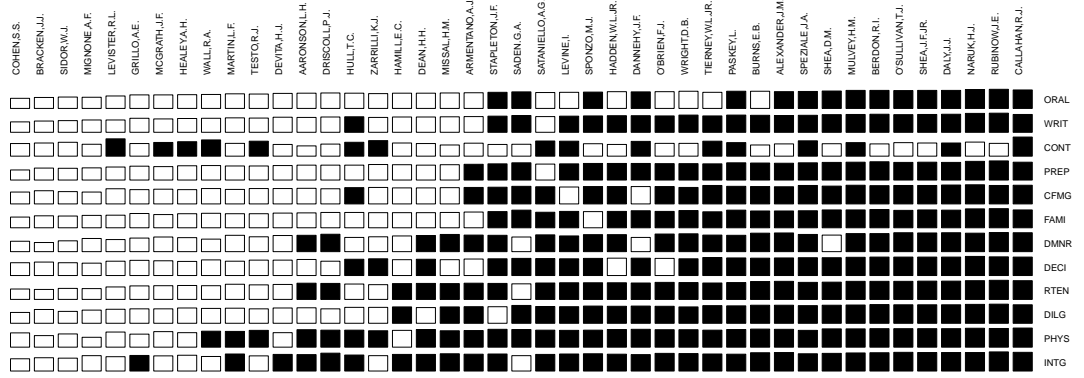


FIGURE 5. Display of a data matrix: USJudgeRatings data. Lawyers' ratings of state judges in the US Superior Court.

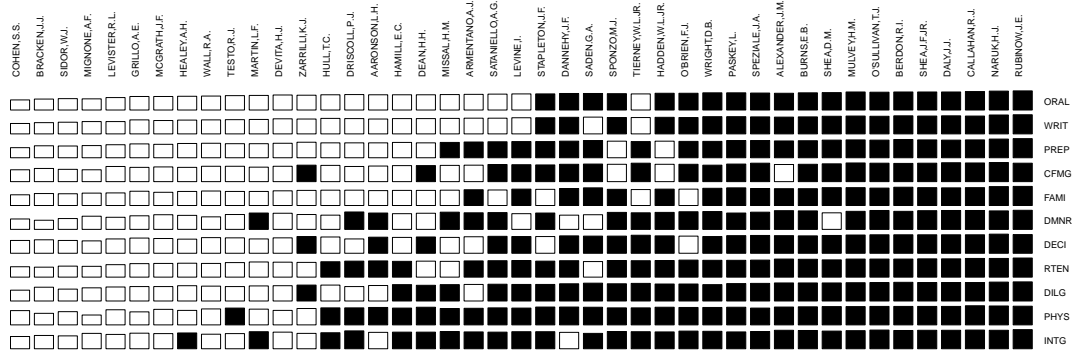


FIGURE 6. Display of a data matrix: USJudgeRatings data. Lawyers' ratings of state judges in the US Superior Court. Variable *CONT* removed.

3. WORK FLOW

Bertin matrices usually are part of a work flow.

In a first step, we transfer the input data to allow for common, or comparable scales. In the Hotel example, Bertin rescales by the maximum value of each variable. The dichotomous variable Faïres is recoded as 0/1. Our implementation default is to

rescale for $(0, \text{max})$ for positive variables, $(\text{min}, 0)$ for negative variables, (min, max) for general variables. Our preferred, or recommended rescaling however is to use ranks. We use the term **score** for the rescaled variables. Orientation of the data set is critical in this step. Usually, rescaling should be by variable, not by case. Depending on the orientation, this can lead for example to ranks by row or by column. We allow global scaling as an additional option for those situations where all data are already on a common scale. Following Bertin, our implementation default is to expect variables in rows.

In a second step, the scores are translated to visualisation attributes. Colour is handled in two steps. The scores are translated to a colour index, which is used together with a colour palette to determine the display colour for a data element. This allows rapid experiments with various colour palettes, as long as the length of the palette is compatible. We strongly recommend to always look at the inverted table together with a chosen one to mitigate the effects of colour perception. Simple image displays limit the visualisation attributes to colour. **rect** for example allows rectangle geometry, colour, and border width. Shading and shading should be considered as an alternative for print media.

Visualisation attributes may reflect different aspect. So for example in the classical Bertin display, height of a rectangle is used to reflect the value of a data element, colour is used to show an indicator whether the value is above or below variable mean.

A third step controls the actual placement of the graphical elements. With a matrix layout, it is specified by possible permutations of rows and of columns. This may be related to information used in the first two steps, but should be considered an independent step. A vector of row orders and of column orders is the critical information from this step. Various seriation methods apply. The typical situation is to select scores and display attributes, and then search for optimal or good seriations. The arrangement often leads to hard optimisation problems. Placing this step later allows to use information from score transformation and attributes, which may allow more efficient algorithms.

The final step is to merge these informations and render a display.

4. SCORES

In principle, scores can be generated using an appropriate score function and **apply** or any of its variants. As examples, and for convenience, we provide a small collection of score functions. Each is applied by row to the Hotel data set, and the result is shown using a default Bertin plot. A second plot shows a poor man's regression: assuming that the hotel occupancy, variable 19, is the parameter of interest, the scores are sorted by correlation to the score of this variable.



`var.orientation="byrow"` is the default, so this parameter can be omitted. Add `var.orientation="bycolumn"` or `var.orientation="global"` if needed.

4.1. Ranks.

$$x \mapsto \text{rank}(x)$$

Input


```
oldpar <-par(mfcol=c(1,2))
hotelrank <- bertinrank(Hotel2)
plot.bertin(hotelrank)
hotelrankorder <- bertin:::ordercor(hotelrank, 19)
plot.bertin(hotelrank, roworder=hotelrankorder)
par(oldpar)
```

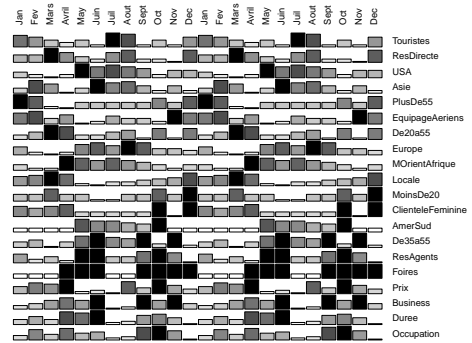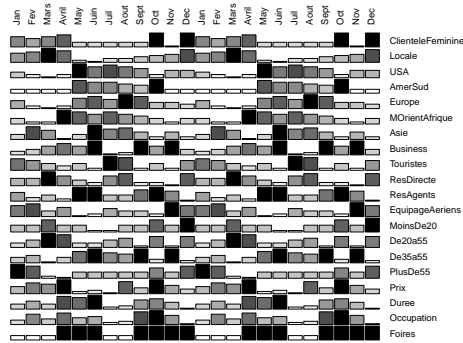

Rank scores have a sound basis. They bring us back to the range of rank statistics. However, since they scale any rank difference by unit steps, they convey order, but not quantitative differences. Preferably they are combined with colour palettes which do not suggest a quantitative scale. The default colour palette uses 256 steps of grey and suggests a quantitative order, whereas the ranks by variable provide at most 12 steps in this example. It is preferable to use a palette with reduced resolution. For 12 rank values, a scale with 3 or four steps should do.

Input

```
oldpar <-par(mfcol=c(1,2))
hotelrank <- bertinrank(Hotel2)
plot.bertin(hotelrank,
            palette = gray((2:0 / 2)^0.5))
hotelrankorder <- bertin:::ordercor(hotelrank, 19)
plot.bertin(hotelrank, roworder=hotelrankorder,
            palette = gray((2:0 / 2)^0.5))
par(oldpar)
```

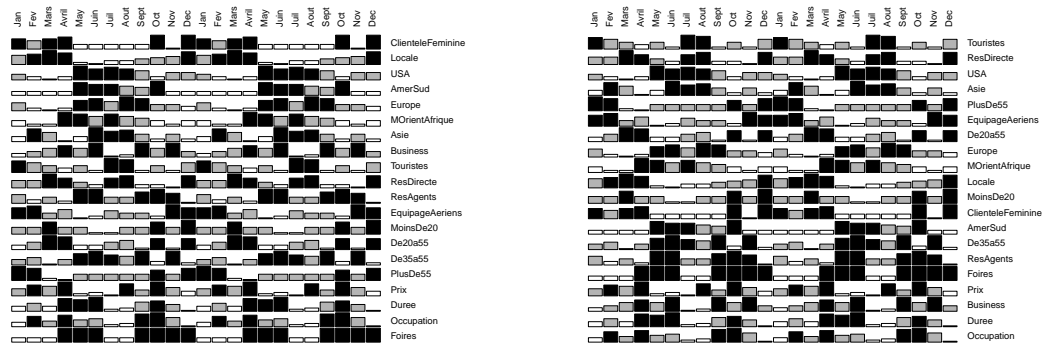4.2. z Scores.


$$x \mapsto \frac{x - \text{mean}(x)}{\text{sd}(x)}$$

Input

```

oldpar <-par(mfcol=c(1,2))
hotelzscore <- bertinzscore(Hotel2)
plot.bertin(hotelzscore)
hotelzscoreorder <- bertin:::ordercor(hotelzscore, 19)
plot.bertin(hotelzscore, roworder=hotelzscoreorder)
par(oldpar)

```

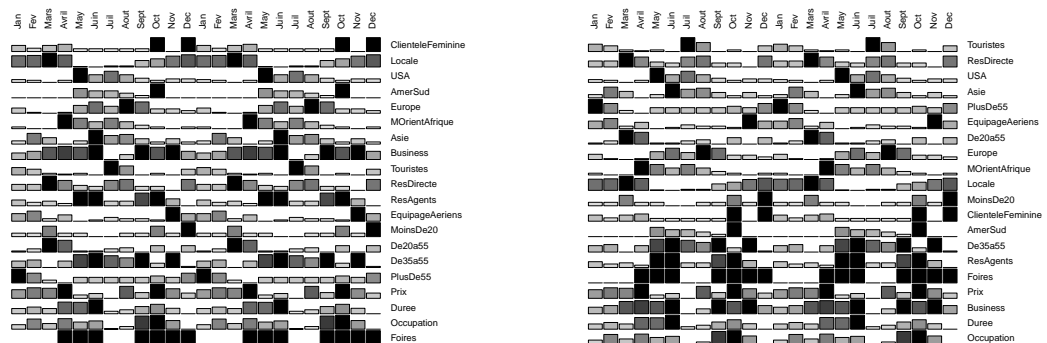

Bertin uses to highlight “above average” observations. If the data is not degenerate, this corresponds to *bertinzscore* > 0.


Since z Scores center the variables around the mean, they require positive and negative values for display. This leads in effect to a reduction of the display space to a half, which should be compensated by a more expressive choice of colour coding.

4.3. Range Scores.

$$x \mapsto \frac{x - \min(x)}{\max(x) - \min(x)}$$

Input

```
oldpar <-par(mfcol=c(1,2))
hotelrangescore <- bertinrangescore(Hotel12)
plot.bertin(hotelrangescore)
hotelrangescoreorder <- bertin:::ordercor(hotelrangescore, 19)
plot.bertin(hotelrangescore, roworder=hotelrangescoreorder)
par(oldpar)
```

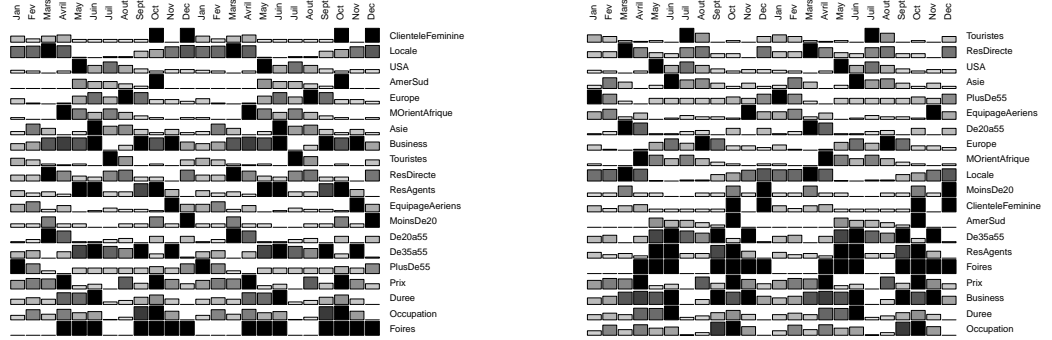

This score just rescales to $[0, 1]$. On contrast to ranks, it preserves quantitative proportions.

5. PERMUTATION, SERIATION, ARRANGEMENT

As Bertin has pointed out,

Ce point est fondamental. C'est la mobilité interne de l'image qui caractérise la graphique moderne. [Bertin 1977, p. 5]

Once we have solved the problem, the problem can often be formulated as an optimisation problem. But while we are searching for a solution, experimenting is necessary. In our implementation, we separate to lines of experiment. Finding an adequate display is one branch. This amounts to building up a collection of proven models, and a

certain data set can contribute by hinting at specific needs. This is repeated not so often. Stability of implementation has priority over speed. We will provide a small number of basic model implementations.

The classic Bertin display shown above is one of the examples. Following the ideas, but deviating in the details, is to use a simple grey scale image for representation. This may be not the most informative variant. But it is most economic in the use of display space. See figure 7. We will follow the classic Bertin display and an image display as main examples.

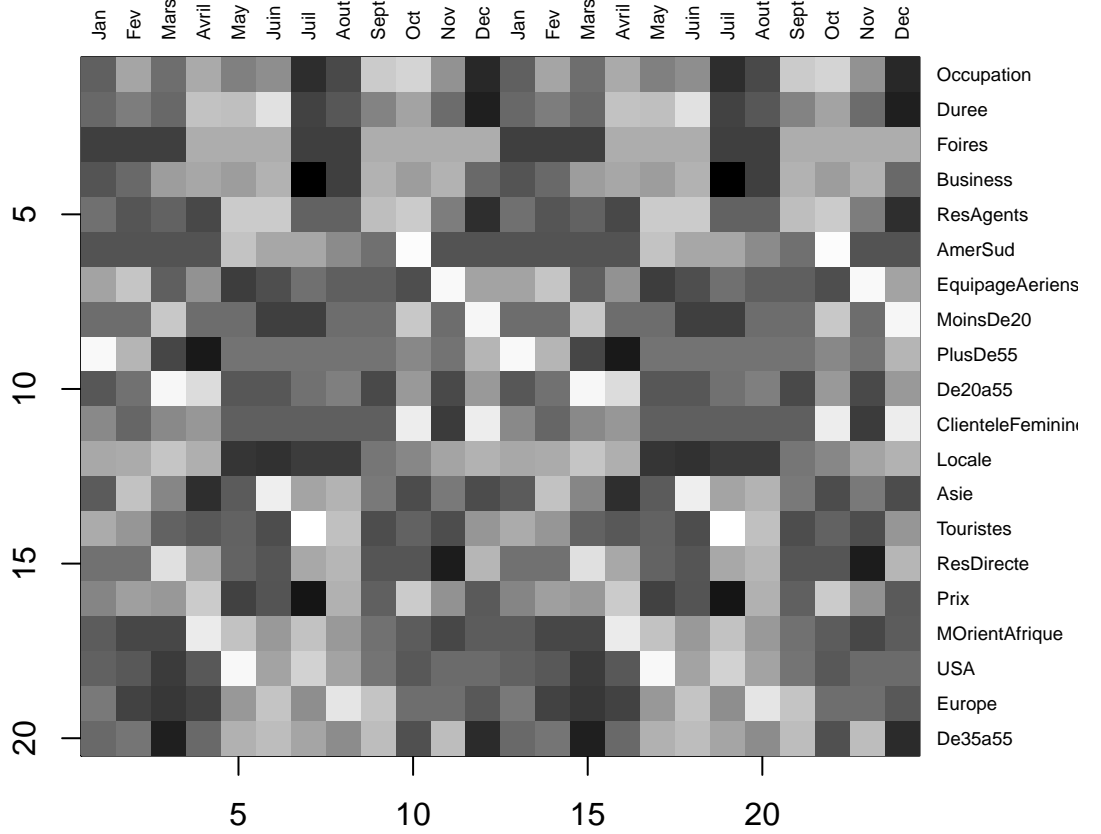


FIGURE 7. Display of a data matrix as grey scale image. Variables are rearranged by similarity to occupation and duration.

For a chosen display, we have to compare different arrangements (seriations, for example). If we allow for interactive work, speed of display has priority. We try to cache the information that is invariant of the permutation.

As a final aspect, display space is limited. The number of variables and cases that can be displayed simultaneously is limited by the pixel size of the display. We can increase it by one or two magnitudes by using a series of detail displays. Any display calibration however should be constant for this series. We try to allow for this global calibration.

The restriction to a matrix structure is arbitrary and can be omitted. Bertin has been working as a cartographer, and his main work applies to geographical data. What we call the Bertin matrices has been introduced in the very beginning of his book and are but a starting point.

6. COLOUR, PERCEPTION AND PITFALLS


Colour may need some experiments to find an informative choice. To allow easy experiments, we use a two step procedure. Based on the original data or the score, we derive a colour index. From an abstract point of view, this is just another score with values in $1, \dots, nrColours$. Colours are provided as a colour palette, and the index is used to select the colour to apply. See `help(palette)` for information on colour palettes.

Some colour palettes that may be useful for Bertin displays are provided.

Input

```
oldpar <- par(mfrow=c(2,1), mar=c(1, 1, 4, 1) + 0.1)
colramp(bertin:::green.colors(100))
colramp(bertin:::green.colors(100, rev=TRUE))
par(oldpar)
```

bertin:::green.colors(100)

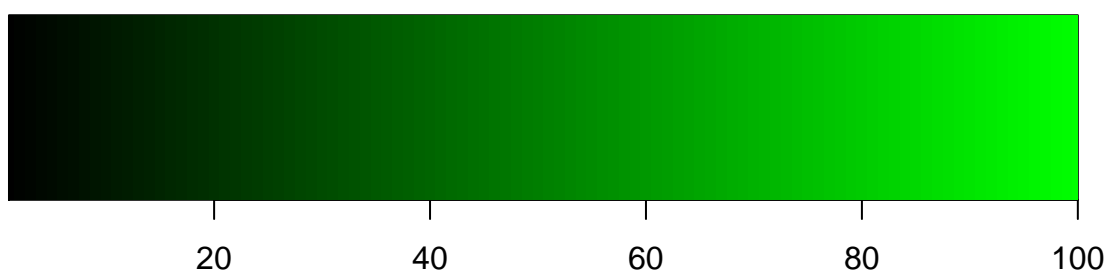


bertin:::green.colors(100, rev = TRUE)



Input

```
oldpar <- par(mfrow=c(2,1), mar=c(1, 1, 4, 1) + 0.1)
colramp(bertin:::red.colors(100), horizontal=TRUE)
colramp(bertin:::red.colors(100, rev=TRUE),horizontal=TRUE)
par(oldpar)
```

bertin:::red.colors(100)

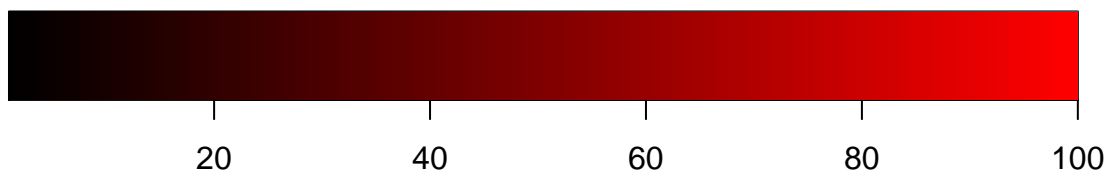


bertin:::red.colors(100, rev = TRUE)



Input

```
oldpar <- par(mfrow=c(2,1), mar=c(1, 1, 4, 1) + 0.1)
colramp(bertin:::blue.colors(100), horizontal=TRUE)
colramp(bertin:::blue.colors(100, rev=TRUE),horizontal=TRUE)
par(oldpar)
```

bertin:::blue.colors(100)

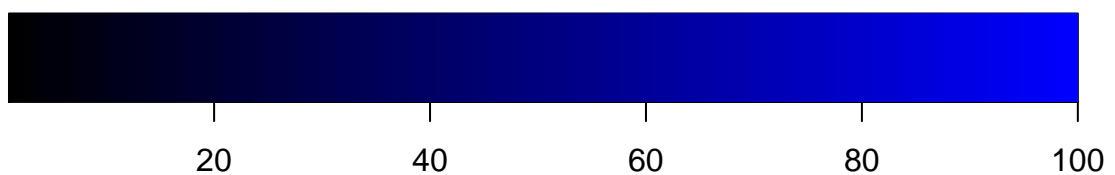


bertin:::blue.colors(100, rev = TRUE)



Input

```
oldpar <- par(mfrow=c(2,1), mar=c(1, 1, 4, 1) + 0.1)
colramp(bertin:::blueyellow.colors(100),horizontal=TRUE)
colramp(bertin:::blueyellow.colors(100, rev=TRUE),horizontal=TRUE)
par(oldpar)
```

bertin:::blueyellow.colors(100)

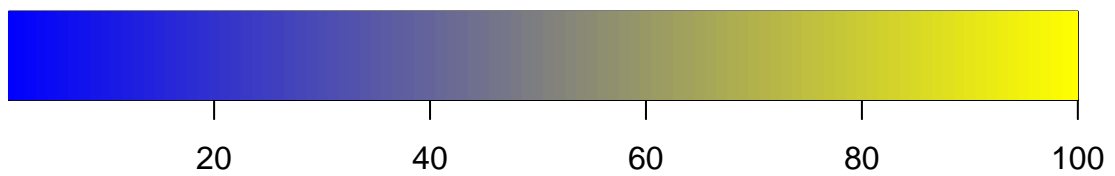


bertin:::blueyellow.colors(100, rev = TRUE)




Input

```
oldpar <- par(mfrow=c(2,1), mar=c(1, 1, 4, 1) + 0.1)
colramp(bertin:::blueyellow2.colors(100),horizontal=TRUE)
colramp(bertin:::blueyellow2.colors(100,rev=TRUE),horizontal=TRUE)
par(oldpar)
```

bertin:::blueyellow2.colors(100)

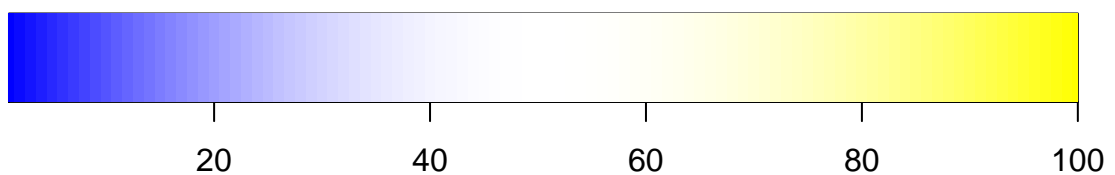


bertin:::blueyellow2.colors(100, rev = TRUE)




Input

```
oldpar <- par(mfrow=c(2,1), mar=c(1, 1, 4, 1) + 0.1)
colramp(bertin:::blueyellow4.colors(100),horizontal=TRUE)
colramp(bertin:::blueyellow4.colors(100,rev=TRUE),horizontal=TRUE)
par(oldpar)
```

bertin:::blueyellow4.colors(100)

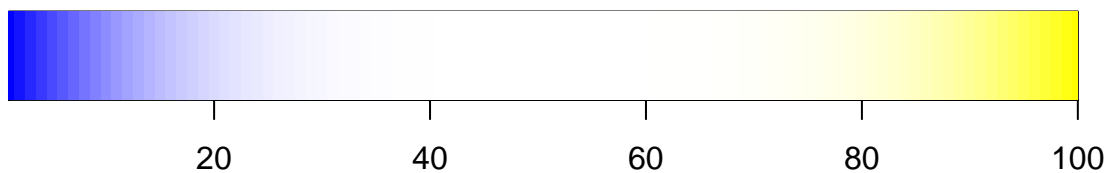


bertin:::blueyellow4.colors(100, rev = TRUE)




Input

```
oldpar <- par(mfrow=c(2,1), mar=c(1, 1, 4, 1) + 0.1)
colramp(bertin:::bluered2.colors(100),horizontal=TRUE)
colramp(bertin:::bluered2.colors(100,rev=TRUE),horizontal=TRUE)
par(oldpar)
```

bertin:::bluered2.colors(100)

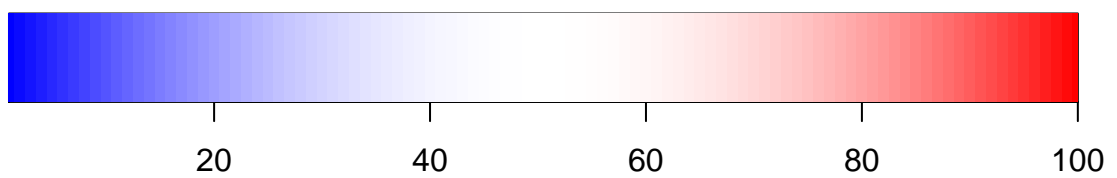


bertin:::bluered2.colors(100, rev = TRUE)




Input

```
oldpar <- par(mfrow=c(2,1), mar=c(1, 1, 4, 1) + 0.1)
colramp(bertin:::bluered4.colors(100),horizontal=TRUE)
colramp(bertin:::bluered4.colors(100,rev=TRUE),horizontal=TRUE)
par(oldpar)
```

bertin:::bluered4.colors(100)

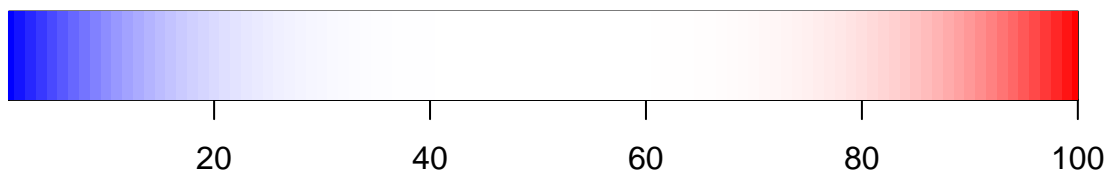


bertin:::bluered4.colors(100, rev = TRUE)




Input

```
oldpar <- par(mfrow=c(2,1), mar=c(1, 1, 4, 1) + 0.1)
colramp(bertin:::greenred2.colors(100),horizontal=TRUE)
colramp(bertin:::greenred2.colors(100,rev=TRUE),horizontal=TRUE)
par(oldpar)
```

bertin:::greenred2.colors(100)

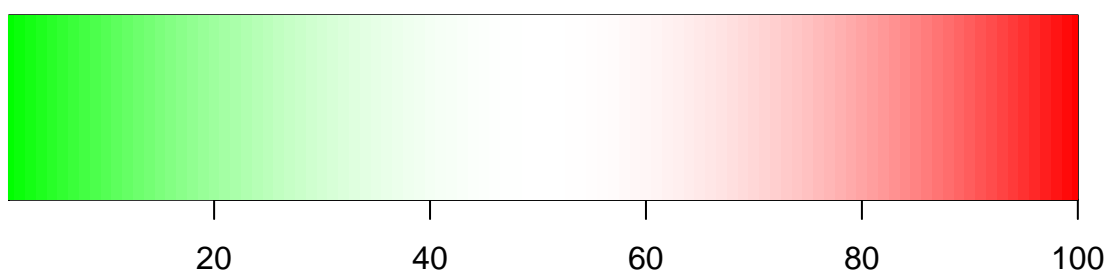


bertin:::greenred2.colors(100, rev = TRUE)

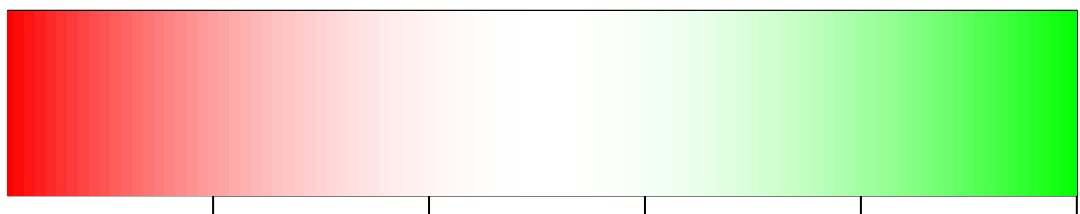


Input

```
oldpar <- par(mfrow=c(2,1), mar=c(1, 1, 4, 1) + 0.1)
colramp(bertin:::greenred4.colors(100),horizontal=TRUE)
colramp(bertin:::greenred4.colors(100,rev=TRUE),horizontal=TRUE)
par(oldpar)
```

bertin:::greenred4.colors(100)

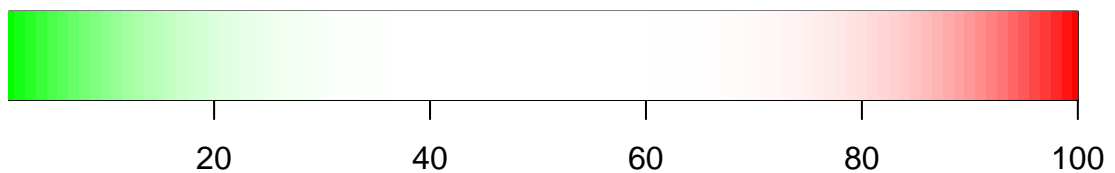


bertin:::greenred4.colors(100, rev = TRUE)



Input

```
oldpar <- par(mfrow=c(2,1), mar=c(1, 1, 4, 1) + 0.1)
colramp(bertin:::tail.colors(100),horizontal=TRUE)
colramp(bertin:::tail.colors(100,rev=TRUE),horizontal=TRUE)
par(oldpar)
```

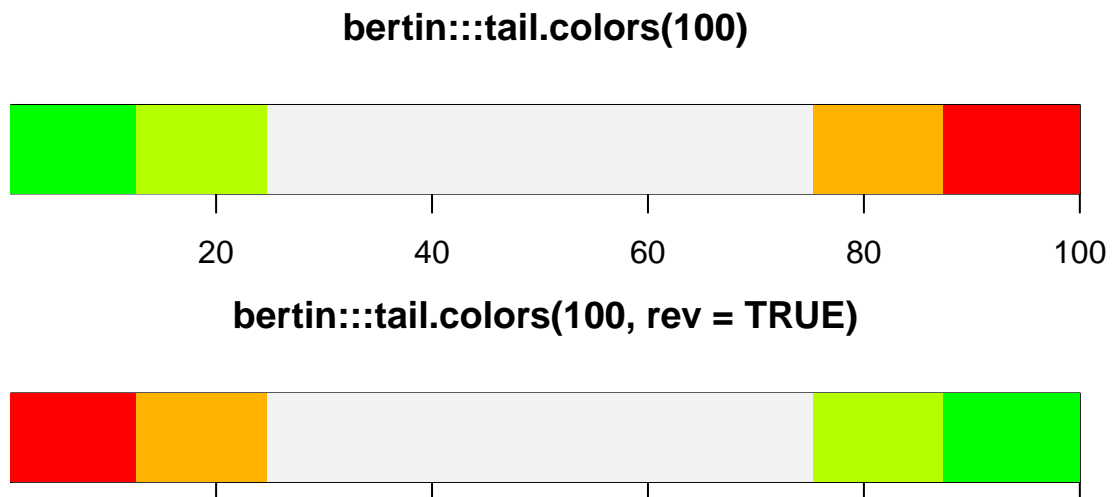

Perception is an active process, and any visual presentation may be swayed by the intricacies of perception. Colour perception is particularly complex. When working with colour (and this includes black and white), we strongly suggest to have a look at the image with inverted colours as well.

Here is a sample implementation. On the R level, provide a plotting function

Input

```
sampleimagem <- function(z,
  col = grey((1:256)/256), xlab, ylab, main,
  colinvert=FALSE){
  if (colinvert) col <- col[length(col):1]
  # x1, x2. y1, y2
  oldpar <- par(fig=c(0, 1, 0.2, 1),
    mar=c(2.5,1.5,0.5,0.5), new=FALSE)
  imagem(z, col=col)

  par(yaxt="n", fig=c(0, 1, 0, 0.2),
    mar=c(3.5,12.0,0.5,12.0), new=TRUE)
  # colramp(col=col, horizontal=TRUE)
  zrange <- range(z, finite=TRUE)
  image(z=t(matrix(seq(zrange[1],zrange[2],length.out=length(col)),
    1, length(col))),
    zlim=zrange,main="", ylab="", xlab="", col=col)
  par(oldpar)
}
```

and run it with `colinvert=FALSE` and `colinvert=TRUE`. If you are using **Sweave**, use two separate chunks, and place the figure output side by side in **T_EX**.

Input

```
hotelrk <- bertinrank(Hotel)
sampleimagem(hotelrk)
```

See Figure 8 left.

Input

```
sampleimagem(hotelrk, colinvert=TRUE)
```

See Figure 8 right.

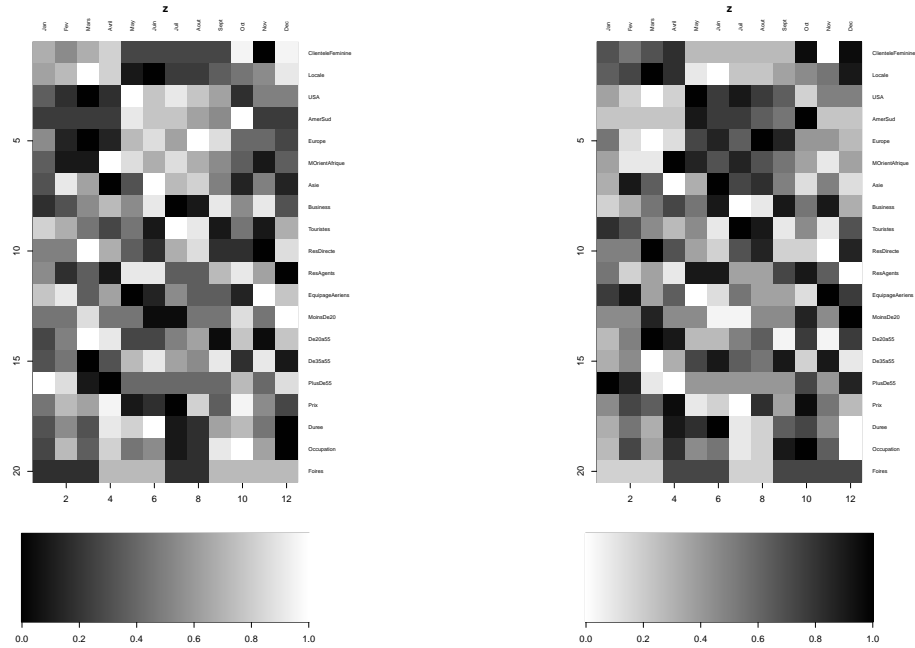


FIGURE 8. Test matrix: same information, but colour table inverted on the right.

7. COORDINATE SYSTEM AND CONVENTIONS

We provide prototypes for the display of Bertin matrices. To simplify the implementation of extensions, we chose a coordinate system that allots unit square to each matrix cell. If we want to add separator lines to structure our data, we have to allocate additional space `sepwd`, measured in user space.

`image` requires increasing scales for both axes. To align with matrix conventions, we have to transform the row numbers.

The total user space has the size $(nrows * (1+2*sepwd), ncols * (1+2*sepwd))$. The drawing area for cell $x[i, j]$ is a unit square with bottom left coordinates


```
(nrrows-i+1)* (1+2*sepwd) - sepwd* (1+ 2*sepwd) - sepwd, j* (1+2*sepwd)
- sepwd .
```

8. TEST MATRICES

To test the implementation, a series of matrices is provided. Each matrix is shown in four displays: as an image using default setting of the low level function *imagem*, as an image using the default setting of *image.bertin*, as a rectangle display using the low level function *bertinrect* and as a display using the default setting of *plot.bertin*.

8.1. Random Matrices.

Input

```
nrow <- 5
ncol <- 3
BMunif <- matrix(runif(nrow*ncol), nrow, ncol)
colnames(BMunif) <- colnames(BMunif, do.NULL=FALSE)
rownames(BMunif) <- rownames(BMunif, do.NULL=FALSE)
BMnorm <- matrix(rnorm(nrow*ncol), nrow, ncol)
colnames(BMnorm) <- colnames(BMnorm, do.NULL=FALSE)
rownames(BMnorm) <- rownames(BMnorm, do.NULL=FALSE)
```

8.2. Pure Vanilla. The most simple case: all variables are on a common scale, and the sequence is given (no seriation possible) or irrelevant (no seriation necessary).

If we want to build test matrices, there are two free parameters to be set, for example

Input

```
BMExplRows=8
BMExplCols=6
```


Typical cases are :

Input

```
BMExplUnif <- matrix( runif(BMExplRows*BMExplCols),
                        nrow= BMExplRows, ncol= BMExplCols)
BMExplNorm <- matrix( rnorm(BMExplRows*BMExplCols),
                        nrow= BMExplRows, ncol= BMExplCols)
```

Input


```
oldpar <- par(mfrow=c(1,2))
imagem(BMExplUnif)
image.bertin(BMExplUnif,useRaster=FALSE)
par(oldpar)
```

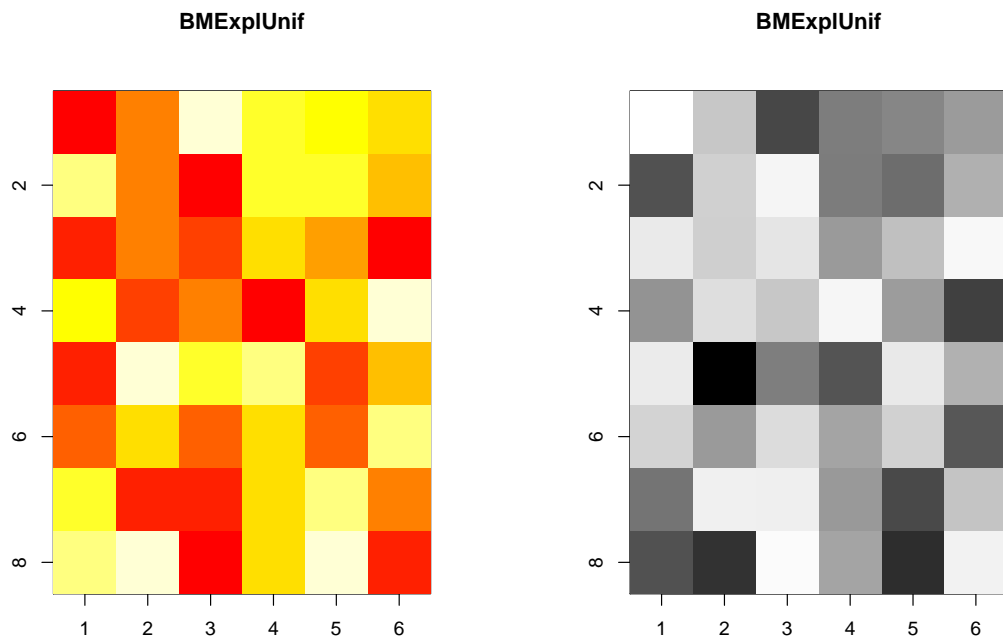

Random uniform left: *imagem()* right: *image.bertin()* using default settings


Input

```
oldpar <- par(mfrow=c(1,2))
bertinrect(BMExplUnif)
plot.bertin(BMExplUnif)
par(oldpar)
```

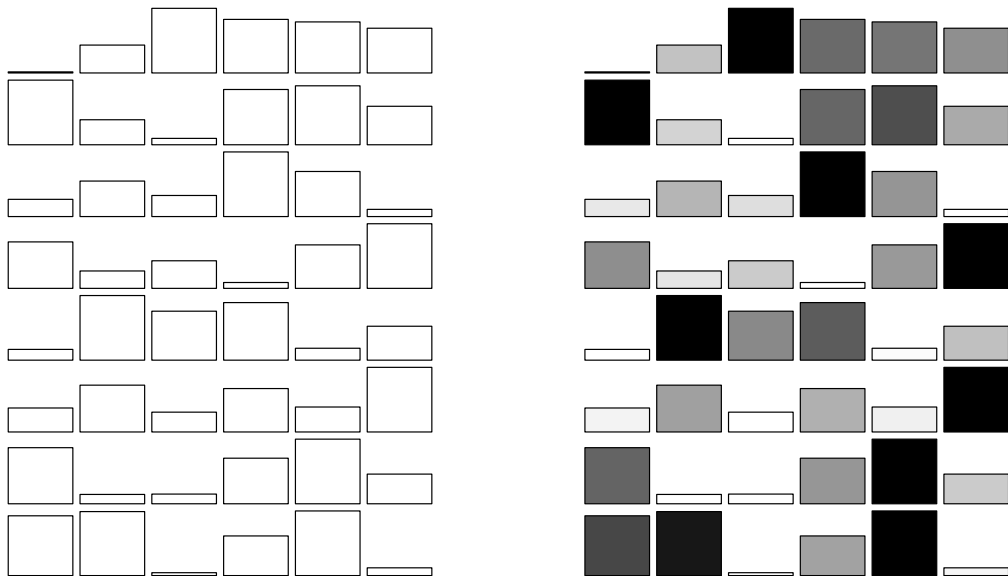

Input


```
oldpar <- par(mfrow=c(1,2))
imagem(BMExplNorm)
image.bertin(BMExplNorm)
par(oldpar)
```

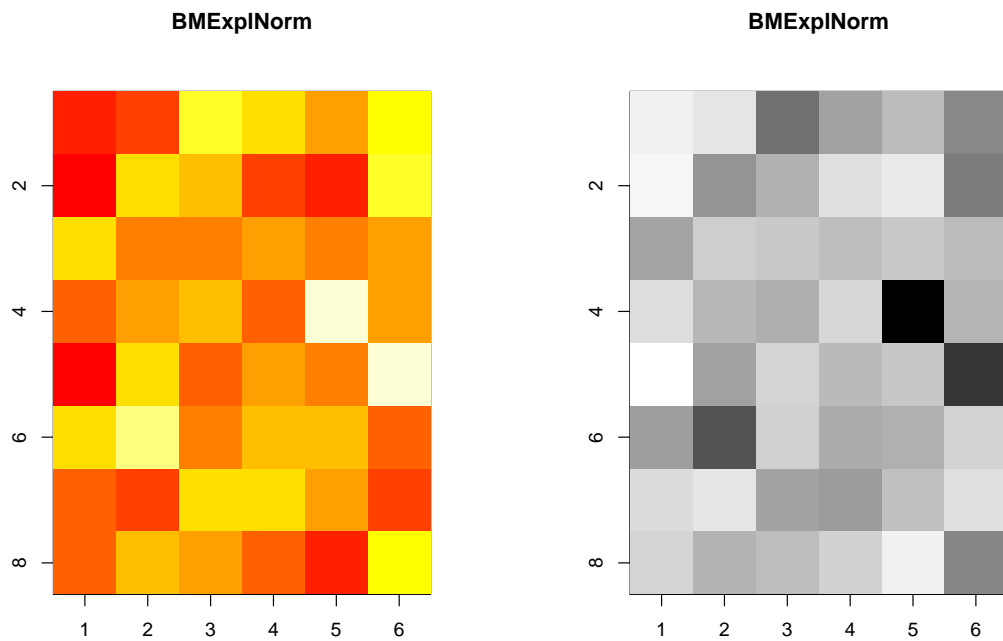

Random normal left: *imagem()* right: *image.bertin()* using default settings

```
oldpar <- par(mfrow=c(1,2))
bertinrect(BMExplNorm)
plot.bertin(BMExplNorm)
par(oldpar)
```

Input

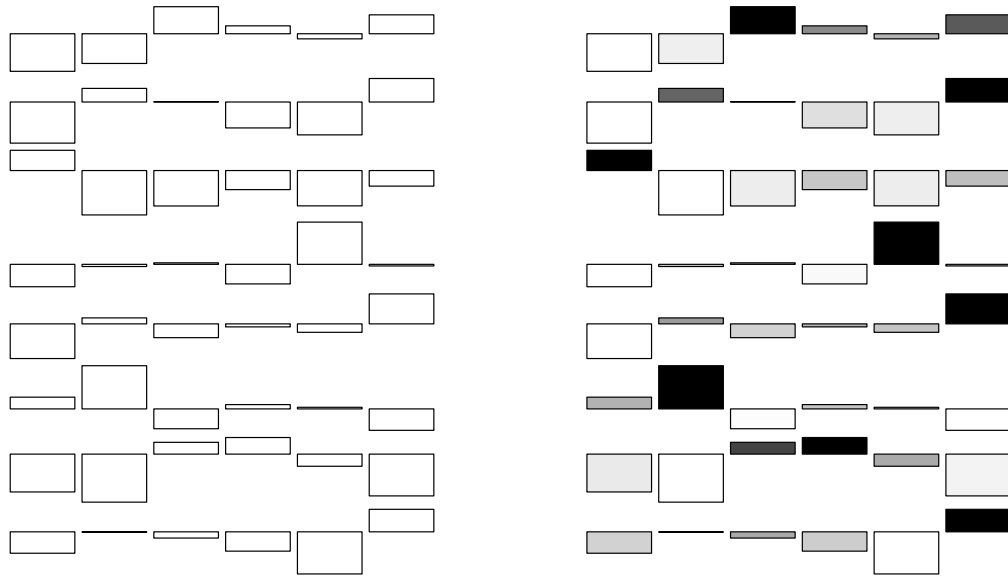

Input

8.3. Vanilla. The next round of test cases are numeric, but not on a common scale. We provide some test vectors which we can use to construct various test matrices.

Input

```
# Test vectors, used to build a matrix
Bzero <- rep(0, BMEsplCols)
Bone <- rep(1, BMEsplCols)
Bmone <- rep(-1, BMEsplCols)
Binc <- (1:BMEsplCols)/BMEsplCols
Bdec <- (BMEsplCols:1)/BMEsplCols
Bstep <- c(Bmone[1:floor(BMEsplCols/2)],
           Bone[(1+floor(BMEsplCols/2)):BMEsplCols])
Bhat <- Bone
Bhat[(floor(BMEsplCols/3)+1):(BMEsplCols-floor(BMEsplCols/3))] <- 0.5
Bnazero <- rep(c(NA,0),length.out= BMEsplCols)
Bnanzero <- rep(c(NaN,0),length.out= BMEsplCols)
Binf <- rep(c(Inf,0,-Inf),length.out= BMEsplCols)
```

8.3.1. *Basic test matrices.*


Input

```
Brmatrix <- rbind(Bzero, Bone, Bmone, Binc, Bdec, Bstep, Bhat)
colnames(Brmatrix) <- colnames(Brmatrix,FALSE)
```

	1	2	3	4	5	6
Bzero	0.00	0.00	0.00	0.00	0.00	0.00
Bone	1.00	1.00	1.00	1.00	1.00	1.00
Bmone	-1.00	-1.00	-1.00	-1.00	-1.00	-1.00
Binc	0.17	0.33	0.50	0.67	0.83	1.00
Bdec	1.00	0.83	0.67	0.50	0.33	0.17
Bstep	-1.00	-1.00	-1.00	1.00	1.00	1.00
Bhat	1.00	1.00	0.50	0.50	1.00	1.00
Bnzero		0.00		0.00		0.00
Bnanzero		0.00		0.00		0.00
Binf	Inf	0.00	-Inf	Inf	0.00	-Inf

Input


```
oldpar <- par(mfrow=c(1,2))
imagem(Brmatrix)
image.bertin(Brmatrix,useRaster=FALSE)
par(oldpar)
```

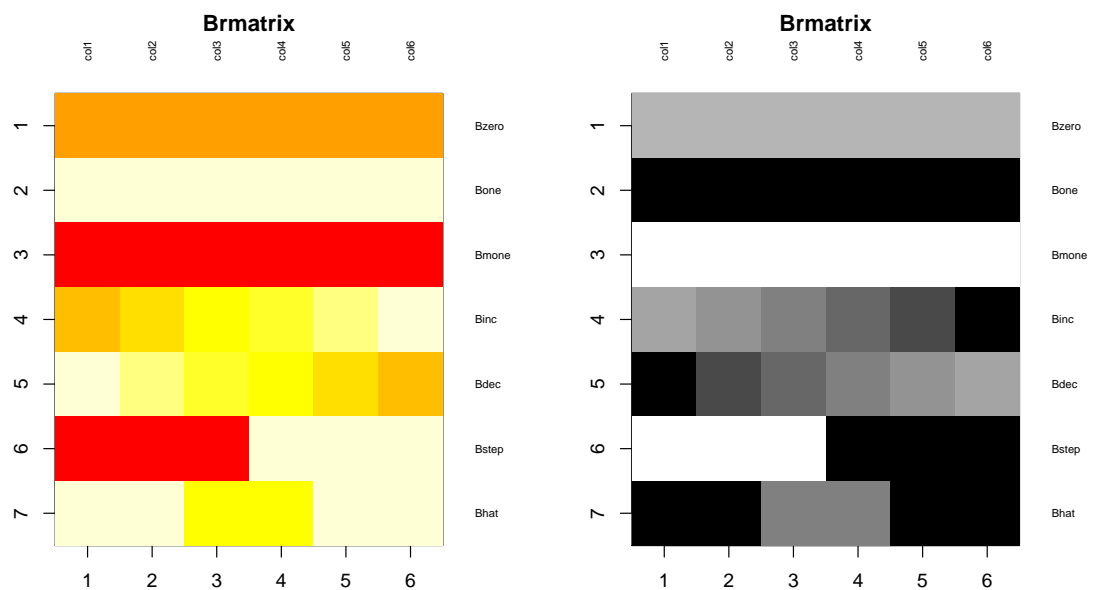

Test matrix by row. Left: *imagem()* right: *image.bertin()* using default settings

Input

```
oldpar <- par(mfrow=c(1,2))
bertinrect(Brmatrix)
plot.bertin(Brmatrix)
par(oldpar)
```

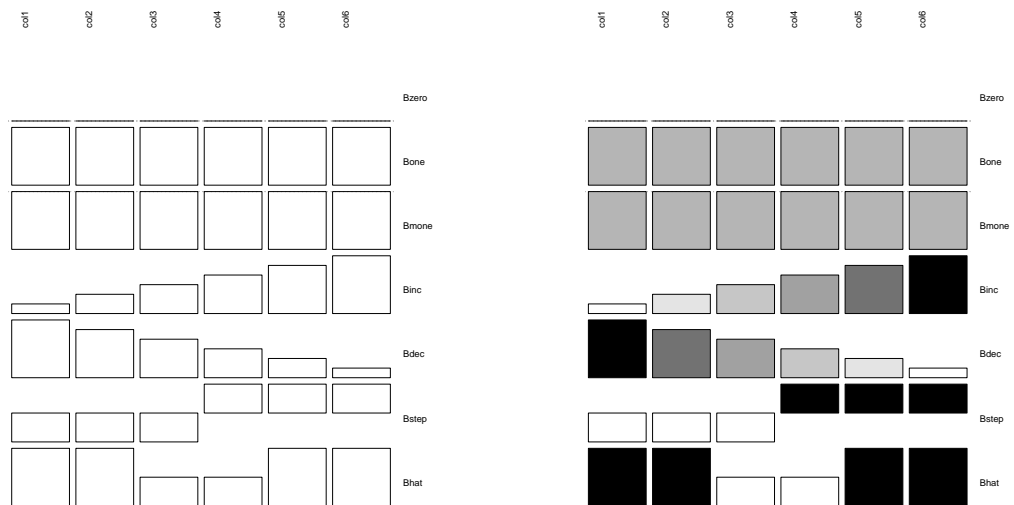

Test matrix by row. Left: `bertinrect()` right: `plot.bertin()` using default settings

R may use internal housekeeping to keep matrix columns homogeneous. Check! Use row matrix and column matrix for tests.


Input

```
Bcmatrix <- cbind(Bzero, Bone, Bmone, Binc, Bdec, Bstep, Bhat)
rownames(Bcmatrix) <- rownames(Bcmatrix, FALSE)
```

	1	2	3	4	5	6
Bzero	0.00	0.00	0.00	0.00	0.00	0.00
Bone	1.00	1.00	1.00	1.00	1.00	1.00
Bmone	-1.00	-1.00	-1.00	-1.00	-1.00	-1.00
Binc	0.17	0.33	0.50	0.67	0.83	1.00
Bdec	1.00	0.83	0.67	0.50	0.33	0.17
Bstep	-1.00	-1.00	-1.00	1.00	1.00	1.00
Bhat	1.00	1.00	0.50	0.50	1.00	1.00
Bnazero		0.00		0.00		0.00
Bnanzero		0.00		0.00		0.00
Binf	Inf	0.00	-Inf	Inf	0.00	-Inf

Input


```
oldpar <- par(mfrow=c(1,2))
imagem(Bcmatrix)
image.bertin(Bcmatrix, useRaster=FALSE)
par(oldpar)
```

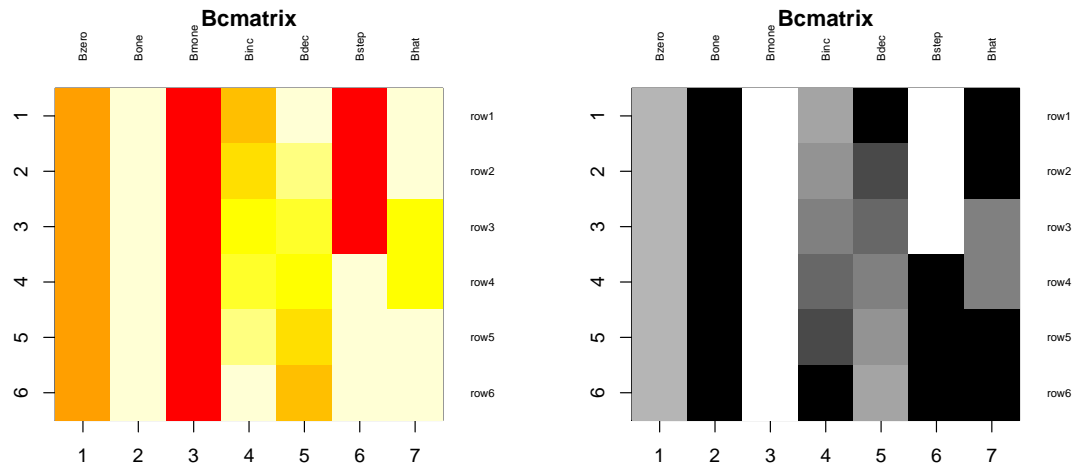

Test matrix by column. Left: `imagem()` right: `image.bertin()` using default settings

Input

```
oldpar <- par(mfrow=c(1,2))
bertinrect(Bcmatrix)
plot.bertin(Bcmatrix)
par(oldpar)
```

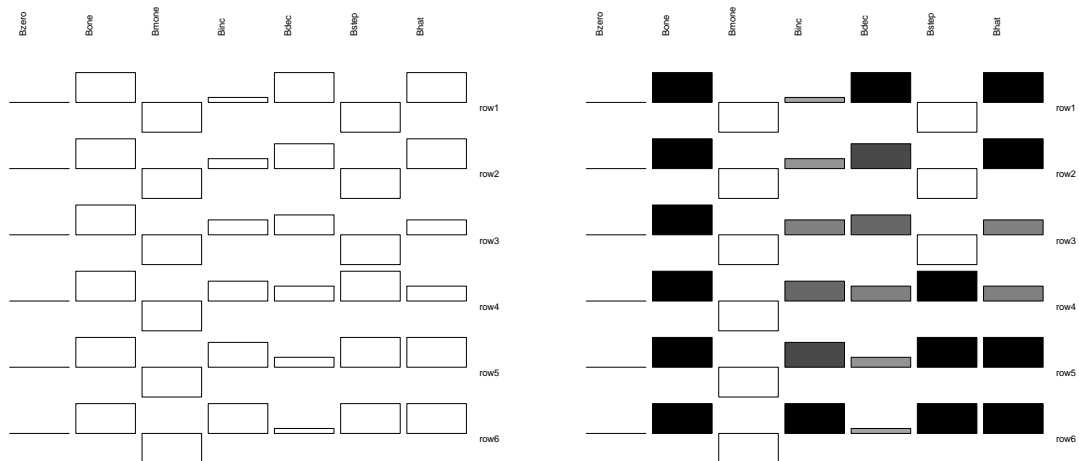

Test matrix by column. Left: `bertinrect()` right: `plot.bertin()` using default settings

Basic test matrices with normal random error

```


                                Input
BrRndmatrix <- Brmatrix+rnorm(nrow(Brmatrix)*ncol(Brmatrix))

```

```

                                Input
oldpar <- par(mfrow=c(1,2))
imagem(BrRndmatrix)
image.bertin(BrRndmatrix,useRaster=FALSE)
par(oldpar)

```

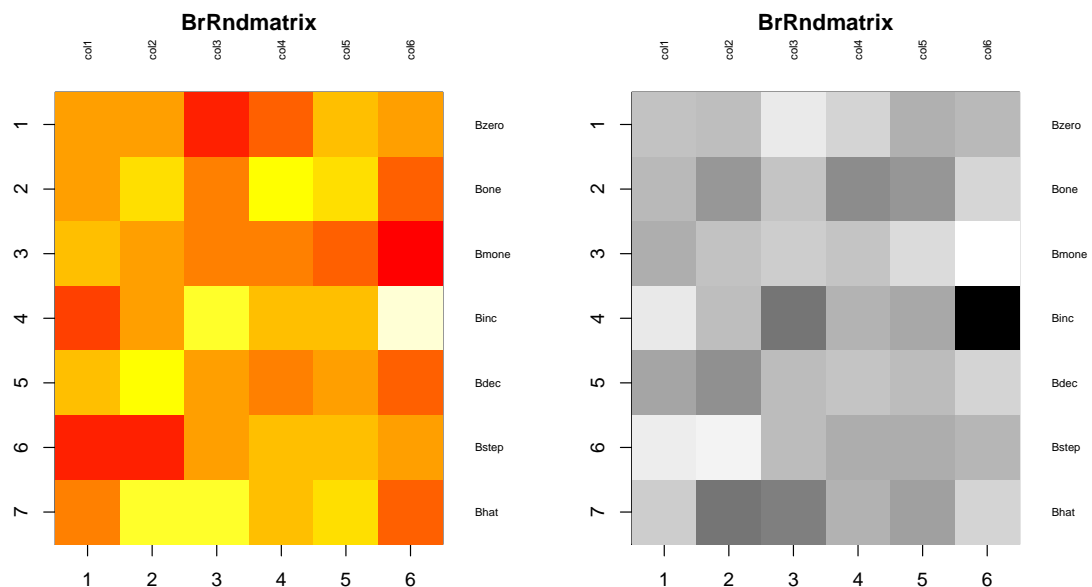


Test matrix by row with normal random error. Left: *imagem()* right: *image.bertin()* using default settings

```

                                Input
oldpar <- par(mfrow=c(1,2))
bertinrect(BrRndmatrix)
plot.bertin(BrRndmatrix)
par(oldpar)

```

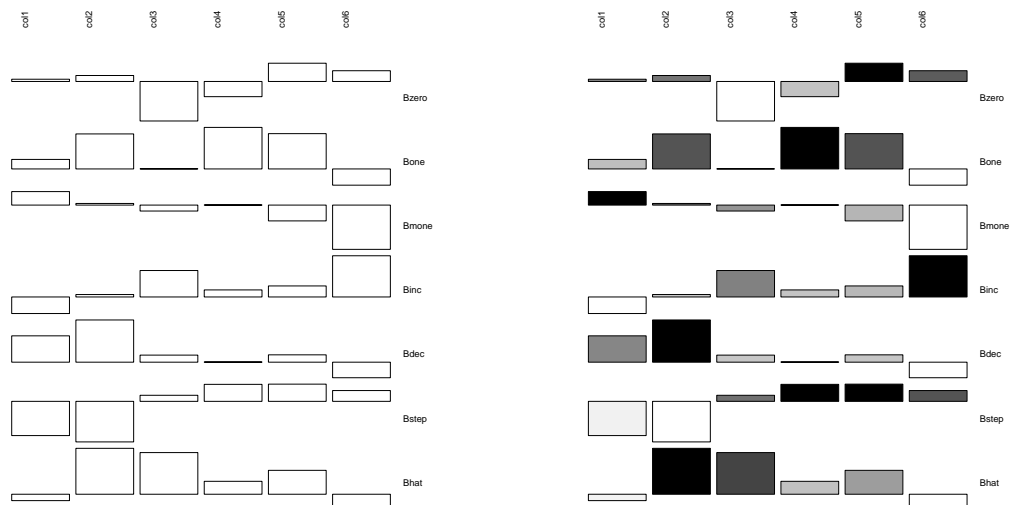

Test matrix by row with normal random error. Left: `bertinrect()` right: `plot.bertin()` using default settings

8.4. Test matrices with IEEE specials.


Input

```
Brmatrixx <- rbind(Bzero, Bone, Bmone, Binc, Bdec, Bstep, Bhat,
  Bnazero, Bnanzero, Binf)
```

	1	2	3	4	5	6
Bzero	0.00	0.00	0.00	0.00	0.00	0.00
Bone	1.00	1.00	1.00	1.00	1.00	1.00
Bmone	-1.00	-1.00	-1.00	-1.00	-1.00	-1.00
Binc	0.17	0.33	0.50	0.67	0.83	1.00
Bdec	1.00	0.83	0.67	0.50	0.33	0.17
Bstep	-1.00	-1.00	-1.00	1.00	1.00	1.00
Bhat	1.00	1.00	0.50	0.50	1.00	1.00
Bnazero		0.00		0.00		0.00
Bnanzero		0.00		0.00		0.00
Binf	Inf	0.00	-Inf	Inf	0.00	-Inf

Input


```
oldpar <- par(mfrow=c(1,2))
imagem(Brmatrixx)
image.bertin(Brmatrixx,useRaster=FALSE)
par(oldpar)
```

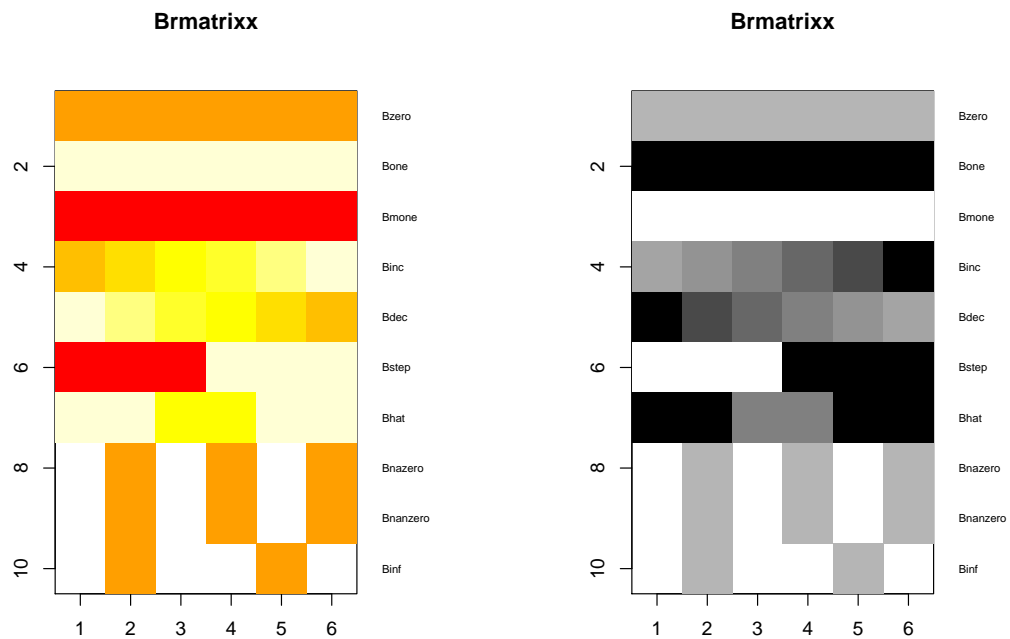

Test matrix with IEEE specials by row. Left: *imagem()* right: *image.bertin()* using default settings

Input

```
oldpar <- par(mfrow=c(1,2))
bertinrect(Brmatrixx)
plot.bertin(Brmatrixx)
par(oldpar)
```


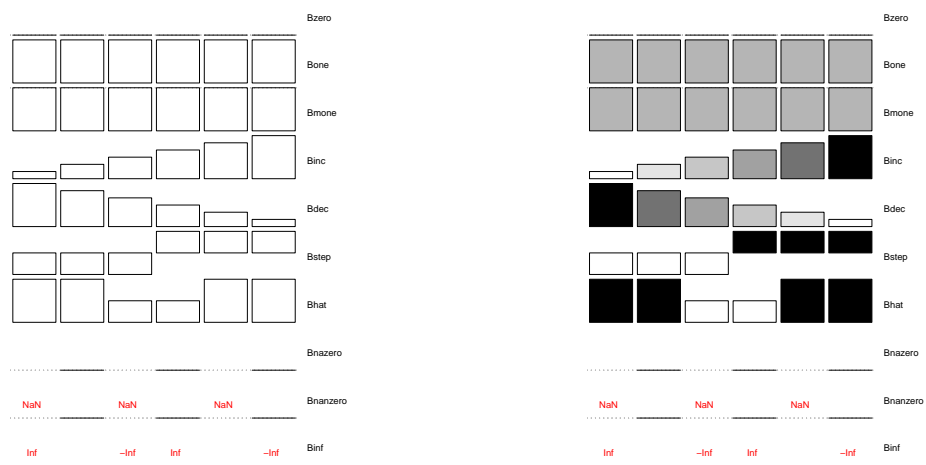


Test matrix with IEEE specials by row. Left: *bertinrect()* right: *plot.bertin()* using default settings

Input


```
Bcmatrixx <- cbind(Bzero, Bone, Bmone, Binc, Bdec, Bstep, Bhat,
                   Bnazero, Bnanzero, Binf)
```

```
oldpar <- par(mfrow=c(1,2))
image(Bcmatrixx)
image.bertin(Bcmatrixx,useRaster=FALSE)
par(oldpar)
```

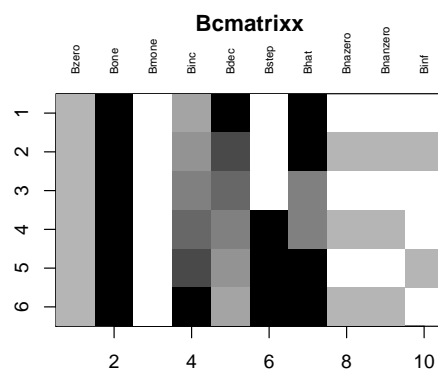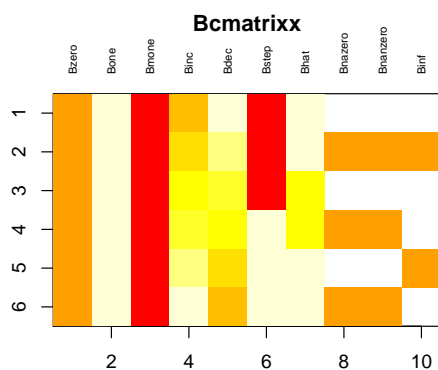

Test matrix with IEEE specials by column. Left: `image()` right: `image.bertin()` using default settings

```
oldpar <- par(mfrow=c(1,2))
bertinrect(Bcmatrixx)
plot.bertin(Bcmatrixx)
par(oldpar)
```

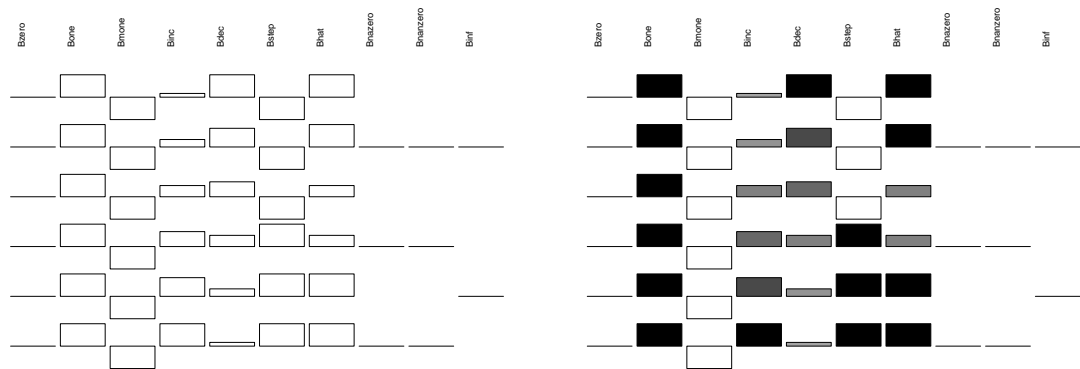


Test matrix with IEEE specials by column. Left: `bertinrect()` right: `plot.bertin()` using default settings

Input

```
BrRndmatrixx <- Brmatrixx+rnorm(nrow(Brmatrixx)*ncol(Brmatrixx))
```



Input

```
oldpar <- par(mfrow=c(1,2))
imagem(BrRndmatrixx)
image.bertin(BrRndmatrixx,useRaster=FALSE)
par(oldpar)
```

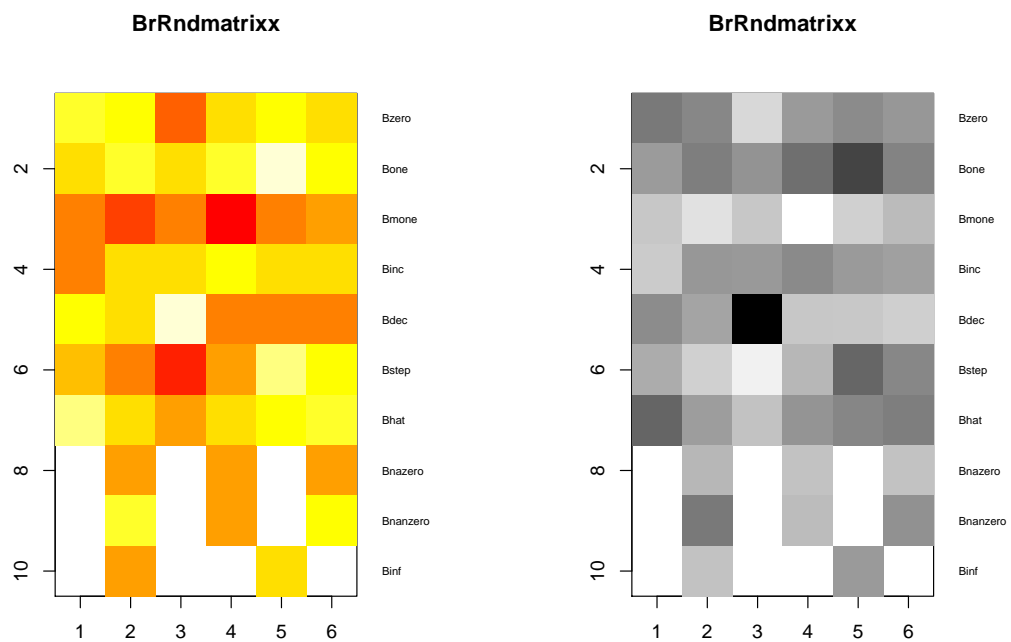

Input

```
oldpar <- par(mfrow=c(1,2))
bertinrect(BrRndmatrixx)
plot.bertin(BrRndmatrixx)
par(oldpar)
```

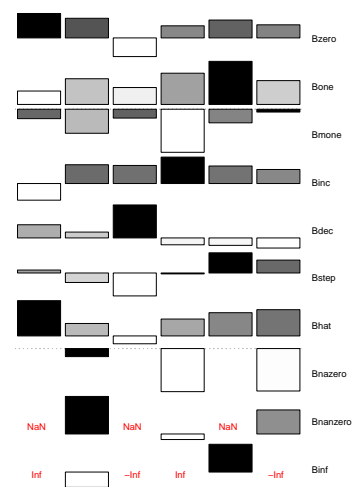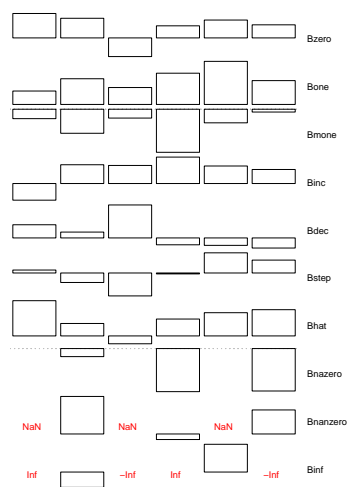

REFERENCES

- Bertin, J. 1977. *La graphique et le traitement graphique de l'information*, Flammarion, Paris.
- . 1999. *Graphics and graphic information processing*, Readings in information visualization, pp. 62–65.
- de Falguerolles, Antoine, Felix Friedrich, and Günther Sawitzki. 1997. *A tribute to J. Bertin's graphical data analysis*, Softstat '97 (advances in statistical software 6), pp. 11–20.
- Sawitzki, Günther. 1996. *Extensible statistical software: On a voyage to oberon.*, Journal of Computational and Graphical Statistics **5**, no. 3.

\$Id: bertinR.Rnw 37 2011-09-13 19:26:00Z gsawitzki \$
\$Revision: 37 \$
\$Date: 2011-09-13 21:26:00 +0200 (Tue, 13 Sep 2011) \$
\$Author: gsawitzki \$
textwidth: 6.00612in linewidth:6.00612in

ADDRESS: STATLAB HEIDELBERG

E-mail address: `gs@statlab.uni-heidelberg.de`

URL: `http://www.statlab.uni-heidelberg.de/projects/r/`