

# Package **bvpSolve**, solving testproblems

**Karline Soetaert**

Centre for Estuarine and Marine Ecology  
Netherlands Institute of Ecology  
The Netherlands

---

## Abstract

This document implements several testproblems that can be found on [http://www.ma.ic.ac.uk/~jcash/BVP\\_software](http://www.ma.ic.ac.uk/~jcash/BVP_software), using solvers from package **bvpSolve** (?).

*Keywords:* ordinary differential equations, boundary value problems, shooting method, collocation method, R.

---

## 1. introduction

**bvpSolve** numerically solves boundary value problems (BVP) of first-order ordinary differential equations (ODE), which for one ODE can be written as:

$$\begin{aligned}\frac{dy}{dx} &= f(x, y) \\ a &\leq x \leq b \\ g_1(y)|_a &= 0 \\ g_2(y)|_b &= 0\end{aligned}$$

where  $y$  is the dependent,  $x$  the independent variable, function  $f$  is the differential equation,  $g_a$  and  $g_b$  the boundary conditions at the end points  $a$  and  $b$ .

The problem must be specified as a first-order system. Thus, higher-order ODEs need to be rewritten as a set of first-order systems. For instance:

$$\frac{d^2y}{dx^2} = f(x, y, \frac{dy}{dx})$$

can be rewritten as:

$$\begin{aligned}\frac{dy}{dx} &= z \\ \frac{dz}{dx} &= f(x, y, z)\end{aligned}$$

In this document, all boundary value problems that can be found on [http://www.ma.ic.ac.uk/~jcash/BVP\\_software](http://www.ma.ic.ac.uk/~jcash/BVP_software), are implemented and solved using solvers from package **bvpSolve**.

For each solver, the default settings are used, i.e. without providing "initial guesses" of the solution.

With these settings, some methods cannot solve certain problems. This does not mean that other settings cannot be found that do solve the problem.

If available, then the analytical solution of the problem is plotted (as dots).

## 2. Linear problems

### 2.1. problem 1

This problem is:

$$\begin{aligned}\xi y'' - y &= 0 \\ y_{(x=0)} &= y_{(x=1)} = 0\end{aligned}$$

which is rewritten as:

$$\begin{aligned}y_1' &= y_2 \\ y_2' &= y_1/\xi\end{aligned}$$

and implemented as:

```
> Prob1 <- function(t, y, pars) {
+   list(c( y[2] , y[1]/xi ))
+ }
```

which is solved for different values of  $\xi$

```
> xi <-0.1
> print(system.time(
+   shoot <- bvpshoot(yini=c(1,NA),yend=c(0,NA),x=seq(0,1,by=0.01),
+     func=Prob1, guess=0)))
```

```
user  system elapsed
0.02   0.00   0.02
```

```
> print(system.time(
+   twp <- bvptwp(yini=c(1,NA),yend=c(0,NA),x=seq(0,1,by=0.01),
+     func=Prob1, guess=0)))
```

```
user  system elapsed
0.03   0.00   0.03
```

```
> print(system.time(
+   mod <- bvpcolmod(yini=c(1,NA),yend=c(0,NA),x=seq(0,1,by=0.01),
+     func=Prob1, guess=0)))
```

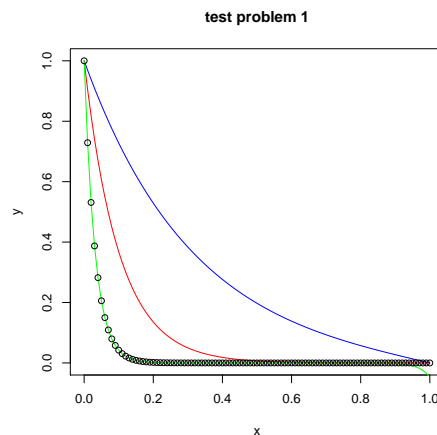


Figure 1: Solution of the BVP ODE problem 1, see text for R-code

```
user  system elapsed
0.1    0.0    0.1
```

for smaller  $\xi$

```
> xi <-0.01
> shoot2 <- bvpshoot(yini=c(1,NA),yend=c(0,NA),x=seq(0,1,by=0.01),
+                   func=Prob1, guess=0)
```

and for a very small value

```
> xi <-0.001
> shoot3 <- bvpshoot(yini=c(1,NA),yend=c(0,NA),x=seq(0,1,by=0.01),
+                   func=Prob1, guess=0)
> col2 <- bvpcolmod(yini=c(1,NA),yend=c(0,NA),x=seq(0,1,by=0.01),
+                  func=Prob1, guess=0)
```

and the output plotted

```
> plot(shoot[,1],shoot[,2],type="l",main="test problem 1",col="blue",
+       xlab="x",ylab="y")
> lines(shoot2[,1],shoot2[,2],col="red")
> lines(shoot3[,1],shoot3[,2],col="green")
> # exact solution
> curve(exp(-x/sqrt(xi))-exp((x-2)/sqrt(xi))/(1-exp(-2/sqrt(xi))),
+       0,1,add=TRUE,type="p")
```

## 2.2. problem 2

This problem is:

$$\xi y'' - y' = 0$$

$$y_{(x=0)} = y_{(x=1)} = 0$$

which is rewritten as:

$$y'_1 = y_2$$

$$y'_2 = y_2/\xi$$

```
> Prob2 <- function(t, y, pars) {
+   list(c( y[2], y[2]/xi ))
+ }
> xi <-0.2
> shoot <- bvpsshoot(yini=c(1,NA),yend=c(0,NA),x=seq(0,1,by=0.01),
+   func=Prob2, guess=0)
```

For lower values of  $\xi$  ( $<0.1$ ) this problem cannot be solved by the shooting method, but it is solvable by collocation

```
> xi <-0.1
> twp <- bvptwp(yini=c(1,NA),yend=c(0,NA),x=seq(0,1,by=0.01),
+   func=Prob2, guess=0, atol=1e-10)
> xi <- 0.01
> mod <- bvpcolmod(yini=c(1,NA),yend=c(0,NA),x=seq(0,1,by=0.01),
+   func=Prob2, guess=0, atol=1e-10)
```

The solution can be compared with the analytical solution:

```
> plot(shoot[,1],shoot[,2],type="l",main="test problem 2",col="blue",
+   xlab="x",ylab="y")
> lines(twp[,1],twp[,2],col="red")
> lines(mod[,1],mod[,2],col="green")
> curve((1-exp((x-1)/xi))/(1-exp(-1/xi)),0,1,type="p",add=TRUE)
```

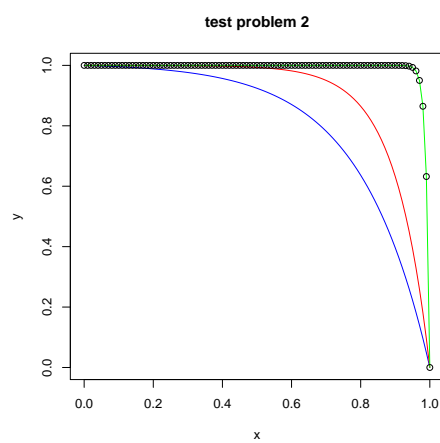


Figure 2: Solution of the BVP ODE problem 2, see text for R-code

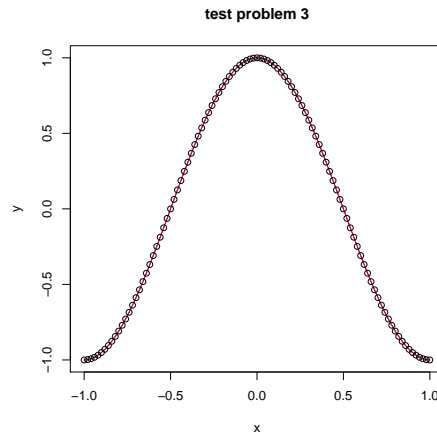


Figure 3: Solution of the BVP ODE problem 3, see text for R-code

### 2.3. problem 3

$$\xi y'' + (2 + \cos(\pi x))y' - y = -(1 + \xi \pi^2) \cos(\pi x) - (2 + \cos(\pi x))\pi \sin(\pi x)$$

$$y_{(x=-1)} = y_{(x=1)} = -1$$

```
> Prob3 <- function(x, y, pars) {
+   list(c( y[2],
+           1/xi*(-(2+cos(pi*x))*y[2]+y[1]-
+           (1+xi*pi*pi)*cos(pi*x)-(2+cos(pi*x))*pi*sin(pi*x))
+         ))
+ }
> #-----
> xi <-0.1
> shoot <- bvpshoot(yini=c(-1,NA),yend=c(-1,NA),x=seq(-1,1,by=0.01),
+   func=Prob3, guess=0)
> xi <-0.01
> twp <- bvptwp(yini=c(-1,NA),yend=c(-1,NA),x=seq(-1,1,by=0.01),
+   func=Prob3, guess=0)

> plot(shoot[,1],shoot[,2],type="l",main="test problem 3",col="blue",
+   xlab="x",ylab="y")
> lines(twp[,1],twp[,2],col="red")
> curve(cos(pi*x),-1,1,type="p",add=TRUE)
```

## 2.4. problem 4

$$\begin{aligned}\xi y'' + y' - (1 + \xi)y &= 0 \\ y_{(x=-1)} &= 1 + \exp(-2) \\ y_{(x=1)} &= 1 + \exp(-2(1 + \xi)/\xi)\end{aligned}$$

```
> Prob4 <- function(t, y, pars) {
+   list(c( y[2], (-y[2]+(1+xi)*y[1])/xi ))
+ }
> yini <- c(1+exp(-2),NA)
> xi <- -0.5
> yend <- c(1+exp(-2*(1+xi)/xi),NA)
> shoot <- bvpsshoot(yini=yini,yend=yend,x=seq(-1,1,by=0.01),
+   func=Prob4, guess=0)
> xi <- -0.1
> yend <- c(1+exp(-2*(1+xi)/xi),NA)
> twp <- bvptwp(yini=yini,yend=yend,x=seq(-1,1,by=0.01),
+   func=Prob4, guess=0)
> xi <- -0.01
> yend <- c(1+exp(-2*(1+xi)/xi),NA)
> mod <- bvpcolmod(yini=yini,yend=yend,x=seq(-1,1,by=0.01),
+   func=Prob4, guess=0)

> plot(shoot[,1],shoot[,2],type="l",main="test problem 4",ylim=c(0,1.2),
+   col="blue",xlab="x",ylab="y")
> lines(twp[,1],twp[,2],col="red")
> lines(mod[,1],mod[,2],col="green")
> curve(exp(x-1)+exp(-(1+xi)*(1+x)/xi),-1,1,type="p",add=TRUE)
```

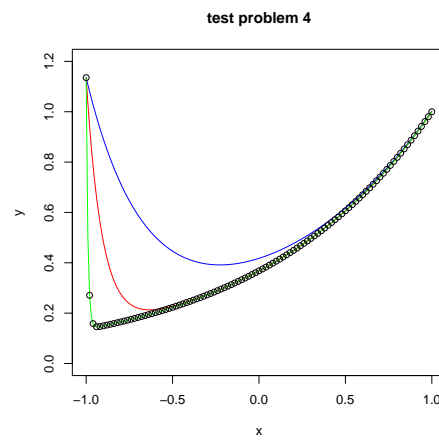


Figure 4: Solution of the BVP ODE problem 4, see text for R-code



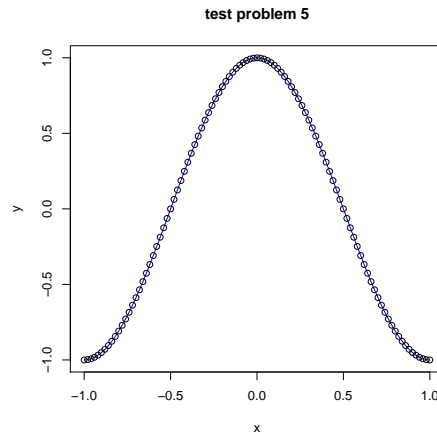


Figure 5: Solution of the BVP ODE problem 5, see text for R-code

## 2.5. problem 5

$$\xi y'' - xy' - y = -(1 + \xi\pi^2) \cos(\pi x) + (\pi x) \sin(\pi x)$$

$$y_{(x=-1)} = y_{(x=1)} = -1$$

```
> Prob5 <- function(x, y, pars) {
+   list(c( y[2],
+           x*y[2]+y[1]-(1+pi*pi)*cos(pi*x)+pi*x*sin(pi*x) ))
+ }
> xi <-0.1
> shoot <- bvpshoot(yini=c(-1,NA),yend=c(-1,NA),x=seq(-1,1,by=0.01),
+   func=Prob5, guess=0)
> twp <- bvptwp(yini=c(-1,NA),yend=c(-1,NA),x=seq(-1,1,by=0.01),
+   func=Prob5, guess=0)

> plot(shoot[,1],shoot[,2],type="l",main="test problem 5",
+   col="blue",xlab="x",ylab="y")
> curve(cos(pi*x),-1,1,type="p",add=TRUE)
```

## 2.6. problem 6

$$\begin{aligned}\xi y'' + xy' &= -\xi \pi^2 \cos(\pi x) - \pi x \sin(\pi x) \\ y_{(x=-1)} &= -2 \\ y_{(x=1)} &= 0\end{aligned}$$

This problem cannot be solved by the shooting method, except for the largest value of xi

```
> Prob6 <- function(t, y, pars) {
+   list(c( y[2],
+           1/xi*(-t*y[2]-xi*pi*pi*cos(pi*t)-pi*t*sin(pi*t)) ))
+ }
> xi <-0.1
> shoot <- bvpshoot(yini=c(-2,NA),yend=c(0,NA),x=seq(-1,1,by=0.01),
+   func=Prob6, guess=0)
> xi <-0.01
> twp <- bvptwp(yini=c(-2,NA),yend=c(0,NA),x=seq(-1,1,by=0.01),
+   func=Prob6, guess=0)
> xi <-0.001
> mod <- bvpcolmod(yini=c(-2,NA),yend=c(0,NA),x=seq(-1,1,by=0.01),
+   func=Prob6, guess=0)

> plot(shoot[,1],shoot[,2],type="l",main="test problem 6",
+   ylim =c(-2,2),col="blue",xlab="x",ylab="y")
> lines(twp[,1],twp[,2],col="red")
> lines(mod[,1],mod[,2],col="green")
> erf <- function(x) 2 * pnorm(x * sqrt(2)) - 1
> curve(cos(pi*x)+erf(x/sqrt(2*xi))/erf(1/sqrt(2*xi)),-1,1,type="p",add=TRUE)
```

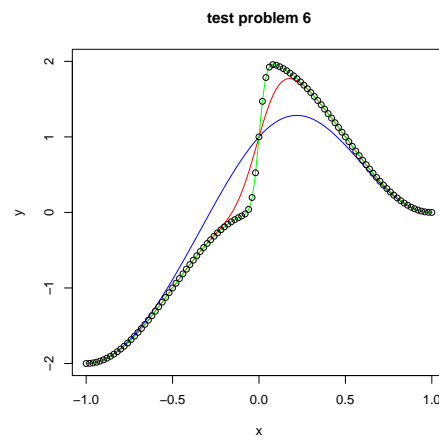


Figure 6: Solution of the BVP ODE problem 6, see text for R-code

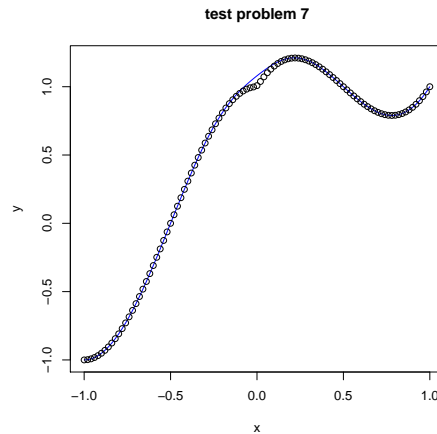


Figure 7: Solution of the BVP ODE problem 7,  $y$  versus  $x$ - see text for R-code

## 2.7. problem 7

$$\begin{aligned}\xi y'' + xy' - y &= -(1 + \xi \pi^2) \cos(\pi x) - \pi x \sin(\pi x) \\ y(-1) &= -1 \\ y(1) &= 1\end{aligned}$$

This problem cannot be solved with the shooting method for large  $\xi$ .

```
> prob7 <- function(x, y, pars) {
+   list(c(y[2],
+         1/xi*(-x*y[2]+y[1]-(1+xi*pi*pi)*cos(pi*x)-pi*x*sin(pi*x)))
+   )
+ }
> x <- seq(-1,1,by=0.01)
> xi <- 0.01
> twp <- bvptwp(yini=c(-1,NA),yend=c(1,NA),x=x,func=prob7, guess=0)
> xi <- 0.001
> mod <- bvpcolmod(yini=c(-1,NA),yend=c(1,NA),x=x,func=prob7, guess=0)
> xi <- 0.0001
> twp2 <- bvptwp(yini=c(-1,NA),yend=c(1,NA),x=x,func=prob7, guess=0)

> plot(twp[,1],twp[,2],type="l",main="test problem 7",
+   col="blue",xlab="x",ylab="y")
> erf <- function(x) 2 * pnorm(x * sqrt(2)) - 1
> curve(cos(pi*x)+x+(x*erf(x/sqrt(2*xi))+sqrt(2*xi/pi)*exp(-x^2/2/xi))/
+   (erf(1/(2*xi))+sqrt(2*xi/pi)*exp(-1/2/xi)),-1,1,type="p",add=TRUE)
```

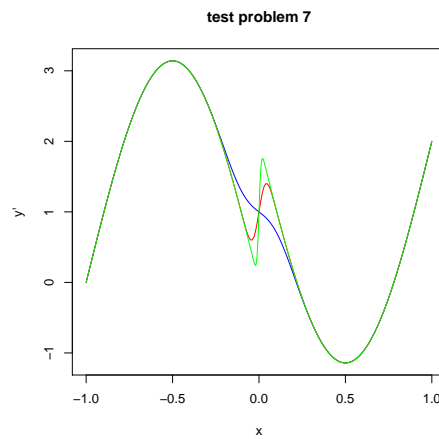


Figure 8: Solution of the BVP ODE problem 7,  $y'$  versus  $x$ - see text for R-code

```
> plot(twp[,1],twp[,3],type="l",main="test problem 7",  
+      col="blue",xlab="x",ylab="y'")  
> lines(mod[,1],mod[,3],col="red")  
> lines(twp2[,1],twp2[,3],col="green")
```

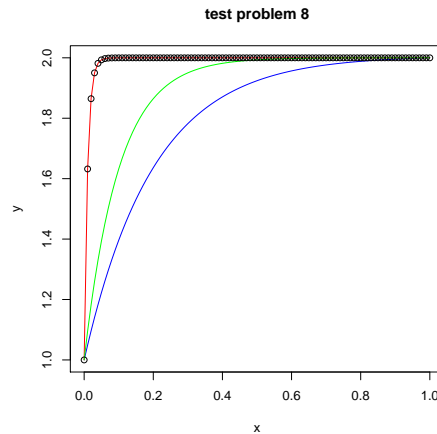


Figure 9: Solution of the BVP ODE problem 8, see text for R-code

## 2.8. problem 8

$$\begin{aligned}\xi y'' + y' &= 0 \\ y(0) &= 1 \\ y(1) &= 2\end{aligned}$$

```
> prob8 <- function(x, y, pars) {
+   list(c( y[2], -1/xi*y[2]))
+ }
> x <- seq(0,1,by=0.01)
> xi <- 0.2
> shoot <- bvpshoot(yini=c(1,NA),yend=c(2,NA),x=x,func=prob8,guess=0)
> xi <- 0.1
> twp <- bvptwp(yini=c(1,NA),yend=c(2,NA),x=x,func=prob8, guess=0)
> xi <- 0.01
> mod <- bvpcolmod(yini=c(1,NA),yend=c(2,NA),x=x,func=prob8, guess=0)

> plot(shoot[,1],shoot[,2],type="l",main="test problem 8",
+   col="blue",xlab="x",ylab="y")
> lines(mod[,1],mod[,2],col="red")
> lines(twp[,1],twp[,2],col="green")
> # analytical solution
> curve(2-exp(-1/xi)-exp(-x/xi)/(1-exp(-1/xi)),0,1,add=TRUE,type="p")
```

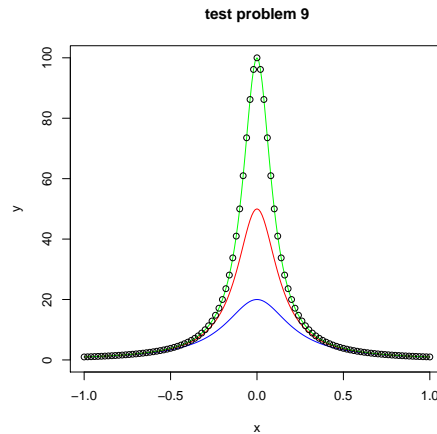


Figure 10: Solution of the BVP ODE problem 9, see text for R-code

## 2.9. problem 9

$$(\xi + x^2)y'' + 4xy' + 2y = 0$$

$$y_{(x=-1)} = y_{(x=1)} = 1/(1 + \xi)$$

This problem cannot be solved by the shooting method

```
> Prob9 <- function(x, y, pars) {
+   list(c( y[2], -1/(xi+x^2)*(4*x*y[2]+2*y[1]) ))
+ }
> xi <-0.05
> twp  <- bvptwp(yini=c(1/(1+xi),NA),yend=c(1/(1+xi),NA),x=seq(-1,1,by=0.01),
+               func=Prob9, guess=0)
> xi <-0.02
> twp2 <- bvptwp(yini=c(1/(1+xi),NA),yend=c(1/(1+xi),NA),x=seq(-1,1,by=0.01),
+               func=Prob9, guess=0)
> xi <-0.01
> mod  <- bvpcolmod(yini=c(1/(1+xi),NA),yend=c(1/(1+xi),NA),x=seq(-1,1,by=0.01),
+                  func=Prob9, guess=0)

> plot(twp[,1],twp[,2],type="l",main="test problem 9", ylim=c(0,100),
+      col="blue",xlab="x",ylab="y")
> lines(twp2[,1],twp2[,2],col="red")
> lines(mod[,1],mod[,2],col="green")
> # exact
> curve(1/(xi+x^2),-1,1,type="p",add=TRUE)
```

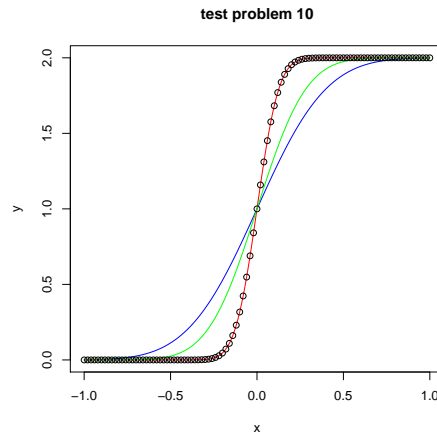


Figure 11: Solution of the BVP ODE problem 10, see text for R-code

## 2.10. problem 10

$$\xi y'' + xy' = 0$$

$$y(x=-1) = 0$$

$$y(x=1) = 2$$

```
> Prob10 <- function(x, y, pars) {
+   list(c( y[2], -1/xi*x*y[2] ))
+ }
> xi <- 0.1
> shoot <- bvpshoot(yini=c(0,NA),yend=c(2,NA),x=seq(-1,1,by=0.01),
+   func=Prob10, guess=0,atol=1e-10)
> xi <- 0.05
> twp <- bvptwp(yini=c(0,NA),yend=c(2,NA),x=seq(-1,1,by=0.01),
+   func=Prob10, guess=0)
> xi <- 0.01
> mod <- bvpcolmod(yini=c(0,NA),yend=c(2,NA),x=seq(-1,1,by=0.01),
+   func=Prob10, guess=0)

> plot(shoot[,1],shoot[,2],type="l",main="test problem 10",
+   col="blue",xlab="x",ylab="y")
> lines(mod[,1],mod[,2],col="red")
> lines(twp[,1],twp[,2],col="green")
> erf <- function(x) 2 * pnorm(x * sqrt(2)) - 1
> curve(1+erf(x/sqrt(2*xi))/erf(1/sqrt(2*xi)),-1,1,type="p",add=TRUE)
```



## 2.11. problem 11

$$\xi y'' - y = -(\xi \pi^2 + 1) \cos(\pi x)$$

$$y_{(x=-1)} = -1$$

$$y_{(x=1)} = -1$$

All xi give the same result

```
> Prob11 <- function(x, y, pars) {
+   list(c(y[2], 1/xi*(y[1]-(xi*pi*pi+1)*cos(pi*x)) ))
+ }
> xi <-0.1
> # Shooting
> print(system.time(
+ shoot <- bvpshoot(yini=c(-1,NA),yend=c(-1,NA),x=seq(-1,1,by=0.01),
+   func=Prob11, guess=0,atol=1e-10)
+ ))

      user system elapsed
      0.03   0.00   0.03

> print(system.time(
+ twp <- bvptwp(yini=c(-1,NA),yend=c(-1,NA),x=seq(-1,1,by=0.01),
+   func=Prob11, guess=0,atol=1e-10)
+ ))

      user system elapsed
      0.12   0.00   0.13

> print(system.time(
+ mod <- bvpcolmod(yini=c(-1,NA),yend=c(-1,NA),x=seq(-1,1,by=0.01),
+   func=Prob11, guess=0,atol=1e-10)
+ ))

      user system elapsed
      0.70   0.00   0.71

> plot(shoot[,1],shoot[,2],type="l",main="test problem 11",
+   col="blue",xlab="x",ylab="y")
> lines(mod[,1],mod[,2],col="red")
> lines(twp[,1],twp[,2],col="green")
> curve(cos(pi*x),-1,1,type="p",add=TRUE)
```

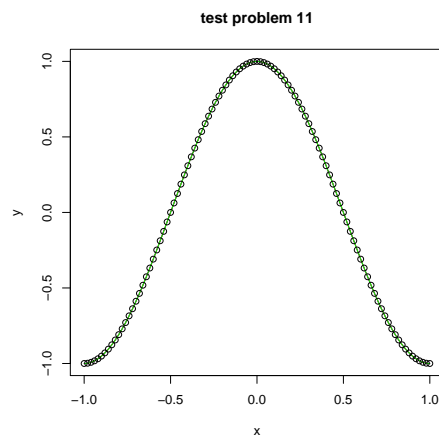


Figure 12: Solution of the BVP ODE problem 11, see text for R-code

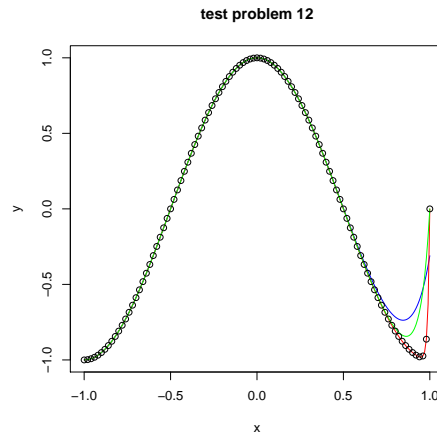


Figure 13: Solution of the BVP ODE problem 12, see text for R-code

## 2.12. problem 12

The same as problem 11, but with different boundary values:

$$\begin{aligned}\xi y'' &= y = -(\xi\pi^2 + 1)\cos(\pi x) \\ y_{(x=-1)} &= -1 \\ y_{(x=1)} &= 0\end{aligned}$$

```
> Prob12 <- function(x, y, pars) {
+   list(c(y[2], 1/xi*(y[1]-(xi*pi*pi+1)*cos(pi*x))))
+ }
> xi <-0.01
> shoot <- bvpshoot(yini=c(-1,NA),yend=c(0,NA),x=seq(-1,1,by=0.01),
+   func=Prob12, guess=0)
> xi <-0.0025
> twp <- bvptwp(yini=c(-1,NA),yend=c(0,NA),x=seq(-1,1,by=0.01),
+   func=Prob12, guess=0)
> xi <-0.0001
> mod <- bvpcolmod(yini=c(-1,NA),yend=c(0,NA),x=seq(-1,1,by=0.01),
+   func=Prob12, guess=0)

> plot(shoot[,1],shoot[,2],type="l",main="test problem 12",
+   col="blue",xlab="x",ylab="y")
> lines(mod[,1],mod[,2],col="red")
> lines(twp[,1],twp[,2],col="green")
> curve(cos(pi*x)+exp((x-1)/sqrt(xi)),-1,1,type="p",add=TRUE)
```

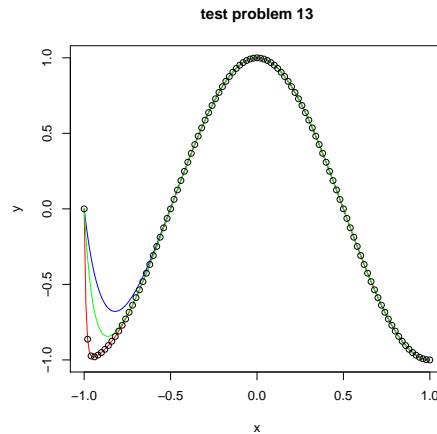


Figure 14: Solution of the BVP ODE problem 13, see text for R-code

### 2.13. problem 13

The same as problem 11, but with different boundary values:

$$\begin{aligned}\xi y'' &= y = -(\xi\pi^2 + 1)\cos(\pi x) \\ y_{(x=-1)} &= 0 \\ y_{(x=1)} &= -1\end{aligned}$$

```
> Prob13 <- function(x, y, pars) {
+   list(c( y[2], 1/xi*(y[1]-(xi*pi*pi+1)*cos(pi*x)) ))
+ }
> xi <-0.01
> shoot <- bvpshoot(yini=c(0,NA),yend=c(-1,NA),x=seq(-1,1,by=0.01),
+   func=Prob13, guess=0)
> xi <-0.0025
> twp <- bvptwp(yini=c(0,NA),yend=c(-1,NA),x=seq(-1,1,by=0.01),
+   func=Prob13, guess=0)
> xi <-0.0001
> mod <- bvpcolmod(yini=c(0,NA),yend=c(-1,NA),x=seq(-1,1,by=0.01),
+   func=Prob13, guess=0)

> plot(shoot[,1],shoot[,2],type="l",main="test problem 13",
+   col="blue",xlab="x",ylab="y")
> lines(mod[,1],mod[,2],col="red")
> lines(twp[,1],twp[,2],col="green")
> curve(cos(pi*x)+exp(-(x+1)/sqrt(xi)),-1,1,type="p",add=TRUE)
```

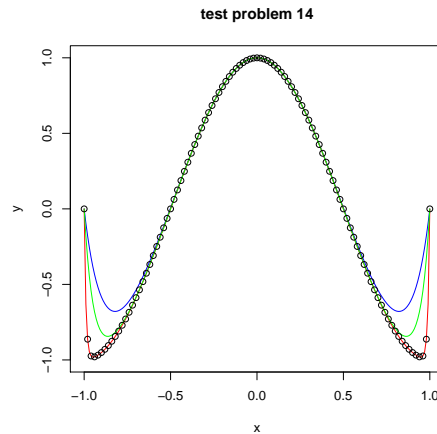


Figure 15: Solution of the BVP ODE problem 14, see text for R-code

## 2.14. problem 14

The same as problem 11, but with different boundary values:

$$\begin{aligned} \xi y'' &= y = -(\xi\pi^2 + 1)\cos(\pi x) \\ y_{(x=-1)} &= 0 \\ y_{(x=1)} &= -1 \end{aligned}$$

```
> Prob14 <- function(x, y, pars) {
+   list(c( y[2], 1/xi*(y[1]-(xi*pi*pi+1)*cos(pi*x))))
+ }
> xi <-0.01
> shoot <- bvpshoot(yini=c(0,NA),yend=c(0,NA),x=seq(-1,1,by=0.01),
+   func=Prob14, guess=0)
> xi <-0.0025
> twp <- bvptwp(yini=c(0,NA),yend=c(0,NA),x=seq(-1,1,by=0.01),
+   func=Prob14, guess=0)
> xi <-0.0001
> mod <- bvpcolmod(yini=c(0,NA),yend=c(0,NA),x=seq(-1,1,by=0.01),
+   func=Prob14, guess=0)

> plot(shoot[,1],shoot[,2],type="l",main="test problem 14", ylim=c(-1,1),
+   col="blue",xlab="x",ylab="y")
> lines(mod[,1],mod[,2],col="red")
> lines(twp[,1],twp[,2],col="green")
> curve(cos(pi*x)+exp((x-1)/sqrt(xi))+exp(-(x+1)/sqrt(xi)),-1,1,type="p",add=TRUE)
```

## 2.15. problem 15

$$\xi y'' - xy = 0$$

$$y_{(x=-1)} = y_{(x=1)} = 1$$

```

> Prob15 <- function(x, y, pars) {
+   list(c( y[2], 1/xi*x*y[1] ))
+ }
> xi <-0.003
> # Shooting
> print(system.time(
+ shoot  <- bvpshoot(yini=c(1,NA),yend=c(1,NA),x=seq(-1,1,by=0.01),
+                   func=Prob15, guess=0)
+ ))

      user  system elapsed
      0.08    0.00    0.08

> xi <- 0.005
> print(system.time(
+ twp    <- bvptwp(yini=c(1,NA),yend=c(1,NA),x=seq(-1,1,by=0.01),
+                 func=Prob15, guess=0)
+ ))

      user  system elapsed
      0.08    0.00    0.08

> xi <- 0.01
> print(system.time(
+ mod     <- bvpcolmod(yini=c(1,NA),yend=c(1,NA),x=seq(-1,1,by=0.01),
+                    func=Prob15, guess=0)
+ ))

      user  system elapsed
      0.72    0.00    0.72

> plot(shoot[,1],shoot[,2],type="l",main="test problem 15",
+      col="blue",xlab="x",ylab="y")
> lines(twp[,1],twp[,2],col="red")
> lines(mod[,1],mod[,2],col="green")

```

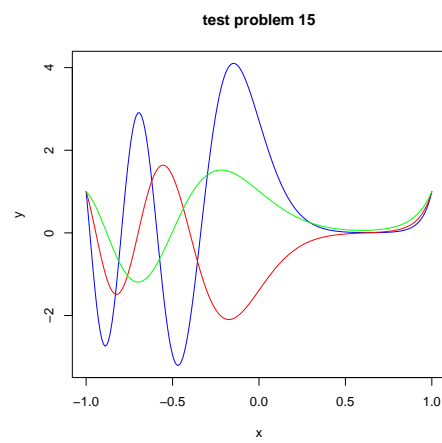


Figure 16: Solution of the BVP ODE problem 15, see text for R-code

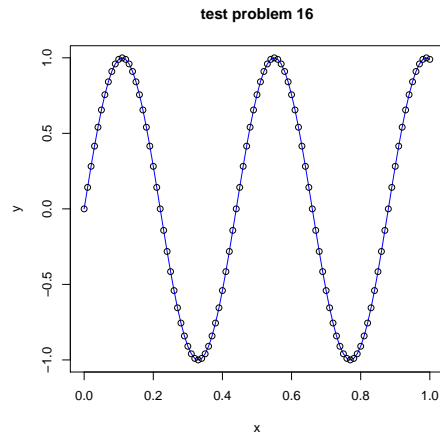


Figure 17: Solution of the BVP ODE problem 16, see text for R-code

**2.16. problem 16**

$$\xi^2 y'' + \pi^2 y/4 = 0$$

$$y_{(x=0)} = 0$$

$$y_{(x=1)} = \sin(\pi x/2\xi)$$

```
> Prob16 <- function(x, y, pars) {
+   list(c( y[2], -1/xi^2*pi^2*y[1]/4 ))
+ }
> xi <-0.11
> # Shooting
> print(system.time(
+ shoot <- bvpshoot(yini=c(0,NA),yend=c(sin(pi/2/xi),NA),x=seq(0,1,by=0.01),
+   func=Prob16, guess=0,atol=1e-10)
+ ))
```

```
user  system elapsed
0.09   0.00   0.09
```

```
> plot(shoot[,1],shoot[,2],type="l",main="test problem 16",
+   col="blue",xlab="x",ylab="y")
> curve(sin(pi*x/2/xi),0,1,type="p",add=TRUE)
```



## 2.17. problem 17

$$y'' = -3\xi y/(\xi + x^2)^2$$

$$y_{(x=0.1)} = -y(-0.1) = 0.1\sqrt{(\xi + 0.01)}$$

only bvptwp works.

```
> Prob17 <- function(x, y, pars) {
+   list(c( y[2], -3*xi*y[1]/(xi+x^2)^2 ))
+ }
> xseq<-seq(-0.1,0.1,by=0.001)
> xi <-0.01
> twp1 <- bvptwp(yini=c(-0.1/sqrt(xi+0.01),NA),
+               yend=c(0.1/sqrt(xi+0.01),NA),x=xseq,
+               func=Prob17, guess=0,atol=1e-10)
> xi <- 0.001
> twp2 <- bvptwp(yini=c(-0.1/sqrt(xi+0.01),NA),
+               yend=c(0.1/sqrt(xi+0.01),NA),x=xseq,
+               func=Prob17, guess=0,atol=1e-8)
> xi <- 0.0001
> twp3 <- bvptwp(yini=c(-0.1/sqrt(xi+0.01),NA),
+               yend=c(0.1/sqrt(xi+0.01),NA),x=xseq,
+               func=Prob17, guess=0,atol=1e-8)

> plot(twp1[,1],twp1[,2],type="l",main="test problem 17",ylim=c(-1,1),
+      col="blue",xlab="x",ylab="y")
> lines(twp2[,1],twp2[,2],col="red")
> lines(twp3[,1],twp3[,2],col="red")
> curve(x/sqrt(xi+x^2),-0.1,0.1,type="p",add=TRUE)
```

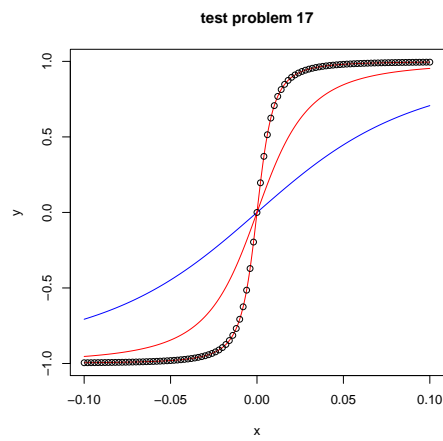


Figure 18: Solution of the BVP ODE problem 17, see text for R-code

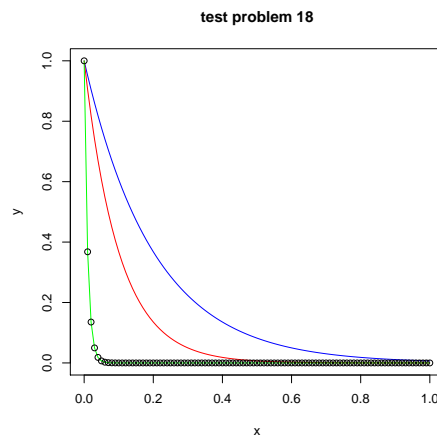


Figure 19: Solution of the BVP ODE problem 18, see text for R-code

## 2.18. problem 18

$$\begin{aligned}\xi y'' &= -y' \\ y_{(x=0)} &= 1 \\ y_{(x=1)} &= -x/\xi\end{aligned}$$

```
> Prob18 <- function(x, y, pars) {
+   list(c( y[2], -1/xi*y[2]) )
+ }
> xseq<-seq(0,1,by=0.01)
> xi <-0.2
> shoot <- bvpshoot(yini=c(1,NA),yend=c(exp(-1/xi),NA),x=xseq,
+                   func=Prob18, guess=0,atol=1e-10)
> xi <- 0.1
> twp <- bvptwp(yini=c(1,NA),yend=c(exp(-1/xi),NA),x=xseq,
+               func=Prob18, guess=0,atol=1e-10)
> xi <- 0.01
> mod <- bvpcolmod(yini=c(1,NA),yend=c(exp(-1/xi),NA),x=xseq,
+                  func=Prob18, guess=0,atol=1e-10)

> plot(shoot[,1],shoot[,2],type="l",main="test problem 18",ylim=c(0,1),
+       col="blue",xlab="x",ylab="y")
> lines(twp[,1],twp[,2],col="red")
> lines(mod[,1],mod[,2],col="green")
> curve(exp(-x/xi),0,1,type="p",add=TRUE)
```

### 3. nonlinear problems

For the nonlinear problems, the analytical solution is often not known.

#### 3.1. problem 19

$$\xi y'' + \exp(y)y' - \frac{\pi}{2} \sin(\pi x/2) \exp(2y) = 0$$

$$y_{(x=0)} = y_{(x=1)} = 0$$

```
> Prob19 <- function(t, y, pars, ksi) {
+   pit = pi*t
+   list(c(y[2], (pi/2*sin(pit/2)*exp(2*y[1]) - exp(y[1])*y[2])/ksi))
+ }
> xi <- 0.05
> shoot <- bvpshoot(yini=c(0,NA),yend=c(0,NA),x=seq(0,1,by=0.01),
+   func=Prob19, guess=0,ksi=xi)
> xi <- 0.03
> twp <- bvptwp(yini=c(0,NA),yend=c(0,NA),x=seq(0,1,by=0.01),
+   func=Prob19, guess=0,ksi=xi,atol=1e-15)
> xi <- 0.005
> print(system.time(
+
+ mod <- bvpcolmod(yini=c(0,NA),yend=c(0,NA),x=seq(0,1,by=0.01),
+   func=Prob19, guess=0,ksi=xi, atol=1e-10)
+ ))

      user  system elapsed
      3.38    0.00    3.37

> # same, using continuation
> print(system.time(
+ solcol3 <- bvpcolmod(yini=c(0,NA),yend=c(0,NA),x=seq(0,1,by=0.01),
+   func=Prob19, guess=0,eps=xi)
+ ))

      user  system elapsed
      0.72    0.00    0.72

> plot(shoot[,1],shoot[,2],type="l",main="test problem 19", ylim=c(-0.7,0),
+   col="blue",xlab="x",ylab="y")
> lines(twp[,1],twp[,2],col="red")
> lines(mod[,1],mod[,2],col="green")
```

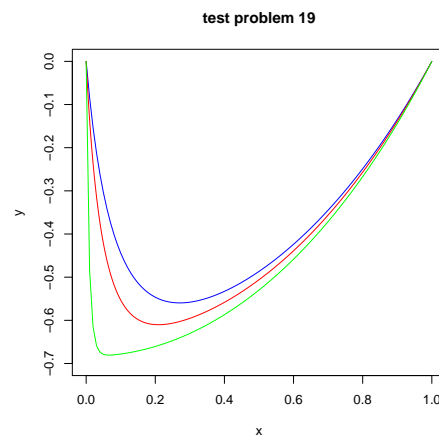


Figure 20: Solution of the BVP ODE problem 19, see text for R-code

## 3.2. problem 20

$$\xi y'' + y'^2 = 1$$

$$y_{x=0} = 1 + \xi \ln(\cosh(0.745/\xi))$$

$$y_{x=1} = 1 + \xi \ln(\cosh(0.255/\xi))$$

```

> Prob20 <- function(x, y, pars, xi) {
+   list(c( y[2] , 1/xi *(1-y[2]^2) ))
+ }
> xi <-0.5
> ini <- c(1+xi * log(cosh(0.745/xi)),NA)
> end <- c(1+xi * log(cosh(0.255/xi)),NA)
> mod1 <- bvpcolmod(yini=ini,yend=end,x=seq(0,1,by=0.01),
+   func=Prob20, guess=0, eps=xi)
> xi <-0.3
> ini <- c(1+xi * log(cosh(0.745/xi)),NA)
> end <- c(1+xi * log(cosh(0.255/xi)),NA)
> mod2 <- bvpcolmod(yini=ini,yend=end,x=seq(0,1,by=0.01),
+   func=Prob20, guess=0, eps=xi)
> xi <-0.01
> ini <- c(1+xi * log(cosh(0.745/xi)),NA)
> end <- c(1+xi * log(cosh(0.255/xi)),NA)
> mod3 <- bvpcolmod(yini=ini,yend=end,x=seq(0,1,by=0.01),
+   func=Prob20, guess=0, eps=xi)

> plot(mod1[,1],mod1[,2],type="l",main="test problem 20", ylim=c(1,1.8),
+   col="blue",xlab="x",ylab="y")
> lines(mod2[,1],mod2[,2],col="red")
> lines(mod3[,1],mod3[,2],col="green")
> curve(1+xi * log(cosh((x-0.745)/xi)),0,1,add=TRUE,type="p")

```

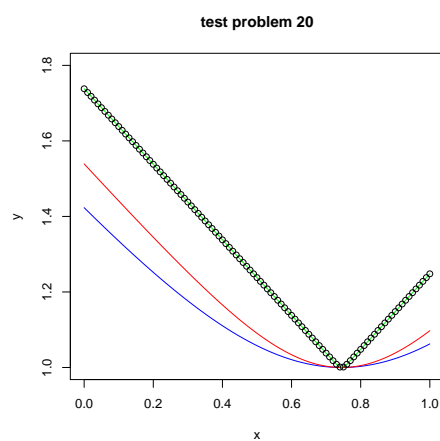


Figure 21: Solution of the BVP ODE problem 20, see text for R-code

## 3.3. problem 21

$$\begin{aligned}\xi y'' &= y + y^2 - \exp(-2x/\sqrt{\xi}) \\ y_{x=0} &= 1 \\ y_{x=1} &= \exp(-1/\sqrt{\xi})\end{aligned}$$

```
> Prob21 <- function(x, y, pars, xi) {
+   list(c( y[2], 1/xi *(y[1]+y[1]^2-exp(-2*x/sqrt(xi)))) ))
+ }
> ini <- c(1,NA)
> xi <-0.2
> end <- c(exp(-1/sqrt(xi)),NA)
> shoot <- bvpsshoot(yini=ini,yend=end,x=seq(0,1,by=0.01),
+   func=Prob21, guess=0, xi=xi)
> xi <-0.1
> end <- c(exp(-1/sqrt(xi)),NA)
> twp <- bvptwp(yini=ini,yend=end,x=seq(0,1,by=0.01),
+   func=Prob21, guess=0, xi=xi)
> xi <-0.01
> end <- c(exp(-1/sqrt(xi)),NA)
> mod <- bvpcolmod(yini=ini,yend=end,x=seq(0,1,by=0.01),
+   func=Prob21, guess=0, eps=xi)

> plot(shoot[,1],shoot[,2],type="l",main="test problem 21", ylim=c(0,1),
+   col="blue",xlab="x",ylab="y")
> lines(twp[,1],twp[,2],col="red")
> lines(mod[,1],mod[,2],col="green")
> curve(exp(-x/sqrt(xi)),0,1,add=TRUE,type="p")
```



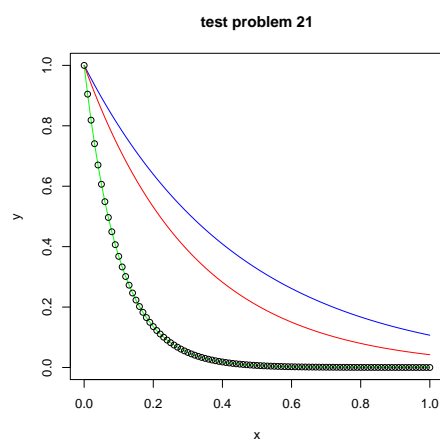


Figure 22: Solution of the BVP ODE problem 21, see text for R-code

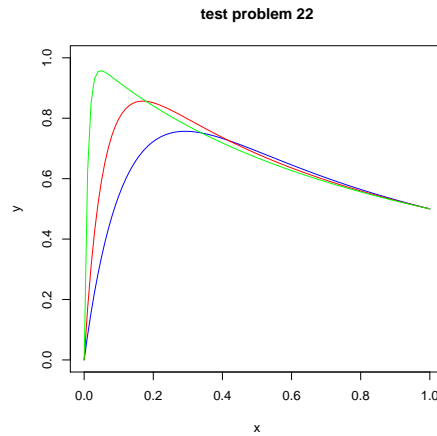


Figure 23: Solution of the BVP ODE problem 22, see text for R-code

### 3.4. problem 22

$$\begin{aligned}\xi y'' + y' + y^2 &= 0 \\ y_{x=0} &= 0 \\ y_{x=1} &= 1/2\end{aligned}$$

```
> Prob22 <- function(t, y, pars, xi) {
+   list(c( y[2], -1/xi *(y[2]+y[1]^2) ))
+ }
> ini <- c(0,NA)
> end <- c(1/2,NA)
> xi <-0.1
> shoot <- bvpshoot(yini=ini,yend=end,x=seq(0,1,by=0.01),
+   func=Prob22, guess=0, xi=xi)
> xi <-0.05
> twp <- bvptwp(yini=ini,yend=end,x=seq(0,1,by=0.01),
+   func=Prob22, guess=0, xi=xi)
> xi <- 0.01
> mod <- bvpcolmod(yini=ini,yend=end,x=seq(0,1,by=0.01),
+   func=Prob22, guess=0,xi=xi)

> plot(shoot[,1],shoot[,2],type="l",main="test problem 22", ylim=c(0,1),
+   col="blue",xlab="x",ylab="y")
> lines(twp[,1],twp[,2],col="red")
> lines(mod[,1],mod[,2],col="green")
```

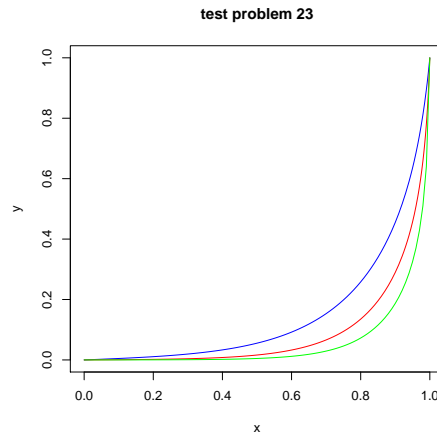


Figure 24: Solution of the BVP ODE problem 23, see text for R-code

### 3.5. problem 23

This is a difficult problem that cannot be solved with `bvpshoot`

$$y'' = \mu \sinh(\mu y)$$

$$y(x=0) = y(x=1) = 1$$

```
> Prob23 <- function(t, y, pars, xi) {
+   list(c( y[2], sinh(y[1]/xi)/xi )
+ }
> ini <- c(0,NA)
> end <- c(1,NA)
> xi <- 1/5
> twp1 <- bvptwp(yini=ini,yend=end,x=seq(0,1,by=0.01),
+   func=Prob23, guess=c(0),xi=xi)
> xi <- 1/7
> twp <- bvptwp(yini=ini,yend=end,x=seq(0,1,by=0.01),
+   func=Prob23, guess=0,xi=xi)
> xi <- 1/9
> mod <- bvpcolmod(yini=ini,yend=end,x=seq(0,1,by=0.01),
+   func=Prob23, guess=0,xi=xi)

> plot(twp1[,1],twp1[,2],type="l",main="test problem 23",
+   col="blue",xlab="x",ylab="y")
> lines(twp[,1],twp[,2],col="red")
> lines(mod[,1],mod[,2],col="green")
```

### 3.6. problem 24

This is a particularly difficult problem to solve

$$\xi A(x)yy'' - \left(\frac{1+1.4}{2} - \xi A'(x)\right)yy' + \frac{y'}{y} + \frac{A'(x)}{A(x)}\left(1 - \frac{1.4-1}{2}y^2\right) = 0$$

$$A(x) = 1 + x^2$$

$$y_{(x=0)} = 0.9129$$

$$y_{(x=1)} = 0.375$$

```
> Prob24 <- function(t, y, pars, xi) {
+   A <- 1+t*t
+   AA <- 2*t
+   ga <- 1.4
+   list(c(y[2],
+         (((1+ga)/2 -xi*AA)*y[1]*y[2]-y[2]/y[1]-
+         (AA/A)*(1-(ga-1)*y[1]^2/2))/(xi*A*y[1]))
+   )
+ }
> ini <- c(0.9129,NA)
> end <- c(0.375,NA)
```

Neither shooting nor bvptwp work...

and bvpcolmod works only with eps sufficiently large...

```
> xi <-0.03
> mod1 <- bvpcolmod(yini=ini,yend=end,x=seq(0,1,by=0.01),
+   func=Prob24, guess=0 ,eps=xi)
> xi <-0.01
> mod2 <- bvpcolmod(yini=ini,yend=end,x=seq(0,1,by=0.01),
+   func=Prob24, guess=0 ,eps=xi)
> xi <-0.0015
> mod3 <- bvpcolmod(yini=ini,yend=end,x=seq(0,1,by=0.01),
+   func=Prob24, guess= c(0) ,eps=xi)

> plot(mod1[,1],mod1[,2],type="l",main="test problem 24", ylim=c(0.2,1.4),
+   col="blue",xlab="x",ylab="y")
> lines(mod2[,1],mod2[,2],col="red")
> lines(mod3[,1],mod3[,2],col="green")
```

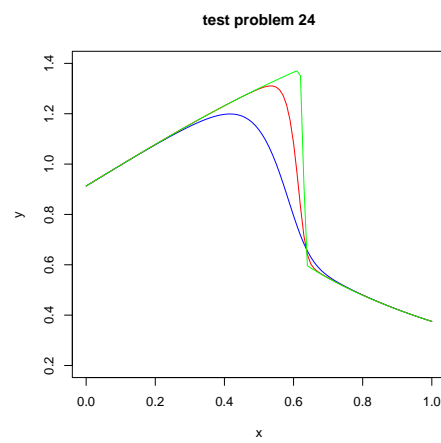


Figure 25: Solution of the BVP ODE problem 24, see text for R-code

### 3.7. problem 25

Now come a series of similar problems (problem 25-29), that differ only by their boundary conditions:

The differential equation is:

$$\xi y'' + yy' - y = 0$$

For problem 25, the boundary conditions are:

$$y_{x=0} = -1/3$$

$$y_{x=1} = 1/3$$

These problems are most easily solved with `bvptwp`

```
> Prob25 <- function(t, y, pars, xi) {
+   list(c( y[2], -1/xi *(y[1]*y[2]-y[1]) ))
+ }
> ini <- c(-1/3,NA)
> end <- c(1/3,NA)
> xi <-0.1
> twp1 <- bvptwp(yini=ini,yend=end,x=seq(0,1,by=0.01),
+               func=Prob25, guess=0, xi=xi)
> xi <-0.01
> twp2 <- bvptwp(yini=ini,yend=end,x=seq(0,1,by=0.01),
+               func=Prob25, guess=0,xi=xi)
```

This problem can also be solved with `bvpcolmod`, but only when treating  $\xi$  as a continuation parameter (`eps`):

```
> xi <- 0.001
> mod <- bvpcolmod(yini=ini,yend=end,x=seq(0,1,by=0.01),
+                 func=Prob25, guess=0,eps=xi)

> plot(twp1[,1],twp1[,2],type="l",main="test problem 25",
+      col="blue",xlab="x",ylab="y")
> lines(twp2[,1],twp2[,2],col="red")
> lines(mod[,1],mod[,2],col="green")
```

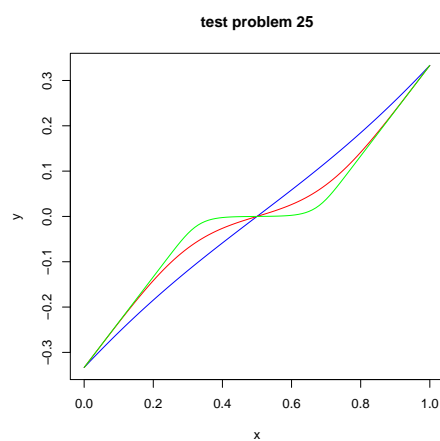


Figure 26: Solution of the BVP ODE problem 25, see text for R-code

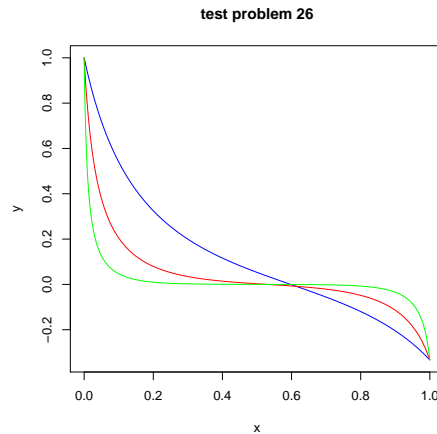


Figure 27: Solution of the BVP ODE problem 26, see text for R-code

### 3.8. problem 26

This problem equals previous problem, but with different boundary conditions:

$$\begin{aligned} y_{x=0} &= 1 \\ y_{x=1} &= -1/3 \end{aligned}$$

```
> Prob26 <- function(t, y, pars, xi) {
+   list(c( y[2], -1/xi *(y[1]*y[2]-y[1]) ))
+ }
> ini <- c(1,NA)
> end <- c(-1/3,NA)
> xi <- -0.1
> twp1 <- bvptwp(yini=ini,yend=end,x=seq(0,1,by=0.01),
+   func=Prob26, guess=0,xi=xi)
> xi <- -0.02
> twp2 <- bvptwp(yini=ini,yend=end,x=seq(0,1,by=0.01),
+   func=Prob26, guess=0,xi=xi)
> xi <- -0.005
> twp3 <- bvptwp(yini=ini,yend=end,x=seq(0,1,by=0.01),
+   func=Prob26, guess=0,xi=xi)

> plot(twp1[,1],twp1[,2],type="l",main="test problem 26",
+   col="blue",xlab="x",ylab="y")
> lines(twp2[,1],twp2[,2],col="red")
> lines(twp3[,1],twp3[,2],col="green")
```



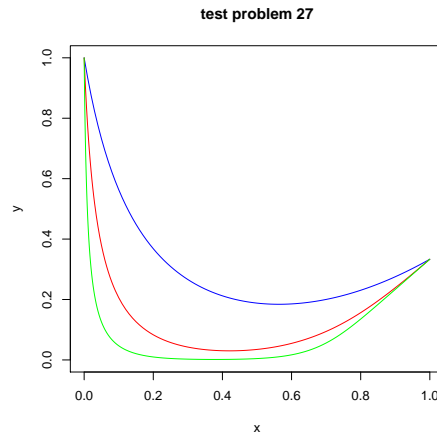


Figure 28: Solution of the BVP ODE problem 27, see text for R-code

### 3.9. problem 27

This problem equals previous problem, but with different boundary conditions:

$$y_{x=0} = 1$$

$$y_{x=1} = 1/3$$

```
> Prob27 <- function(t, y, pars, xi) {
+   list(c( y[2], -1/xi *(y[1]*y[2]-y[1]) ))
+ }
> ini <- c(1,NA)
> end <- c(1/3,NA)
> xi <- -0.1
> twp1 <- bvptwp(yini=ini,yend=end,x=seq(0,1,by=0.01),
+   func=Prob27, guess=0,xi=xi)
> xi <- -0.02
> twp2 <- bvptwp(yini=ini,yend=end,x=seq(0,1,by=0.01),
+   func=Prob27, guess=0,xi=xi)
> xi <- -0.005
> twp3 <- bvptwp(yini=ini,yend=end,x=seq(0,1,by=0.01),
+   func=Prob27, guess=0,xi=xi)

> plot(twp1[,1],twp1[,2],type="l",main="test problem 27", ylim=c(0,1),
+   col="blue",xlab="x",ylab="y")
> lines(twp2[,1],twp2[,2],col="red")
> lines(twp3[,1],twp3[,2],col="green")
```

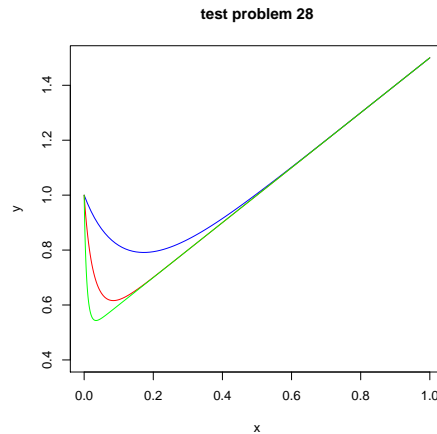


Figure 29: Solution of the BVP ODE problem 28, see text for R-code

### 3.10. problem 28

This problem equals previous problem, but with different boudnary conditions:

$$y_{x=0} = 1$$

$$y_{x=1} = 3/2$$

```
> Prob28 <- function(t, y, pars, xi) {
+   list(c( y[2], -1/xi *(y[1]*y[2]-y[1]) ))
+ }
> ini <- c(1,NA)
> end <- c(3/2,NA)
> xi <-0.1
> twp1 <- bvptwp(yini=ini,yend=end,x=seq(0,1,by=0.01),
+   func=Prob28, guess=0,xi=xi)
> xi <-0.02
> twp2 <- bvptwp(yini=ini,yend=end,x=seq(0,1,by=0.01),
+   func=Prob28, guess=0,xi=xi)
> xi <-0.005
> twp3 <- bvptwp(yini=ini,yend=end,x=seq(0,1,by=0.01),
+   func=Prob28, guess=0,xi=xi)

> plot(twp1[,1],twp1[,2],type="l",main="test problem 28", ylim=c(0.4,1.5),
+   col="blue",xlab="x",ylab="y")
> lines(twp2[,1],twp2[,2],col="red")
> lines(twp3[,1],twp3[,2],col="green")
```

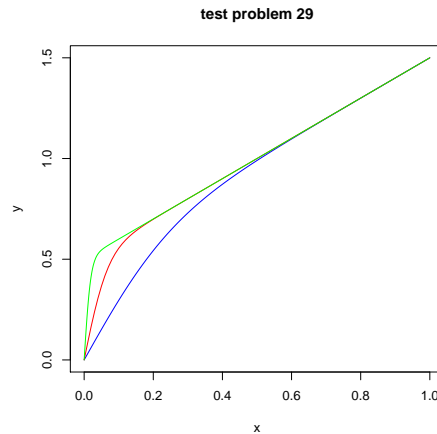


Figure 30: Solution of the BVP ODE problem 29, see text for R-code

### 3.11. problem 29

This problem equals previous problem, but with different boundary conditions:

$$y_{x=0} = 0$$

$$y_{x=1} = 3/2$$

```
> Prob29 <- function(t, y, pars, xi) {
+   list(c( y[2], -1/xi *(y[1]*y[2]-y[1]) ))
+ }
> ini <- c(0,NA)
> end <- c(3/2,NA)
> xi <- -0.1
> twp1 <- bvptwp(yini=ini,yend=end,x=seq(0,1,by=0.01),
+   func=Prob29, guess=0,xi=xi)
> xi <- -0.02
> twp2 <- bvptwp(yini=ini,yend=end,x=seq(0,1,by=0.01),
+   func=Prob29, guess=0,xi=xi)
> xi <- -0.005
> twp3 <- bvptwp(yini=ini,yend=end,x=seq(0,1,by=0.01),
+   func=Prob29, guess=0,xi=xi)

> plot(twp1[,1],twp1[,2],type="l",main="test problem 29",
+   col="blue",xlab="x",ylab="y")
> lines(twp2[,1],twp2[,2],col="red")
> lines(twp3[,1],twp3[,2],col="green")
```

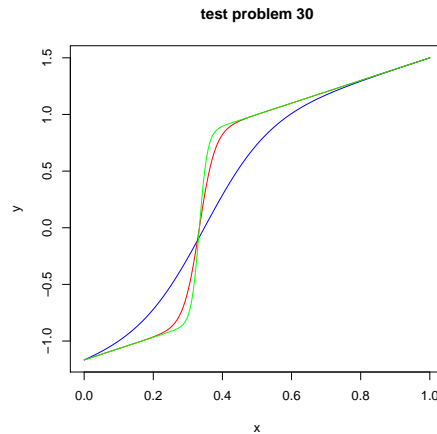


Figure 31: Solution of the BVP ODE problem 30, see text for R-code

### 3.12. problem 30

Similar to previous problems, with different boundary conditions:

$$y_{x=0} = -7/6$$

$$y_{x=1} = 3/2$$

```
> Prob30 <- function(t, y, pars, xi) {
+   list(c( y[2], -1/xi *(y[1]*y[2]-y[1]) ))
+ }
> ini <- c(-7/6,NA)
> end <- c(3/2,NA)
> xi <-0.1
> twp1 <- bvptwp(yini=ini,yend=end,x=seq(0,1,by=0.01),
+   func=Prob30, guess=0,xi=xi)
> xi <-0.02
> twp2 <- bvptwp(yini=ini,yend=end,x=seq(0,1,by=0.01),
+   func=Prob30, guess=0,xi=xi)
> xi <-0.01
> twp3 <- bvptwp(yini=ini,yend=end,x=seq(0,1,by=0.01),
+   func=Prob30, guess=0,xi=xi)

> plot(twp1[,1],twp1[,2],type="l",main="test problem 30",
+   col="blue",xlab="x",ylab="y")
> lines(twp2[,1],twp2[,2],col="red")
> lines(twp3[,1],twp3[,2],col="green")
```

## 3.13. problem 31

$$\begin{aligned}
y' &= \sin(\theta) \\
\theta' &= M \\
\xi M' &= -Q \\
\xi Q' &= (y-1)\cos(\theta) - MT \\
T &= \sec(\theta) + \xi Q \tan(\theta)
\end{aligned}$$

where

$$y_{x=0} = y_{x=1} = M_{x=0} = M_{x=1} = 0$$

```

> Prob31 <- function(t, Y, pars) {
+   with (as.list(Y), {
+     dy    <- sin(Tet)
+     dTet  <- M
+     dM    <- -Q/xi
+     T <- 1/cos (Tet) +xi*Q*tan(Tet)
+     dQ    <- 1/xi*((y-1)*cos(Tet)-M*T)
+     list(c( dy, dTet, dM, dQ))
+   })
+ }
> ini <- c(y=0,Tet=NA,M=0,Q=NA)
> end <- c(y=0,Tet=NA,M=0,Q=NA)

```

Shooting does not work...

But both collocation methods do...

```

> xi <-0.1
> twp  <- bvptwp(yini=ini,yend=end,x=seq(0,1,by=0.01),
+               func=Prob31, guess=c(0,0),atol=1e-10)
> xi <- 0.05
> mod  <- bvpcolmod(yini=ini,yend=end,x=seq(0,1,by=0.01),
+                 func=Prob31, guess=c(0,0),atol=1e-10)
> xi <- 0.01
> mod2 <- bvpcolmod(yini=ini,yend=end,x=seq(0,1,by=0.01),
+                 func=Prob31, guess=c(0,0),atol=1e-10)

> plot(twp[,1],twp[,4],type="l",main="test problem 31",
+      col="blue",xlab="x",ylab="y3")
> lines(mod[,1],mod[,4],col="red")
> lines(mod2[,1],mod2[,4],col="green")

```

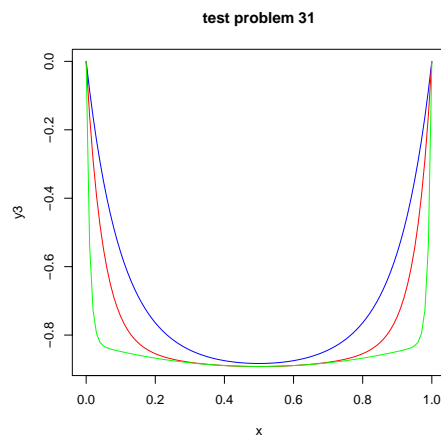


Figure 32: Solution of the BVP ODE problem 31, see text for R-code

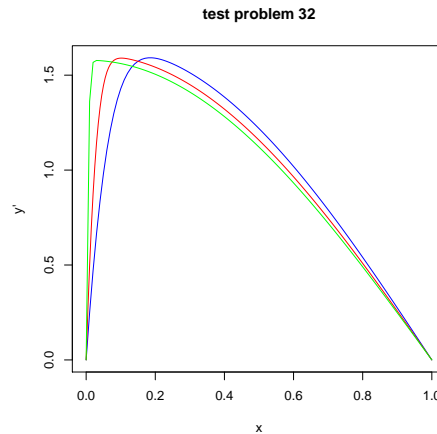


Figure 33: Solution of the BVP ODE problem 32, see text for R-code

### 3.14. problem 32

$$y'''' = 1/\xi(y'y'' - yy''')$$

where

$$y_{x=0} = y'_{x=0} = 0, y_{x=1} = 1, y'_{x=1} = 0$$

```
> Prob32 <- function(t, y, pars, xi) {
+   list(c( y[2], y[3], y[4], 1/xi*(y[2]*y[3]-y[1]*y[4])))
+ }
> ini <- c(0,0,NA,NA)
> end <- c(1,0,NA,NA)
> xi <-0.01
> twp <- bvptwp(yini=ini,yend=end,x=seq(0,1,by=0.01),
+   func=Prob32, guess=c(0,0), xi=xi)
> xi <-0.002
> twp2 <- bvptwp(yini=ini,yend=end,x=seq(0,1,by=0.01),
+   func=Prob32, guess=c(0,0), xi=xi)
> xi <-0.0001
> mod <- bvpcolmod(yini=ini,yend=end,x=seq(0,1,by=0.01),
+   func=Prob32, guess=c(0,0), xi=xi)

> plot(twp[,1],twp[,3],type="l",main="test problem 32",
+   col="blue",xlab="x",ylab="y'")
> lines(twp2[,1],twp2[,3],col="red")
> lines(mod[,1],mod[,3],col="green")
```

**3.15. problem 33**

$$\begin{aligned}\xi z'''' &= -z \cdot z''' - y \cdot y' \\ \xi y'' &= y \cdot z' - z \cdot y'\end{aligned}$$

where

$$y_{x=0} = -1, y_{x=1} = 1, z_{x=0} = z'_{x=0} = z_{x=1} = z'_{x=1} = 0$$

```
> Prob33 <- function(t, z, pars, xi) {
+   list(c( z[2], z[3], z[4], 1/xi*(z[1]*z[4]-z[5]*z[6]),
+         z[6], 1/xi*(z[5]*z[2]-z[1]*z[6])))
+ }
> ini <- c(0,0,NA,NA,-1,NA)
> end <- c(0,0,NA,NA,1,NA)
> xi <-0.1
> twp <- bvptwp(yini=ini,yend=end,x=seq(0,1,by=0.01),
+   func=Prob33, guess=c(0,0,0), xi=xi)
> xi <-0.01
> twp2 <- bvptwp(yini=ini,yend=end,x=seq(0,1,by=0.01),
+   func=Prob33, guess=c(0,0,0), xi=xi)
> xi <-0.001
> twp3 <- bvptwp(yini=ini,yend=end,x=seq(0,1,by=0.01),
+   func=Prob33, guess=c(0,0,0), xi=xi)

> plot(twp[,1],twp[,2],type="l",main="test problem 33",
+   col="blue",xlab="x",ylab="y",ylim=c(-0.05,0.05))
> lines(twp2[,1],twp2[,2],col="red")
> lines(twp3[,1],twp3[,2],col="green")
```



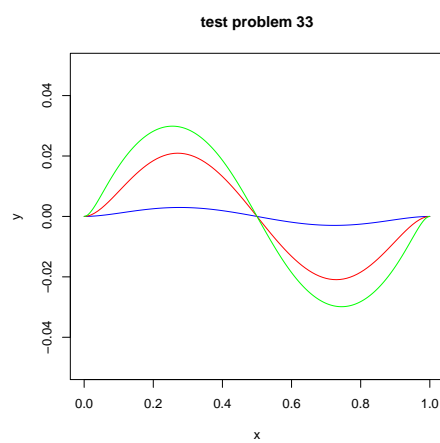


Figure 34: Solution of the BVP ODE problem 33, see text for R-code

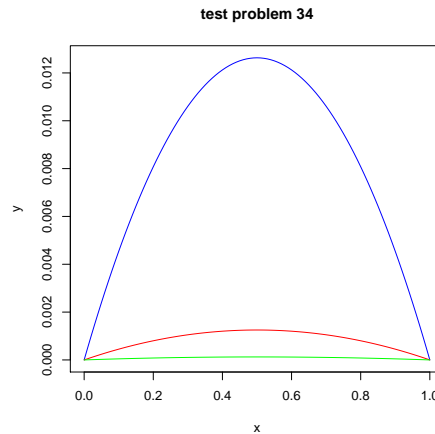


Figure 35: Solution of the BVP ODE problem 34, see text for R-code

### 3.16. problem 34

$$y'' = -\xi \cdot \exp(y)$$

where

$$y_{x=0} = y_{x=1} = 0$$

```
> Prob34 <- function(t, y, pars, xi) {
+   list(c( y[2], -xi*exp(y[1])))
+ }
> ini <- c(0,NA)
> end <- c(0,NA)
> xi <-0.1
> twp <- bvptwp(yini=ini,yend=end,x=seq(0,1,by=0.01),
+               func=Prob34, guess=c(0), xi=xi)
> xi <-0.01
> twp2 <- bvptwp(yini=ini,yend=end,x=seq(0,1,by=0.01),
+                func=Prob34, guess=c(0), xi=xi)
> xi <-0.001
> twp3 <- bvptwp(yini=ini,yend=end,x=seq(0,1,by=0.01),
+                 func=Prob34, guess=c(0), xi=xi)

> plot(twp[,1],twp[,2],type="l",main="test problem 34",
+       col="blue",xlab="x",ylab="y")
> lines(twp2[,1],twp2[,2],col="red")
> lines(twp3[,1],twp3[,2],col="green")
```

**Affiliation:**

Karline Soetaert

Centre for Estuarine and Marine Ecology (CEME)

Netherlands Institute of Ecology (NIOO)

4401 NT Yerseke, Netherlands E-mail: [k.soetaert@nioo.knaw.nl](mailto:k.soetaert@nioo.knaw.nl)

URL: <http://www.nioo.knaw.nl/ppages/ksoetaert>