

# zoo: An S3 Class and Methods for Indexed Totally Ordered Observations

Achim Zeileis  
Wirtschaftsuniversität Wien

Gabor Grothendieck

---

## Abstract

**zoo** is an R package providing an S3 class with methods for indexed totally ordered observations, such as irregular time series. Its key design goals are independence of a particular index/time/date class and consistency with base R and the "ts" class for regular time series. This paper describes how these are achieved within **zoo** and provides several illustrations of the available methods for "zoo" objects which include plotting, merging and binding, several mathematical operations, extracting and replacing data and index, coercion and NA handling. A sub-class "zooreg" embeds regular time series into the "zoo" framework and thus bridges the gap between regular and irregular time series classes in R.

*Keywords:* totally ordered observations, irregular time series, S3, R.

---

## 1. Introduction

The R system for statistical computing (R Development Core Team 2005, <http://www.R-project.org/>) ships with a class for regularly spaced time series, "ts" in package **stats**, but has no native class for irregularly spaced time series. With the increased interest in computational finance with R over the last years several implementations of classes for irregular time series emerged which are aimed particularly at finance applications. These include the S3 classes "timeSeries" in package **fBasics** from the **Rmetrics** bundle (Wuertz 2004) and "irts" in package **tseries** (Trapletti 2005) and the S4 class "its" in package **its** (Heywood 2004). With these packages available, why would anybody want yet another package providing infrastructure for irregular time series? The above mentioned implementations have in common that they are restricted to a particular class for the time scale: the former implementation comes with its own time class "timeDate" built on top of the "POSIXt" classes available in base R whereas the latter two use "POSIXct" directly. And this was the starting point for the **zoo** project: the first author of the present paper needed more general support for ordered observations, independent of a particular index class, for the package **strucchange** (Zeileis, Leisch, Hornik, and Kleiber 2002). Hence the package was called **zoo** which stands for *Z's ordered observations*. Since the first release, a major part of the additions to **zoo** were provided by the second author of this paper, so that the name of the package does not really reflect the authorship anymore. Nevertheless, independence of a particular index class remained the most important design goal. While the package evolved to its current status, a second key design goal became more and more clear: to provide methods to standard generic functions for the "zoo" class that are similar to those for the "ts" class (and base R in general) such that the usage of **zoo** is rather intuitive because few additional commands have to be learned. This paper describes how these design goals are implemented in **zoo**. The resulting package provides the "zoo" class which offers an extensive (and still growing) set of standard and new methods for working on indexed observations and 'talks' to the classes "ts", "its", "irts" and "timeSeries". In particular, it bridges the gap between regular and irregular time series by providing coercion with (almost) no loss of information between "ts" and "zoo".

The remainder of the paper is organized as follows: Section 2 explains how "zoo" objects are created and illustrates how the corresponding methods for plotting, merging and binding, several

mathematical operations, extracting and replacing data and index, coercion and NA handling can be used. Section 3 outlines how other packages can build on this basic infrastructure. Section 4 gives a few summarizing remarks and an outlook on future developments. Finally, an appendix provides a reference card that gives an overview of the functionality contained in **zoo**.

## 2. The class "zoo" and its methods

This section describes how "zoo" series can be created and subsequently manipulated, visualized, combined or coerced to other classes. In Section 2.1, the general class "zoo" for totally ordered series is described. Subsequently, in Section 2.2, the subclass "zooreg" for regular "zoo" series, i.e., series which have an index with a specified frequency, is discussed. The methods illustrated in the remainder of the section are mostly the same for both "zoo" and "zooreg" objects and hence do not have to be discussed separately. The few differences in merging and binding are briefly highlighted in the corresponding subsection.

### 2.1. Creation of "zoo" objects

The simple idea for the creation of "zoo" objects is to have some vector or matrix of observations **x** which are totally ordered by some index vector. In time series applications, this index is a measure of time but every other numeric, character or even more abstract vector that provides a total ordering of the observations is also suitable. Objects of class "zoo" are created by the function

```
zoo(x, order.by)
```

where **x** is the vector or matrix of observations<sup>1</sup> and **order.by** is the index by which the observations should be ordered. It has to be of the same length as **NROW(x)**, i.e., either the same length as **x** for vectors or the same number of rows for matrices.<sup>2</sup> The "zoo" object created is essentially the vector/matrix as before but has an additional "index" attribute in which the index is stored.<sup>3</sup> Both the observations in the vector/matrix **x** and the index **order.by** can, in principle, be of arbitrary classes. However, most of the following methods (plotting, aggregating, mathematical operations) for "zoo" objects are typically only useful for numeric observations **x**. Special effort in the design was put into independence from a particular class for the index vector. In **zoo**, it is assumed that combination **c()**, querying the **length()**, value matching **MATCH()**, subsetting **[,,** and, of course, ordering **ORDER()** work when applied to the index. In addition, a **as.character()** method might improve printed output<sup>4</sup> and **as.numeric()** could be used for computing distances between indexes, e.g., in interpolation. Both methods are not necessary for working with "zoo" objects but could be used if available. All these methods are available, e.g., for standard numeric and character vectors and for vectors of classes "Date", "POSIXct" or "times" from package **chron**, but not for the class "dateTime" in **fBasics**. In the last case, the solution is to provide methods for the above mentioned functions so that indexing "zoo" objects with "dateTime" vectors works (see Section 3.3 for an example). To achieve this independence of the index class, new generic functions for ordering (**ORDER()**) and value matching (**MATCH()**) are introduced as the corresponding base functions **order()** and **match()** are non-generic. The default methods simply call the corresponding base functions, i.e., no new method needs to be introduced for a particular index class if the non-generic functions **order()** and **match()** work for this class.

<sup>1</sup>In principle, more general objects can be indexed, but currently **zoo** does not support this. Development plans are that **zoo** should eventually support indexed factors, data frames and lists.

<sup>2</sup>The only case where this restriction is not imposed is for zero-length vectors, i.e., vectors that only have an index but no data.

<sup>3</sup>There is some limited support for indexed factors available in which case the "zoo" object also has an attribute "oclass" with the original class of **x**. This feature is still under development and might change in future versions.

<sup>4</sup>If a **as.character()** method is already defined, but gives not the desired output for printing, then a **index2char()** method can be defined. This is a generic convenience function used for creating character representation of the index vector and it defaults to using **as.character()**.

To illustrate the usage of `zoo()`, we first load the package and set the random seed to make the examples in this paper exactly reproducible.

```
R> library(zoo)
R> set.seed(1071)
```

Then, we create two vectors `z1` and `z2` with "POSIXct" indexes, one with random observations

```
R> z1.index <- ISOdatetime(2004, rep(1:2, 5), sample(28, 10), 0,
+   0, 0)
R> z1.data <- rnorm(10)
R> z1 <- zoo(z1.data, z1.index)
```

and one with a sine wave

```
R> z2.index <- as.POSIXct(paste(2004, rep(1:2, 5), sample(1:28,
+   10), sep = "-"))
R> z2.data <- sin(2 * 1:10/pi)
R> z2 <- zoo(z2.data, z2.index)
```

Furthermore, we create a matrix `Z` with random observations and a "Date" index

```
R> Z.index <- as.Date(sample(12450:12500, 10))
R> Z.data <- matrix(rnorm(30), ncol = 3)
R> colnames(Z.data) <- c("Aa", "Bb", "Cc")
R> Z <- zoo(Z.data, Z.index)
```

In the examples above, the generation of indexes looks a bit awkward due to the fact the indexes need to be randomly generated (and there are no special functions for random indexes because these is rarely needed in practice). In “real world” applications, the indexes are typically part of the raw data set read into R so the code would be even simpler. See Section 3 for such examples.<sup>5</sup>

Methods to several standard generic functions are available for "zoo" objects, such as `print`, `summary`, `str`, `head`, `tail` and `[]` (subsetting), a few of which are illustrated in the following.

There are three printing code styles for "zoo" objects: vectors are by default printed in "horizontal" style

```
R> z1

2004-01-05 2004-01-14 2004-01-19 2004-01-25 2004-01-27 2004-02-07
0.74675994 0.02107873 -0.29823529 0.68625772 1.94078850 1.27384445
2004-02-12 2004-02-16 2004-02-20 2004-02-24
0.22170438 -2.07607585 -1.78439244 -0.19533304
```

```
R> z1[3:7]

2004-01-19 2004-01-25 2004-01-27 2004-02-07 2004-02-12
-0.2982353 0.6862577 1.9407885 1.2738445 0.2217044
```

and matrices in "vertical" style

```
R> Z
```

---

<sup>5</sup>Note, that in the code above a new `as.Date` method, provided in `zoo`, is used to convert days since 1970-01-01 to class "Date". See the respective help page for more details.

	Aa	Bb	Cc
2004-02-02	1.25543390	0.68157316	-0.63292049
2004-02-08	-1.49458326	1.32341223	-1.49442269
2004-02-09	-1.87462247	-0.87329289	0.62733971
2004-02-21	-0.14538608	0.45234903	-0.14597401
2004-02-22	0.22542418	0.53838938	0.23136133
2004-02-29	1.20695518	0.31814222	-0.01129202
2004-03-05	-1.20861025	1.42379785	-0.81614483
2004-03-10	-0.11039563	1.34774254	0.95522468
2004-03-14	0.84202385	-2.73842019	0.23150695
2004-03-20	-0.19019104	0.12308872	-1.51862157

```
R> Z[1:3, 2:3]
```

	Bb	Cc
2004-02-02	0.6815732	-0.6329205
2004-02-08	1.3234122	-1.4944227
2004-02-09	-0.8732929	0.6273397

Additionally, there is a "plain" style which simply first prints the data and then the index.

Above, we have illustrated that "zoo" series can be indexed like vectors or matrices respectively, i.e., with integers corresponding to their observation number (and column number). But for indexed observations, one would obviously also like to be able to index with the index class. This is also available in `[` which only uses vector/matrix-type subsetting if the index is of class "numeric", "integer" or "logical".

```
R> z1[ISOdatetime(2004, 1, c(14, 25), 0, 0, 0)]
```

```
2004-01-14 2004-01-25
0.02107873 0.68625772
```

To subset with a numeric index, the index has to be either insulated in `I()` like `z[I(i)]` or the subsetting function `[[` can be used `z[[i]]` which always subsets with the index class.

Summaries and most other methods for "zoo" objects are carried out column wise, reflecting the rectangular structure. In addition, a summary of the index is provided.

```
R> summary(z1)
```

Index	z1
Min. :2004-01-05 00:00:00	Min. : -2.07608
1st Qu.:2004-01-20 12:00:00	1st Qu.: -0.27251
Median :2004-02-01 12:00:00	Median : 0.12139
Mean :2004-02-01 09:36:00	Mean : 0.05364
3rd Qu.:2004-02-15 00:00:00	3rd Qu.: 0.73163
Max. :2004-02-24 00:00:00	Max. : 1.94079

```
R> summary(Z)
```

Index	Aa	Bb	Cc
Min. :2004-02-02	Min. : -1.8746	Min. : -2.7384	Min. : -1.51862
1st Qu.:2004-02-12	1st Qu.: -0.9540	1st Qu.: 0.1719	1st Qu.: -0.77034
Median :2004-02-25	Median : -0.1279	Median : 0.4954	Median : -0.07863
Mean :2004-02-25	Mean : -0.1494	Mean : 0.2597	Mean : -0.25739
3rd Qu.:2004-03-08	3rd Qu.: 0.6879	3rd Qu.: 1.1630	3rd Qu.: 0.23147
Max. :2004-03-20	Max. : 1.2554	Max. : 1.4238	Max. : 0.95522

## 2.2. Creation of "zooreg" objects

Strictly regular series are such series observations where the distance between the indexes of every two adjacent observations is the same. Such series can also be described by their frequency, i.e., the reciprocal value of the distance between two observations. As "zoo" can be used to store series with arbitrary type of index, it can, of course, also be used to store series with regular indexes. So why should this case be given special attention, in particular as there is already the "ts" class devoted entirely to regular series? There are two reasons: First, to be able to convert back and forth between "ts" and "zoo", the frequency of a certain series needs to be stored on the "zoo" side. Second, "ts" is limited to strictly regular series and the regularity is lost if some internal observations are omitted. Series that can be created by omitting some internal observations from strictly regular series will in the following be referred to as being (weakly) regular. Therefore, a class that bridges the gap between irregular and strictly regular series is needed and "zooreg" fills this gap. Objects of class "zooreg" inherit from class "zoo" but have an additional attribute "frequency" in which the frequency of the series is stored. Therefore, they can be employed to represent both strictly and weakly regular series.

To create a "zooreg" object, either the command `zoo()` can be used or the command `zooreg()`.

```
zoo(x, order.by, frequency)
zooreg(data, start, end, frequency, deltat, ts.eps, order.by)
```

If `zoo()` is called as in the previous section but with an additional `frequency` argument, it is checked whether `frequency` complies with the index `order.by` and if it does an object of class "zooreg" inheriting from "zoo" is returned. The command `zooreg()` takes mostly the same arguments as `ts()` and the whole function is in fact almost identical to `ts()`.<sup>6</sup> The main difference between `zoo()` and `zooreg()` is that the latter will only create numeric indexes whereas the former only requires that the index can be coerced to a numeric vector (for checking its regularity).<sup>7</sup>

The following calls yield equivalent series

```
R> zr1 <- zooreg(sin(1:9), start = 2000, frequency = 4)
R> zr2 <- zoo(sin(1:9), seq(2000, 2002, by = 1/4), 4)
R> zr1
```

2000(1)	2000(2)	2000(3)	2000(4)	2001(1)	2001(2)	2001(3)
0.8414710	0.9092974	0.1411200	-0.7568025	-0.9589243	-0.2794155	0.6569866
2001(4)	2002(1)					
0.9893582	0.4121185					

```
R> zr2
```

2000(1)	2000(2)	2000(3)	2000(4)	2001(1)	2001(2)	2001(3)
0.8414710	0.9092974	0.1411200	-0.7568025	-0.9589243	-0.2794155	0.6569866
2001(4)	2002(1)					
0.9893582	0.4121185					

to which methods to standard generic functions for regular series can be applied, such as `frequency`, `deltat`, `cycle`.

As stated above, the advantage of "zooreg" series is that they remain regular even if an internal observation is dropped:

<sup>6</sup>Only if `order.by` is specified in the `zooreg()` call, then `zoo(x, order.by, frequency)` is called.

<sup>7</sup>An application of non-numeric indexes for regular series are the classes "yearmon" and "yearqtr" which are designed for monthly and quarterly series respectively and are discussed in Section 3.

```
R> zr1 <- zr1[-c(3, 5)]
R> zr1
```

2000(1)	2000(2)	2000(4)	2001(2)	2001(3)	2001(4)	2002(1)
0.8414710	0.9092974	-0.7568025	-0.2794155	0.6569866	0.9893582	0.4121185

```
R> class(zr1)
```

```
[1] "zooreg" "zoo"
```

```
R> frequency(zr1)
```

```
[1] 4
```

This facilitates NA handling significantly compared to "ts" and makes "zooreg" a much more attractive data type, e.g., for time series regression.

To check whether a certain series is (strictly) regular, the new generic function `is.regular(x, strict = FALSE)` can be used:

```
R> is.regular(zr1)
```

```
[1] TRUE
```

```
R> is.regular(zr1, strict = TRUE)
```

```
[1] FALSE
```

This function (and also the `frequency`, `deltat` and `cycle`) also work for "zoo" objects if the regularity can still be inferred from the data:

```
R> zr1 <- as.zoo(zr1)
```

```
R> zr1
```

2000	2000.25	2000.75	2001.25	2001.5	2001.75	2002
0.8414710	0.9092974	-0.7568025	-0.2794155	0.6569866	0.9893582	0.4121185

```
R> class(zr1)
```

```
[1] "zoo"
```

```
R> is.regular(zr1)
```

```
[1] TRUE
```

```
R> frequency(zr1)
```

```
[1] 4
```

Of course, inferring the underlying regularity is not always reliable and it is safer to store a regular series as a "zooreg" object if it is intended to be a regular series.

If a weakly regular series is coerced to "ts" the missing observations are filled with NAs. For strictly regular series with numeric index, the class can be switched between "zoo" and "ts" without loss of information.

```
R> as.ts.zoo(zr1)
```

	Qtr1	Qtr2	Qtr3	Qtr4
2000	0.8414710	0.9092974	NA	-0.7568025
2001	NA	-0.2794155	0.6569866	0.9893582
2002	0.4121185			

```
R> identical(zr2, as.zoo(as.ts.zoo(zr2)))
```

```
[1] TRUE
```

This enables direct use of functions such as `acf`, `arima`, `stl` etc. on "zooreg" objects as these methods coerce to "ts" first. The result only has to be coerced back to "zoo", if appropriate.

## 2.3. Plotting

The `plot` method for "zoo" objects, in particular for multivariate "zoo" series, is based on the corresponding method for (multivariate) regular time series. It relies on `plot` and `lines` methods being available for the index class which can plot the index against the observations.

By default the `plot` method creates a panel for each series

```
R> plot(Z)
```

but can also display all series in a single panel

```
R> plot(Z, plot.type = "single", col = 2:4)
```

In both cases additional graphical parameters like color `col`, plotting character `pch` and line type `lty` can be expanded to the number of series. But the `plot` method for "zoo" objects offers some more flexibility in specification of graphical parameters as in

```
R> plot(Z, type = "b", lty = 1:3, pch = list(Aa = 1:5, Bb = 2, Cc = 4),
+       col = list(Bb = 2, 4))
```

The argument `lty` behaves as before and sets every series in another line type. The `pch` argument is a named list that assigns to each series a different vector of plotting characters each of which is expanded to the number of observations. Such a list does not necessarily have to include the names of all series, but can also specify a subset. For the remaining series the default parameter is then used which can again be changed: e.g., in the above example the `col` argument is set to display the series "Bb" in red and all remaining series in blue. The results of the multiple panel plots are depicted in Figure 2 and the single panel plot in 1.

## 2.4. Merging and binding

As for many rectangular data formats in R, there are both methods for combining the rows and columns of "zoo" objects respectively. For the `rbind` method the number of columns of the combined objects has to be identical and the indexes may not overlap.

```
R> rbind(z1[5:10], z1[2:3])
```

2004-01-14	2004-01-19	2004-01-27	2004-02-07	2004-02-12	2004-02-16
0.02107873	-0.29823529	1.94078850	1.27384445	0.22170438	-2.07607585
2004-02-20	2004-02-24				
-1.78439244	-0.19533304				

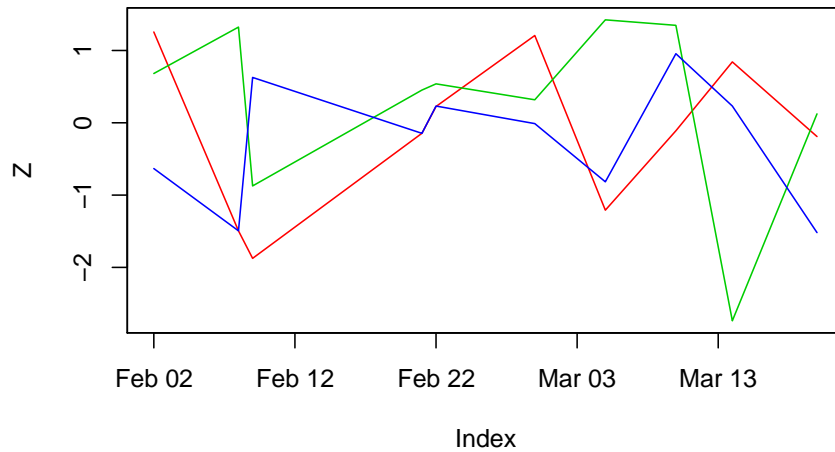


Figure 1: Example of a single panel plot

The `cbind` method by default combines the columns by the union of the indexes and fills the created gaps by NAs.

```
R> cbind(z1, z2)
```

	z1	z2
2004-01-03	NA	0.94306673
2004-01-05	0.74675994	-0.04149429
2004-01-14	0.02107873	NA
2004-01-17	NA	0.59448077
2004-01-19	-0.29823529	-0.52575918
2004-01-24	NA	-0.96739776
2004-01-25	0.68625772	NA
2004-01-27	1.94078850	NA
2004-02-07	1.27384445	NA
2004-02-08	NA	0.95605566
2004-02-12	0.22170438	-0.62733473
2004-02-13	NA	-0.92845336
2004-02-16	-2.07607585	NA
2004-02-20	-1.78439244	NA
2004-02-24	-0.19533304	NA
2004-02-25	NA	0.56060280
2004-02-26	NA	0.08291711

In fact, the `cbind` method is synonymous with the `merge` method<sup>8</sup> except that the latter provides additional arguments which allow for combining the columns by the intersection of the indexes using the argument `all = FALSE`

```
R> merge(z1, z2, all = FALSE)
```

<sup>8</sup>Note, that in some situations the column naming in the resulting object is somewhat problematic in the `cbind` method and the `merge` method might provide better formatting of the column names.



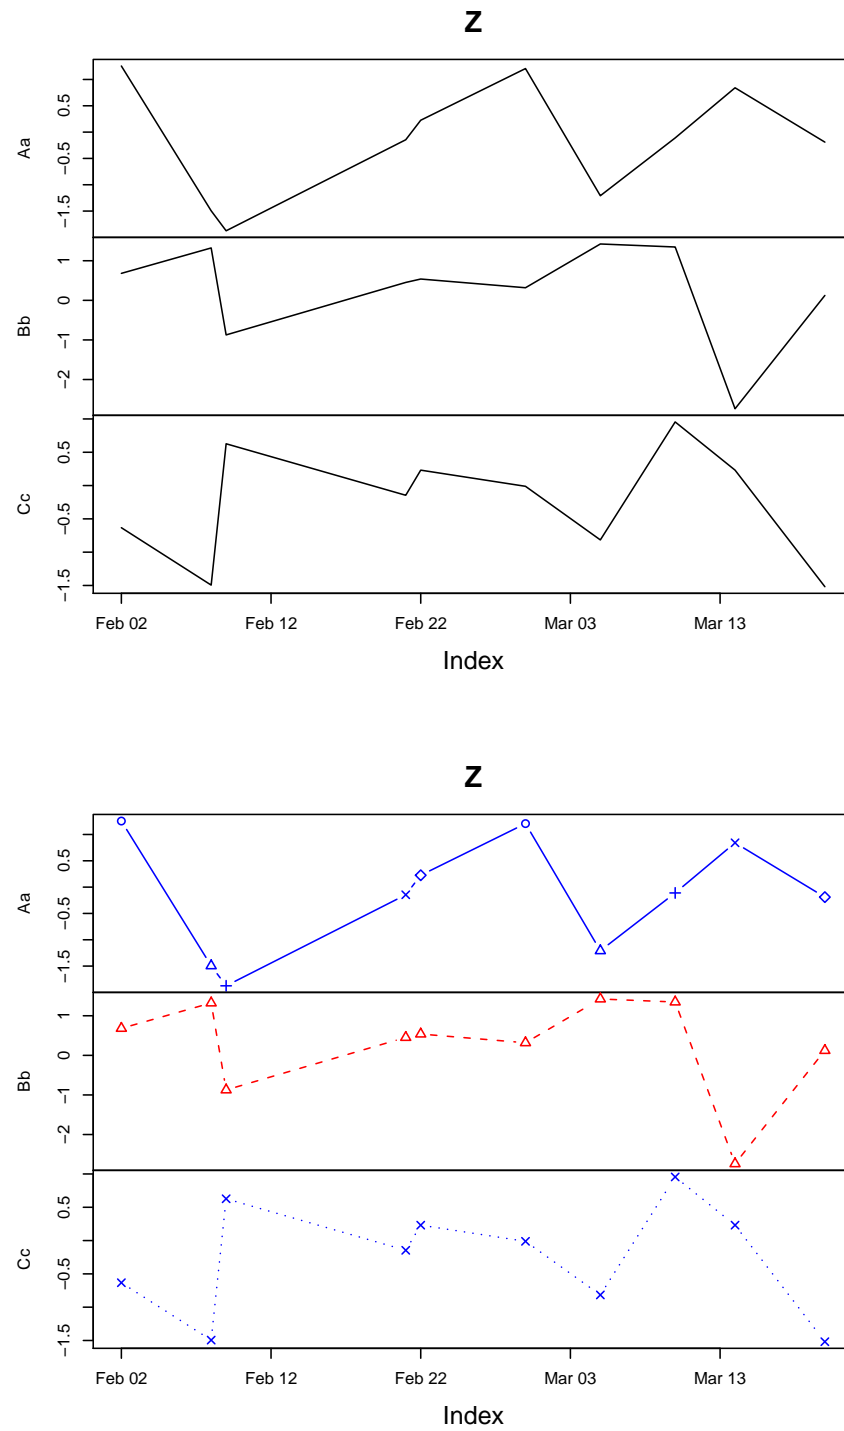


Figure 2: Examples of multiple panel plots

```

      z1      z2
2004-01-05 0.74675994 -0.04149429
2004-01-19 -0.29823529 -0.52575918
2004-02-12 0.22170438 -0.62733473

```

Additionally, the filling pattern can be changed in `merge`, the naming of the columns can be modified and the return class of the result can be specified. In the case of merging of objects with different index classes, R gives a warning and tries to coerce the indexes. Merging objects with different index classes is generally discouraged—if it is used nevertheless, it is the responsibility of the user to ensure that the result is as intended.

Another function which performs operations along a subset of indexes is `aggregate`, which is discussed in this section although it does not combine several objects. Using the `aggregate` method, "zoo" objects are split into subsets along a coarser index grid, summary statistics are computed for each and then the reduced object is returned. In the following example, first a function is set up which returns for a given "Date" value the corresponding first of the month. This function is then used to compute the coarser grid for the `aggregate` call: in the first example the mean of the observations in the month is returned, in the second example the first observation.

```

R> firstofmonth <- function(x) as.Date(sub(".$", "01", format(x)))
R> aggregate(Z, firstofmonth(Z.index), mean)

```

```

      Aa      Bb      Cc
2004-02-01 0.53820841 0.04508597 -0.12412352
2004-03-01 -1.18080051 0.58156655 -0.45730045

```

```

R> aggregate(Z, firstofmonth(Z.index), head, 1)

```

```

      Aa      Bb      Cc
2004-02-01 1.2554339 0.6815732 -0.6329205
2004-03-01 -1.4945833 1.3234122 -1.4944227

```

## 2.5. Mathematical operations

To allow for standard mathematical operations among "zoo" objects, **zoo** extends group generic functions `Ops`. These perform the operations only for the intersection of the indexes of the objects. As an example, the summation and logical comparison with `<` of `z1` and `z2` yield

```

R> z1 + z2

```

```

2004-01-05 2004-01-19 2004-02-12
0.7052657 -0.8239945 -0.4056304

```

```

R> z1 < z2

```

```

2004-01-05 2004-01-19 2004-02-12
FALSE      FALSE      FALSE

```

Additionally, methods for transposing `t` of "zoo" objects—which coerces to a matrix before, see below—and computing cumulative quantities such as `cumsum`, `cumprod`, `cummin`, `cummax` which are all applied column wise.

```

R> cumsum(Z)

```

	Aa	Bb	Cc
2004-02-02	1.2554339	0.6815732	-0.6329205
2004-02-08	-0.2391494	2.0049854	-2.1273432
2004-02-09	-2.1137718	1.1316925	-1.5000035
2004-02-21	-2.2591579	1.5840415	-1.6459775
2004-02-22	-2.0337337	2.1224309	-1.4146162
2004-02-29	-0.8267785	2.4405731	-1.4259082
2004-03-05	-2.0353888	3.8643710	-2.2420530
2004-03-10	-2.1457844	5.2121135	-1.2868283
2004-03-14	-1.3037606	2.4736933	-1.0553214
2004-03-20	-1.4939516	2.5967820	-2.5739429

## 2.6. Extracting and replacing the data and the index

**zoo** provides several generic functions and methods to work on the data contained in a "zoo" object, the index (or time) attribute associated to it, and on both data and index.

The data stored in "zoo" objects can be extracted by `coredata` which strips off all "zoo"-specific attributes and it can be replaced using `coredata<-`. Both are new generic functions<sup>9</sup> with methods for "zoo" objects as illustrated in the following example.

```
R> coredata(z1)

[1] 0.74675994 0.02107873 -0.29823529 0.68625772 1.94078850 1.27384445
[7] 0.22170438 -2.07607585 -1.78439244 -0.19533304

R> coredata(z1) <- 1:10
R> z1

2004-01-05 2004-01-14 2004-01-19 2004-01-25 2004-01-27 2004-02-07 2004-02-12
      1         2         3         4         5         6         7
2004-02-16 2004-02-20 2004-02-24
      8         9        10
```

The index associated with a "zoo" object can be extracted by `index` and modified by `index<-`. As the interpretation of the index as "time" in time series applications is natural, there are also synonymous methods `time` and `time<-`. Hence, the commands `index(z2)` and `time(z2)` return equivalent results.

```
R> index(z2)

[1] "2004-01-03 CET" "2004-01-05 CET" "2004-01-17 CET" "2004-01-19 CET"
[5] "2004-01-24 CET" "2004-02-08 CET" "2004-02-12 CET" "2004-02-13 CET"
[9] "2004-02-25 CET" "2004-02-26 CET"
```

The index scale of `z2` can be changed to that of `z1` by

```
R> index(z2) <- index(z1)
R> z2
```

---

<sup>9</sup>The `coredata` functionality is similar in spirit to the `core` function in `its` and `value` in `tseries`. However, the focus of those functions is somewhat narrower and we try to provide more general purpose generic functions. See the respective manual page for more details.

```

2004-01-05 2004-01-14 2004-01-19 2004-01-25 2004-01-27 2004-02-07
0.94306673 -0.04149429 0.59448077 -0.52575918 -0.96739776 0.95605566
2004-02-12 2004-02-16 2004-02-20 2004-02-24
-0.62733473 -0.92845336 0.56060280 0.08291711

```

The start and the end of the index/time vector can be queried by `start` and `end`:

```
R> start(z1)
```

```
[1] "2004-01-05 CET"
```

```
R> end(z1)
```

```
[1] "2004-02-24 CET"
```

To work on both data and index/time, `zoo` provides `window` and `window<-` methods for "zoo" objects. In both cases the window is specified by

```
window(x, index, start, end)
```

where `x` is the "zoo" object, `index` is a set of indexes to be selected (by default the full index of `x`) and `start` and `end` can be used to restrict the `index` set.

```
R> window(Z, start = as.Date("2004-03-01"))
```

```

      Aa      Bb      Cc
2004-03-05 -1.2086102  1.4237978 -0.8161448
2004-03-10 -0.1103956  1.3477425  0.9552247
2004-03-14  0.8420238 -2.7384202  0.2315069
2004-03-20 -0.1901910  0.1230887 -1.5186216

```

```
R> window(Z, index = index(Z)[5:8], end = as.Date("2004-03-01"))
```

```

      Aa      Bb      Cc
2004-02-22  0.22542418  0.53838938  0.23136133
2004-02-29  1.20695518  0.31814222 -0.01129202

```

The first example selects all observations starting from 2004-03-01 whereas the second selects from the from the 5th to 8th observation those up to 2004-03-01.

The same syntax can be used for the corresponding replacement function.

```
R> window(z1, end = as.POSIXct("2004-02-01")) <- 9:5
```

```
R> z1
```

```

2004-01-05 2004-01-14 2004-01-19 2004-01-25 2004-01-27 2004-02-07 2004-02-12
      9      8      7      6      5      6      7
2004-02-16 2004-02-20 2004-02-24
      8      9     10

```

Two methods that are standard in time series applications are `lag` and `diff`. These are available with the same arguments as the "ts" methods.<sup>10</sup>

<sup>10</sup>`diff` also has an additional argument that also allows for geometric and not only allows arithmetic differences. Furthermore, note the sign of the lag in `lag`: by default it is positive and shifts the observations *forward*, to obtain the more standard *backward* shift the lag has to be negative.

```
R> lag(z1, k = -1)
```

```
2004-01-14 2004-01-19 2004-01-25 2004-01-27 2004-02-07 2004-02-12 2004-02-16
           9         8         7         6         5         6         7
2004-02-20 2004-02-24
           8         9
```

```
R> merge(z1, lag(z1, k = 1))
```

```
      z1 lag(z1, k = 1)
2004-01-05 9  8
2004-01-14 8  7
2004-01-19 7  6
2004-01-25 6  5
2004-01-27 5  6
2004-02-07 6  7
2004-02-12 7  8
2004-02-16 8  9
2004-02-20 9 10
2004-02-24 10 NA
```

```
R> diff(z1)
```

```
2004-01-14 2004-01-19 2004-01-25 2004-01-27 2004-02-07 2004-02-12 2004-02-16
          -1         -1         -1         -1         1         1         1
2004-02-20 2004-02-24
          1         1
```

## 2.7. Coercion to and from "zoo"

Coercion to and from "zoo" objects is available for objects of various classes, in particular "ts", "irts" and "its" objects can be coerced to "zoo" using the respective `as.zoo` method. The reverse coercion is available for "its" and for "irts" (the latter in package `tseries`). Furthermore, "zoo" objects can be coerced to vectors, matrices, lists and data frames (the latter dropping the index/time attribute). A simple example is

```
R> as.data.frame(Z)
```

```
      Aa      Bb      Cc
2004-02-02 1.2554339 0.6815732 -0.63292049
2004-02-08 -1.4945833 1.3234122 -1.49442269
2004-02-09 -1.8746225 -0.8732929 0.62733971
2004-02-21 -0.1453861 0.4523490 -0.14597401
2004-02-22 0.2254242 0.5383894 0.23136133
2004-02-29 1.2069552 0.3181422 -0.01129202
2004-03-05 -1.2086102 1.4237978 -0.81614483
2004-03-10 -0.1103956 1.3477425 0.95522468
2004-03-14 0.8420238 -2.7384202 0.23150695
2004-03-20 -0.1901910 0.1230887 -1.51862157
```

## 2.8. NA handling

Four methods for dealing with NAs (missing observations) in the observations are applicable to "zoo" objects: `na.omit`, `na.contiguous`, `na.approx` and `na.locf`. `na.omit`—or its default method to be more precise—returns a "zoo" object with incomplete observations removed. `na.contiguous` extracts the longest consecutive stretch of non-missing values. This function is currently made generic in `zoo` with a "zoo" method and the `stats` function as the default.<sup>11</sup> Furthermore, new generic functions `na.approx` and `na.locf` and corresponding default methods are introduced in `zoo`. The former replaces NAs by linear interpolation (using the function `approx`) and the name of the latter stands for last observation carried forward. It replaces missing observations by the most recent non-NA prior to it. Leading NAs, which cannot be replaced by previous observations, are removed in both functions by default.

```
R> z1[sample(1:10, 3)] <- NA
R> z1

2004-01-05 2004-01-14 2004-01-19 2004-01-25 2004-01-27 2004-02-07 2004-02-12
          9         NA          7          6          5          6         NA
2004-02-16 2004-02-20 2004-02-24
          8          9         NA

R> na.omit(z1)

2004-01-05 2004-01-19 2004-01-25 2004-01-27 2004-02-07 2004-02-16 2004-02-20
          9          7          6          5          6          8          9

R> na.contiguous.zoo(z1)

2004-01-19 2004-01-25 2004-01-27 2004-02-07
          7          6          5          6

R> na.approx(z1)

2004-01-05 2004-01-14 2004-01-19 2004-01-25 2004-01-27 2004-02-07 2004-02-12
 9.000000  7.714286  7.000000  6.000000  5.000000  6.000000  7.111111
2004-02-16 2004-02-20
 8.000000  9.000000

R> na.approx(z1, 1:NROW(z1))

2004-01-05 2004-01-14 2004-01-19 2004-01-25 2004-01-27 2004-02-07 2004-02-12
          9          8          7          6          5          6          7
2004-02-16 2004-02-20
          8          9

R> na.locf(z1)

2004-01-05 2004-01-14 2004-01-19 2004-01-25 2004-01-27 2004-02-07 2004-02-12
          9          9          7          6          5          6          6
2004-02-16 2004-02-20 2004-02-24
          8          9          9
```

<sup>11</sup>`na.contiguous` will be generic in base R from version 2.1.0 on.

As the above example illustrates, `na.approx` uses by default the underlying time scale for interpolation. This can be changed, e.g., to an equidistant spacing, by setting the second argument of `na.approx`.

## 2.9. Rolling functions

Describe `rollapply` and the specialized functions `rollmean`, `rollmed` and `rollmax`.

# 3. Combining zoo with other packages

The main purpose of the package **zoo** is to provide basic infrastructure for working with indexed totally ordered observations that can be either employed by users directly or can be a basic ingredient on top of which other packages can build. The latter is illustrated with a few brief examples involving the packages **strucchange**, **tseries**, **fBasics** and **stats** in this section.

## 3.1. strucchange: Empirical fluctuation processes

The package **strucchange** provides a collection of methods for testing, monitoring and dating structural changes, in particular in linear regression models. Tests for structural change assess whether the parameters of a model remain constant over an ordering with respect to a specified variable, usually time. To adequately store and visualize empirical fluctuation processes which capture instabilities over this ordering, a data type for indexed ordered observations is required. This was the motivation for starting the **zoo** project.

A simple example for the need of "zoo" objects in **strucchange** which is not (easily) be implemented by other irregular time series classes available on CRAN is described in the following. We assess the constancy of the electrical resistance over the apparent juice content of kiwi fruits.<sup>12</sup> The data set `fruitohms` is contained in the **DAAG** package (Mairdonald and Braun 2004). The fitted `ocus` object contains the OLS-based CUSUM process for the mean of the electrical resistance (variable `ohms`) indexed by the juice content (variable `juice`).

```
R> library(strucchange)
R> library(DAAG)
R> data(fruitohms)
R> ocus <- gefp(ohms ~ 1, order.by = ~juice, data = fruitohms)
```

This OLS-based CUSUM process can be visualized using the `plot` method for "gefp" objects which builds on the "zoo" method and yields in this case the plot in Figure 3 showing the process which crosses its 5% critical value and thus signals a significant decrease in the mean electrical resistance over the juice content. for more information on the package **strucchange** and the function `gefp` see Zeileis *et al.* (2002) and Zeileis (2004).

## 3.2. tseries: Historical financial data

A typical application for irregular time series which became increasingly important over the last years in computational statistics and finance is daily (or higher frequent) financial data. The package **tseries** provides the function `get.hist.quote` for obtaining historical financial data by querying Yahoo! Finance at <http://finance.yahoo.com/>, an online portal quoting data provided by Reuters. The following code queries the quotes of Lucent Technologies starting from 2001-01-01:

```
R> library(tseries)
R> LU <- get.hist.quote(instrument = "LU", start = "2001-01-01",
+   end = "2004-09-30", origin = "1970-01-01")
```

<sup>12</sup>A different approach would be to test whether the slope of a regression of electrical resistance on juice content changes with increasing juice content, i.e., to test for instabilities in `ohms ~ juice` instead of `ohms ~ 1`. Both lead to similar results.

```
R> plot(ocus)
```

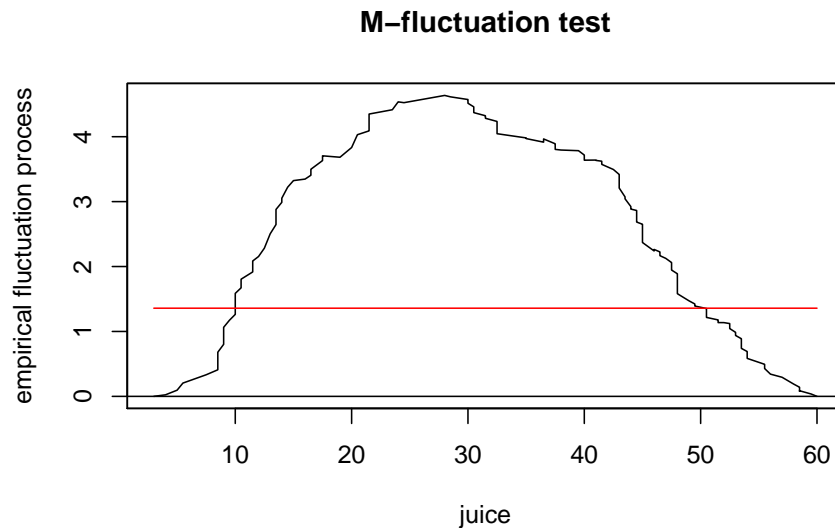


Figure 3: Empirical M-fluctuation process for `fruitohms` data

In the returned LU object the irregular data is stored by extending it in a regular grid and filling the gaps with NAs. The time is stored in days starting from an `origin`, in this case specified to be 1970-01-01, the origin used by the `Date` class. This series can be transformed easily into an irregular "zoo" series using a "Date" index. The log-difference returns for Lucent Technologies is depicted in Figure 4.

```
R> LU <- as.zoo(LU)
R> index(LU) <- as.Date(index(LU))
R> LU <- na.omit(LU)
```

### 3.3. fBasics: Indexes of class "timeDate"

Although the methods in `zoo` work out of the box for many index classes, it might be necessary for some index classes to provide `c`, `length`, `ORDER` and `MATCH` methods such that the methods in `zoo` work properly. An example for such an index class which requires a bit more attention is "timeDate" from the `fBasics` package.

But after the necessary methods have been defined

```
R> length.timeDate <- function(x) prod(x@Dim)
R> ORDER.timeDate <- function(x, ...) order(as.POSIXct(x), ...)
R> MATCH.timeDate <- function(x, table, nomatch = NA, ...) match(as.POSIXct(x),
+   as.POSIXct(table), nomatch = NA, ...)
```

the class "timeDate" can be used for indexing "zoo" objects. The following example illustrates how `z2` can be transformed to use the "timeDate" class.

```
R> library(fBasics)
R> z2td <- zoo(coredata(z2), timeDate(index(z2), FinCenter = "GMT"))
R> z2td
```



```
R> plot(diff(log(LU)))
```

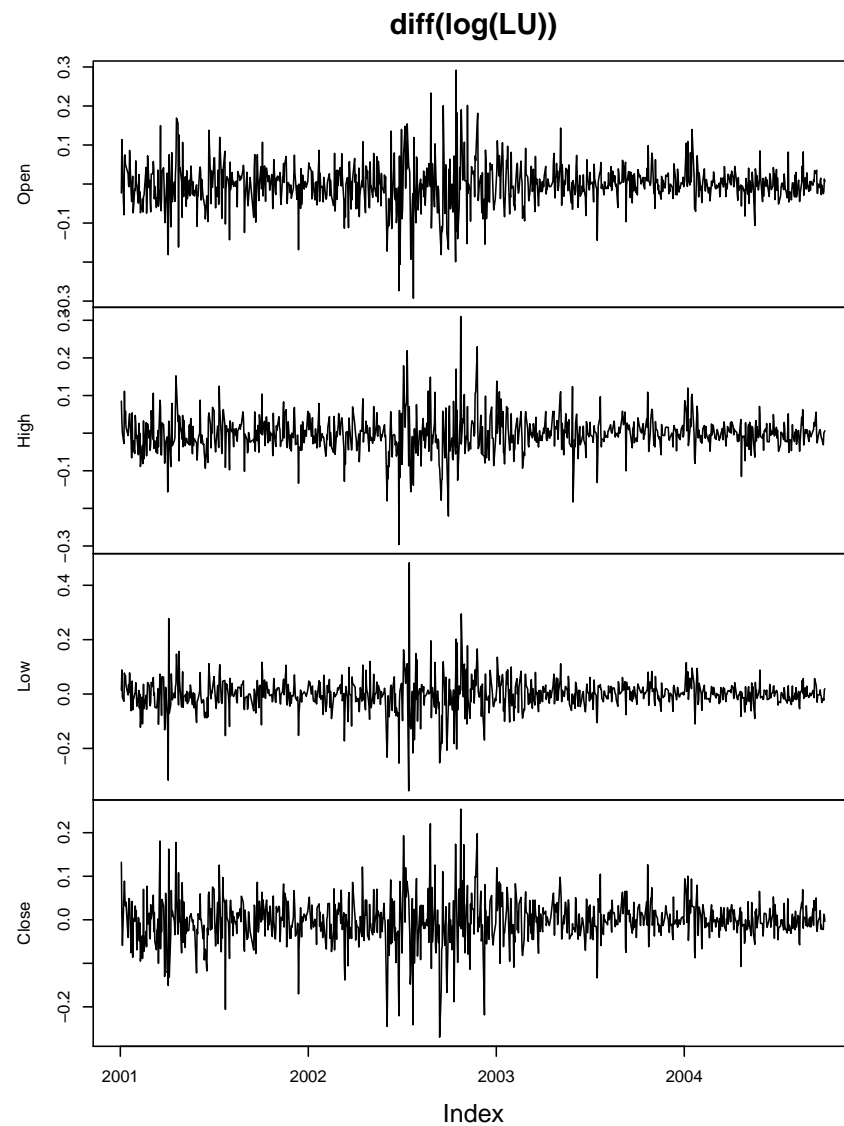


Figure 4: Log-difference returns for Lucent Technologies

2004-01-05	2004-01-14	2004-01-19	2004-01-25	2004-01-27	2004-02-07
0.94306673	-0.04149429	0.59448077	-0.52575918	-0.96739776	0.95605566
2004-02-12	2004-02-16	2004-02-20	2004-02-24		
-0.62733473	-0.92845336	0.56060280	0.08291711		

### 3.4. The classes "yearmon" and "yearqtr": Roll your own index

## 4. Summary and outlook

The package **zoo** provides an S3 class and methods for indexed totally ordered observations, such as irregular time series. Its key design goals are independence of a particular index class and compatibility with standard generics similar to the behaviour of the corresponding **ts** methods. This paper describes how these are implemented in **zoo** and illustrates the usage of the methods for plotting, merging and binding, several mathematical operations, extracting and replacing data and index, coercion and NA handling.

An indexed object of class "zoo" can be thought of as data plus index where the data are essentially vectors or matrices and the index can be a vector of (in principle) arbitrary class. Therefore, objects of classes **ts**, **its**, **irts** and **timeSeries** can easily be transformed into "zoo" objects—the reverse transformation is also possible provided that the index fulfills the restrictions of the respective class. Hence, the "zoo" class can also be used as the basis for other classes of indexed objects and more specific functionality can be built on top of it.

Whereas a lot of effort was put into achieving independence of a particular index class, the types of data that can be indexed with "zoo" are currently limited to vectors and matrices, typically containing numeric values. Although, there is some limited support available for indexed factors, one important direction for future development of **zoo** is to add better support for other objects that can also naturally be indexed including specifically factors, data frames and lists.

## Computational details

The results in this paper were obtained using R 2.0.1 with the packages **zoo** 0.9–1, **strucchange** 1.2–9, **fBasics** 200.10058, **tseries** 0.9–25 and **DAAG** 0.46. R itself and all packages used are available from CRAN at <http://CRAN.R-project.org/>.

## References

- Heywood G (2004). **its**: *Irregular Time Series*. Portfolio & Risk Advisory Group and Commerzbank Securities. R package version 1.0.4.
- Maindonald J, Braun WJ (2004). **DAAG**: *Data Analysis and Graphics*. R package version 0.46, URL <http://www.stats.uwo.ca/DAAG/>.
- R Development Core Team (2005). *R: A Language and Environment for Statistical Computing*. R Foundation for Statistical Computing, Vienna, Austria. ISBN 3-900051-00-3, URL <http://www.R-project.org/>.
- Trapletti A (2005). **tseries**: *Time Series Analysis and Computational Finance*. R package version 0.9-25.
- Wuertz D (2004). **Rmetrics**: *An Environment and Software Collection for Teaching Financial Engineering and Computational Finance*. R package **fBasics**, version 200.10058, URL <http://www.itp.phys.ethz.ch/econophysics/R/2.0>.

Zeileis A (2004). “Implementing a Class of Structural Change Tests: An Econometric Computing Approach.” *Report 7*, Department of Statistics and Mathematics, Wirtschaftsuniversität Wien, Research Report Series. URL <http://epub.wu-wien.ac.at/>.

Zeileis A, Leisch F, Hornik K, Kleiber C (2002). “**strucchange**: An R Package for Testing for Structural Change in Linear Regression Models.” *Journal of Statistical Software*, **7**(2), 1–38. URL <http://www.jstatsoft.org/v07/i02/>.

## A. Reference card

### Creation

`zoo(x, order.by)` creation of a "zoo" object from the observations `x` (a vector or a matrix) and an index `order.by` by which the observations are ordered. For computations on arbitrary index classes, methods to the following generic functions are assumed to work: combining `c()`, querying length `length()`, subsetting `[],` ordering `ORDER()` and value matching `MATCH()`.

### Standard methods

<code>plot</code>	plotting
<code>lines</code>	adding a "zoo" series to a plot
<code>print</code>	printing
<code>summary</code>	summarizing (column-wise)
<code>str</code>	displaying structure of "zoo" objects
<code>head, tail</code>	head and tail of "zoo" objects

### Coercion

<code>as.zoo</code>	coercion to "zoo" is available for objects of class "ts", "its", "irts" (plus a default method).
<code>as.class.zoo</code>	coercion from "zoo" to other classes. Currently available for <i>class</i> in "matrix", "vector", "data.frame", "list", "irts" and "its".
<code>is.zoo</code>	querying whether an object is of class "zoo"

### Merging and binding

<code>merge</code>	union, intersection, left join, right join along indexes
<code>cbind</code>	column binding along the intersection of the index
<code>c, rbind</code>	combining/row binding (indexes may not overlap)
<code>aggregate</code>	compute summary statistics along a coarser grid of indexes

### Mathematical operations

<code>Ops</code>	group generic functions performed along the intersection of indexes
<code>t</code>	transposing (coerces to "matrix" before)
<code>cumsum</code>	compute (columnwise) cumulative quantities: sums <code>cumsum()</code> , products <code>cumprod()</code> , maximum <code>cummax()</code> , minimum <code>cummin()</code> .

### Extracting and replacing data and index

<code>index, time</code>	extract the index of a series
<code>index&lt;-, time&lt;-</code>	replace the index of a series
<code>coredata, coredata&lt;-</code>	extract and replace the data associated with a "zoo" object
<code>lag</code>	lagged observations
<code>diff</code>	arithmetic and geometric differences
<code>start, end</code>	querying start and end of a series
<code>window, window&lt;-</code>	subsetting of "zoo" objects using their index

### NA handling

<code>na.omit</code>	omit NAs
<code>na.contiguous</code>	compute longest sequence of non-NA observations
<code>na.locf</code>	impute NAs by carrying forward the last observation
<code>na.approx</code>	impute NAs by interpolation