

zoo: An S3 Class and Methods for Indexed Totally Ordered Observations

Achim Zeileis
Wirtschaftsuniversität Wien

Gabor Grothendieck

Abstract

zoo is an R package providing an S3 class with methods for indexed totally ordered observations, such as irregular time series. Its key design goals are independence of a particular index/time/date class and consistency with base R and the "ts" class for regular time series. This paper describes how these are achieved within **zoo** and provides several illustrations of the available methods for "zoo" objects which include plotting, merging and binding, several mathematical operations, extracting and replacing data and index, coercion and NA handling.

Keywords: totally ordered observations, irregular time series, S3, R.

1. Introduction

The R system for statistical computing (R Development Core Team 2004, <http://www.R-project.org/>) ships with a class for regularly spaced time series, "ts" in package **stats**, but has no native class for irregularly spaced time series. With the increased interest in computational finance with R over the last years several implementations of classes for irregular time series emerged which are aimed particularly at finance applications. These include the S3 classes "timeSeries" in package **fBasics** from the **Rmetrics** bundle (Wuertz 2004) and "irts" in package **tseries** (Trapletti 2004) and the S4 class "its" in package **its** (Heywood 2004). With these packages available, why would anybody want yet another package providing infrastructure for irregular time series? The above mentioned implementations have in common that they are restricted to a particular class for the time scale: the former implementation comes with its own time class "timeDate" built on top of the "POSIXt" classes available in base R whereas the latter two use "POSIXct" directly. And this was the starting point for the **zoo** project: the first author of the present paper needed more general support for ordered observations, independent of a particular index class, for the package **strucchange** (Zeileis, Leisch, Hornik, and Kleiber 2002). Hence the package was called **zoo** which stands for Z's ordored observations. Since the first release, a major part of the additions to **zoo** were provided by the second author of this paper, so that the name of the package does not really reflect the authorship anymore. Nevertheless, independence of a particular index class remained one the most important design goal. While the package evolved to its current status, a second key design goal became more and more clear: to provide methods to standard generic functions for the "zoo" class that are similar to those for the "ts" class (and base R in general) such that the usage of **zoo** is rather intuitive because few additional commands have to be learned.

This paper describes how these design goals are implemented in **zoo**. Section 2 explains how "zoo" objects are created and illustrates how the corresponding methods for plotting, merging and binding, several mathematical operations, extracting and replacing data and index, coercion and NA handling can be used. Section 3 outlines how other packages can build on this basic infrastructure. Section 4 gives a few summarizing remarks.

2. The class "zoo" and its methods

2.1. Creation of "zoo" objects

The simple idea for the creation of "zoo" objects is to have some vector or matrix of observations **x** which are totally ordered by some index vector. In time series applications this index is a measure of time but every other numeric, character or even more abstract vector that provides a total ordering of the observations is also suitable. Objects of class "zoo" are created by the function

```
zoo(x, order.by)
```

where **x** is the vector or matrix of observations and **order.by** is the index by which the observations should be ordered. It has to be of the same length as **NROW(x)**, i.e., either the same length as **x** for vectors or the same number of rows for matrices. (This constraint is not imposed for zero length vectors.) The "zoo" object created is essentially the vector/matrix as before but has an additional "index" attribute in which the index is stored. Both the data **x** and the index can, in principle, be of arbitrary classes. However, most of the following methods (plotting, aggregating, mathematical operations) for "zoo" objects are typically only useful for numeric observations **x**. In contrast, special effort in the design was put into independence from a particular class for the index vector. In **zoo**, it is assumed that combination **c()**, querying the **length()**, value matching **MATCH()**, subsetting **[],** and, of course, ordering **ORDER()** work when applied to the index. This is the case, e.g., for standard numeric and character vectors and for vectors of classes "Date", "POSIXct" or "times" from package **chron**, but not for the class "dateTime" in **fBasics**. In the last case, the solution is to provide methods for the above mentioned functions so that indexing "zoo" objects with "dateTime" vectors works. To achieve this independence of the index class, new generic functions for ordering (**ORDER()**) and value matching (**match()**) are introduced as the corresponding base functions **order()** and **match()** are non-generic. The default methods simply call the corresponding base functions, i.e., no new method needs to be introduced for a particular index class if the non-generic functions **order()** and **match()** work for this class.

To illustrate the usage of **zoo**, we first load the package and set the random seed to make the examples in this paper exactly reproducible.

```
R> library(zoo)
R> set.seed(1071)
```

Then, we create two vectors **z1** and **z2** with "POSIXct" indexes, one with random observations

```
R> z1.index <- ISOdatetime(2004, rep(1:2, 5), sample(28, 10), 0,
+   0, 0)
R> z1.data <- rnorm(10)
R> z1 <- zoo(z1.data, z1.index)
```

and one with a sine wave

```
R> z2.index <- as.POSIXct(paste(2004, rep(1:2, 5), sample(1:28,
+   10), sep = "-"))
R> z2.data <- sin(2 * 1:10/pi)
R> z2 <- zoo(z2.data, z2.index)
```

Furthermore, we create a matrix **Z** with random observations and a "Date" index

```
R> Z.index <- as.Date(sample(12450:12500, 10))
R> Z.data <- matrix(rnorm(30), ncol = 3)
R> colnames(Z.data) <- c("Aa", "Bb", "Cc")
R> Z <- zoo(Z.data, Z.index)
```

Note that `zoo` provides `as.Date` methods to convert days since January 1, 1970 to class `Date`, used in the above. The argument to `as.Date` was used to generate random dates for this illustration. In “real world” applications, the indexes are typically part of the raw data set read into R so the code would be even simpler. See Section 3 for such examples.

Methods to several standard generic functions are available for “`zoo`” objects, such as `print`, `summary`, `str`, `head`, `tail` and `[]` (subsetting), a few of which are illustrated in the following.

There are three printing code styles for “`zoo`” objects: vectors are by default printed in “`horizontal`” style

```
R> z1
```

```
2004-01-05 2004-01-14 2004-01-19 2004-01-25 2004-01-27 2004-02-07
0.74675994 0.02107873 -0.29823529 0.68625772 1.94078850 1.27384445
2004-02-12 2004-02-16 2004-02-20 2004-02-24
0.22170438 -2.07607585 -1.78439244 -0.19533304
```

```
R> z1[3:7]
```

```
2004-01-19 2004-01-25 2004-01-27 2004-02-07 2004-02-12
-0.2982353 0.6862577 1.9407885 1.2738445 0.2217044
```

and matrices in “`vertical`” style

```
R> Z
```

```
      Aa      Bb      Cc
2004-02-02 1.25543390 0.68157316 -0.63292049
2004-02-08 -1.49458326 1.32341223 -1.49442269
2004-02-09 -1.87462247 -0.87329289 0.62733971
2004-02-21 -0.14538608 0.45234903 -0.14597401
2004-02-22 0.22542418 0.53838938 0.23136133
2004-02-29 1.20695518 0.31814222 -0.01129202
2004-03-05 -1.20861025 1.42379785 -0.81614483
2004-03-10 -0.11039563 1.34774254 0.95522468
2004-03-14 0.84202385 -2.73842019 0.23150695
2004-03-20 -0.19019104 0.12308872 -1.51862157
```

```
R> Z[1:3, 2:3]
```

```
      Bb      Cc
2004-02-02 0.6815732 -0.6329205
2004-02-08 1.3234122 -1.4944227
2004-02-09 -0.8732929 0.6273397
```

Additionally, there is a “`plain`” style which simply first prints the data and then the index.

Summaries and most other methods for “`zoo`” objects are carried out column wise, reflecting the rectangular structure. In addition, a summary of the index is provided.

```
R> summary(z1)
```

```
      Index      z1
Min.   :2004-01-05 00:00:00   Min.   : -2.07608
1st Qu.:2004-01-20 12:00:00   1st Qu.: -0.27251
```

```

Median :2004-02-01 12:00:00   Median : 0.12139
Mean    :2004-02-01 09:36:00   Mean    : 0.05364
3rd Qu.:2004-02-15 00:00:00   3rd Qu.: 0.73163
Max.    :2004-02-24 00:00:00   Max.    : 1.94079

```

```
R> summary(Z)
```

Index	Aa	Bb	Cc
Min. :2004-02-02	Min. :-1.8746	Min. :-2.7384	Min. :-1.51862
1st Qu.:2004-02-12	1st Qu.: -0.9540	1st Qu.: 0.1719	1st Qu.: -0.77034
Median :2004-02-25	Median :-0.1279	Median : 0.4954	Median :-0.07863
Mean :2004-02-25	Mean :-0.1494	Mean : 0.2597	Mean :-0.25739
3rd Qu.:2004-03-08	3rd Qu.: 0.6879	3rd Qu.: 1.1630	3rd Qu.: 0.23147
Max. :2004-03-20	Max. : 1.2554	Max. : 1.4238	Max. : 0.95522

2.2. Plotting

The `plot` method for "zoo" objects, in particular for multivariate "zoo" series, is based on the corresponding method for (multivariate) regular time series. It relies on `plot` and `lines` methods being available for the index class which can plot the index against the observations.

By default the `plot` method creates a panel for each series

```
R> plot(Z)
```

but can also display all series in a single panel

```
R> plot(Z, plot.type = "single", col = 2:4)
```

In both cases additional graphical parameters like color `col`, plotting character `pch` and line type `lty` can be expanded to the number of series. But the `plot` method for "zoo" objects offers some more flexibility in specification of graphical parameters as in

```
R> plot(Z, type = "b", lty = 1:3, pch = list(Aa = 1:5, Bb = 2, Cc = 4),
+       col = list(Bb = 2, 4))
```

The argument `lty` behaves as before and sets every series in another line type. The `pch` argument is a named list that assigns to each series a different vector of plotting characters each of which is expanded to the number of observations. Such a list does not necessarily have to include the names of all series, but can also specify a subset. For the remaining series the default parameter is then used which can again be changed: e.g., in the above example series "Bb" is plotted in red and all remaining series in blue. The results of the multiple panel plots are depicted in Figure 2 and the single panel plot in 1.

2.3. Merging and binding

As for many rectangular data formats in R, there are both methods for combining the rows and columns of "zoo" objects respectively. For the `rbind` method the number of columns of the combined objects has to be identical and the indexes may not overlap.

```
R> rbind(z1[5:10], z1[2:3])
```

```

2004-01-14 2004-01-19 2004-01-27 2004-02-07 2004-02-12 2004-02-16
0.02107873 -0.29823529 1.94078850 1.27384445 0.22170438 -2.07607585
2004-02-20 2004-02-24
-1.78439244 -0.19533304

```



Figure 1: Example of a single panel plot

The `cbind` method by default combines the columns by the union of the indexes and fills the created gaps by `NA`s.

```
R> cbind(z1, z2)
```

	..1	..2
2004-01-03	NA	0.94306673
2004-01-05	0.74675994	-0.04149429
2004-01-14	0.02107873	NA
2004-01-17	NA	0.59448077
2004-01-19	-0.29823529	-0.52575918
2004-01-24	NA	-0.96739776
2004-01-25	0.68625772	NA
2004-01-27	1.94078850	NA
2004-02-07	1.27384445	NA
2004-02-08	NA	0.95605566
2004-02-12	0.22170438	-0.62733473
2004-02-13	NA	-0.92845336
2004-02-16	-2.07607585	NA
2004-02-20	-1.78439244	NA
2004-02-24	-0.19533304	NA
2004-02-25	NA	0.56060280
2004-02-26	NA	0.08291711

In fact, the `cbind` method is synonymous with the `merge` method except that the latter provides additional arguments which allow for combining the columns by the intersection of the indexes using the argument `all = FALSE`

```
R> merge(z1, z2, all = FALSE)
```

	z1	z2
2004-01-05	0.74675994	-0.04149429



Figure 2: Examples of multiple panel plots

```
2004-01-19 -0.29823529 -0.52575918
2004-02-12  0.22170438 -0.62733473
```

Additionally, the filling pattern can be changed in `merge`, the naming of the columns can be modified and the return class of the result can be specified. In the case of merging of objects with different index classes, R gives a warning and tries to coerce the indexes. It is the responsibility of the user to ensure that the result is as intended.

Another function which performs operations along a subset of indexes is `aggregate`, which is discussed in this section although it does not combine several objects. Using the `aggregate` method, "zoo" objects are split into subsets along a coarser index grid, summary statistics are computed for each and then the reduced object is returned. In the following example, first a function is set up which returns for a given "Date" value the corresponding first of the month. This function is then used to compute the coarser grid for the `aggregate` call: in the first example the mean of the observations in the month is returned, in the second example the first observation.

```
R> firstofmonth <- function(x) as.Date(sub("..$", "01", format(x)))
R> aggregate(Z, firstofmonth(Z.index), mean)
```

```
      Aa      Bb      Cc
2004-02-01  0.53820841  0.04508597 -0.12412352
2004-03-01 -1.18080051  0.58156655 -0.45730045
```

```
R> aggregate(Z, firstofmonth(Z.index), head, 1)
```

```
      Aa      Bb      Cc
2004-02-01  1.2554339  0.6815732 -0.6329205
2004-03-01 -1.4945833  1.3234122 -1.4944227
```

2.4. Mathematical operations

To allow for standard mathematical operations among "zoo" objects, **zoo** extends group generic functions `Ops`. These perform the operations only for the intersection of the indexes of the objects. Hence, the summation of `z1` and `z2` yields

```
R> z1 + z2

2004-01-05 2004-01-19 2004-02-12
 0.7052657 -0.8239945 -0.4056304
```

Additionally, methods for transposing `t` of "zoo" objects—which coerces to a matrix before, see below—and computing cumulative quantities such as `cumsum`, `cumprod`, `cummin`, `cummax` which are all applied column wise.

```
R> cumsum(Z)

      Aa      Bb      Cc
2004-02-02  1.2554339  0.6815732 -0.6329205
2004-02-08 -0.2391494  2.0049854 -2.1273432
2004-02-09 -2.1137718  1.1316925 -1.5000035
2004-02-21 -2.2591579  1.5840415 -1.6459775
2004-02-22 -2.0337337  2.1224309 -1.4146162
2004-02-29 -0.8267785  2.4405731 -1.4259082
2004-03-05 -2.0353888  3.8643710 -2.2420530
2004-03-10 -2.1457844  5.2121135 -1.2868283
2004-03-14 -1.3037606  2.4736933 -1.0553214
2004-03-20 -1.4939516  2.5967820 -2.5739429
```

2.5. Extracting and replacing the data and the index

zoo provides several generic functions and methods to work on the data contained in a "zoo" object, the index (or time) attribute associated to it, and on both data and index.

The data stored in "zoo" objects can be extracted by `coredata` which strips off all "zoo"-specific attributes and it can be replaced using `coredata<-`. Both are new generic functions with methods for "zoo" objects as illustrated in the following example.

```
R> coredata(z1)

[1] 0.74675994 0.02107873 -0.29823529 0.68625772 1.94078850 1.27384445
[7] 0.22170438 -2.07607585 -1.78439244 -0.19533304

R> coredata(z1) <- 1:10
R> z1

2004-01-05 2004-01-14 2004-01-19 2004-01-25 2004-01-27 2004-02-07 2004-02-12
           1         2         3         4         5         6         7
2004-02-16 2004-02-20 2004-02-24
           8         9        10
```

The index associated with a "zoo" object can be extracted by `index` and modified by `index<-`. As the interpretation of the index as "time" in time series applications is natural, there are also synonymous methods `time` and `time<-`. Hence, the following two commands return equivalent results

```
R> index(z2)

[1] "2004-01-03 GMT" "2004-01-05 GMT" "2004-01-17 GMT" "2004-01-19 GMT"
[5] "2004-01-24 GMT" "2004-02-08 GMT" "2004-02-12 GMT" "2004-02-13 GMT"
[9] "2004-02-25 GMT" "2004-02-26 GMT"

R> time(z2)

[1] "2004-01-03 GMT" "2004-01-05 GMT" "2004-01-17 GMT" "2004-01-19 GMT"
[5] "2004-01-24 GMT" "2004-02-08 GMT" "2004-02-12 GMT" "2004-02-13 GMT"
[9] "2004-02-25 GMT" "2004-02-26 GMT"
```

The index scale of `z2` can be changed to that of `z1` by

```
R> index(z2) <- index(z1)
R> z2

2004-01-05 2004-01-14 2004-01-19 2004-01-25 2004-01-27 2004-02-07
0.94306673 -0.04149429 0.59448077 -0.52575918 -0.96739776 0.95605566
2004-02-12 2004-02-16 2004-02-20 2004-02-24
-0.62733473 -0.92845336 0.56060280 0.08291711
```

The start and the end of the index/time vector can be queried by `start` and `end`:

```
R> start(z1)

[1] "2004-01-05 GMT"
```



```
R> end(z1)
```

```
[1] "2004-02-24 GMT"
```

To work on both data and index/time, **zoo** provides **window** and **window<-** methods for "zoo" objects. In both cases the window is specified by

```
window(x, index, start, end)
```

where **x** is the "zoo" object, **index** is a set of indexes to be selected (by default the full index of **x**) and **start** and **end** can be used to restrict the **index** set. Thus, the first command in the following example selects all observations starting from 2004-03-01 whereas the second selects only from the observations with the 5th to 8th index those up to 2004-03-01.

```
R> window(Z, start = as.Date("2004-03-01"))
```

	Aa	Bb	Cc
2004-03-05	-1.2086102	1.4237978	-0.8161448
2004-03-10	-0.1103956	1.3477425	0.9552247
2004-03-14	0.8420238	-2.7384202	0.2315069
2004-03-20	-0.1901910	0.1230887	-1.5186216

```
R> window(Z, index = index(Z)[5:8], end = as.Date("2004-03-01"))
```

	Aa	Bb	Cc
2004-02-22	0.22542418	0.53838938	0.23136133
2004-02-29	1.20695518	0.31814222	-0.01129202

The same syntax can be used for the corresponding replacement function.

```
R> window(z1, end = as.POSIXct("2004-02-01")) <- 9:5
```

```
R> z1
```

2004-01-05	2004-01-14	2004-01-19	2004-01-25	2004-01-27	2004-02-07	2004-02-12
9	8	7	6	5	6	7
2004-02-16	2004-02-20	2004-02-24				
8	9	10				

Two methods that are standard in time series applications are **lag** and **diff**. These are available with the same arguments as the "ts" methods—with the only exception that **diff** not only allows for arithmetic but also geometric differences.

```
R> lag(z1, k = -1)
```

2004-01-14	2004-01-19	2004-01-25	2004-01-27	2004-02-07	2004-02-12	2004-02-16
9	8	7	6	5	6	7
2004-02-20	2004-02-24					
8	9					

```
R> merge(z1, lag(z1, k = 1))
```

	z1	lag(z1, k = 1)
2004-01-05	9	8
2004-01-14	8	7

```

2004-01-19  7  6
2004-01-25  6  5
2004-01-27  5  6
2004-02-07  6  7
2004-02-12  7  8
2004-02-16  8  9
2004-02-20  9 10
2004-02-24 10 NA

```

```
R> diff(z1)
```

```

2004-01-14 2004-01-19 2004-01-25 2004-01-27 2004-02-07 2004-02-12 2004-02-16
          -1          -1          -1          -1          1          1          1
2004-02-20 2004-02-24
          1          1

```

2.6. Coercion to and from "zoo"

Coercion to and from "zoo" objects is available for objects of various classes, in particular "ts", "irts" and "its" objects can be coerced to "zoo" using the respective `as.zoo` method. The reverse coercion is available for "its" and for "irts" (the latter in package `tseries`). Furthermore, "zoo" objects can be coerced to vectors, matrices, lists and data frames (the latter dropping the index/time attribute). A simple example is

```
R> as.data.frame(Z)
```

```

      Aa      Bb      Cc
1  1.2554339 0.6815732 -0.63292049
2 -1.4945833 1.3234122 -1.49442269
3 -1.8746225 -0.8732929  0.62733971
4 -0.1453861 0.4523490 -0.14597401
5  0.2254242 0.5383894  0.23136133
6  1.2069552 0.3181422 -0.01129202
7 -1.2086102 1.4237978 -0.81614483
8 -0.1103956 1.3477425  0.95522468
9  0.8420238 -2.7384202  0.23150695
10 -0.1901910 0.1230887 -1.51862157

```

2.7. NA handling

Three methods for dealing with NAs (missing observations) in the observations are applicable to "zoo" objects: `na.omit`, `na.contiguous`, `na.locf`. `na.omit`—or its default method to be more precise—returns a "zoo" object with incomplete observations removed. `na.contiguous` extracts the longest consecutive stretch of non-missing values. This function is made generic in **zoo** with a default method (also applicable to "zoo" objects) and the `stats` function being the "ts" method. Furthermore, a new generic function `na.locf` and corresponding default method is introduced in **zoo** which stands for last observation carried forward. It replaces missing observations by the most recent non-NA prior to it. Leading NAs, which cannot be replaced by previous observations, are removed by default.

```

R> z1[sample(1:10, 3)] <- NA
R> z1

```

```

2004-01-05 2004-01-14 2004-01-19 2004-01-25 2004-01-27 2004-02-07 2004-02-12
           9         NA         7         6         5         6         NA
2004-02-16 2004-02-20 2004-02-24
           8         9         NA

```

```
R> na.omit(z1)
```

```

2004-01-05 2004-01-19 2004-01-25 2004-01-27 2004-02-07 2004-02-16 2004-02-20
           9         7         6         5         6         8         9

```

```
R> na.contiguous(z1)
```

```

2004-01-19 2004-01-25 2004-01-27 2004-02-07
           7         6         5         6

```

```
R> na.locf(z1)
```

```

2004-01-05 2004-01-14 2004-01-19 2004-01-25 2004-01-27 2004-02-07 2004-02-12
           9         9         7         6         5         6         6
2004-02-16 2004-02-20 2004-02-24
           8         9         9

```

3. Combining zoo with other packages

The main purpose of the package **zoo** is to provide basic infrastructure for working with indexed totally ordered observations that can be either employed by users directly or can be a basic ingredient on top of which other packages can build. The latter is illustrated with a few brief examples involving the packages **stats**, **strucchange**, **tseries** and **fBasics** in this section.

3.1. stats: regression-style modelling with zoo

zoo provides a general mechanism for interfacing with regression style functions. This mechanism can be used with linear modelling function **lm**, general linear modelling function **glm** and certain other regression-style functions found in various R packages. This works for regression functions whose code is sufficiently similar to the pattern established by **lm** and includes the **randomForest** ensemble approach from the **randomForest** package, the **svm** support vector machine function from the **e1071** package, the **lqs** resistant regression function from the **MASS** package, the **nnet** neural network function from the **nnet** and **rq** quantile regression function from the **quantreg** package.

zoo allows one to specify formulas to these functions in which *all* variables in the formula are **zoo** objects. For such formulas, **zoo** will align the zoo objects, if necessary. **lag** and **diff** can also be used in the formulas and **zoo** will perform appropriate alignment as well.

In each case, the user simply places **I(...)** around the entire formula to tell the system that the special processing just described should be invoked. For example,

```

R> yz <- zoo(1:12)^2
R> xz <- zoo(1:9)^2
R> fz <- zoo(g1(2, 5))
R> lm(I(lag(yz) ~ diff(xz) + fz))

```

Call:

```
lm(formula = I(lag(yz) ~ diff(xz) + fz))
```

Coefficients:

```

(Intercept)      diff(xz)           fz
-1.750e+01    6.500e+00   -6.424e-15

```

```

R> glm(I(lag(yz) ~ diff(xz) + fz))

Call:  glm(formula = I(lag(yz) ~ diff(xz) + fz))

Coefficients:
(Intercept)      diff(xz)           fz
-1.750e+01    6.500e+00   -6.424e-15

Degrees of Freedom: 7 Total (i.e. Null);  5 Residual
Null Deviance:      7266
Residual Deviance: 168      AIC: 55.06

R> library(randomForest)

randomForest 4.4-2
Type rfNews() to see new features/changes/bug fixes.

R> randomForest(I(lag(yz) ~ diff(xz) + fz))

Call:
randomForest.formula(x = I(lag(yz) ~ diff(xz) + fz))
      Type of random forest: regression
      Number of trees: 500
No. of variables tried at each split: 1

      Mean of squared residuals: 275.1779
      % Var explained: 69.7

```

See the help page for `model.frame.zoo` for more examples and additional information.

3.2. strucchange: Empirical fluctuation processes of class "zoo"

The package **strucchange** provides a collection of methods for testing, monitoring and dating structural changes, in particular in linear regression models. Tests for structural change assess whether the parameters of a model remain constant over an ordering with respect to a specified variable, usually time. To adequately store and visualize empirical fluctuation processes which capture instabilities over this ordering, a data type for indexed ordered observations is required. This was the motivation for starting the **zoo** project.

A simple example for the need of "zoo" objects in **strucchange** which is not (easily) be implemented by other irregular time series classes available on CRAN is described in the following. We assess the constancy of the electrical resistance over the apparent juice content of kiwi fruits. The data set `fruitohms` is contained in the **DAAG** package ([Maindonald and Braun 2004](#)). The fitted `ocus` object contains the OLS-based CUSUM process for the mean of the electrical resistance (variable `ohms`) indexed by the juice content (variable `juice`).

```

R> library(strucchange)
R> library(DAAG)

Loading required package: leaps
Loading required package: oz

R> data(fruitohms)
R> ocus <- gefp(ohms ~ 1, order.by = ~juice, data = fruitohms)

```

```
R> plot(ocus)
```

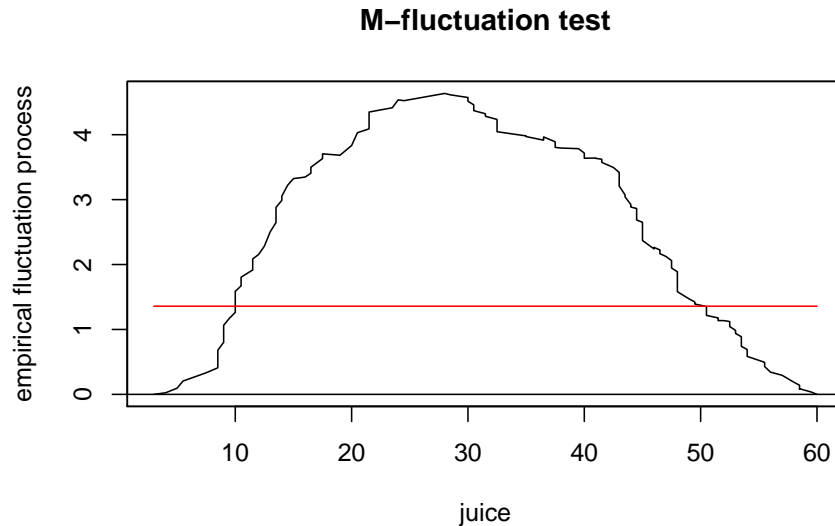


Figure 3: Empirical M-fluctuation process for `fruitohms` data

This OLS-based CUSUM process can be visualized using the `plot` method for `"gefp"` objects which builds on the `"zoo"` method and yields in this case the plot in Figure 3 showing the process which crosses its 5% critical value and thus signals a significant decrease in the mean electrical resistance over the juice content. for more information on the package `strucchange` and the function `gefp` see Zeileis *et al.* (2002) and Zeileis (2004).

3.3. tseries: historical financial data

A typical application for irregular time series which became increasingly important over the last years in computational statistics and finance is daily (or higher frequent) financial data. The package `tseries` provides the function `get.hist.quote` for obtaining historical financial data by querying Yahoo! Finance at <http://finance.yahoo.com/>, an online portal quoting data provided by Reuters. The following code queries the quotes of Lucent Technologies starting from 2001-01-01:

```
R> library(tseries)
R> LU <- get.hist.quote(instrument = "LU", start = "2001-01-01",
+   end = "2004-09-30", origin = "1970-01-01")
```

In the returned `LU` object the irregular data is stored by extending it in a regular grid and filling the gaps with `NA`s. The time is stored in days starting from an `origin`, in this case specified to be 1970-01-01, the origin used by the `Date` class. This series can be transformed easily into an irregular `"zoo"` series using a `"Date"` index. The log-difference returns for Lucent Technologies is depicted in Figure 4.

```
R> LU <- as.zoo(LU)
R> index(LU) <- as.Date(index(LU))
R> LU <- na.omit(LU)
```

```
R> plot(diff(log(LU)))
```

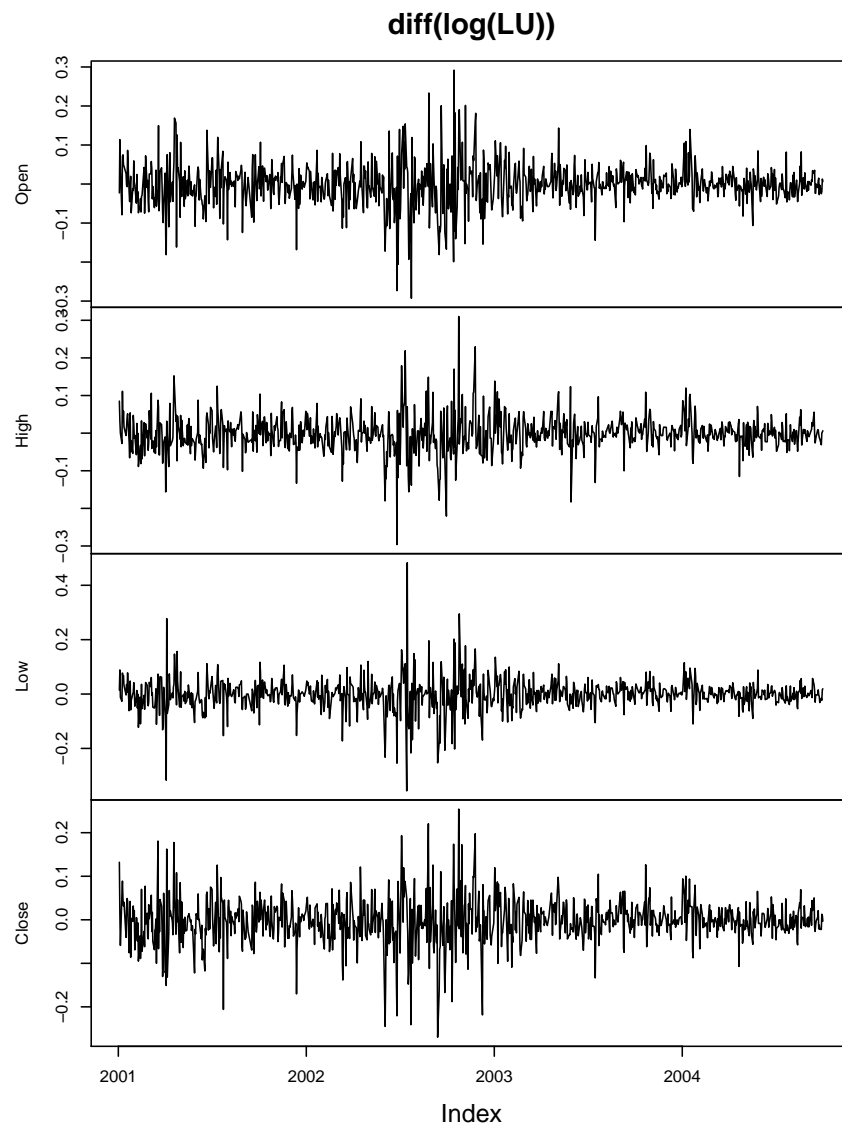


Figure 4: Log-difference returns for Lucent Technologies

3.4. fBasics: Indexes of class "timeDate"

Although the methods in **zoo** work out of the box for many index classes, it might be necessary for some index classes to provide `c`, `length`, `ORDER` and `MATCH` methods such that the methods in **zoo** work properly. An example for such an index class which requires a bit more attention is "timeDate" from the **fBasics** package.

But after the necessary methods have been defined

```
R> length.timeDate <- function(x) prod(x@Dim)
R> ORDER.timeDate <- function(x, ...) order(as.POSIXct(x), ...)
R> MATCH.timeDate <- function(x, y, ...) match(as.POSIXct(x), as.POSIXct(y),
+      ...)
```

the class "timeDate" can be used for indexing "zoo" objects. The following example illustrates how `z2` can be transformed to use the "timeDate" class.

```
R> library(fBasics)
```

```
Rmetrics, (C) 1999-2004, Diethelm Wuertz, GPL
fBasics: Markets, Basic Statistics, Date and Time
```

```
R> z2td <- zoo(coredata(z2), timeDate(index(z2), FinCenter = "GMT"))
R> z2td
```

```
2004-01-05 2004-01-14 2004-01-19 2004-01-25 2004-01-27 2004-02-07
0.94306673 -0.04149429 0.59448077 -0.52575918 -0.96739776 0.95605566
2004-02-12 2004-02-16 2004-02-20 2004-02-24
-0.62733473 -0.92845336 0.56060280 0.08291711
```

4. Summary

The package **zoo** provides an S3 class and methods for indexed totally ordered observations, such as irregular time series. Its key design goals are independence of a particular index class and compatibility with standard generics similar to the behaviour of the corresponding "ts" methods. This paper describes how these are implemented in **zoo** and illustrates the usage of the methods for plotting, merging and binding, several mathematical operations, extracting and replacing data and index, coercion and NA handling.

Computational details

The results in this paper were obtained using R 2.0.0 with the packages **zoo** 0.9-1, **strucchange** 1.2-7, **fBasics** 200.10058, **tseries** 0.9-23, **randomForest** 4.4-2 and **DAAG** 0.37. R itself and all packages used are available from CRAN at <http://CRAN.R-project.org/>.

References

- Heywood G (2004). *its: Irregular Time Series*. Portfolio & Risk Advisory Group and Commerzbank Securities. R package version 1.0.3.
- Maindonald J, Braun WJ (2004). **DAAG: Data Analysis And Graphics**. R package version 0.37, URL <http://www.stats.uwo.ca/DAAG/>.

- R Development Core Team (2004). *R: A Language and Environment for Statistical Computing*. R Foundation for Statistical Computing, Vienna, Austria. ISBN 3-900051-00-3, URL <http://www.R-project.org/>.
- Trapletti A (2004). **tseries**: *Time Series Analysis and Computational Finance*. R package version 0.9-23.
- Wuertz D (2004). **Rmetrics**: *An Environment and Software Collection for Teaching Financial Engineering and Computational Finance*. R package **fBasics**, version 191.10057, URL <http://www.itp.phys.ethz.ch/econophysics/R/1.9>.
- Zeileis A (2004). “Implementing a Class of Structural Change Tests: An Econometric Computing Approach.” *Report 7*, Department of Statistics and Mathematics, Wirtschaftsuniversität Wien, Research Report Series. URL <http://epub.wu-wien.ac.at/>.
- Zeileis A, Leisch F, Hornik K, Kleiber C (2002). “**strucchange**: An R Package for Testing for Structural Change in Linear Regression Models.” *Journal of Statistical Software*, **7**(2), 1–38. URL <http://www.jstatsoft.org/v07/i02/>.

A. Reference card

Creation

`zoo(x, order.by)` creation of a "zoo" object from the observations `x` (a vector or a matrix) and an index `order.by` by which the observations are ordered. For computations on arbitrary index classes, methods to the following generic functions are assumed to work: combining `c()`, querying length `length()`, subsetting `[],` ordering `ORDER()` and value matching `MATCH()`.

Standard methods

<code>plot</code>	plotting
<code>lines</code>	adding a "zoo" series to a plot
<code>print</code>	printing
<code>summary</code>	summarizing (column-wise)
<code>str</code>	displaying structure of "zoo" objects
<code>head, tail</code>	head and tail of "zoo" objects

Coercion

<code>as.zoo</code>	coercion to "zoo" is available for objects of class "ts", "its", "irts" (plus a default method).
<code>as.class.zoo</code>	coercion from "zoo" to other classes. Currently available for <i>class</i> in "matrix", "vector", "data.frame", "list", "irts" and "its".
<code>is.zoo</code>	querying whether an object is of class "zoo"

Merging and binding

<code>merge</code>	union, intersection, left join, right join along indexes
<code>cbind</code>	column binding along the intersection of the index
<code>rbind</code>	row binding (indexes may not overlap)
<code>aggregate</code>	compute summary statistics along a coarser grid of indexes

Mathematical operations

<code>Ops</code>	group generic functions performed along the intersection of indexes
<code>t</code>	transposing (coerces to "matrix" before)
<code>cumsum</code>	compute (columnwise) cumulative quantities: sums <code>cumsum()</code> , products <code>cumprod()</code> , maximum <code>cummax()</code> , minimum <code>cummin()</code> .

Extracting and replacing data and index

<code>index, time</code>	extract the index of a series
<code>index<-, time<-</code>	replace the index of a series
<code>coredata, coredata<-</code>	extract and replace the data associated with a "zoo" object
<code>lag</code>	lagged observations
<code>diff</code>	arithmetic and geometric differences
<code>start, end</code>	querying start and end of a series
<code>window, window<-</code>	subsetting of "zoo" objects using their index

NA handling

<code>na.omit</code>	omit NAs
<code>na.contiguous</code>	compute longest sequence of non-NA observations
<code>na.locf</code>	impute NAs by carrying forward the last observation
<code>na.approx</code>	impute NAs by interpolation