Working example for generating multiple plots inside a map2 call

Ronald (Ryy) Glenn Thomas 2024-02-22

Table of contents

| 1 | Introduction | 1 |
|---|--|---|
| 2 | Plots for every variable and each species map inside map see ref 2 below | 3 |
| 3 | combine plots in a upper triangular grid with correlation coefs | 3 |
| 4 | Code | 3 |
| 5 | References | 5 |

1 Introduction

Consider the problem of running a data analysis requiring a separate analysis for each of n strata. For example consider an effort to model the relationship between Bill length and Flipper length across three different species of penguins.

We can work with the dataset ${\tt penguins}$ included in the package ${\tt palmerpenguins}$

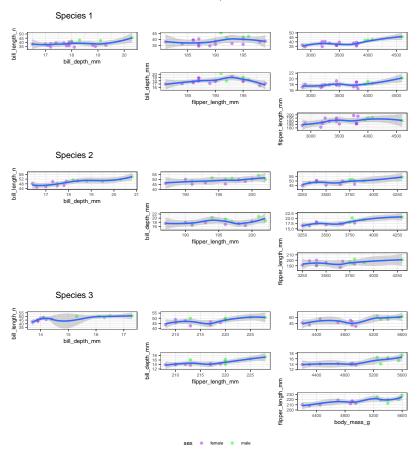


Figure 1: purrr

library(palmerpenguins)

One naive approach is to split the dataset and do three separate analyses:

The R package purr provides a straightforward method to conduct the analyses with a single command. Assume the set of data tables are contained in a list of dataframes. Also assume the analysis is a simple visualization of a potential linear association between two features,



- 2 Plots for every variable and each species map inside map see ref 2 below
- 3 combine plots in a upper triangular grid with correlation coefs

4 Code

```
library(pacman)
   p_load(grid, patchwork, rlang, purrr, palmerpenguins, tidyverse, knitr)
   opts_chunk$set(
     warning = FALSE, message = FALSE, echo = FALSE, fig.width = 8,
     fig.height = 9, results = "asis", dev = "pdf"
6
   df0 <- sample_n(penguins, 50) |> na.omit()
   # nn = 50 ; df1 = sample_n(penguins, 50)
   df1 <- split(df0, df0$species)</pre>
   # df2 = penguins |> group_by(species)
12
13
   ct \leftarrow names(df0)[3:6]
14
   # mm = expand.grid(names(df1[3:6]), names(df1[3:6]))
   nn \leftarrow t(combn(ct, 2))
   colnames(nn) <- letters[1:2]</pre>
   nn2 <- data.frame(nn) |> cbind(g = "sex")
18
19
   # nn2 |> pmap(function(a,b) {paste(a,b)})
20
21
   plt1 <- function(a, b, g, spc, df_split) {</pre>
22
     out_plot <- df_split |> ggplot(aes(x = .data[[a]], y = .data[[b]])) +
23
        geom_point(aes(color = .data[[g]]), alpha = .5) +
24
       geom smooth() +
25
       scale_color_manual(values = c("purple", "green", "red")) +
26
        theme bw()
27
     # theme(legend.position = c(.8,.2))+
28
     # theme(legend.title = element_text(size = 4),
29
```

```
legend.text = element_text(size = 4))+
30
     # theme(legend.box.background = element_rect(colour = "black"))+
31
     # guides(color = guide_legend(override.aes = list(size = 0.5)))+
32
        labs(, x = a, y = b,
33
              color = "sex")
34
     ggsave(paste0(spc, "_", a, "_", b, ".pdf"))
35
     assign(paste0(spc, "_", a, "_", b), value = out_plot, envir = .GlobalEnv)
36
     return(out_plot)
37
   }
38
39
40
   temp <- df1 |> map2(names(df1), function(df_split, spc) {
41
     nn2 |> pmap(function(a, b, g) {
42
       plt1(b, a, g, spc, df_split)
43
     })
44
   })
45
46
   p1 <- temp[[1]][[1]]
47
   p2 <- temp[[1]][[2]]
48
   p3 <- temp[[1]][[3]]
49
   p4 <- temp[[1]][[4]]
   p5 <- temp[[1]][[5]]
   p6 <- temp[[1]][[6]]
   p7 <- temp[[2]][[1]]
   p8 <- temp[[2]][[2]]
   p9 <- temp[[2]][[3]]
55
   p10 <- temp[[2]][[4]]
   p11 <- temp[[2]][[5]]
57
   p12 <- temp[[2]][[6]]
   p13 <- temp[[3]][[1]]
   p14 <- temp[[3]][[2]]
   p15 <- temp[[3]][[3]]
61
   p16 <- temp[[3]][[4]]
62
   p17 <- temp[[3]][[5]]
63
   p18 <- temp[[3]][[6]]
64
   #names(temp)
65
66
   layout <- "
   X##
68
   ABC
69
```

```
#DE
70
    ##F
71
    Y##
    GHI
73
    #JK
74
    ##L
75
    Z##
76
    MNO
77
    #PQ
    ##R
80
          grid::textGrob('Species 1')
81
    t2 = grid::textGrob('Species 2')
82
    t3 = grid::textGrob('Species 3')
83
84
    out <- wrap_plots(</pre>
85
      X=t1, A = p1, B = p2, C = p3, D = p4, E = p5, F = p6, Y=t2,
86
      G = p7, H = p8, I = p9, J = p10, K = p11, L = p12, Z = t3,
87
      M = p13, N = p14, O = p15, P = p16, Q = p17, R = p18,
88
      design = layout
89
    ) +
90
      plot_layout(
91
        guides = "collect",
92
        axis_titles = "collect"
93
      ) &
94
      theme(
95
        legend.position = "bottom",
96
        legend.direction = "horizontal",
97
        text = element text(size = 8)
98
      )
99
100
    out
101
```

5 References

principal components analysis

Automating exploratory plots with ggplot2 and purrr