

Core Java

Rajeev Gupta

Java Trainer & Consultant (MTech CS)

rgupta.mtech@gmail.com



Rajeev Gupta

FreeLancer Corporate Java JEE/ Spring Trainer

freelance • Institution of Electronics and Telecommunication Engineers IETE

New Delhi Area, India • 500+ 

-
1. Expert trainer for Java 8, GOF Design patterns, OOAD, JEE 7, Spring 5, Hibernate 5, Spring boot, microservice, netflix oss, Spring cloud, angularjs, Spring MVC, Spring Data, Spring Security, EJB 3, JPA 2, JMS 2, Struts 1/2, Web service
 2. Helping technology organizations by training their fresh and senior engineers in key technologies and processes.
 3. Taught graduate and post graduate academic courses to students of professional degrees.

I am open for advance java training /consultancy/ content development/ guest lectures/online training for corporate / institutions on freelance basis

Day-1: Introduction to Java, JVM, procedural programming, Arrays

- Introduction to OO Concepts
- Introduction to UML
- Pillars of OO: Inheritance - Polymorphism - Abstraction - Encapsulation
- JVM basics: JDK,JRE and JVM
- Procedural programming: if else, looping, switch etc
- Array, defining usages 1D/2D arrays
- Lab Assignments

=> oops concept

=> ds

=> threads:


classical threads: Thread, runnable , syn

java 1.5: juc (modern multithreads)

Java 1.7=> F & J framework (|| procesing)

java 8: declarative data processing (Stream data processing)

GOF:

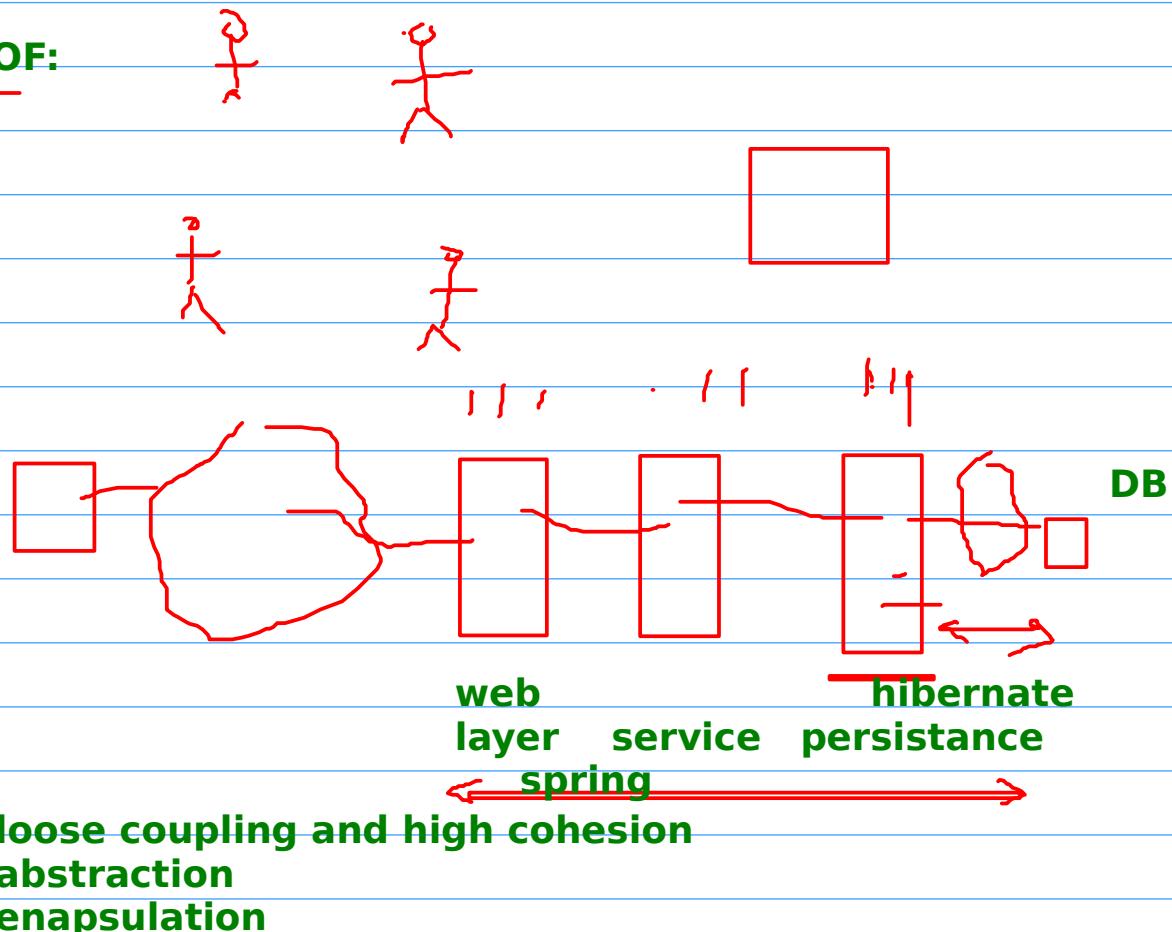

loose coupling and high cohesion
abstraction
enapsulation

SQL vs Java

select * from emp;


javascript: classical javascript

ES6: modern javascript

Typescript: wrapper on js




:)



a.ts



a.js



servlet

Day 2: Object Orientation & JVM introduction

- Creating Class, Object, constructor, init paramaters
- Static variable and method
- Concepts of packages, Access specifier
- Inheritance, Types of inheritance in Java, Inheriting Data Member and Methods
- Role of Constructors in inheritance,Overriding super Class methods, super
- Hands On & Lab

Day 3: Advanced Class Features

- Loose coupling and high cohesion
- composition, aggrigation, inheritance, basic of uml
 - Abstract classes and methods
 - Relationship between classes- IS-A, HAS-A, USE-A
 - Interface Vs Abstract, when to use what?
 - Final classes and methods
 - Interfaces, loose coupling and high cohesion
 - SOLID principles, Square – rectangle problem
 - Hands On & Lab

Day-4: Strings,Wrapper classes, Immutability, Inner classes,Lambda expression, Java 5 features , IO, Exception Handling

- String class: Immutability and usages, stringbuilder and stringbuffer
- Wrapper classes and usages, Java 5 Language Features
- AutoBoxing and Unboxing, Enhanced For loop, Varargs, Static Import, Enums
- Inner classes: Regular inner class, method local inner class, anonymous inner class
- Char and byte oriented streams
- BufferedReader and BufferedWriter
- File handling
- Object Serialization and IO [ObjectInputStream / ObjectOutputStream]
- Exception Handling, Types of Exception, Exception Hierarchy, Exception wrapping and re throwing
- Hands On & Lab

Day 5: Introduction to Java threads, thread life cycle, synchronization, dead lock

- Program vs process
- Thread as LWP
- Creating and running thread
- Thread life cycle
- Need of synchronization
- Producer consumer problem
- dead lock
- Hands on & Lab

Day 6:Java Collection, Generics

- Collections Framework introduction
- List, Set, Map
- Iterator, ListIterator and Enumeration
- Collections and Array classes
- Sorting and searching, Comparator vs Comparable
- Generics, wildcards, using extends and super, bounded type
- Hands on & Lab

Day-7: Annotation, Java Reflection

- Introduction to java reflection
- Java Annotation, JDK annotation, creating custom annotation, Annotation and reflection
- Introduction to Design pattern
- Hands on & Lab

Day 8: GOF design patterns

- Pattern categories: Creational, Structural, Behavioral
- Creational Patterns: Singleton, Factory, Builder, Prototype
- Structural Patterns: Decorator, Facade Pattern, Proxy
- Behavioral Patterns: Iterator, Observer, Strategy,Template Method
- Hands on & Lab



Day-1: Introduction to Java, JVM, procedural programming, Arrays

- Introduction to OO Concepts
- Introduction to UML
- Pillars of OO: Inheritance - Polymorphism - Abstraction - Encapsulation
- JVM basics: JDK,JRE and JVM
- Procedural programming: if else, looping, switch etc
- Array, defining usages 1D/2D arrays
- Lab Assignments

What is java?

HLL PL

WORA

PI

OOL

security

wide variety of use cases..


robust ?

~~fast as compared to c++~~



What is java= oops + jvm + comes with rich set api

C/C++ are native language


HW

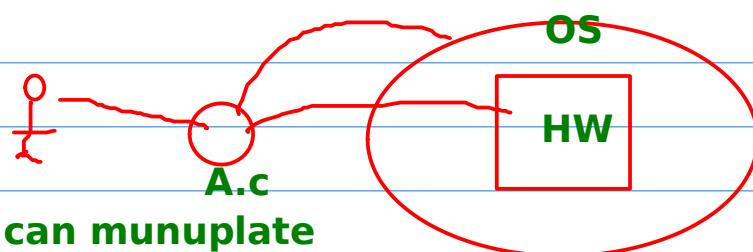

Pointer: you can manipulate pointer to create a virus

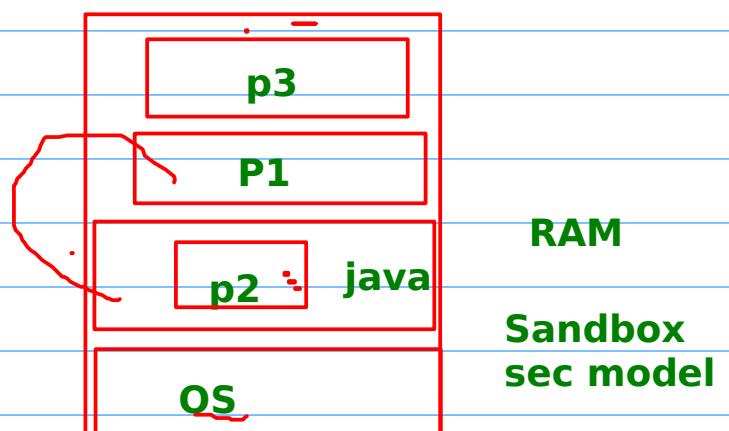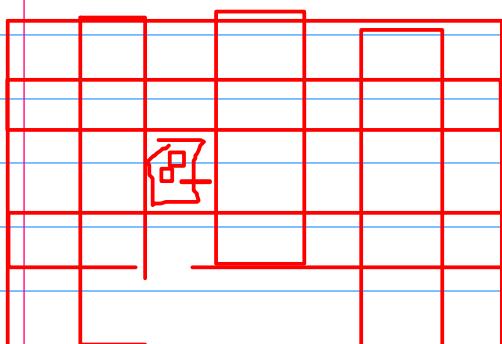

java is not that powerful as compared to c/c++
java is even slower than c/c++

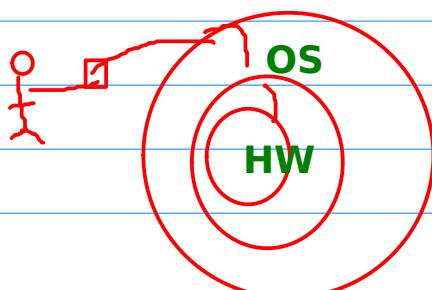

JVM (Java virtual machine)

main purpose of java is to provide a programming ie
secure and network friendly....
and PI too...


J Gosling's:C++: Oak: Java

Portability & network security

Java was 15 time slower than C++:
java performance is nearly to c++

c++ vs Java


it bind with machine info

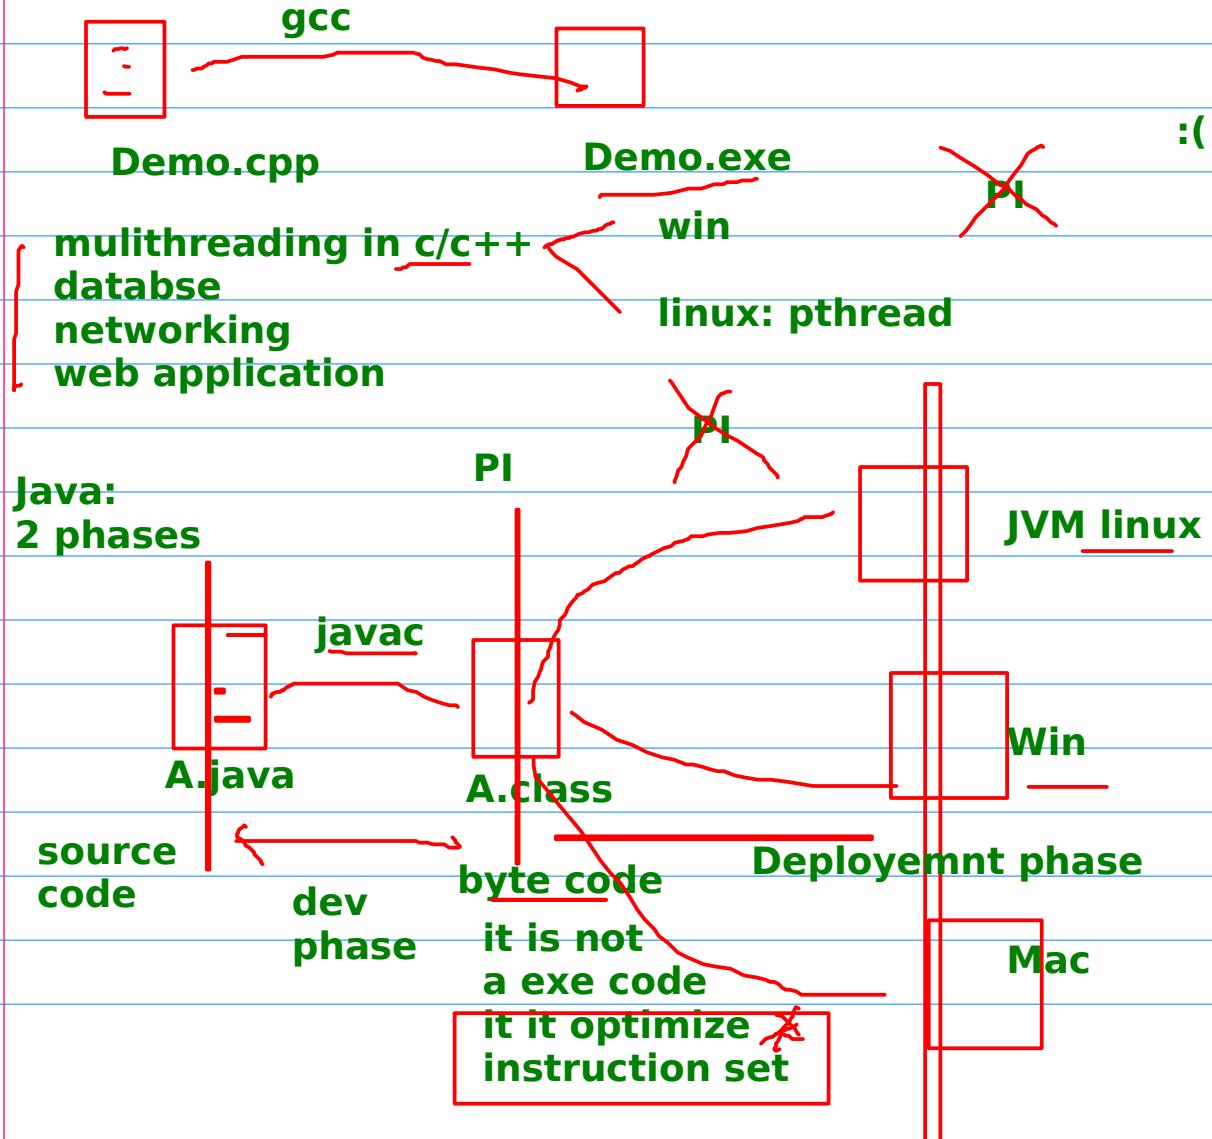


**JVM is plateform dependent entity
while java is PI till dev phase**


we are all dev :)


how to write a hello world ? how java is secure

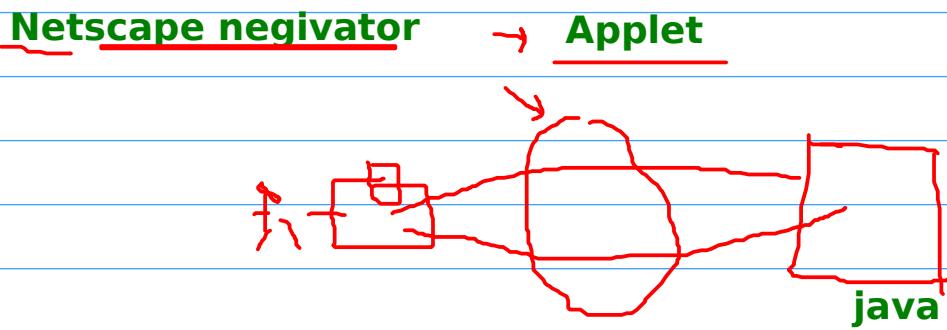

**java
javac
java -verbose**

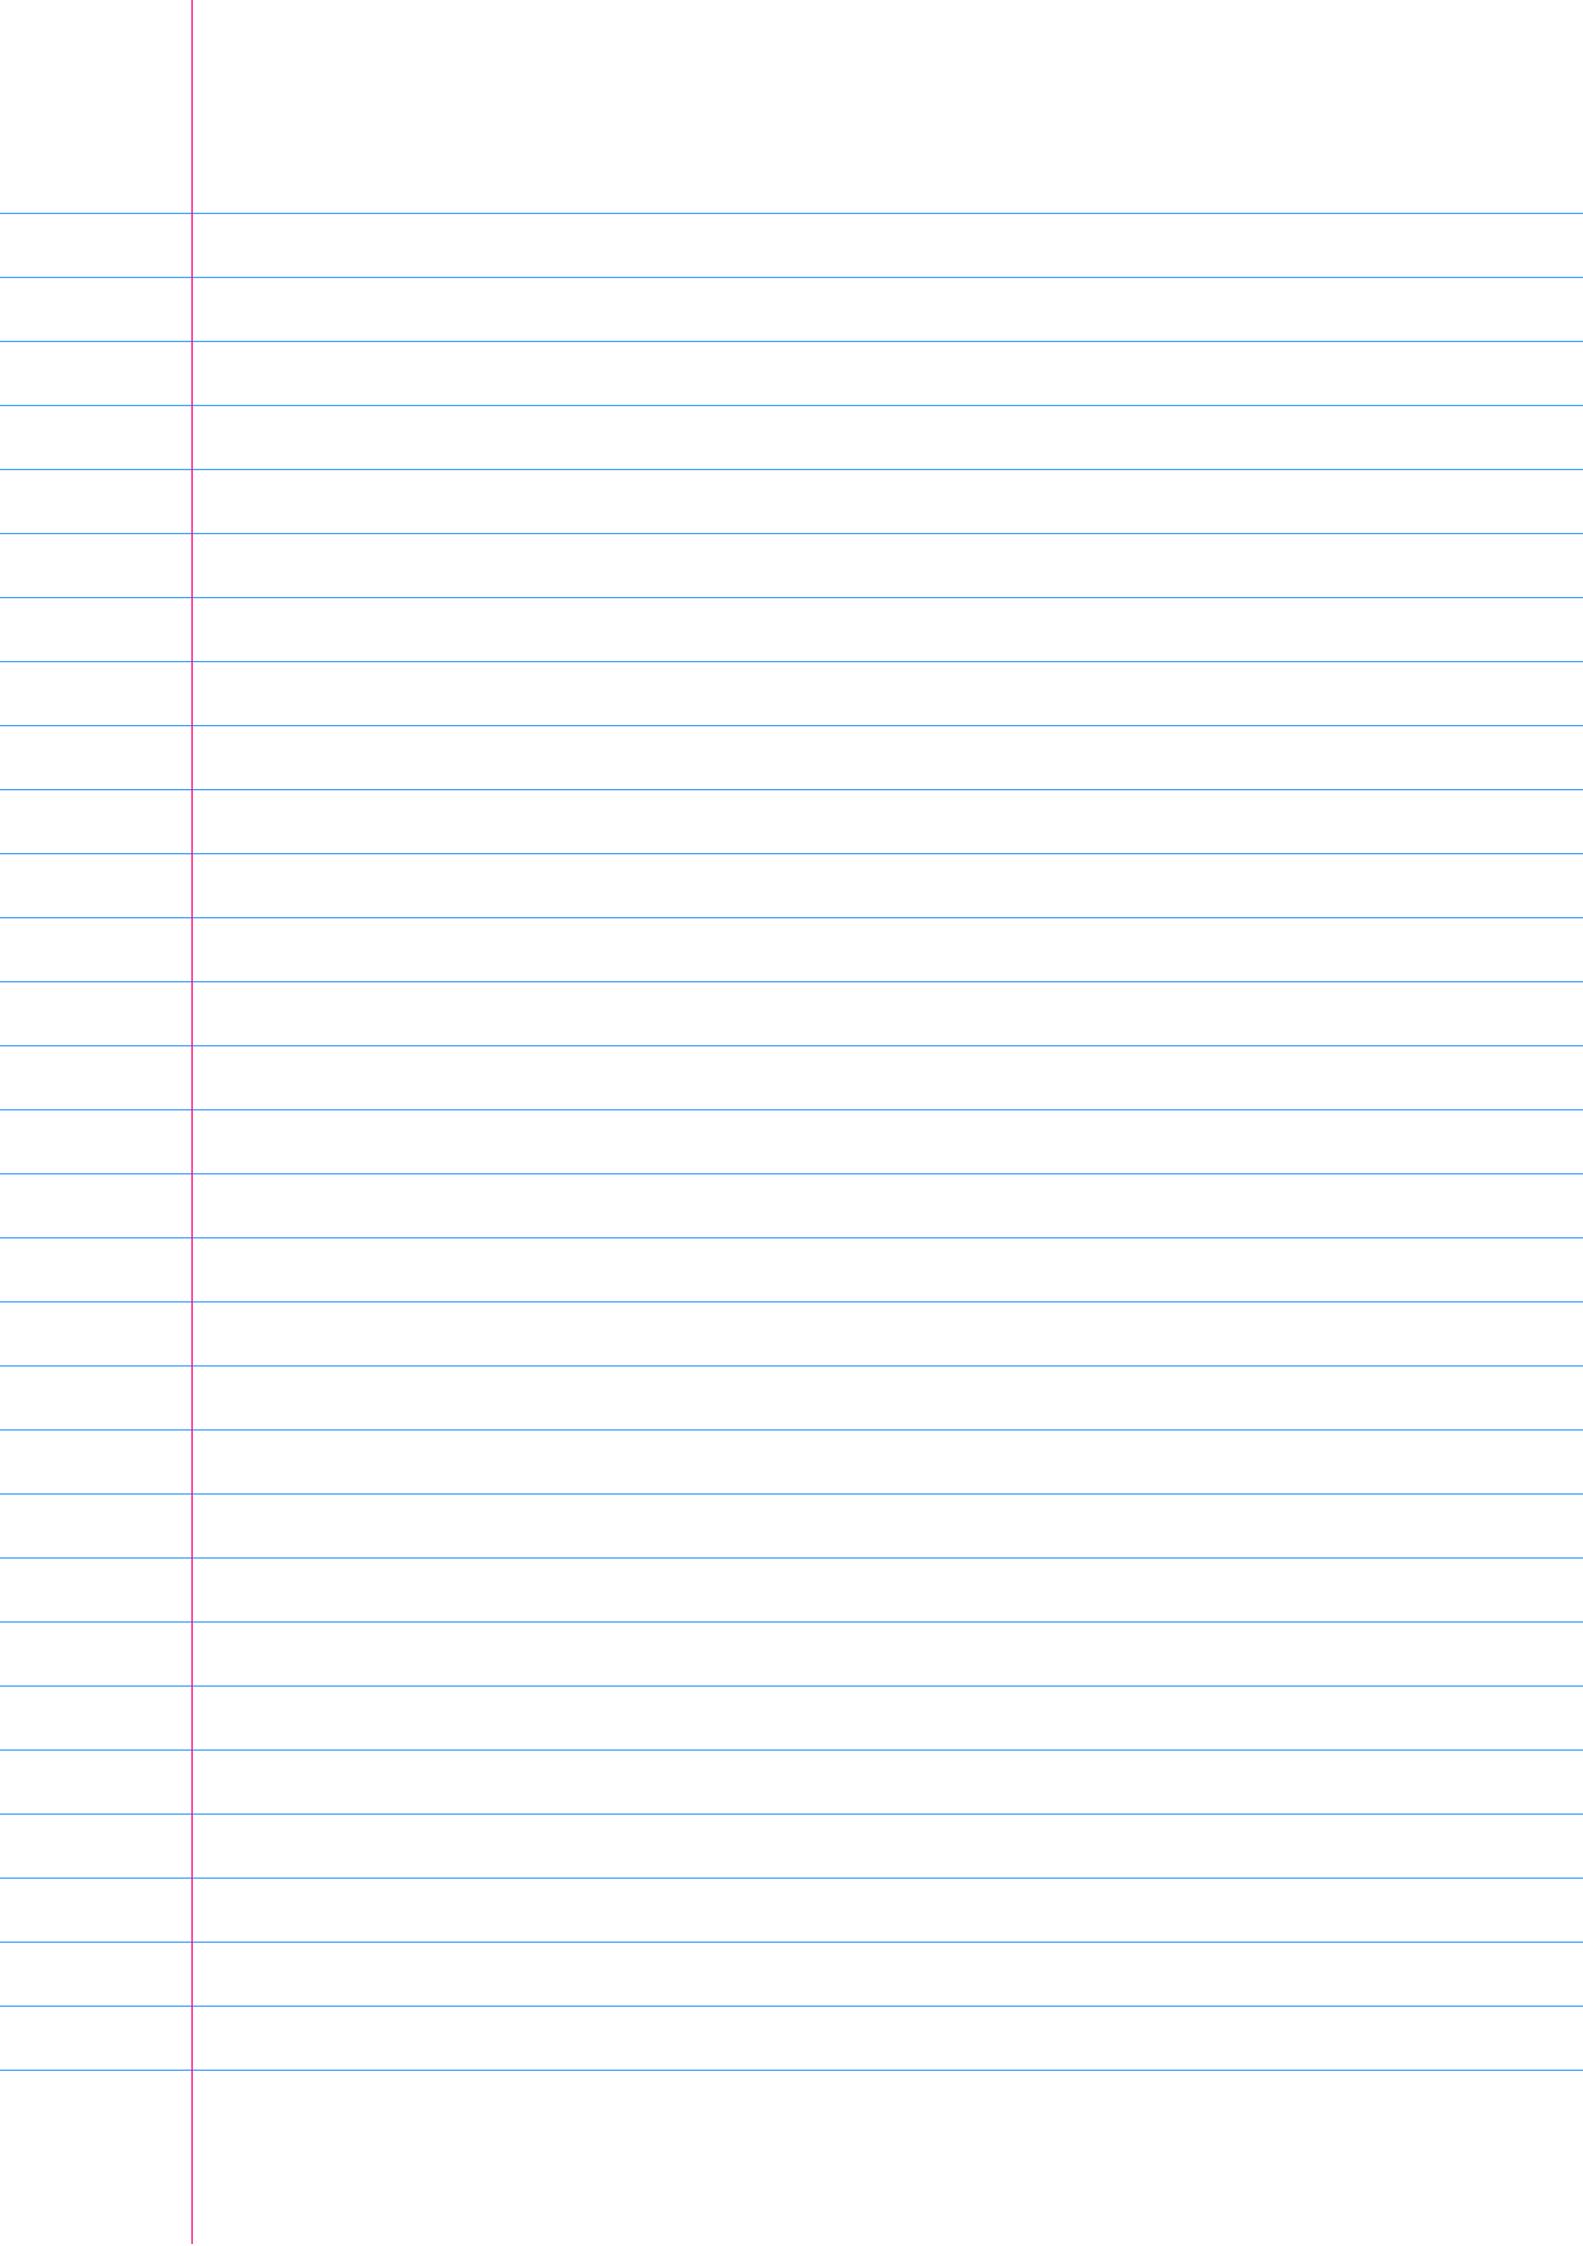

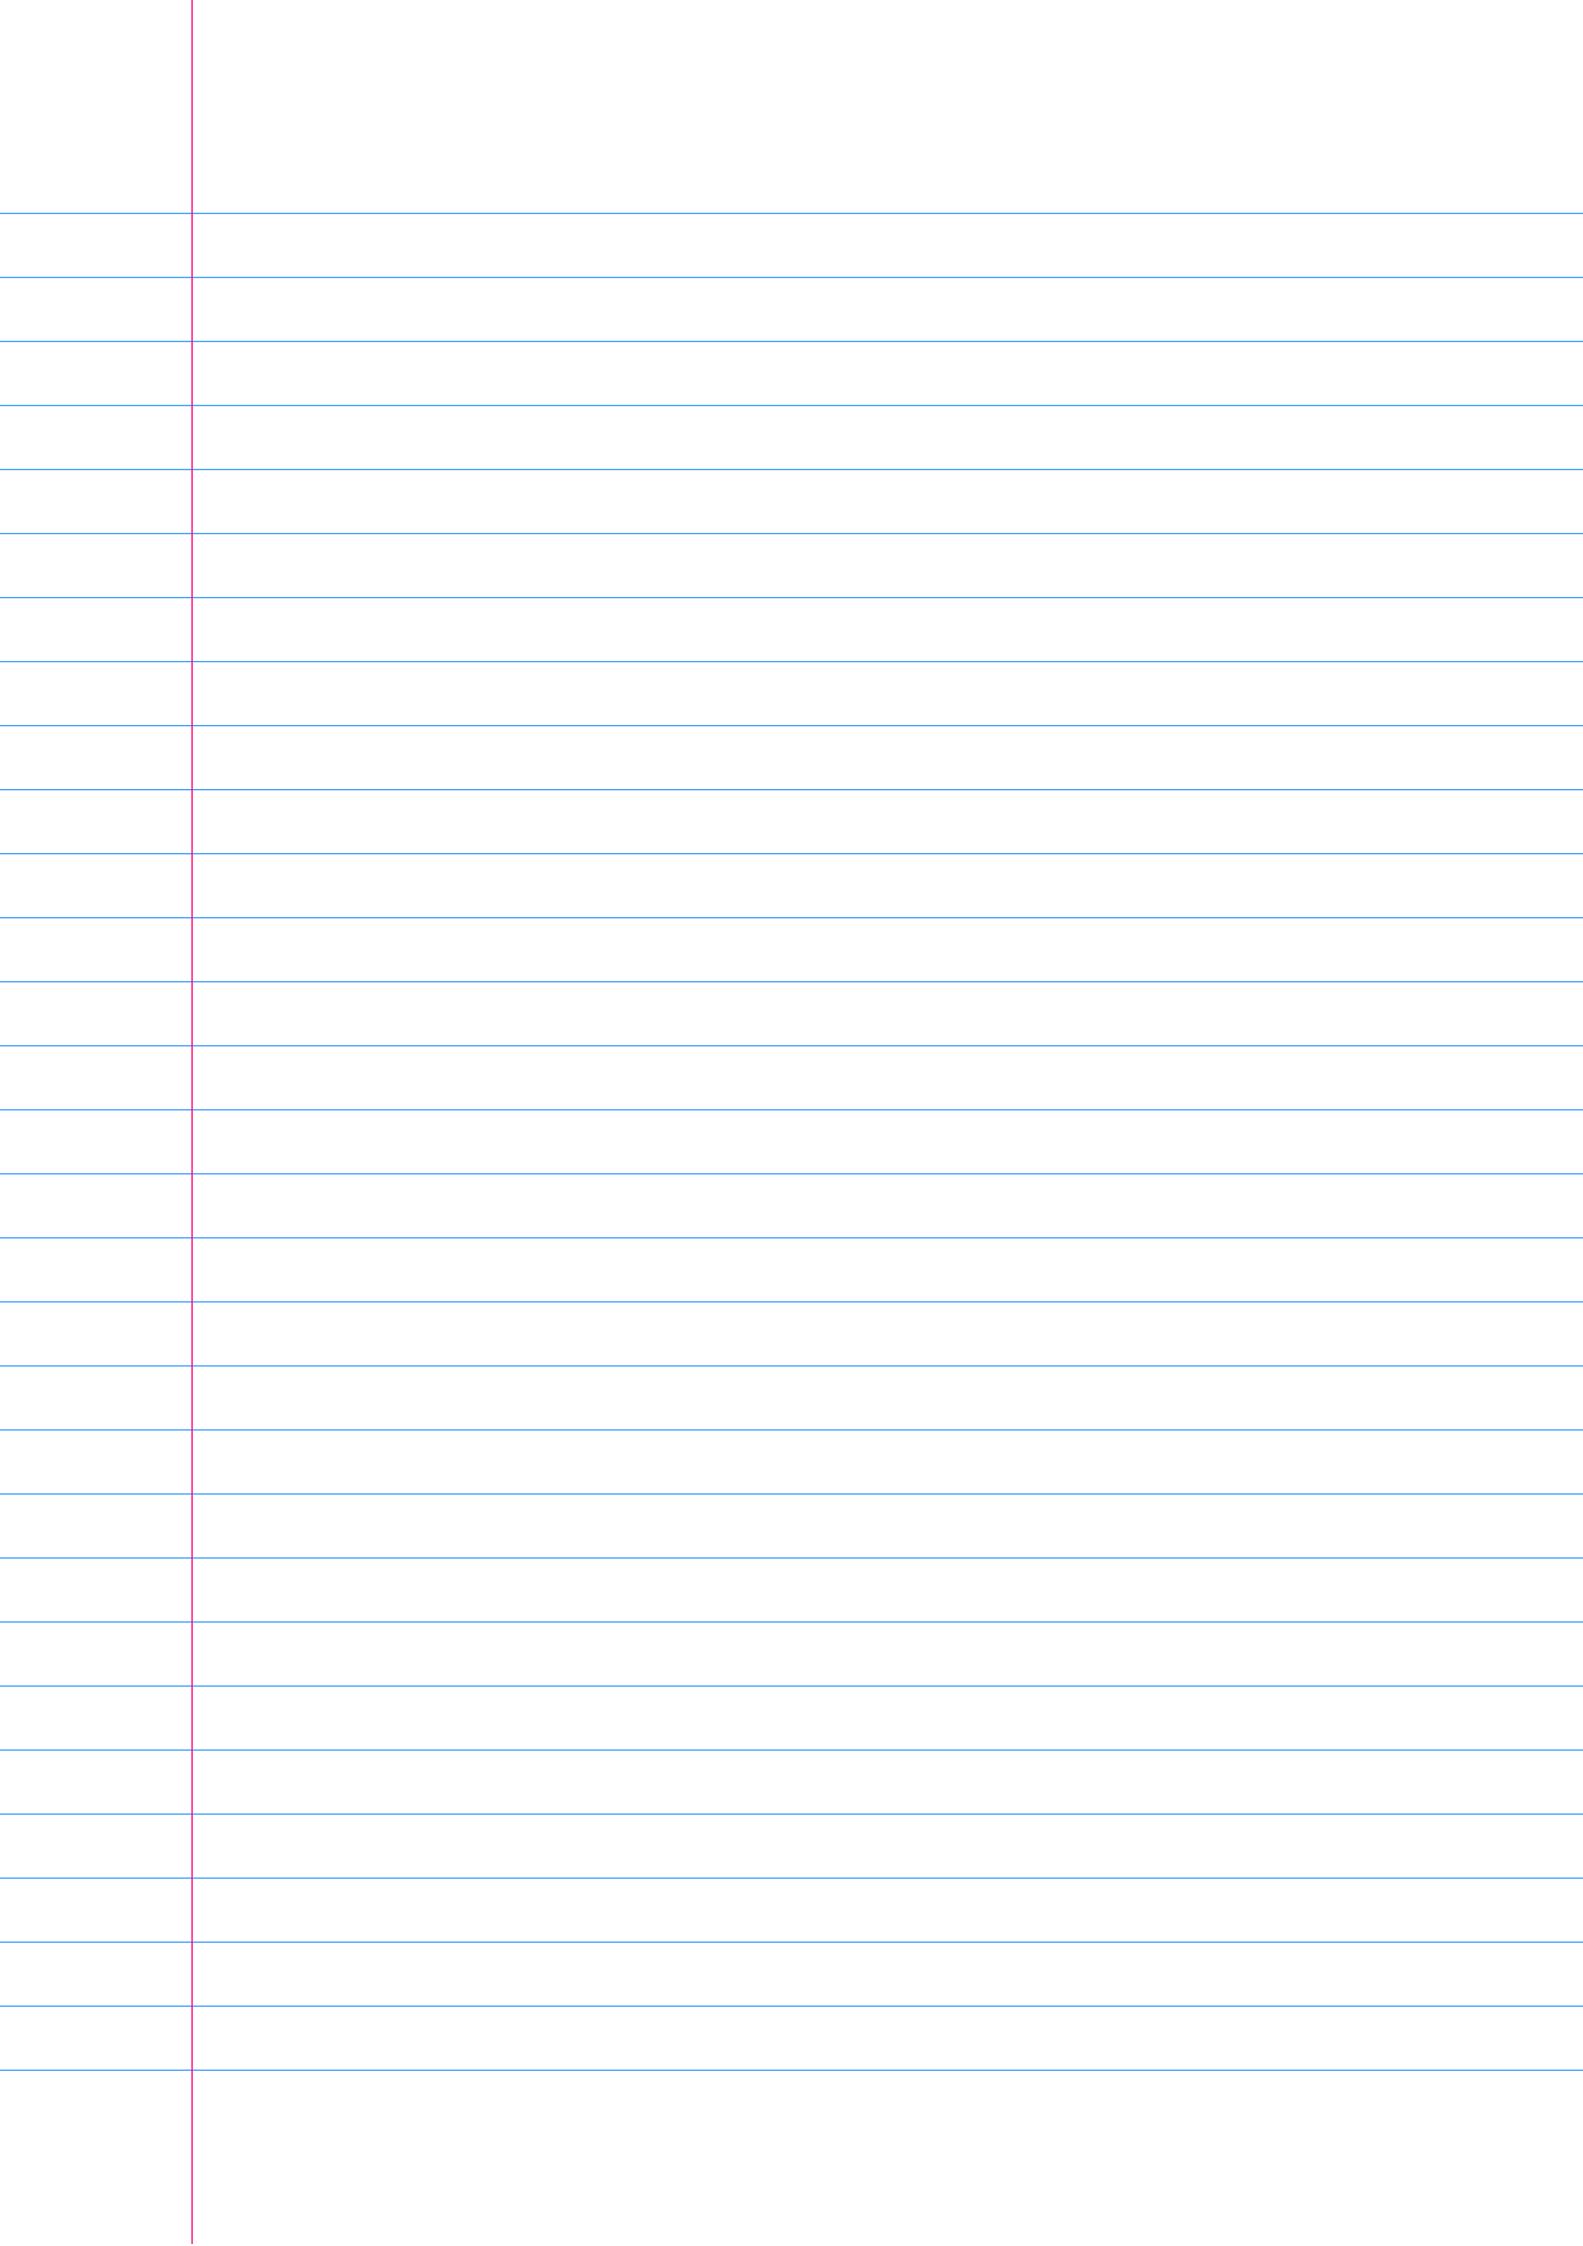

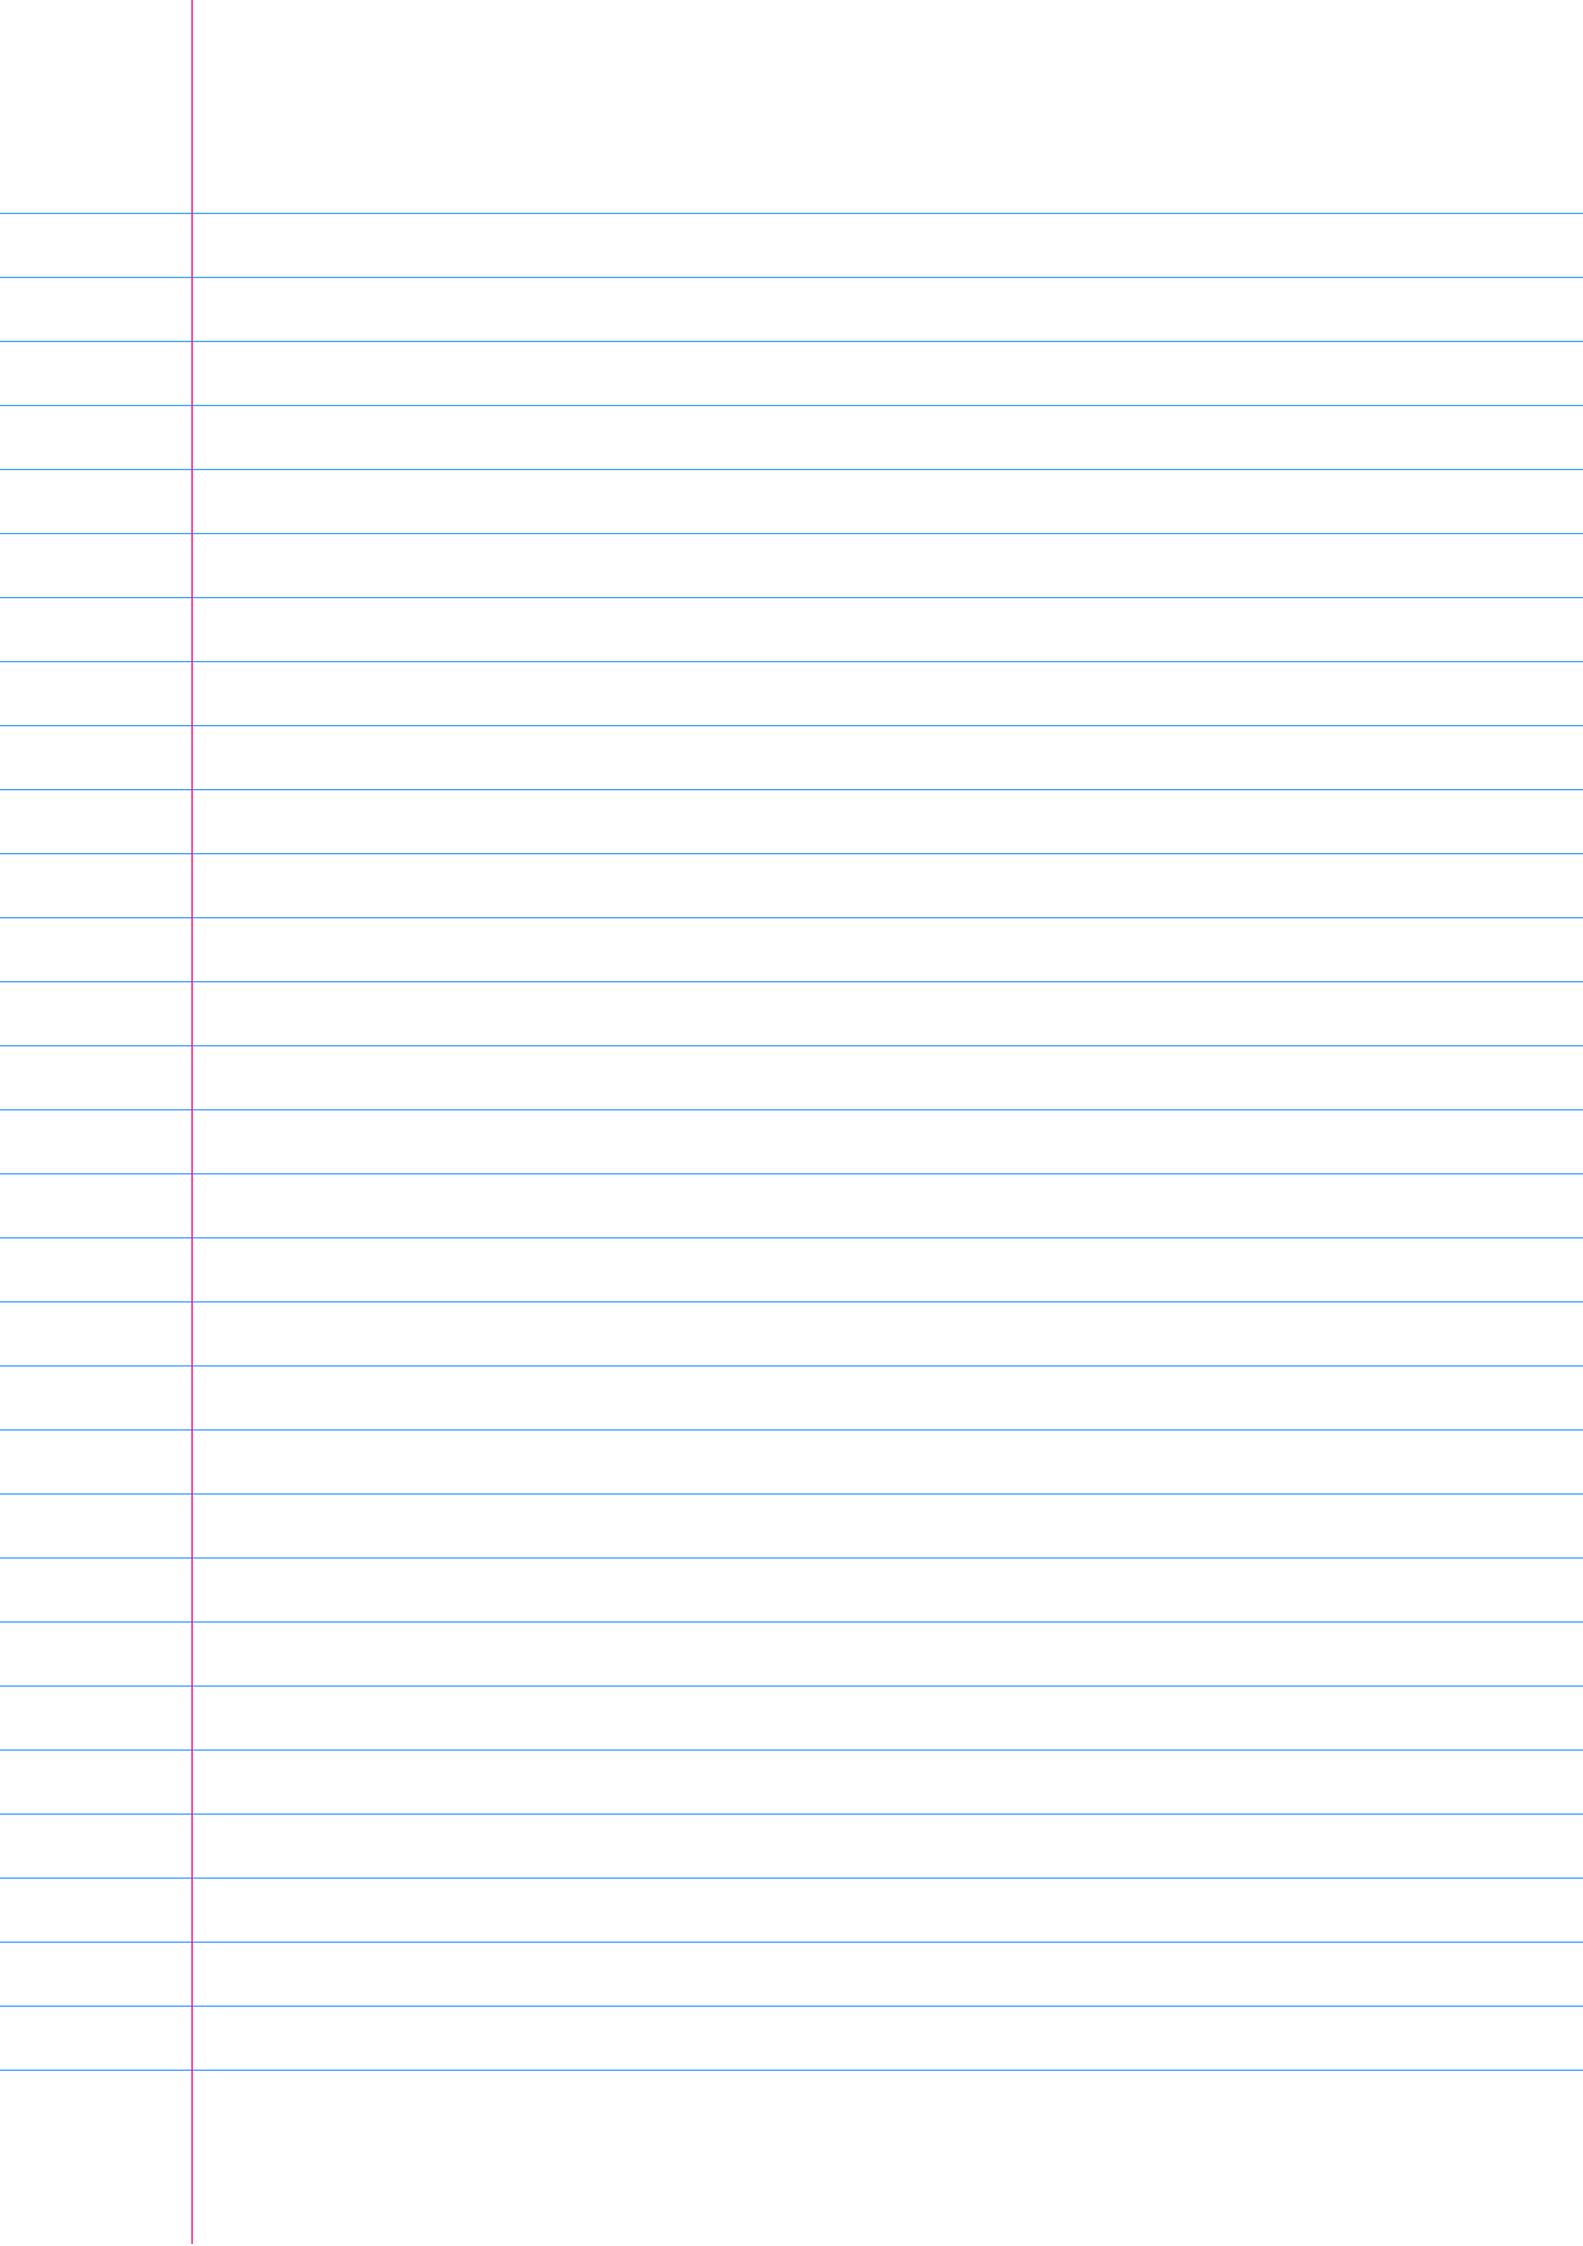

What is Java?

Java=OOPL+JVM+lib

- How Java is different then C++?





Java Language		Java Language											
Tools & Tool APIs		java	javac	javadoc	apt	jar	javap	JPDA		JConsole	Java VisualVM		
		Security	Int'l	RMI	IDL	Deploy	Monitoring	Troubleshoot		Scripting	JVM TI		
Deployment Technologies		Deployment			Java Web Start			Java Plug-in					
		AWT			Swing			Java 2D					
User Interface Toolkits		Accessibility		Drag n Drop		Input Methods		Image I/O	Print Service		Sound		
		IDL	JDBC™		JNDI™		RMI	RMI-IIOP		Scripting			
JRE Other Base Libraries		Beans		Intl Support		I/O	JMX		JNI		Math		
		Networking		Override Mechanism		Security	Serialization		Extension Mechanism		XML JAXP		
lang and util Base Libraries		lang and util	Collections		Concurrency Utilities		JAR		Logging		Management		
		Preferences API	Ref Objects		Reflection		Regular Expressions		Versioning	Zip	Instrument		
Java Virtual Machine		Java Hotspot™ Client VM				Java Hotspot™ Server VM							
Platforms		Solaris™			Linux		Windows			Other			



Java SE API

How Sun define Java?

Robust?

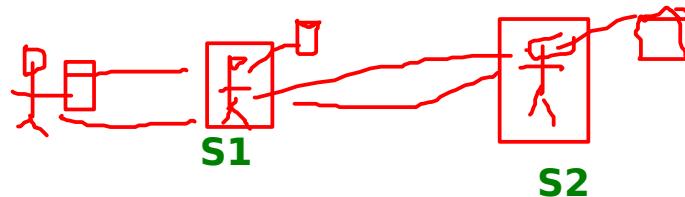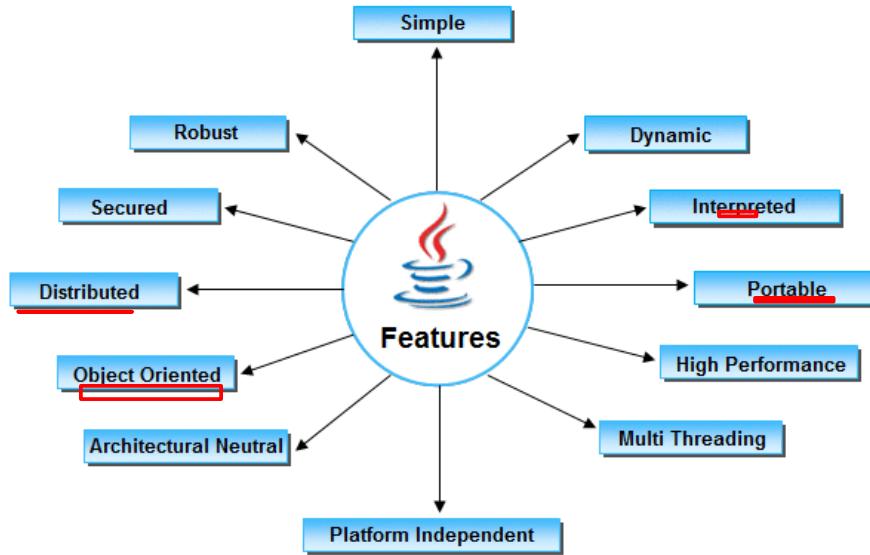

Robust ?


Versions of Java

Java Version/Code Name	Release Date	Important Features/Code Name
JDK Alpha and Beta	1995	Initial release
JDK1.0(OAK)	23 rd Jab 1996	Initial release
JDK1.1	19 th Feb 1997	Reflection ,JDBC, Inner Classes, MI
J2SE1.2(Playground)	8 th Dec 1998	Collection,JIT,String memory map
J2SE 1.3(Kestrel)	8 th May 2000	Java Sound,Java Indexing,JNDI
J2SE 1.4(Merlin)	6 th Feb 2002	Assert,regex,exception chaining
J2SE 5.0(Tiger)	30 th Sept 2004	Generic,autoboxing,enums,varargs,for each,static import
Java SE 6.0(Mustang)	11 th Dec 2006	JDBC4.0,Java compiler API Annotations
Java SE7.0(Dolphin)	28 th July 2011	String in switch case, resource management in exception,catching multiple exception
Java SE8.0	18 th March 2014	Lambad expression,Annotation on Java type,Data and Time API

Version	Release date	End of Public Updates ^[5]	Extended Support Until
JDK Beta	1995	?	?
JDK 1.0	January 1996	?	?
JDK 1.1	February 1997	?	?
J2SE 1.2	December 1998	?	?
J2SE 1.3	May 2000	?	?
J2SE 1.4	February 2002	October 2008	February 2013
J2SE 5.0	September 2004	November 2009	April 2015
Java SE 6	December 2006	April 2013	December 2018
Java SE 7	July 2011	April 2015	July 2022
Java SE 8 (LTS)	March 2014	January 2019 (commercial) December 2020 (non-commercial)	March 2025
Java SE 9	September 2017	March 2018	N/A
Java SE 10 (18.3)	March 2018	September 2018	N/A
Java SE 11 (18.9 LTS)	September 2018	March 2019 from Oracle Later from OpenJDK	Vendor specific
Java SE 12 (19.3)	March 2019	September 2019	N/A
Legend: Old version Older version, still supported Latest version Future release			

Some common buzzwords


- JDK
 - Java development kit, developer need it
- Byte Code
 - Highly optimize instruction set, designed to run on JVM
 - Platform independent
- JRE
 - Java Runtime environment, Create an instance JVM, must be there on deployment machine.
 - Platform dependent
- JVM
 - Java Virtual Machine JVM
 - Pick byte code and execute on client machine
 - Platform dependent...

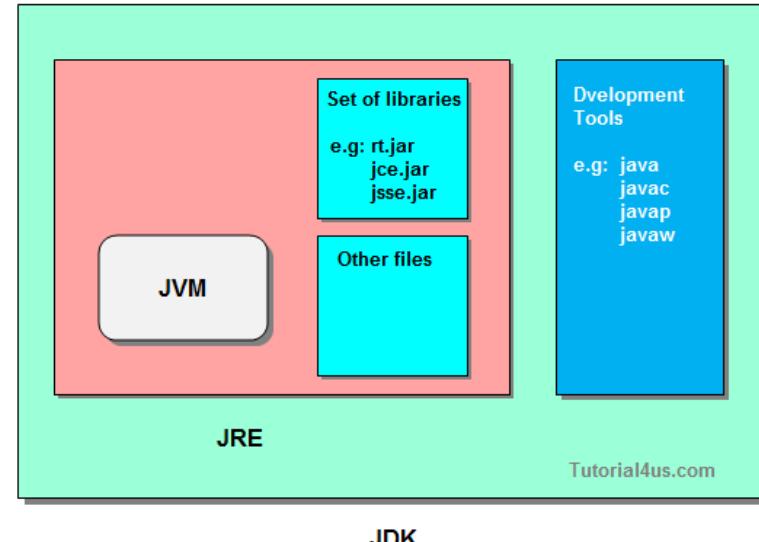

JDK : java dev kit => dev

JRE : is req to run the code

JVM

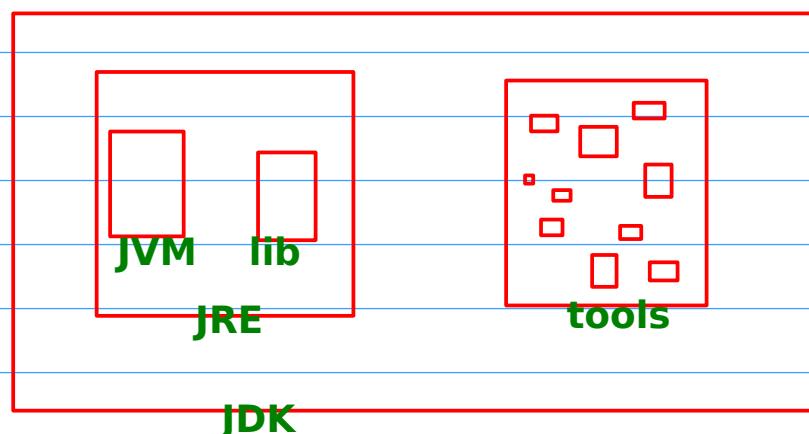

`javac Demo.java`

`java Demo`

this command invoke jre

it give me an instance of jvm

jre is just a install sw
while jvm is a running instance of it (process)


programm vs process

jre

jvm

Understanding JVM

Key HotSpot JVM Components

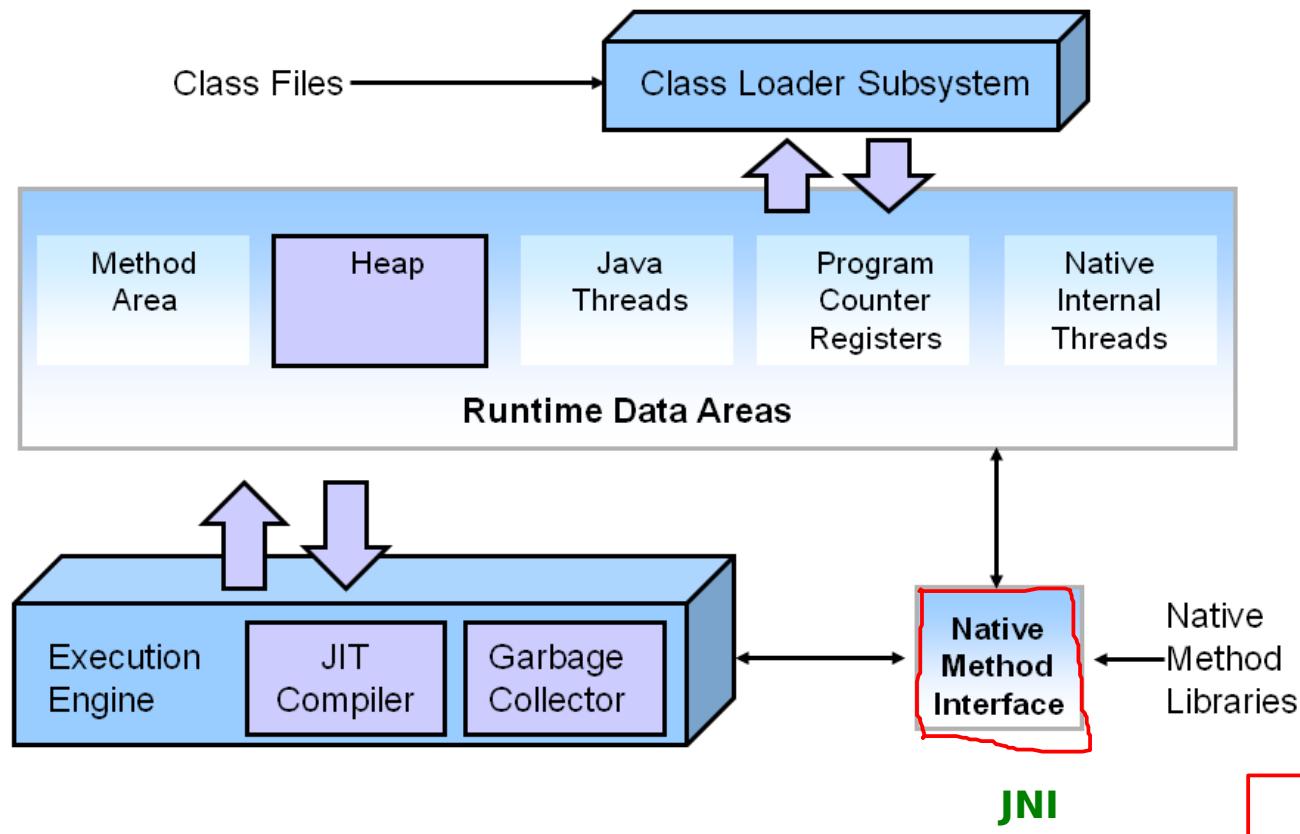

Hello World

- Lab set-up
 - Java 1.8
 - Eclipse Luna

```
public class HelloWorld {  
    public static void main(String args[])  
    {  
        System.out.println("welcome to the world of Java !!!");  
    }  
}
```

Analysis of Hello World !!!

```
public class HelloWorld {  
    public static void main(String args[])  
    {  
        System.out.println("welcome to the world of Java !!!");  
    }  
}
```

keyword

visibility modifier

need to be static

important class in java

Name of the program

declare by compiler, define by user

command line arguments


predefine object of PrintWriter

function define inside this class..

The diagram illustrates the annotated code 'HelloWorld.java'. It highlights several key components with annotations:



- public class HelloWorld {**:
 - public**: keyword
 - class**: visibility modifier
 - HelloWorld**: Name of the program
- main**: declare by compiler, define by user
- String args[]**: command line arguments
- System.out.println**:
 - System**: important class in java
 - out**: predefine object of PrintWriter
 - println**: function define inside this class..

how command line arg works?

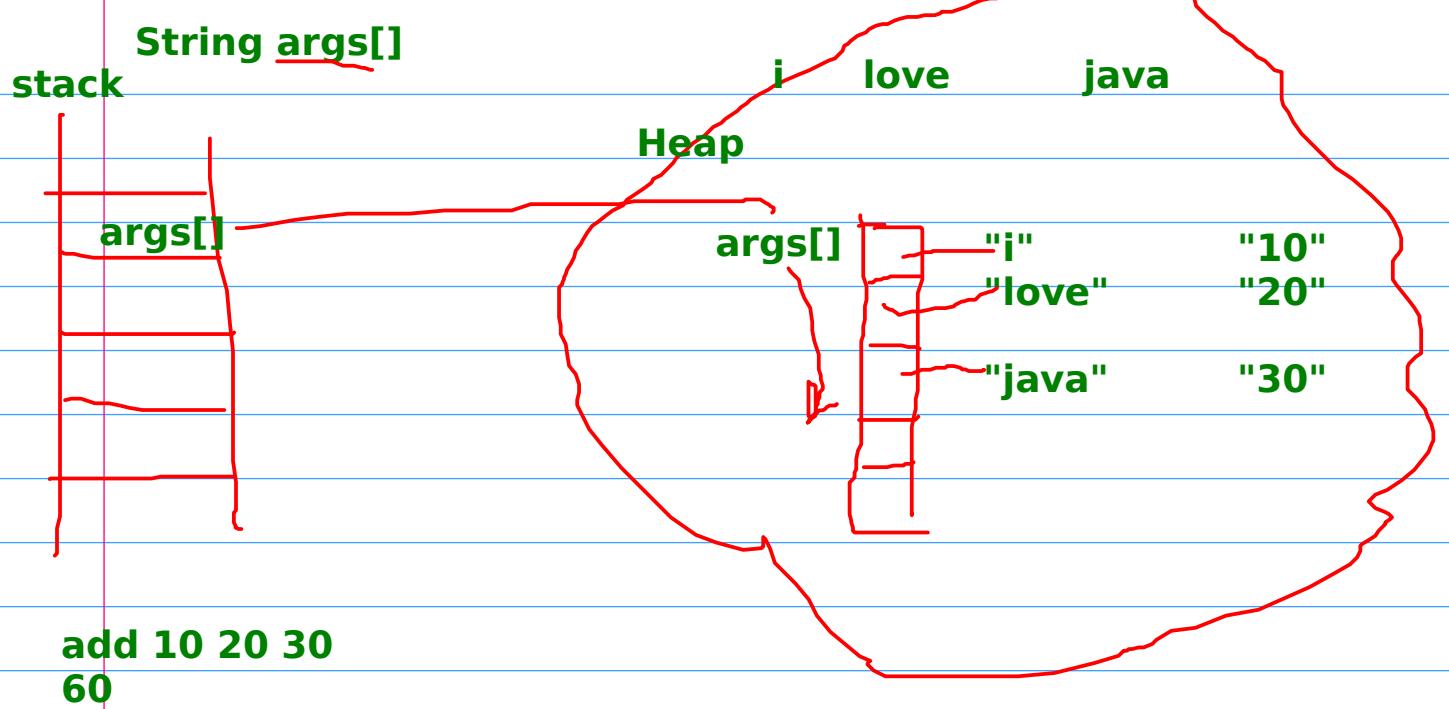

Some basics rules about java classes


- 1) Java Source file structure
- 2) Order of placing package and import statement
- 3) Order of placing interface, class, enum, annotation, doc comment
- 4) How many package and import statements are allowed in a single java file?
- 5) Why only one package statement is allowed in and why multiple import statements are allowed?

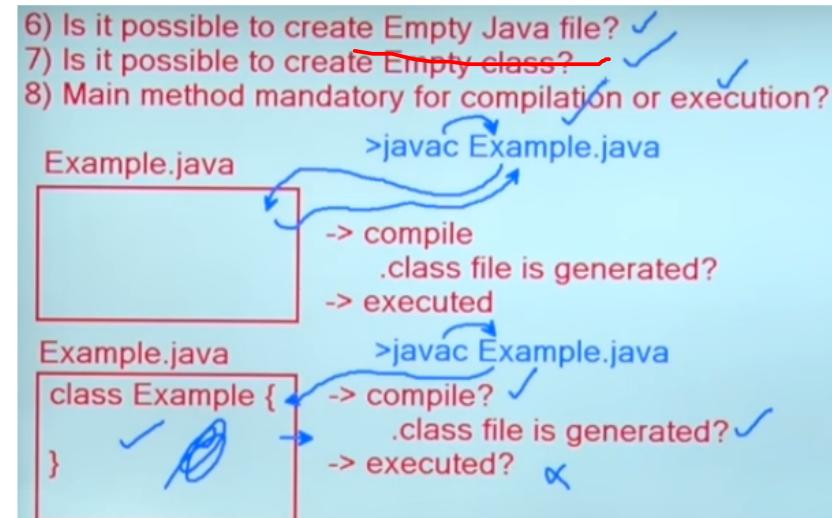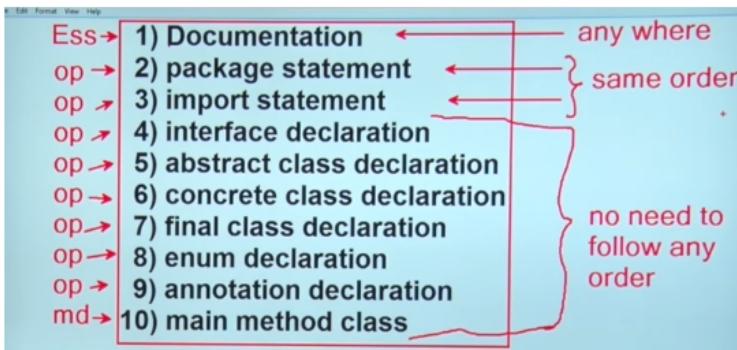

Java Data Type

□ 2 type

- Primitive data type
- Reference data type

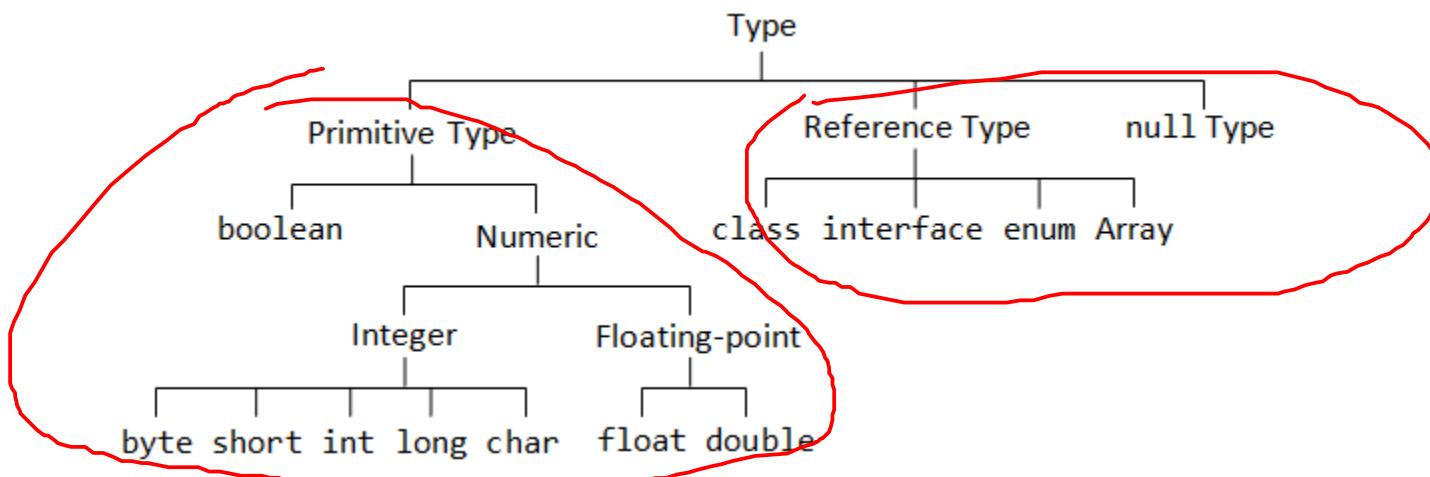

Primitive data type

Java is strongly typed language:

**double i=55.7;
int j=i;**

- boolean either true or false
- char 16 bit Unicode 1.1
- byte 8-bit integer (signed)
- short 16-bit integer (signed)
- int 32-bit integer (signed)
- long 64-bit integer (singed)
- float 32-bit floating point (IEEE 754-1985)
- double 64-bit floating point (IEEE 754-1985)

Java uses Unicode to represent characters internally

```

class Employee{
//data
int id;
String name;
double salary;
//method
//constructor
//getter setter

public void printData(){
    Sysout("id"+ id+"name :" +name + "salary: " + salary);

}
}

```

Employee e1=new Employee();

object handler

e1 is a ref to the object
where is the object: it somewhere in the heap

Emp e1=new Emp();

Heap

id=4
name=raj
sal=4000

...

....

Emp e2=e1;

e2=null;

e1=null;

e2

e1

Method area

java will store
class object in method area

if a object is not refer by a valid pointer then
it become candidate of garbage collector

Procedural Programming

- if..else
- switch
- Looping; for, while, do..while as usual in Java as in C/C++
- Don't mug the program/loaic
- Follow dry run appro
 - Try some programm
 - Create
 - Factorial program
 - Prime No check
 - Date calculation

*
**

Dry run : running the code in our brain, copy


*/ */ */ */ */

rows

```
for(...){  
    for(... column ...){  
        }  
    }
```

```
for(int i=0;i<5; i++) {  
    for(int j=0;j<=i;j++) {  
        System.out.print("*");  
    }  
    System.out.println();  
}
```

i	j
0	0
1	0,1
2	0,1,2
3	0....3
4	0 ...4



*.
**

factorial

prime no?

let accept the no x from the user
let no is a prime no

print no of prime
no bw two given
no

boolean isPrime=true;

n1 n2
23 678

```
for(i=2; i<x/2;i++){  
    if(i%2==0){  
        isPrime=false;  
        break;  
    }  
}
```

```
int counter=0;  
for(int i=n1;i<=n2; i++){  
    if(checkPrime(i)){  
        counter++;  
    }  
}
```

today date:

2/1/2021

3/1/2021

31/12/2020

1/1/2021

dd/mm/yyyy

```
dd=dd+1;  
if(dd>daysInMonths[mm]) {  
    dd=1;  
    mm++;  
    if(mm>12){  
        mm=1;  
        yyyy++;  
    }  
}
```

steps:


1. check input data
2. check for leap year
3. manage no of days/month

```
int daysInMonths[]={-1, 31, 28/29, 31, 30, 31, 30, 31, 31, 30, 31, 30, 31};
```

```
isLeapYear(yyyy);
```

```
int isLeapYear(int year)  
{  
    return (year % 400 == 0) || ((year % 100 != 0)  
        && (year % 4 == 0));  
}
```

oo basics

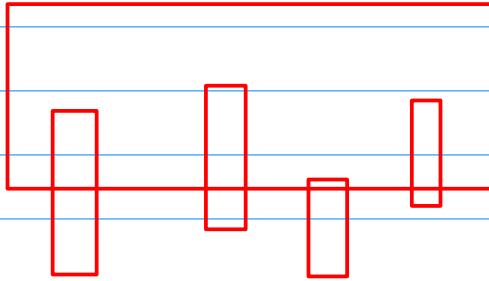

Array of C vs Java
in c/c++ arrays are primitive

in java they are objects

~~int x[3];~~

int x[] = new int[5];

for(int i=0; i<y.length; i++)
 Sysout(y[i]);
}

int y[] = {3,5,6,7};

0 1 2 3 4

3050 3054

newer way:

for(int temp: y){
 Sysout(temp);
}


Dog [] dogs = new Dog[5];

0

what is "dogs"

dogs

**dogs is a pointer (ref) that point to the arrary which can hold 5 dogs
ie array act as a place holder**



2 D arrays?

`int x[][]=new int[4][3];`

x is a ref referring to an array of size 4 which can further hold address of one d array of size 3

x[][],

`int x[][]=new int[4][];`

jagged array java

jagged ar

~~`int x[][]=new int[][][3];`~~


`int arr[][]=new int[4][3];`
`for(int temp[]: arr) {`
`}`

`int arr[][][] = new int[5][4][2];`

arr[][][]



```
Int [][]={{1,0,0},{0,1,0},{0,0,1}};  
  
for(...){  
    for(...){  
        if(i==j){  
            if(a[i][j]!=1){  
                isIdentity=false;  
                break  
            }  
        }  
    }  
}
```

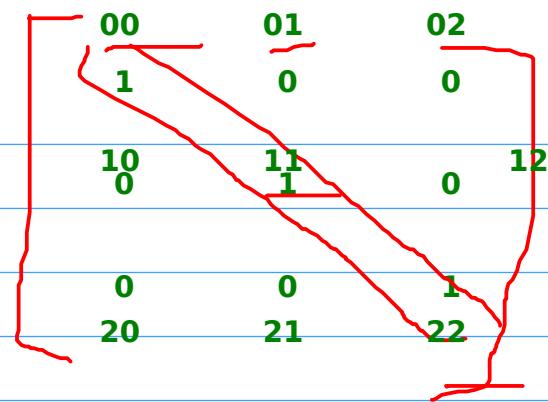

Array are object in java

- How Java array different from C/C++ array?


One Dimensional array

Initialization `int a[] = new int [12];`

Value	1	2	3	4	5	6	7	8	9	10	11	12
Index	a[0]	a[1]	a[2]	a[3]	a[4]	a[5]	a[6]	a[7]	a[8]	a[9]	a[10]	a[11]

`System.out.print(a[5]);`

Output: 6

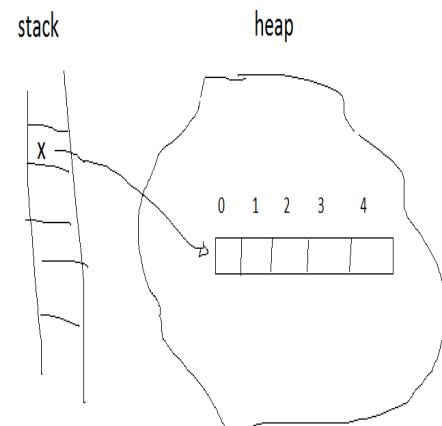

Java Array: its different then C/C++

Object technologies

- OO is a way of looking at a software system as a collection of **interactive objects**

Reality



Tom's House



Tom



Tom's Car

Model



What is an Object?

- Informally, an object represents an entity, either physical, conceptual, or software.

- Physical entity



Tom's Car


- Conceptual entity



US\$100,000,000,000

Bill Gate's bank account

- Software entity



Class

- A class is the blueprint from which individual objects are created.
- An object is an instance of a class.



Object factory



Cookie Cutter



```
public class StudentTest {  
    public static void main(String[] args) {  
        Student s1 = new Student();  
        Student s2 = new Student();  
    }  
}
```

- class -

```
public class Student {  
    private String name;  
    // ...  
}
```

Classes and Object

- All the objects share the same attribute names and methods with other objects of the same class
- Each object has its own value for each of the attribute


Person
- name
- dateOfBirth
+ getAge()





harry:Person	
name	Harry
dateOfBirth	8/12/1975
+ getAge()	

mary:Person	
name	Mary
dateOfBirth	8/12/1980
+ getAge()	



Basic principles of OO

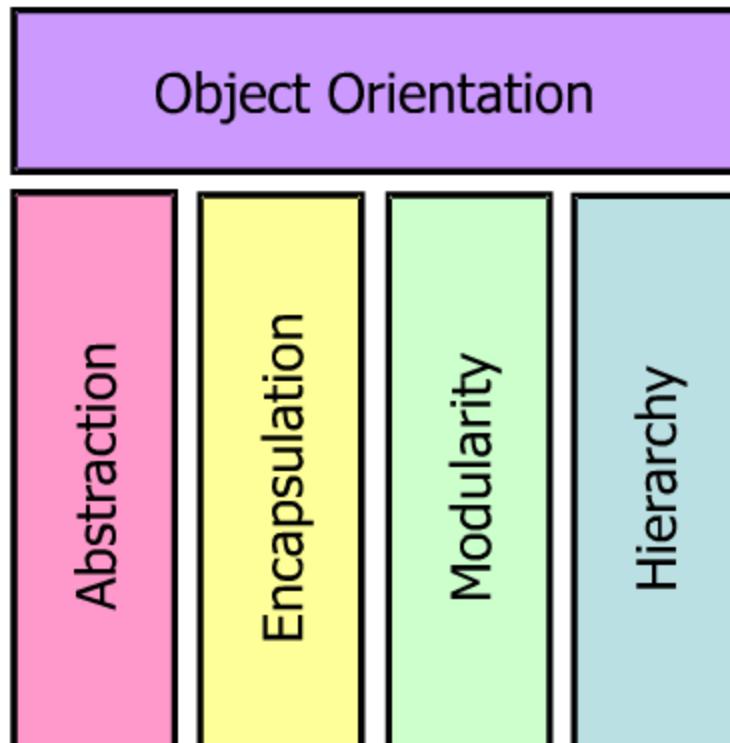

Abstraction : focus on essential thing ignoring the diff for time being?

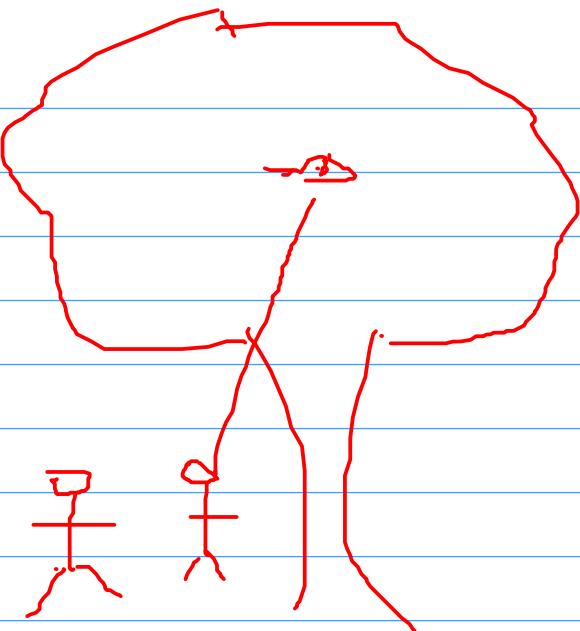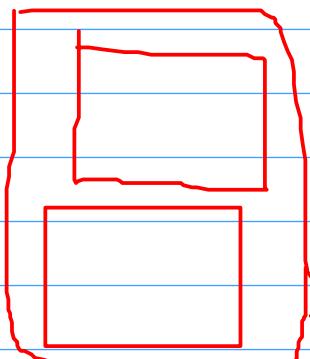


Encapsulation: can be achieve using data hiding

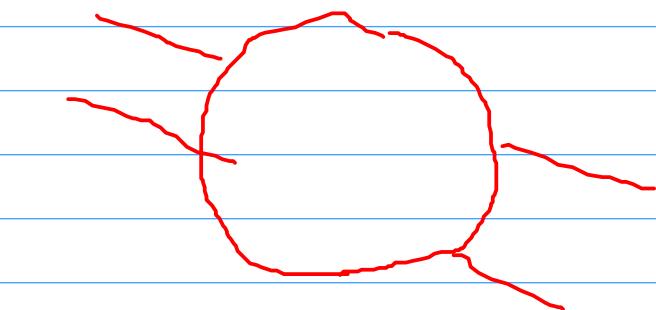

AK



Dealing with Software complicity:Abstraction

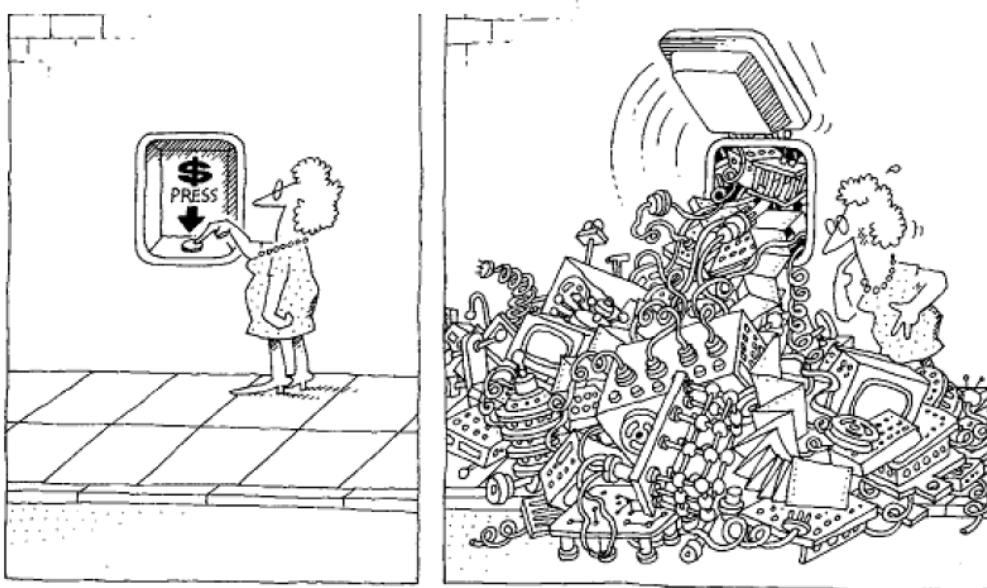

The task of the software development team is to engineer the illusion of simplicity.

Abstraction

- Fundamental ways that we use to cope with complexity
- "abstraction arises from a recognition of similarities between certain objects, situations, or processes in the real world, and the decision to concentrate upon these similarities and to ignore for the time being the differences" -Hoare →
- An abstraction denotes the **essential characteristics of an object that distinguish it from all other kinds of objects** and thus provide crisply defined conceptual boundaries, relative to the perspective of the viewer.

```
Stack  
:int pop()  
push(int x)  
int peek()  
isEmpty()  
isFully()
```

```
class AnkitaStack{
```

```
int popMy(){  
}  
push(int x){  
}  
int peek(){  
}  
isEmpty(){  
}
```

```
}
```

```
stack{  
popMe(){  
}}
```

```
stackRaj{  
popRaj(){  
}}  
}
```

inteface are 100% ab in java

```
StackImpByRaj imp.... Stack{
```

```
interface Stack{  
public void push(int x);  
public int pop();  
....  
....  
}
```

M2

interface

```
Stack s=new StackImpByKeshav();
```

m1

Abstraction

data


method

- Determine the **relevant properties** and features while ignoring non-essential details

Cat
- bloodType - numberOfBones - lastVisitDate

abstraction

Cat
- dateOfBirth - favouriteFood - favouriteToy

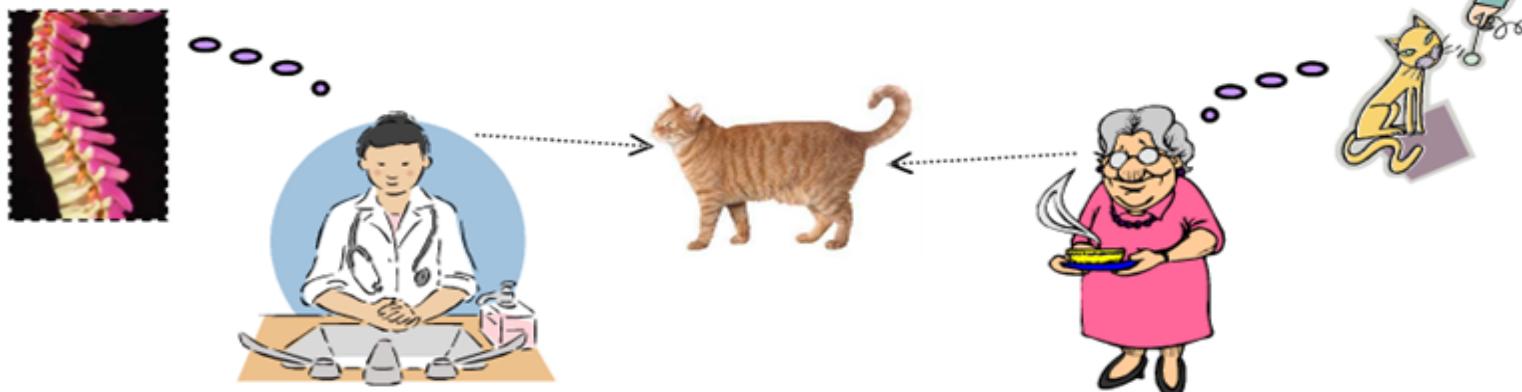




Encapsulation

- Abstraction and encapsulation are *complementary concepts*: abstraction focuses upon the observable behavior of an object, whereas encapsulation focuses upon the implementation that gives rise to this behavior.
- Encapsulation is most often achieved through information hiding which is the process of hiding all the secrets of an object that do not contribute to its essential characteristics; typically, the structure of an object is hidden, as well as the implementation of its methods.
- Information hiding is tool to achieve encapsulation


Understanding encapsulation

```
class Hacker{  
Account a= new Account();  
a.account_balance= -100;  
}
```

Encapsulation

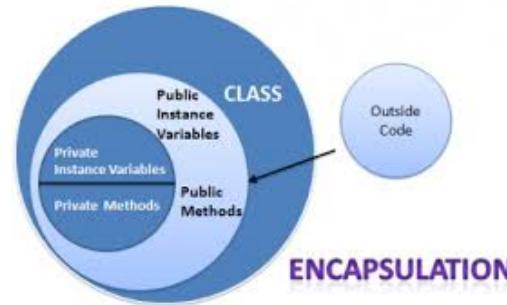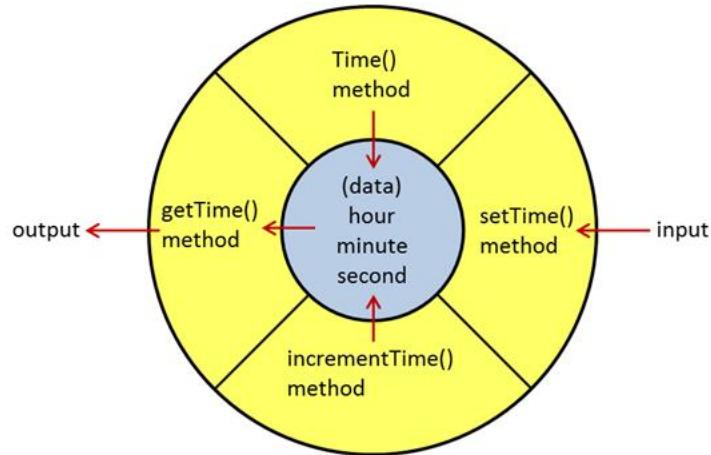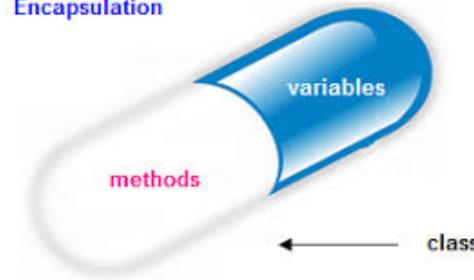


Encapsulation:

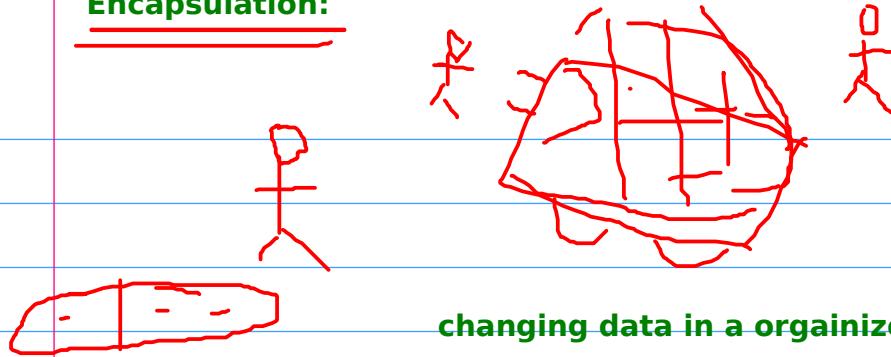

changing data in an organized way is called encapsulation


data hiding is a way to achieve encapsulation

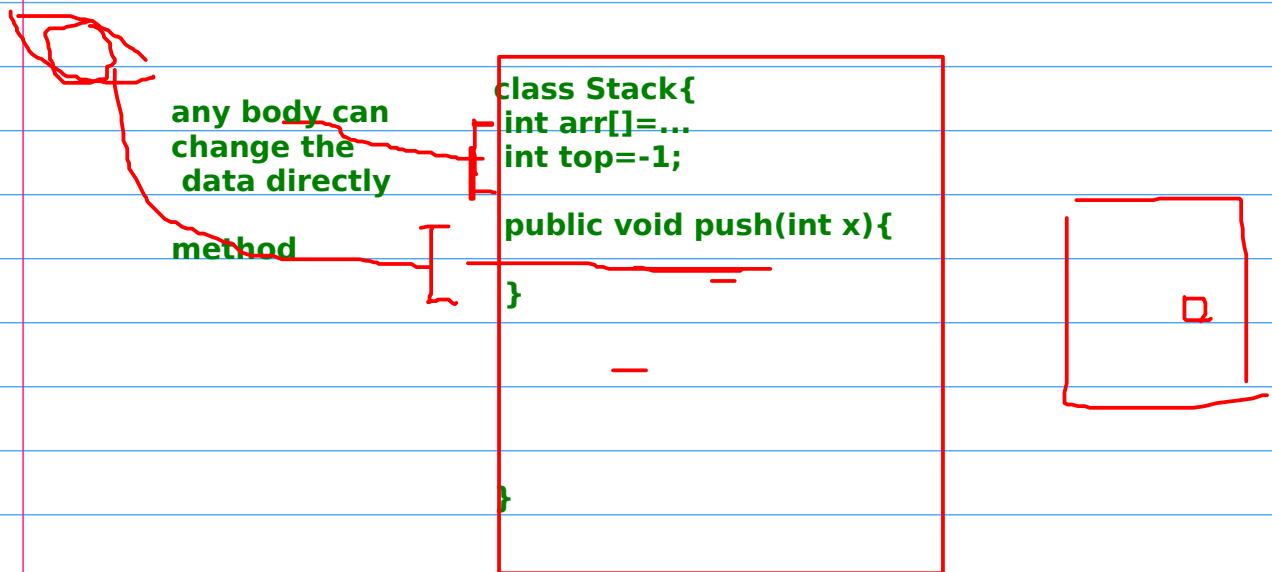

Encapsulation

- Changing data in organized way, by using data hiding and applying business constraints
- Encapsulation= data hiding + constraints





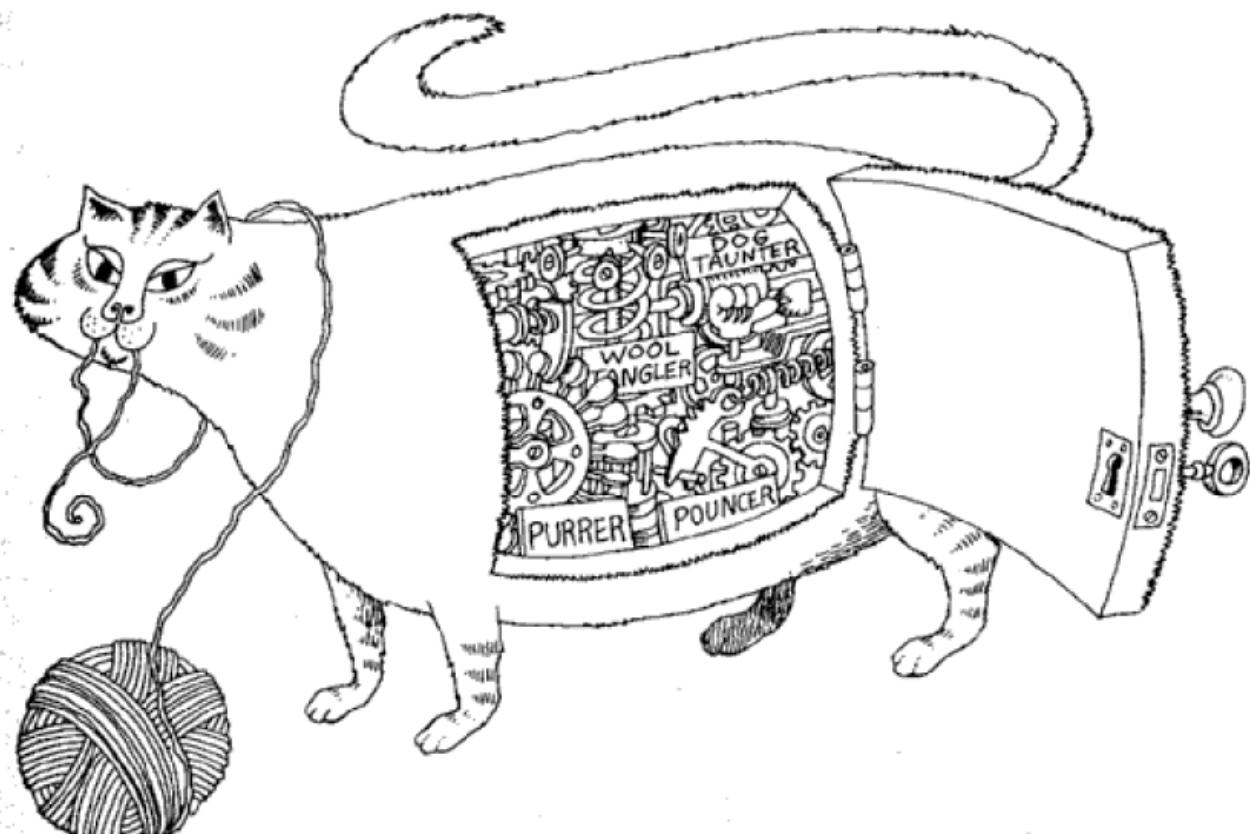


Encapsulation hides the details of the implementation of an object.

Modularity

- Break something complex into manageable pieces
 - Functional Decomposition
 - Object Decomposition

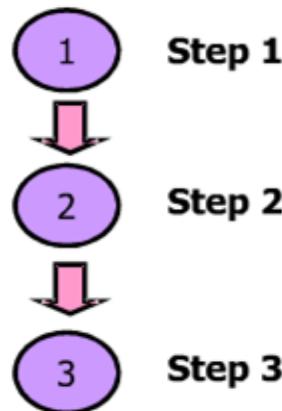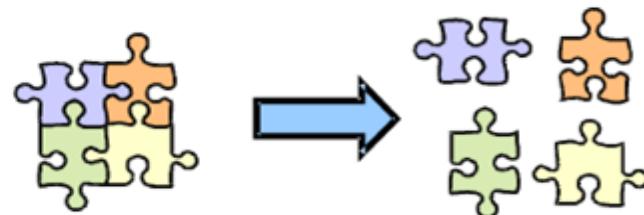


Functional Decomposition

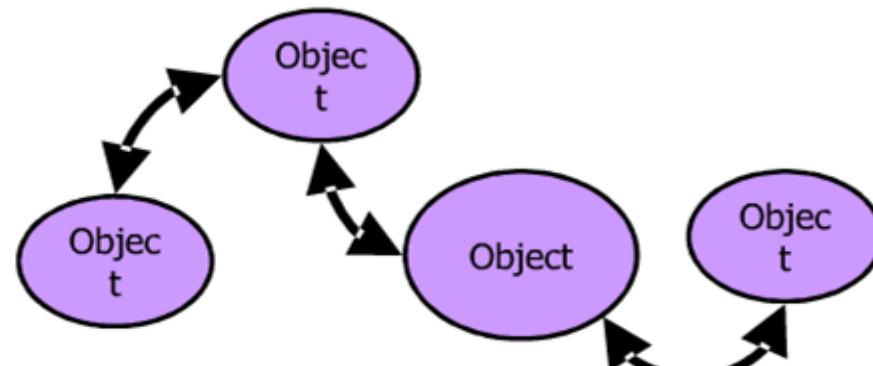

Object Decomposition

Hierarchy

- Ranking or ordering of objects

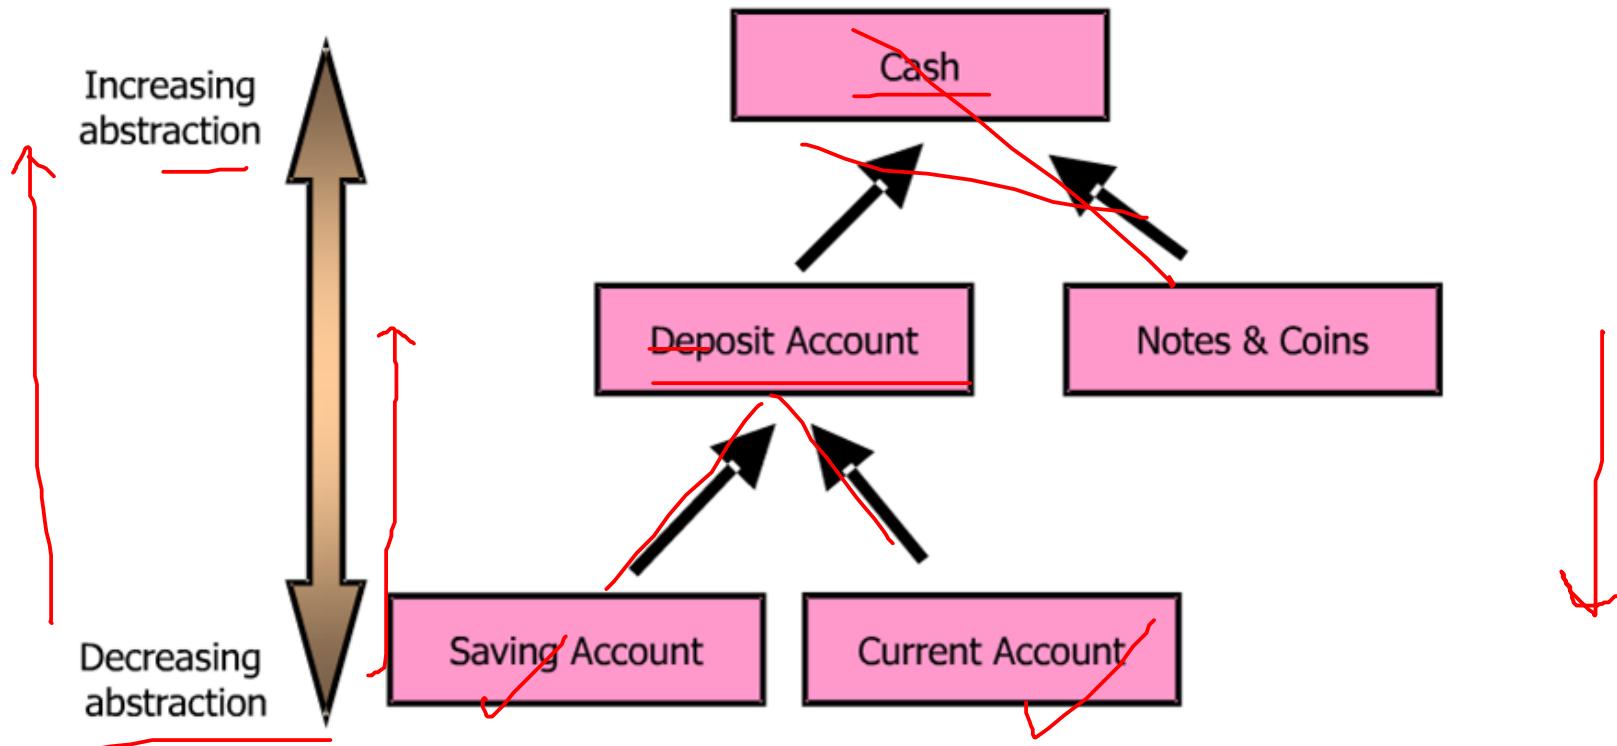




Day 2: Object Orientation & JVM introduction

- Creating Class, Object, constructor, init paramaters
- Static variable and method
- Concepts of packages, Access specifier
- Inheritance, Types of inheritance in Java, Inheriting Data Member and Methods
- Role of Constructors in inheritance,Overriding super Class methods, super
- Hands On & Lab

Day 2: Object Orientation & JVM introduction

- Creating Class, Object, constructor, init paramaters
- Static variable and method
- Concepts of packages, Access specifier
- Inheritance, Types of inheritance in Java, Inheriting Data Member and Methods
- Role of Constructors in inheritance, Overriding super Class methods, super
- Hands On & Lab

String vs double , int , long



Coding convention:

classes: Start with capital letter

MyFirstJob

Customer

Employee

data:



camel notation

class Employee{

//instance variable

private int employeeId;

object
data

private String employeeName;

private double employeeSalary;

class
data

private static String companyName="YMSLI";

public void printDetails(){ printAllEmployeeDetails()
double taxDeduction=....

final double MAX_SALARY=

}

What can goes inside an class?

```
public class A {  
    int i; // instance variable  
    static int j; // static variable  
    //method in class  
    public void foo(){  
        int i; //local variable  
    }  
  
    public A(){} //default constructor  
  
    public A(int i) //parameterized ctr  
    {  
        //.....  
    }  
  
    //getter and setter  
    public int getI(){return i;}  
    public void setI(int i){this.i=i;}  
}
```


mutator: those functions that can change the state of the object
setter are mutator

some time getter can also able to mutate the state of object

Creating Classes and object

```
class Account{  
    public int id;  
    public double balance;  
    //.....  
}  
  
public class AccountDemo{  
    public static void main(String[] args) {  
        Account ac=new Account();  
        ac.id=22;  
    }  
}
```

killing encapsulation

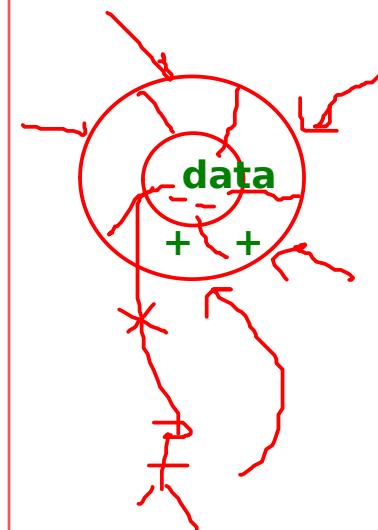

Correct way?


```
class Account{  
    private int id;  
    private double balance;  
    public int getId() {  
        return id;  
    }  
    public void setId(int id) {  
        this.id = id;  
    }  
    public double getBalance() {  
        return balance;  
    }  
    public void setBalance(double balance) {  
        this.balance = balance;  
    }  
}  
  
public class AccountDemo{  
    public static void main(String[] args) {  
        Account ac=new Account();  
        //ac.id=22; will not work  
        ac.setBalance(2000); //correct way  
    }  
}
```

Constructors: default, parameterized and copy

- Initialize state of the object
- Special method have same name as that of class
- Can't return anything
- Can only be called once for an object
- Can be private "singleton dp"
- Can't be static*
- Can overloaded but can't overridden*
- Three type of constructors
 - Default,
 - Parameterized and
 - Copy constructor

```
class Account{  
    private int id;  
    private double balance;  
  
    //default ctr  
    public Account() {  
        //.....  
    }  
  
    //parameterized ctr  
    public Account(int i, double b) {  
        this.id=i;  
        this.balance=b;  
    }  
  
    //copy ctr  
    public Account(Account ac) {  
        //.....  
    }  
}
```

Need of “this” ?

```
class Account{  
    private int id;  
    private double balance;  
  
    //default ctr  
    public Account() {  
        //.....  
    }  
  
    //parameterized ctr  
    public Account(int id, double balance) {  
        id=id;   
        balance=balance;   
    }  
  
    //copy ctr  
    public Account(Account ac) {  
        //.....  
    }  
}
```

- Which id assigned to which id?
- “this” is an reference to the current object required to differentiate local variables with instance variables
 - Refer next slide...

“this” used to resolve confusion...

```
class Account{  
  
    private int id;  
    private double balance;  
  
    //default ctr  
    public Account() {  
        //.....  
    }  
  
    //parameterized ctr  
    public Account(int id, double balance) {  
        this.id=id;  
        this.balance=balance;   
    }  
  
    //copy ctr  
    public Account(Account ac) {  
        _____
```

this : Constructor chaining?

- Calling one constructor from another ?

```
class Account{  
  
    private int id;  
    private double balance;  
  
    //default ctr  
    public Account() {  
        this(22,555.0);  
    }  
  
    //parameterized ctr  
    public Account(int id, double balance) {  
        this.id=id;  
        this.balance=balance;  
    }  
  
    //copy ctr  
    public Account(Account ac) {  
        //  
    }  
}
```


Ctr chaining : calling one ctr from another ?

```
class Account{  
    Account(){  
        this(1, "foo", 5000);  
    }  
  
    Account(int id, String name, double balance){  
        this();  
    }  
  
    Account a=new Account();  
    a.print();
```

Annotations:

- Red box around the constructor call `this(1, "foo", 5000);`
- Red arrow from the box to the text `this should be first statement under a ctr`

What is static variable and method ?

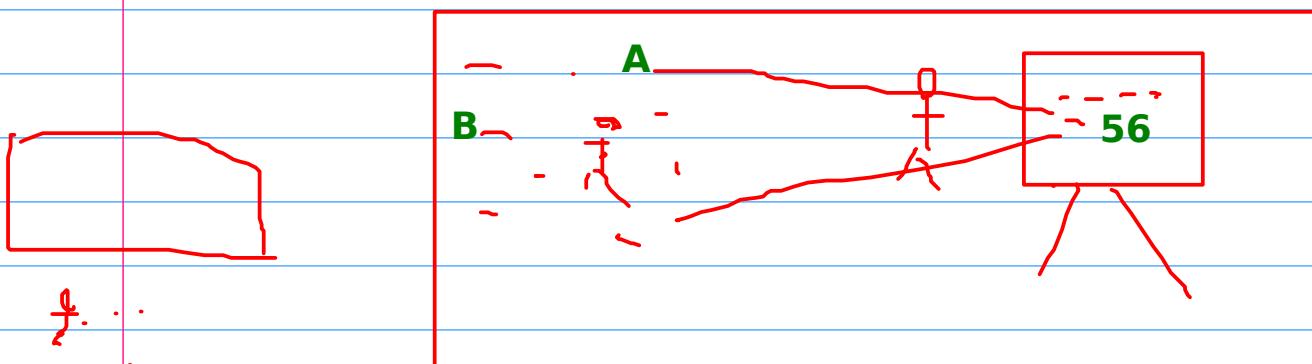

actually we need data that should be share among all objects of the same class ... then we need to use static data

Player:

`id: autogen`
`counter`

`static`

`name`

`rank`

`p1`
`p2`

`p3`

`p4`

class Player{

`id`


`name`

`rank`

`static int counter;`

}

`Player p1=new Player.....);`

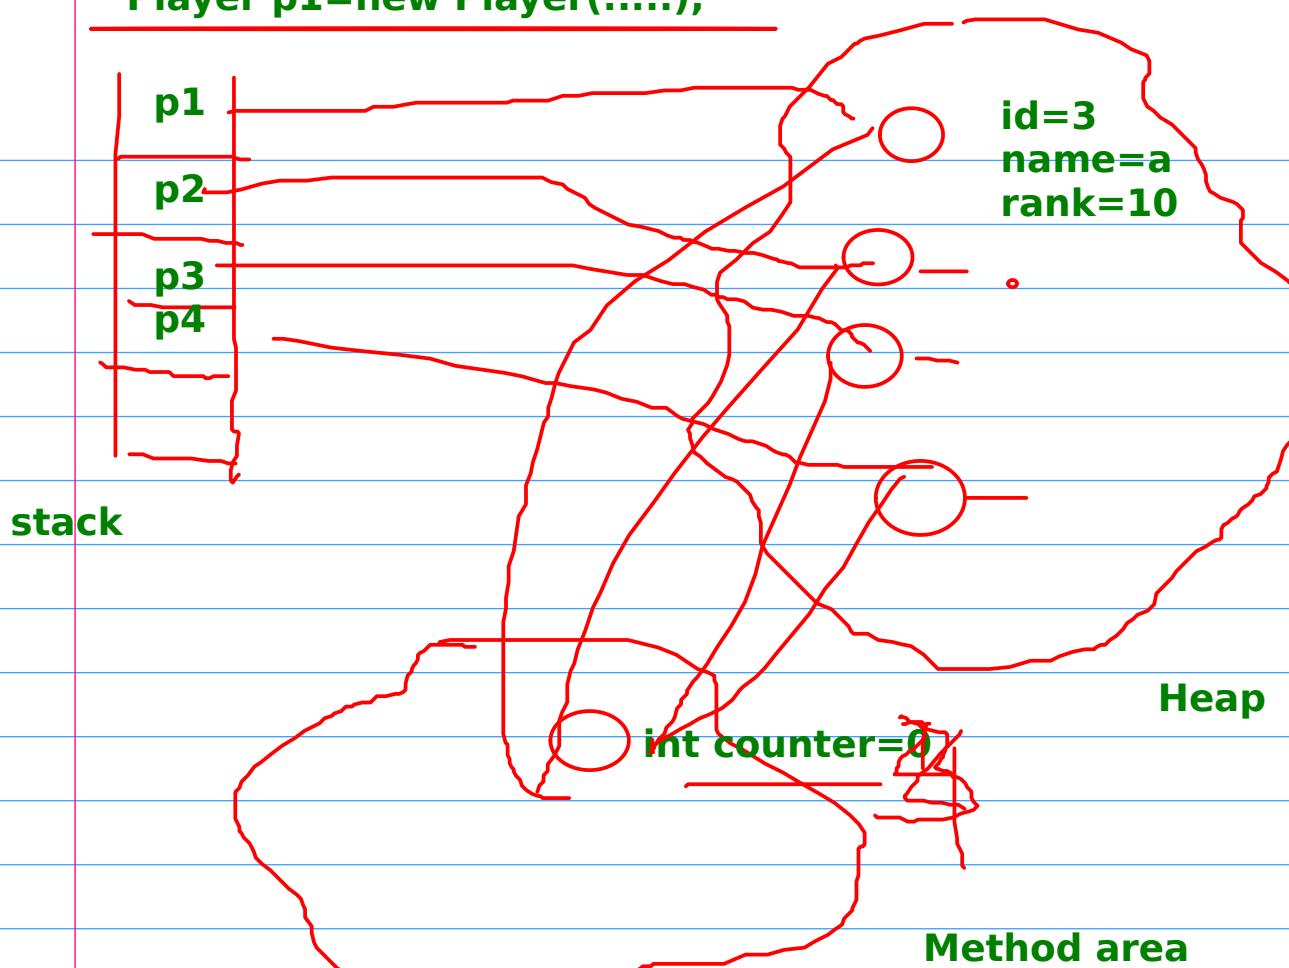


**there is a class
Class in java? ***

"java reflection"*

normal method vs static method :

**the instance method have availability of "this" pointer
while static method dont have it**

what is "this" --> ref to the current object

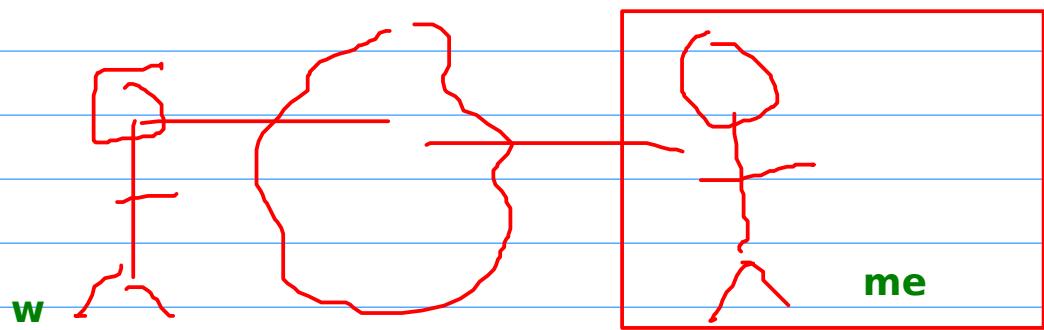

me ==> "implicit" this is a implicit pointer


```
class Player{  
    int id;  
    String name;  
  
    Player(int id, String name){  
        this.id=id;  
        this.name=name;  
    }  
    public void show(this ){  
        .....  
    }
```

instance
metho

static
method

this is implicit
pointer?

```
public static void showStatic(){  
    sysout(this.id)  
}
```

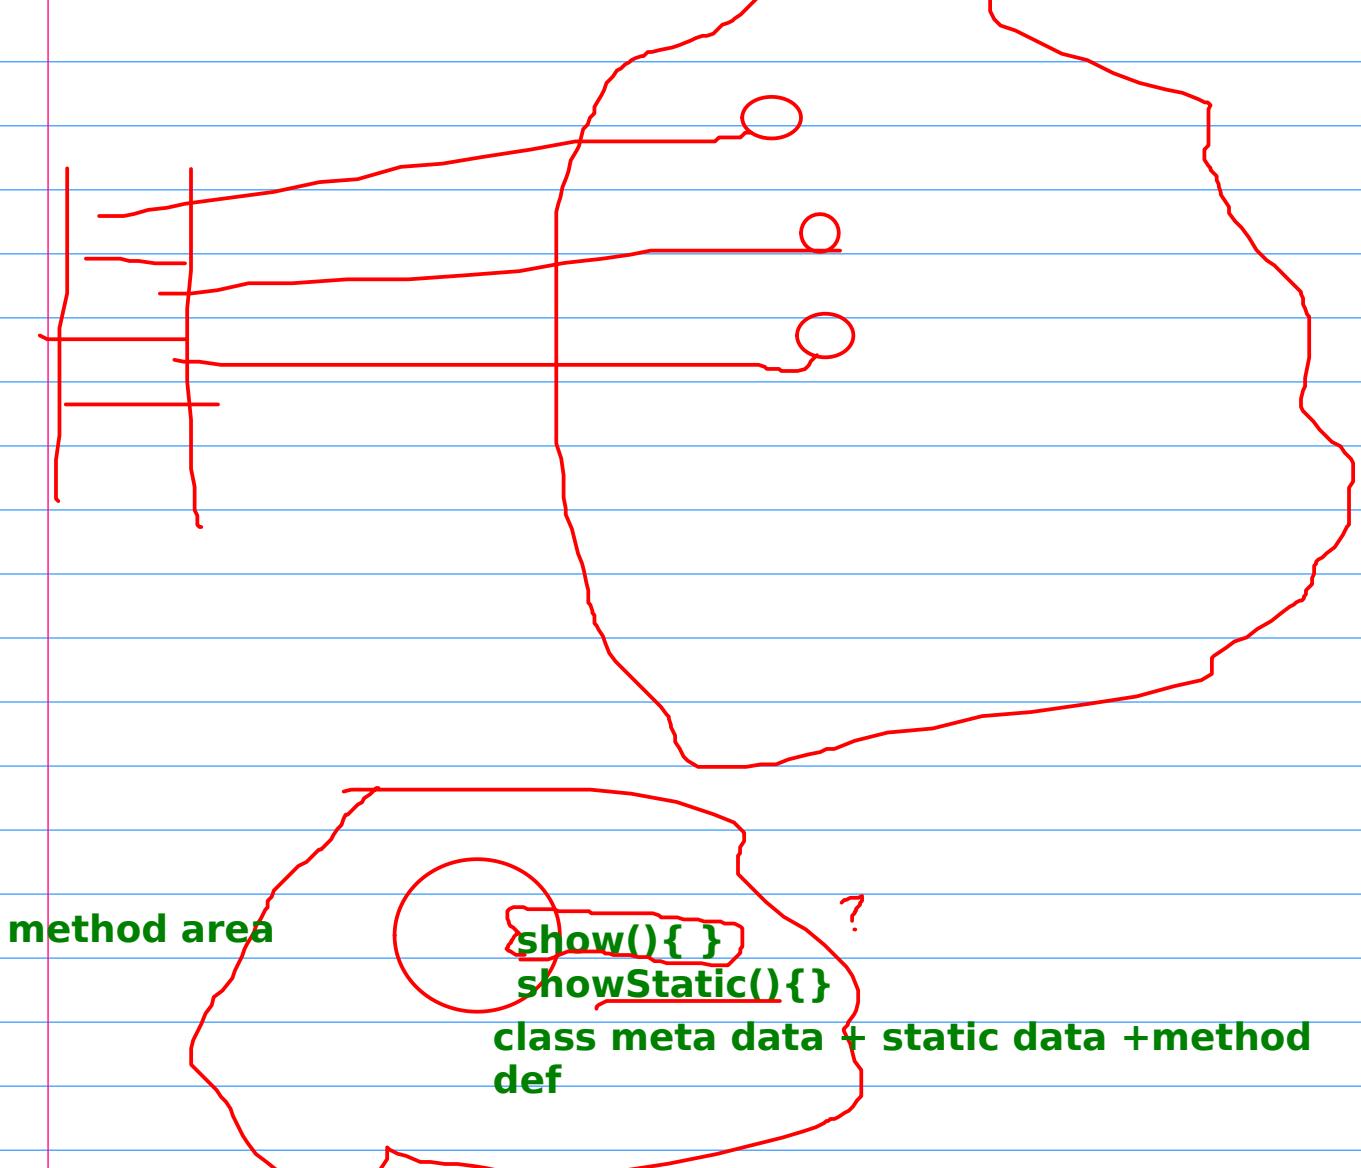

When i shold go for static methods?

when u want to only access static data inside the method of a class...

other powerful feature of static method is that it can be called without creating object of that class!

ex:

"u can call static method even without object of that class... singleton dp"

can we have private ctr in a class: yes


trick:

Static method/variable

- Instance variable -per object while static variable are per class
- Initialize and define before any objects
- Most suitable for counter for object
- Static method can only access static data of the class
- For calling static method we don't need an object of that class

Now guess why main was static?

How to count number of account object in the memory?

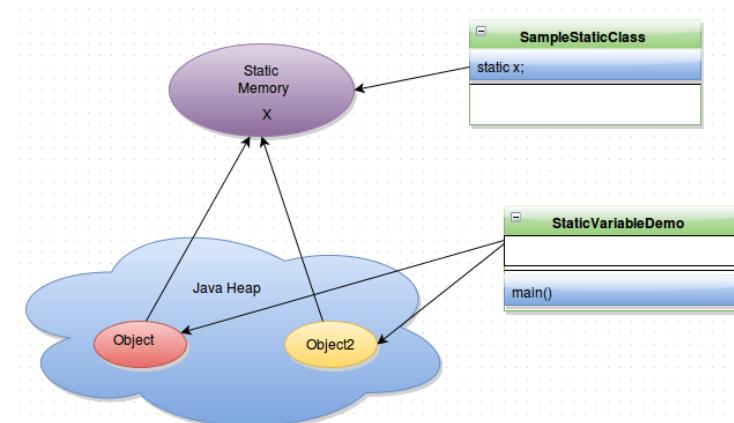

Using static data..

```
class Account{  
  
    private int id;  
    private double balance;  
  
    // will count no of account in application  
    private static int totalAccountCounter=0; → static variable  
  
    public Account(){  
        totalAccountCounter++;  
    }  
  
    public static int getTotalAccountCounter(){  
        return totalAccountCounter; → static method  
    }  
}
```

```
Account ac1=new Account();  
Account ac2=new Account();
```

```
//How many account are there in application ?
```

```
System.out.println(Account.getTotalAccountCounter());
```

```
System.out.println(ac1.getTotalAccountCounter());
```

We can not access instance variable in static method but can access static variable in instance method

Initialization block

- We can put repeated constructor code in an Initialization block...
- Static Initialization block runs before any constructor and runs only once...

```
class Account{  
  
    private int id;  
    private double balance;  
  
    public Account(){  
        //this is common code  
    }  
    public Account(int id , double balance){  
        //this is common code  
  
        this.id=id;  
        this.balance=balance;  
    }  
}
```

code repetition.

Software Design Principles DRY and KISS

programming : DRY pri

Dont repeat yourself

Initialization block

```
class Account{
    private int id;
    private double balance;
    private int accountCounter=0;


    static{
        System.out.println("static block: runs only once ...");
    }

    {
        System.out.println("Init block 1: this runs before any constructor ...");
    }

    {
        System.out.println("Init block 2: this runs after inti block 1 , before any const execute ...");
    }
}
```

Packages

- Packages are Java's way of grouping a number of related classes and/or interfaces together into a single unit.
- Packages act as "containers" for classes.

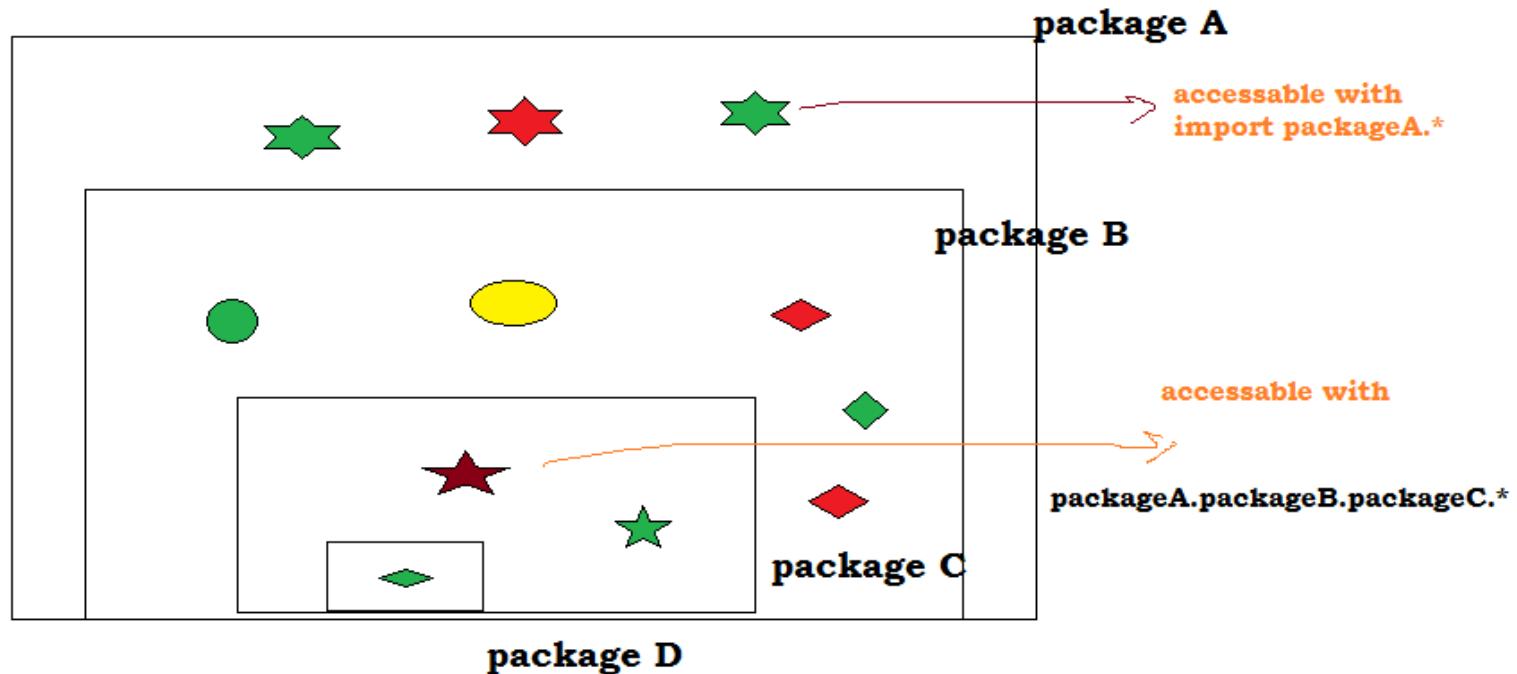


What is package in java ?

1. to organize the code
2. to code security...

~~public~~
~~protected~~
~~default~~
~~private~~


IAF====> ymsli
face rec system

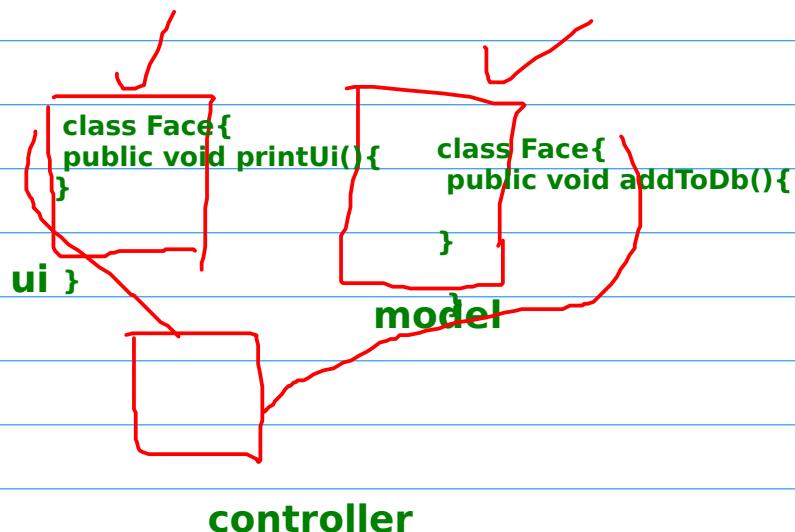

If u are importing two classes with the same name somewhere else one of the class should be fully qualified *

✓ import a.*
✓ import a.b.*;

both access different set of classes

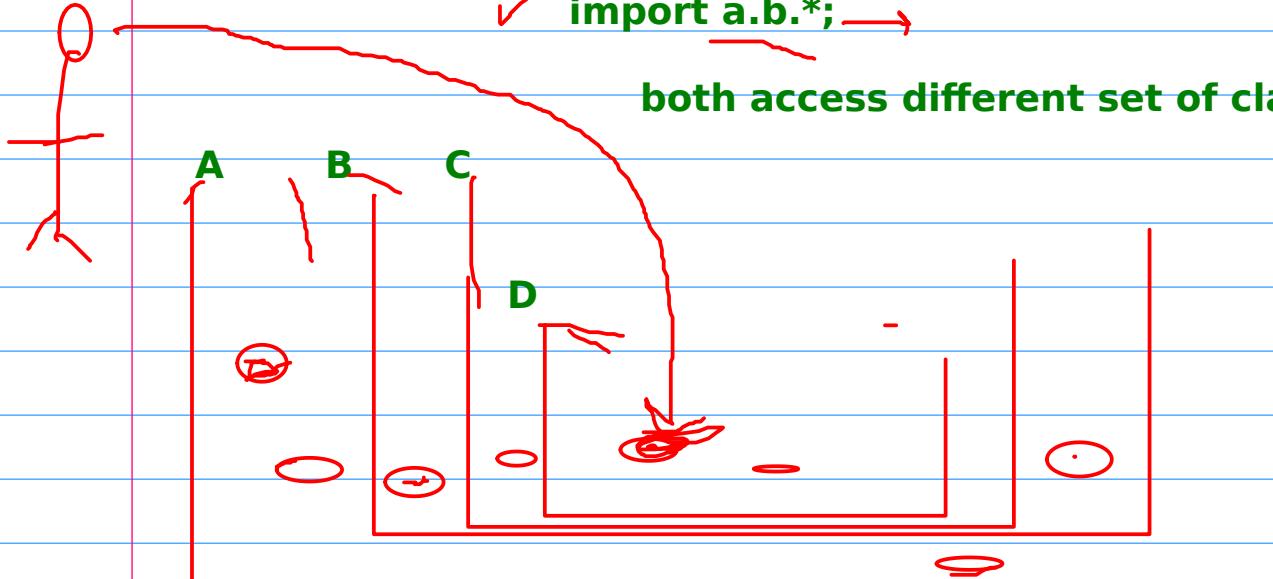

If u are importing two class with the same name form two packages then at least one should be fully qualified

<http://www.ymsli.in>

com.ymsli.aif.facerec.model


..... ui
..... controller

Java Foundation Packages

- Java provides a large number of classes grouped into different packages based on their functionality.
- The six foundation Java packages are:
 - java.lang
 - Contains classes for primitive types, strings, math functions, threads, and exception
 - java.util
 - Contains classes such as vectors, hash tables, date etc.
 - java.io
 - Stream classes for I/O
 - java.awt
 - Classes for implementing GUI – windows, buttons, menus etc.
 - java.net
 - Classes for networking
 - java.applet
 - Classes for creating and implementing applets

Visibility Modifiers

- For instance variable and methods
 - Public
 - Protected
 - Default (package level)
 - Private
- For classes
 - Public and default

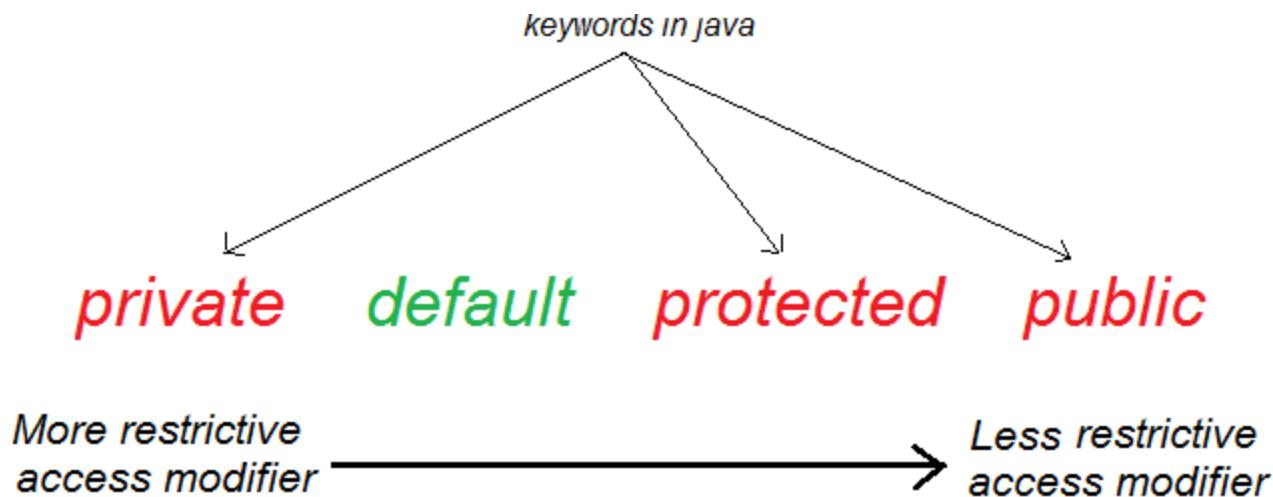

Visibility Modifiers

- class A has default visibility hence can access in the same package only.
- Make class A public, then access it.
- Protected data can access in the same package and all the subclasses in other packages provide class itself is public

```
pack packA;
```

```
class A{  
    public void foo(){  
    }  
}
```

```
pack packB;  
import packA.*;
```

```
class B{  
    public void boo(){  
A a=new A();  
}  
}
```

```
pack packA;
```

```
public  
class A{  
protected  
    void foo(){  
    }  
}
```

```
pack packB;  
import packA.*;
```

```
class B{  
    public void boo(){  
A a=new A();  
}  
}
```

```
pack packB;  
import packA.*;  
class C extends A{
```

```
    public void foo2(){  
        foo();  
    }  
}
```

Want to accept parameter from user?

java.util.Scanner (Java 1.5)

```
Scanner stdin = Scanner.create(System.in);
```

```
int n = stdin.nextInt();
String s = stdin.next();
```

```
boolean b = stdin.hasNextInt()
```

Call by value

- Java support call by value
- The value changes in function is not going to reflected in the main.

```
public class CallByValue {  
    public static void main(String[] args) {  
        int i=22;  
        int j=33;  
        System.out.println("value of i before swapping:"+i);  
        System.out.println("value of j before swapping:"+j);  
        swap(i,j);  
    }  
  
    static void swap(int i, int j) {  
        int temp;  
        temp=i; → not going to change value in  
        i=j;  
        j=temp;  
    }  
}
```

Call by reference

- Java don't support call by reference.
- When you pass an object in a method copy of reference is passed so that we can mutate the state of the object but can't delete original object itself

```
class Foo{  
    private int i;  
    public Foo(int i){  
        this.i=i;  
    }  
    public int getI(){return i;}  
    public void setI(int t){i=t;}  
}  
public class CallByref {  
  
    public static void main(String[] args) {  
        Foo f1=new Foo(22);  
        Foo f2=new Foo(33);  
        swap(f1,f2);  
    }  
  
    static void swap(Foo f1, Foo f2) {  
        Foo temp;  
        temp=f1;  
        f1=f2;  
        f2=temp;  
        // f1.setI(55);  
    }  
}
```

do not effect f1 , f2 in main
can change state of f1

java do not support call by reference:

```
d1 = new Data(22);  
d2 = new Data(33);
```

d1

d2

i

j

121

val=22

234

val =33

Data d1=new Data(44);

d1

d1

44

val=64

77

**when we are passing a ref of a object in
a method call then we are able to change the state of that
object but we can't nullify that object
and we can't assign a new object**

why : to avoid bugs in java

```
final Emp e=new Emp("raj");
```


object state can be change but e can not point to any other
object

constant pointer

how to write the real life code?

oo code:


relationship bw the objects:

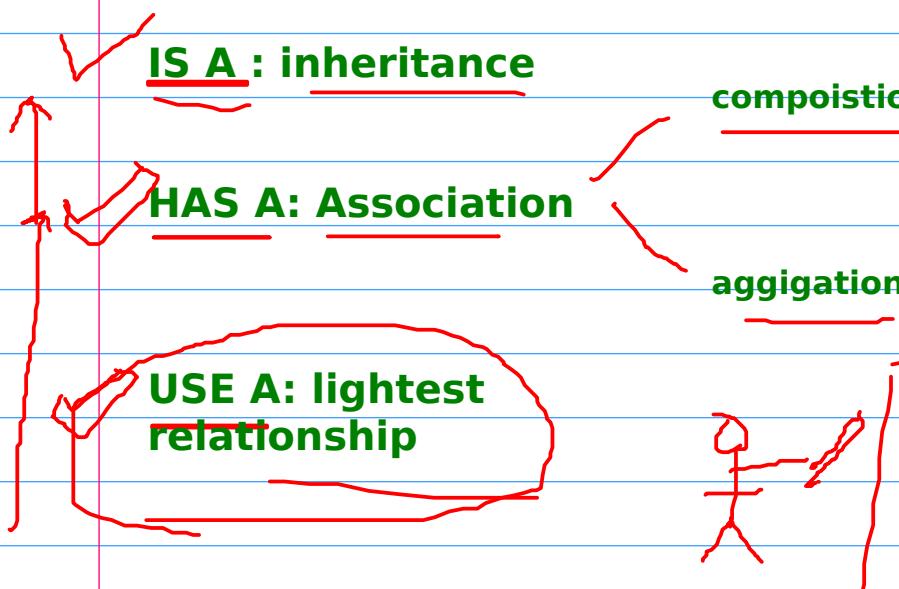

```
class Trainer{  
    Marker marker=new Marke()  
}
```

```
class Marker{  
    color  
    brand  
}
```

raj



pv EM

composition: HAS- A

```
class Metro{
```

```
}
```

```
}
```

```
class Passanger{  
    private Metro m=new Metro();
```

```
class Marker{  
}
```

```
class Trainer{  
    name  
    qualification  
    rating  
    public void teach(Marker marker){  
        marker.write();  
    }  
}
```


trainer while teaching use a marker ...

```
public void lunch(Food food){  
    ....  
}  
}
```


```
class Passanger extends Metro{  
}
```

```
class Passanger{  
    Metro m=new Metro();  
}
```

loose coupling and high cohesion

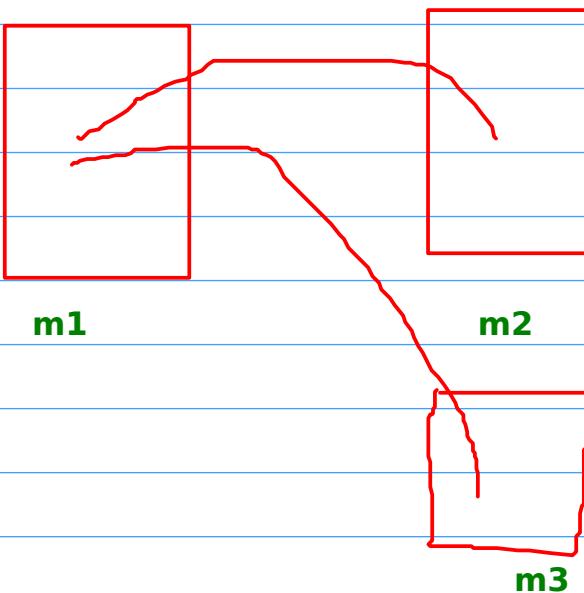

jack of many trade master of none

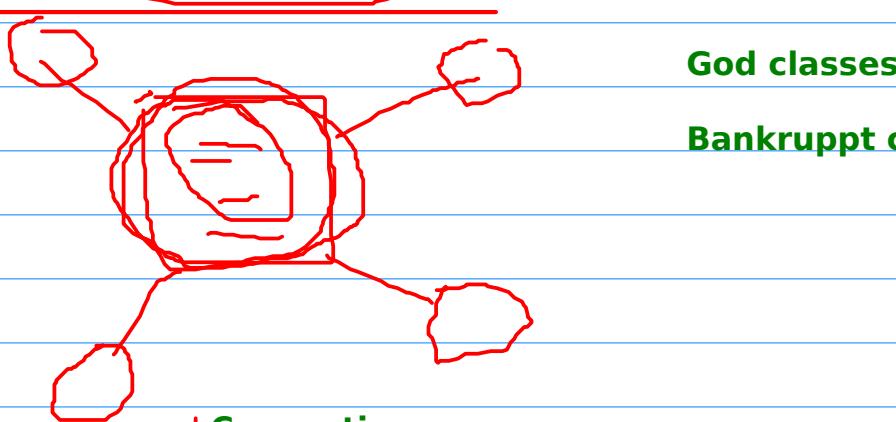

God classes

Bankruppt class

Connection

getJdbcConnection(){


getHibConnection(){

getXMLConnection(){

}

...

...



A passenger named rajesh travel from LN to EM using metro

```
class Metro{  
    public void move(String s, String d){  
        .....  
    }  
}
```


```
class Passanger{  
    private String name;  
    private String address;  
  
    public void travel(String s, String d, Metro m){  
        m.move(s,d);  
    }  
}
```

Vehical

Car
Bike

symptoms
of bad code

2010

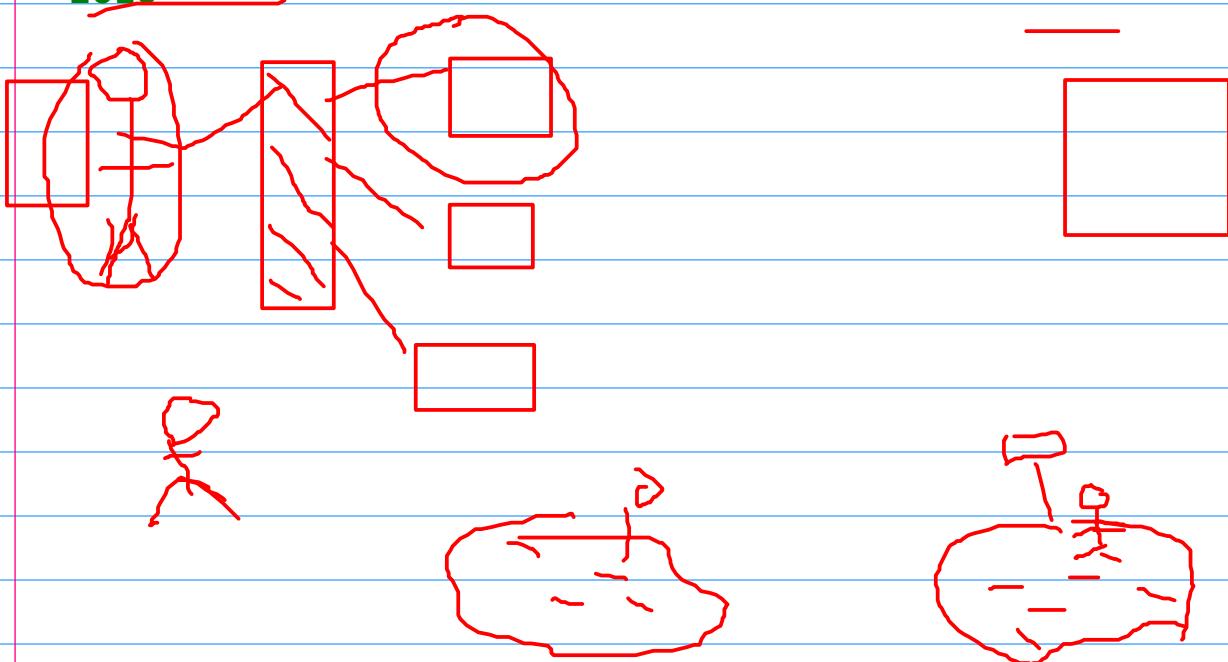

OOPs:


a person have red shirt and shirt has a blue pen

a pond have 4 ducks 2 white 2 black

```

class Duck{  
}  
  
class Pond{  
    private Duck[] ducks=new Duck[10]; //LL  
    //rather than array we can use array list
}


```

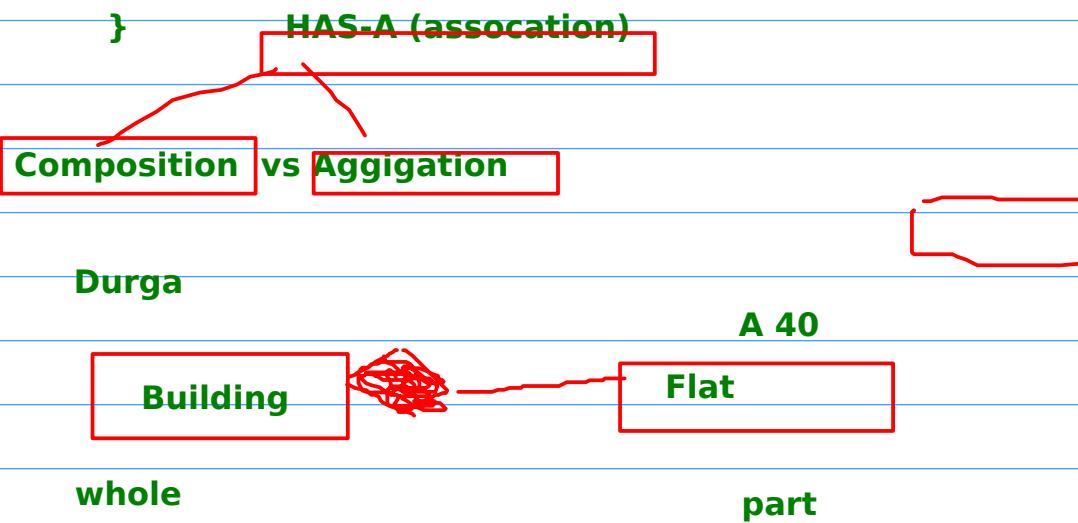

if whole is destroyed part is also destroyed

a part can not be part of another whole at the same time

Aggregation

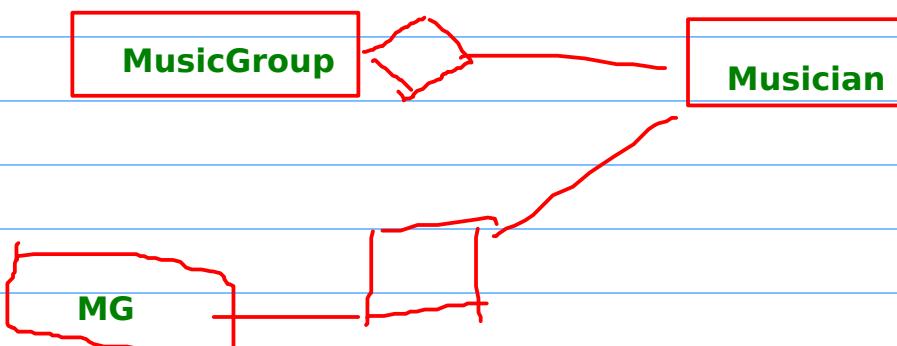

**Basics of uml:
class diagram**

**1
121
1331**

2D array!

constant pointer vs pointer to the constant

```
const char *p="india";
```



Day 3: Advanced Class Features

- Loose coupling and high cohesion
- composition, aggrigation, inheritance, basic of uml
 - Abstract classes and methods
 - Relationship between classes- IS-A, HAS-A, USE-A
 - Interface Vs Abstract, when to use what?
 - Final classes and methods
 - Interfaces, loose coupling and high cohesion
 - SOLID principles, Square – rectangle problem
 - Hands On & Lab

Polymorphism:

Compile time

run time poly...

function overloading

operator overloading

template classes

function overloading?

=> two fun can be overloaded in same class/ seprate classes

```
class Cal{
```

```
    public void add(int a, int b){  
    }
```

```
    public void add(int a, int b, int c){  
    }  
}
```

```
Cal cal=new Cal();  
cal.add(2,5,5);
```

is java is fully oo language?

Number

int i

Integer

Float Double Short

Character

immutable: once object is create u cant chage the state of that object: threads safty

```
int i=0;
```

```
Integer it=new Integer(i);
```

```
int temp=it.intValue();  
temp++;  
it=new Integer(temp);
```

Java 5:
auto boxing and unboxing

List<Integer> list=.....
list.add(4);

it++; :)

java 1.4:

int i=5;

Integer it=new Integer(i);

Integer it=5;

int temp=it.intValue();

int temp=it;

auto boxing

Integer it=5;

Integer it=new Integer(5);

Integer it=33;
Integer it2=33;

String

Double

Object

it1

it2

-128 0 +127

Overriding:

implements

extends

class A{


void foo(){

}

class B extends A{

void foo(){

}



Krishna d

class C extends A{

void foo(){

}

A a =new B();C());

Substitution: overriding



static method do not support overriding ... overloading they support

static method : shadowing?

shadowing:

~~X~~ the purpose of inheritance is reusability of code!

class A{

 void doWork(){

 ///
 }

}

class B extends A{

 void doWork(){
 super.doWork();
 //

}

we are using the code of base class

Faviour co

code reuseability can be achieve by Compositon


extendability
sub....



favor composition over inheritance?

SOLID*

hello world :inheritance ?

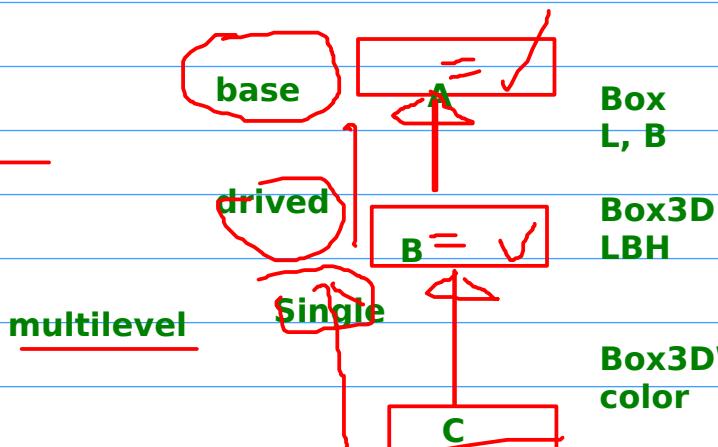

multilevel

void foof()

} Why java dont support
multiple

A i=99

void foof()

{

i=88

Box3DWithColor
color

Diamond*

void foof()

{

super.foof();

how to pass parameters from derived to base

```
class Box{  
    l, b;
```

```
    Box(int l, int b){  
        this.l=l; this.b=b;  
    }  
}
```

```
class Box3D extends Box{  
    h;  
    Box3D(int l, int b,int h){  
        super(l, b);  
        this.h=h;  
    }  
}
```


```
class Foo{  
    Foo(int a){}  
}  
class Bar extends Foo{  
  
    Bar(){  
        super(5);  
    }  
}
```

GPP:

Shape s=new

l=10
b=10

Shape





A bit about UML diagram...

- UML 2.0 aka modeling language has 12 type of diagrams
- Most important once are class diagram, use case diagram and sequence diagram.
- You should know how to read it correctly
- This is not UML session... □

UML	Implementation
<p>Person</p> <p>- name : String - age : int</p> <p>+ Person(name : String) + calculateBMI() : double + isOlderThan(another : Person) : boolean</p>	<pre>public class Person { private String name; private int age; public Person(String name) { ... } public double calculateBMI() { ... } public boolean isOlderThan(Person another) { ... } }</pre>



Relationship between Objects

- USE-A
 - Passanger using metro to reach from office from home
- HAS-A (Association)
 - Compostion
 - Flat is part of Durga apartment
 - Aggregation
 - Ram is musician with RockStart musics group
- IS-A
 - Empoloyee is a person

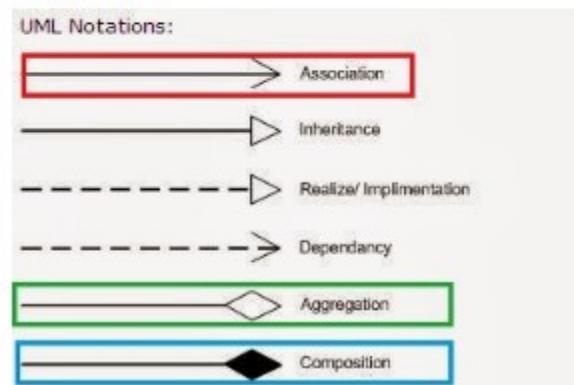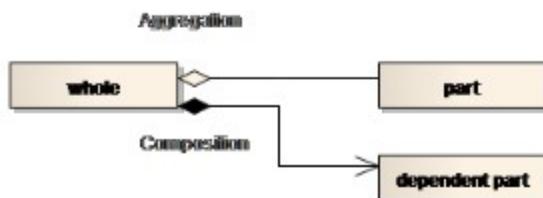

Relationship between Objects


- USE-A
 - Passanger using metro to reach from office from home
- HAS-A (Association)
 - Composition
 - Flat is part of Durga apartment
 - Aggregation
 - Ram is musician with RockStart musics group
- IS-A
 - Empoloyee is a person

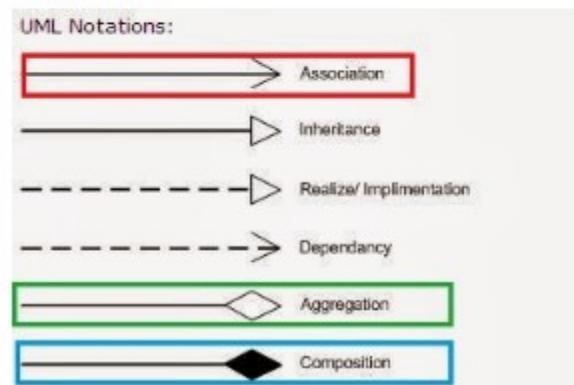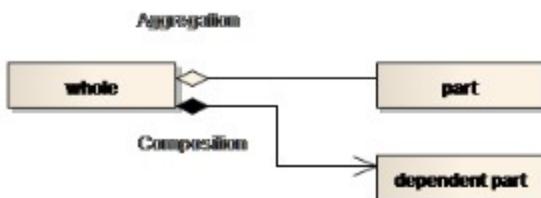

Memory leak:

```
class Product {  
    private int id;  
    private double price;  
    ///  
}
```

```
class Stack{  
    ///
```

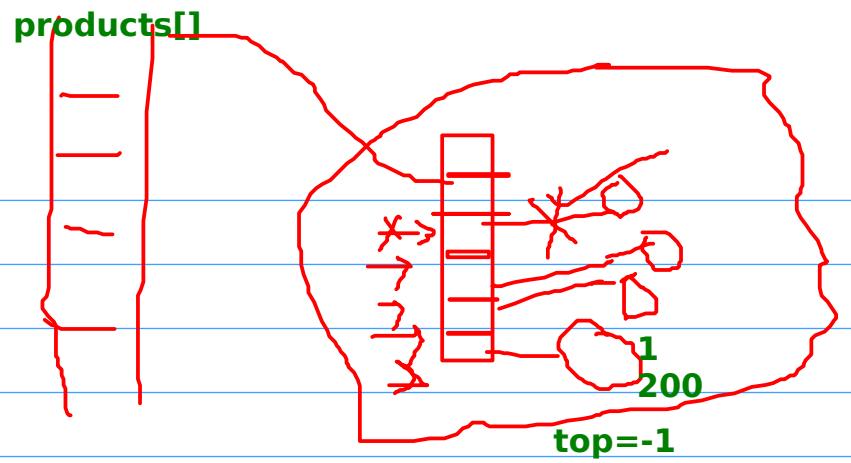

```
public void push(Product val) {  
    if (isFull()) {  
        System.out.println("stack is full...");  
    }  
    x[++top] = val;  
}
```

```
public Product pop() {  
    if (isEmpty()) {  
        System.out.println("stack is Empty...");  
        return null;  
    }  
    return x[top--];  
}
```


Product p=
x[top]
x[top]=null;
return
x[top--];

```
private Product x[]=new Product[10];
```


```
private int x[]=new int[10];
```

Inheritance

- ***Inheritance is the inclusion of behaviour (i.e. methods) and state (i.e. variables) of a base class in a derived class so that they are accessible in that derived class.***
- **code reusability.**
- **Subclass and Super class concept**

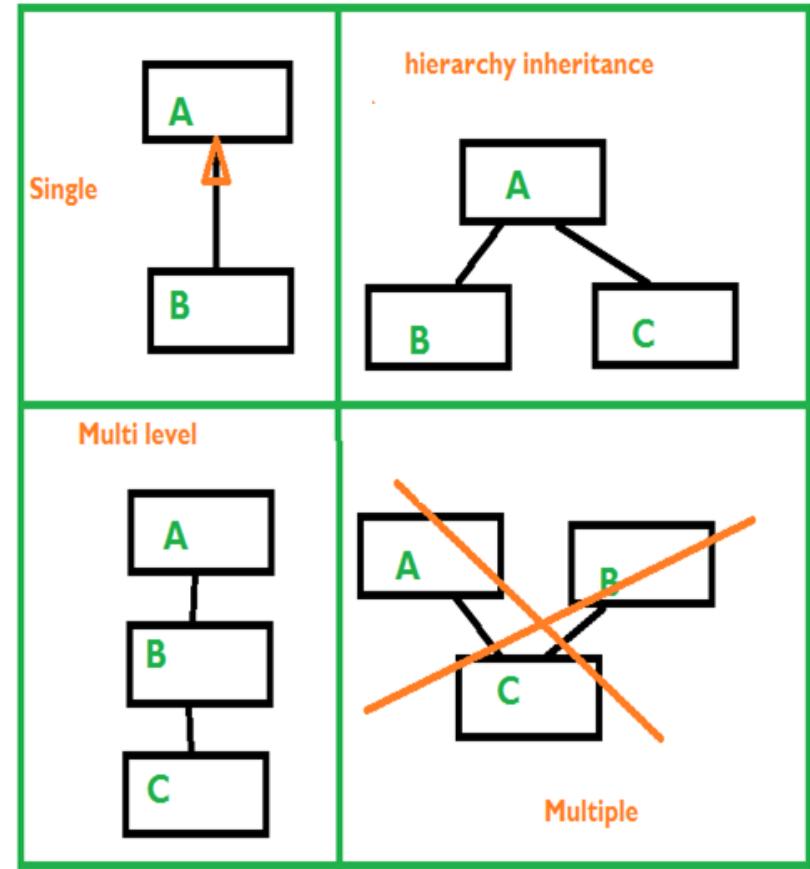


Diamond Problem?



Diamond

- Hierarchy inheritance can leads to poor design..
- Java don't support it directly...(Possible using interface)

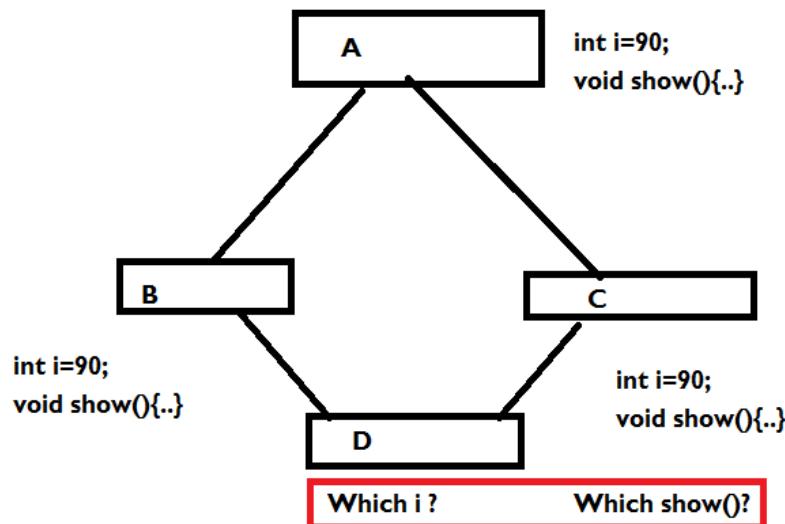

Inheritance example

- Use extends keyword
- Use **super** to pass values to base class constructor.

```
class A{  
    int i;  
    A() {System.out.println("Default ctr of A");}  
    A(int i) {System.out.println("Parameterized ctr of A");}  
}  
  
class B extends A{  
  
    int j;  
    B() {System.out.println("Default ctr of B");}  
    B(int i,int j)  
    {  
        super(i);  
        System.out.println("Parameterized ctr of B");  
    }  
}
```

Overloading

- Overloading deals with multiple methods in the same class with the same signatures.

```
class MyClass {  
    public void getInvestAmount(int rate) {...}  
  
    public void getInvestAmount(int rate, long principal)  
    { ... }  
}
```

- Both the above methods have the same method names but different method signatures, which mean the methods are overloaded.
- Overloading lets you define the same operation in different ways for different data.**

Constructor can be overloaded

Be careful of overloading ambiguity

***Overloading in case of var-arg and Wrapper objects...**

Overriding...

- Overriding deals with two methods, one in the parent class and the other one in the child class and has the same name and signatures.
- Both the above methods have the same method names and the signatures but the method in the subclass *MyClass* overrides the method in the superclass *BaseClass*
- Overriding lets you define the **same operation in different ways for different object types.**


```
class BaseClass{  
    public void getInvestAmount(int rate) {...}  
}  
  
class MyClass extends BaseClass {  
    public void getInvestAmount(int rate) { ...}  
}
```

Polymorphism


- Polymorphism=many forms of one things
- ***Substitutability***
- ***Overriding***
- ***Polymorphism means the ability of a single variable of a given type to be used to reference objects of different types, and automatically call the method that is specific to the type of object the variable references.***

Polymorphism

- Every animal sound but differently...
- We want to have Pointer of Animal class assigned by object of derived class

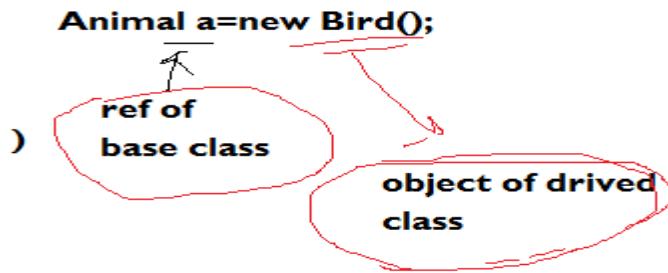

Which method is going to be called is not decided by the type of pointer rather object assigned will decide at run time

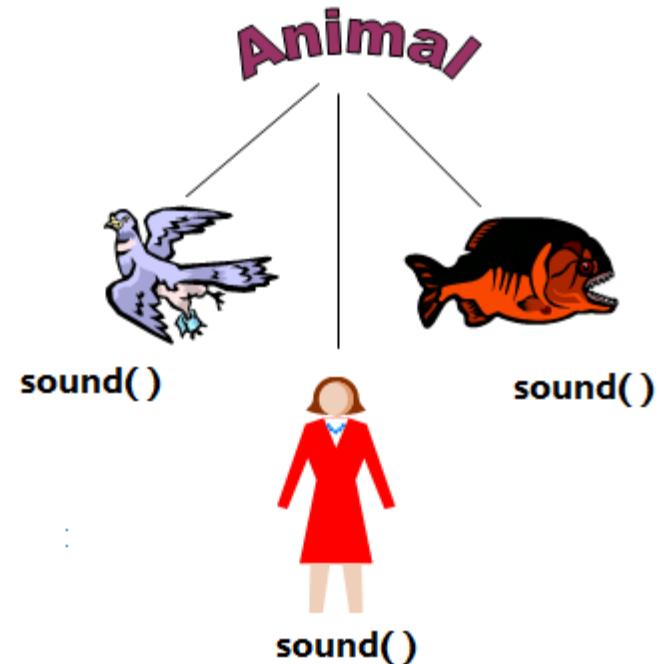

Example...

```
class Animal
{
    public void sound()
    {
        System.out.println("Don't know how generic animal sound.....");
    }
}
class Bird extends Animal
{@Override
    public void sound()
    {
        System.out.println("Bird sound.....");
    }
}
class Person extends Animal
{@Override
    public void sound()
    {
        System.out.println("Person sound.....");
    }
}
```

Need of abstract class?

- Sound() method of Animal class don't make any sense ...i.e. it don't have semantically valid definition
- Method sound() in Animal class should be **abstract** means incomplete
- Using abstract method Derivatives of Animal class **forced** to provide meaningful sound() method

```
class Animal
{
    public void sound()
    {
        System.out.println("Don't know how generic animal sound.....");
    }
}
class Bird extends Animal
@Override
    public void sound()
    {
        System.out.println("Bird sound.....");
    }
}
class Person extends Animal
@Override
    public void sound()
    {
        System.out.println("Person sound.....");
    }
}
```

Abstract class

- If a class have at least one abstract method it should be declare abstract class.
- Some time if we want to stop a programmer to create object of some class...
- Class has some default functionality that can be used as it is.
- Can extends only one abstract class □



```
class Foo{  
    public abstract void foo();  
}
```



```
abstract class Foo{  
    public abstract void foo();  
}
```



```
abstract class Foo{  
}
```

Abstract class use cases...

- Want to have some default functionality from base class and class have some abstract functions that can't be defined at that moment

```
abstract class Animal
{
    public abstract void sound();
    public void eat()
    {
        System.out.println("animal eat...");
    }
}
```

- Don't want to allow a programmer to create object of an class as it is too generic

- Interface vs. abstract class

More example...

```
public abstract class Account {  
    public void deposit (double amount) {  
        System.out.println("depositing " + amount);  
    }  
  
    public void withdraw (double amount) {  
        System.out.println ("withdrawing " + amount);  
    }  
  
    public abstract double calculateInterest(double amount);  
}
```

```
public class SavingsAccount extends Account {  
  
    public double calculateInterest (double amount) {  
        // calculate interest for SavingsAccount  
        return amount * 0.03;  
    }  
  
    public void deposit (double amount) {  
        super.deposit (amount); // get code reuse  
        // do something else  
    }  
  
    public void withdraw (double amount) {  
        super.withdraw (amount); // get code reuse  
        // do something else  
    }  
}
```

```
public class TermDepositAccount extends Account {  
  
    public double calculateInterest (double amount) {  
        // calculate interest for SavingsAccount  
        return amount * 0.05;  
    }  
  
    public void deposit(double amount) {  
        super.deposit (amount); // get code reuse  
        // do something else  
    }  
  
    public void withdraw(double amount) {  
        super.withdraw (amount); // get code reuse  
        // do something else  
    }  
}
```

Final

- What is the meaning of final
 - Something that can not be change!!!
- final
 - Final method arguments
 - Cant be change inside the method
 - Final variable
 - Become constant, once assigned then cant be changed
 - Final method
 - Cant overridden
 - Final class
 - Can not inherited (Killing extendibility)
 - **Can be reuse**

Some examples....

Final class

- Final class can't be subclass i.e. Can't be extended
- No method of this class can be overridden
- Ex: String class in Java...

□ **Real question is in what situation
somebody should declare a class final**

```
package cart;

public final class Beverage{

    public void importantMethod() {
        sysout("hi");
    }
}
```

~~```
package examStuff;
import cart.*;

class Tea extends beverage{
```~~

# Final Method

- Final Method Can't overridden
- Class containing final method can be extended

```
class Foo{

 public final void foo(){
 Sysout("i am the best");
 Sysout("You can use me but can't override me");
 }
};


class Bar extends Foo{
 @Override
 public final void foo(){

 }
}
```

# Interface?

- Interface : Contract bw two parties
- Interface method
  - Only declaration
  - No method definition
- Interface variable
  - Public static and final constant
    - Its how java support global constan
- Break the hierarchy
- Solve diamond problem
- Callback in Java\*

Some Example ....

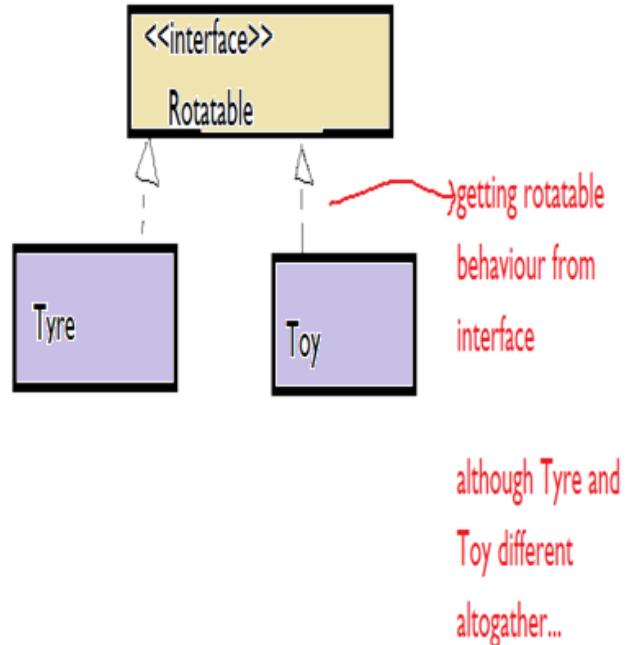

## What is if array declare final

```
final int arr[]={3,5,7};
```

~~arr=null;~~  
~~arr={4,6,7};~~

~~arr[1]=999;~~

✓ **immutability of object:**  
how to create a immutable class/object?

=> thread safe:\*

locking

immutability: scalable sol for thread safty

String , Integer ....


ab class Demo extends Number{}

✓ Val val = new Val(800.00);  
MyImmttableClass imm = new MyImmttableClass(44, val);

imm.print();

val.setValue(900.00);

imm.print();

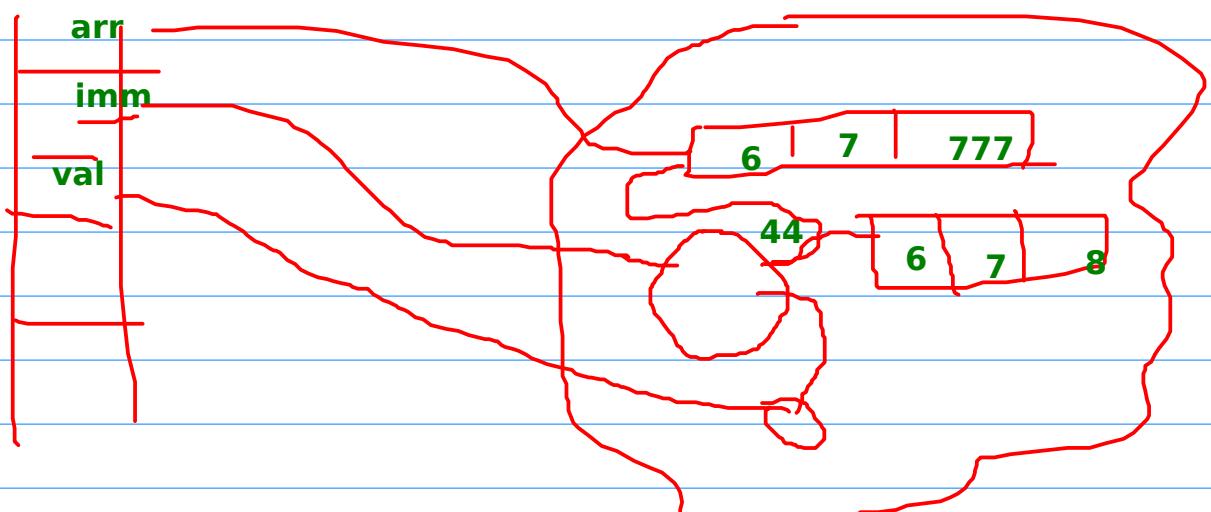

**String: one of heavily used class in java**

\* **string are immutable** (once u create a object of object of string class u can not change the state of that object)

\* **String is the only class in java => for which new operator is not essential while creating the object**

**String s="india"**

**final String s="foo";**

**String s=new String("india");**

**s="foo"+ " bar";**

**final int a[]={4,5,7};**

**final Car car=new Car("red");**

**that ref is constant  
u can not change the reference  
but u can change the state of object  
pointed by that ref**

**pointer to constant vs constant pointer**

```
String s1="india";
s1=s1+ " my";
System.out.println(s1);
```

**String s2="india";**

**Heap**

**GC**

**GC**

**stack**

**GC**

**string pool**

**method area**

## Locality of reference

```
String s=new String("in");
String s2="in";
```

stack

s1  
s2  
s3

String s3="in"

s1=s1+"foo"

4322

"in"

heap

"in"  
5677

if(s1==s2): false

string pool

method area

## String pool : population:

```
String s="a"+"b"+"c"+....."z";
```

s

"a"


"ab"

"abc"

"abc.....z"

Pem gen space problem in java  
java 7:

```
String s2=new String("india");
String s1="india us";
s2=s2+" us";
if(s1==s2)
 System.out.println("are same");
else
 System.out.println("are not same");
```

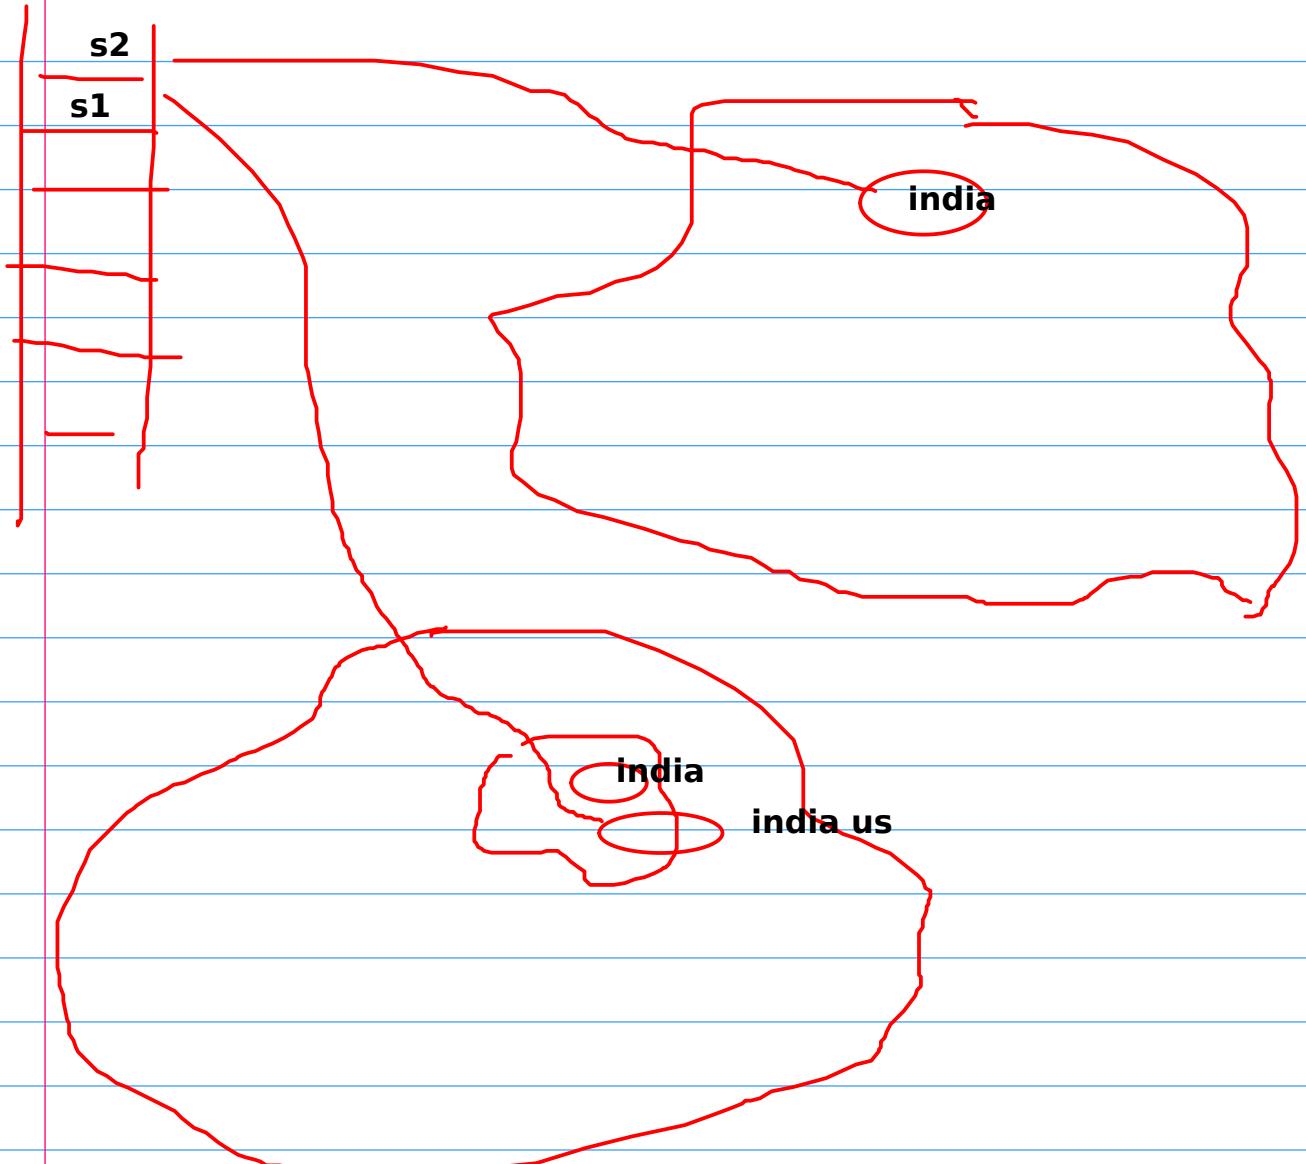

```
String s1 = "india";
//what intern() do? it tell java to look the contents in pool if it is there
// then ignore new operator and assign pointer to same object
String s2 = new String("india").intern();
String s3 = new String("india");
```

```
String s1 = "india";
//what intern() do? it tell java to look the contents in pool if it is there
// then ignore new operator and assign pointer to same object
String s2 = new String("india").intern();
String s3 = new String("india");
```

**String s2=s1+"us"; // code optimization  
s1.concat("us");**

**assumption: java is not doing code optimization**

~~X~~ **String s="a"+ "b" + "c".....+ "z";**

**String s3=new StringBuffer("a").concat("b").toString();**

**String vs StringBuilder vs StringBuffer**

**String: immutable, cacheing, string pool**


**StringBuilder vs StringBuffer  
not based on string pool**

**new**

**StringBuilder :better option  
dont use syn, faster  
Buider design pattern**

**StringBuffer: older option  
it have all the method are syn, slow**

```
String a="a"+ "b" + "c";
String temp=new StringBuilder()
.append("a")
.append("b")
.append("c")
.toString();
```

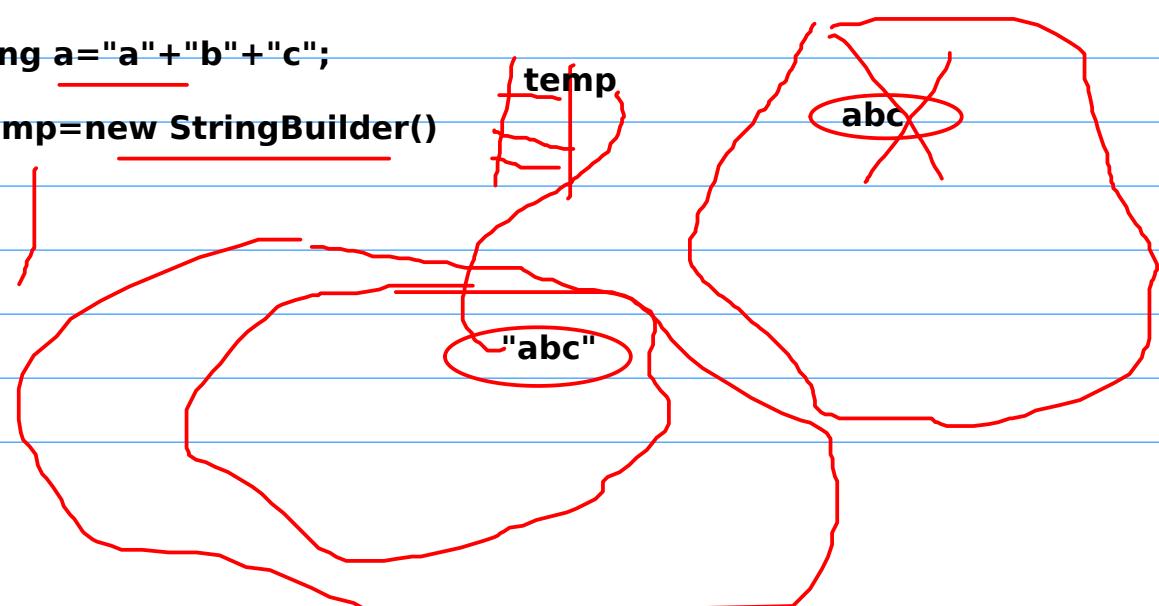

# Interface?

- Rules
  - All interface methods are always public and abstract, whether we say it or not.
  - Variable declared inside interface are always public static and final
  - Interface method can't be static or final
  - Interface cant have constructor
  - An interface can extends other interface
  - Can be used polymorphically
  - A class implementing an interface must implement all of its method otherwise it need to declare itself as an abstract class...

# Implementing an interface...

## What we declare

```
interface Bouncable{
 int i=9;
 void bounce();
 void setBounceFactor();
}
```

## What compiler think...

```
interface Bouncable{
 public static final int i=9;
 public abstract void bounce();
 public abstract void setBounceFactor();
}
```

All interface method  
must be  
implemented....


```
class Tyre implements Bouncable{

 public void bounce() {
 Sysout(i);
 Sysout(i++);
 }
 public void setBounceFactor() {}
}
```

# Note

- Following interface constant declaration are identical
  - int i=90;
  - public static int i=90;
  - public int i=90;
  - public static int i=90;
  - public static final int i=90;
- Following interface method declaration don't compile
  - **final** void bounce();
  - **static** void bounce();
  - **private** void bounce();
  - **protected** void bounce();

# Decreasing Rigidity..increasing Flexibility

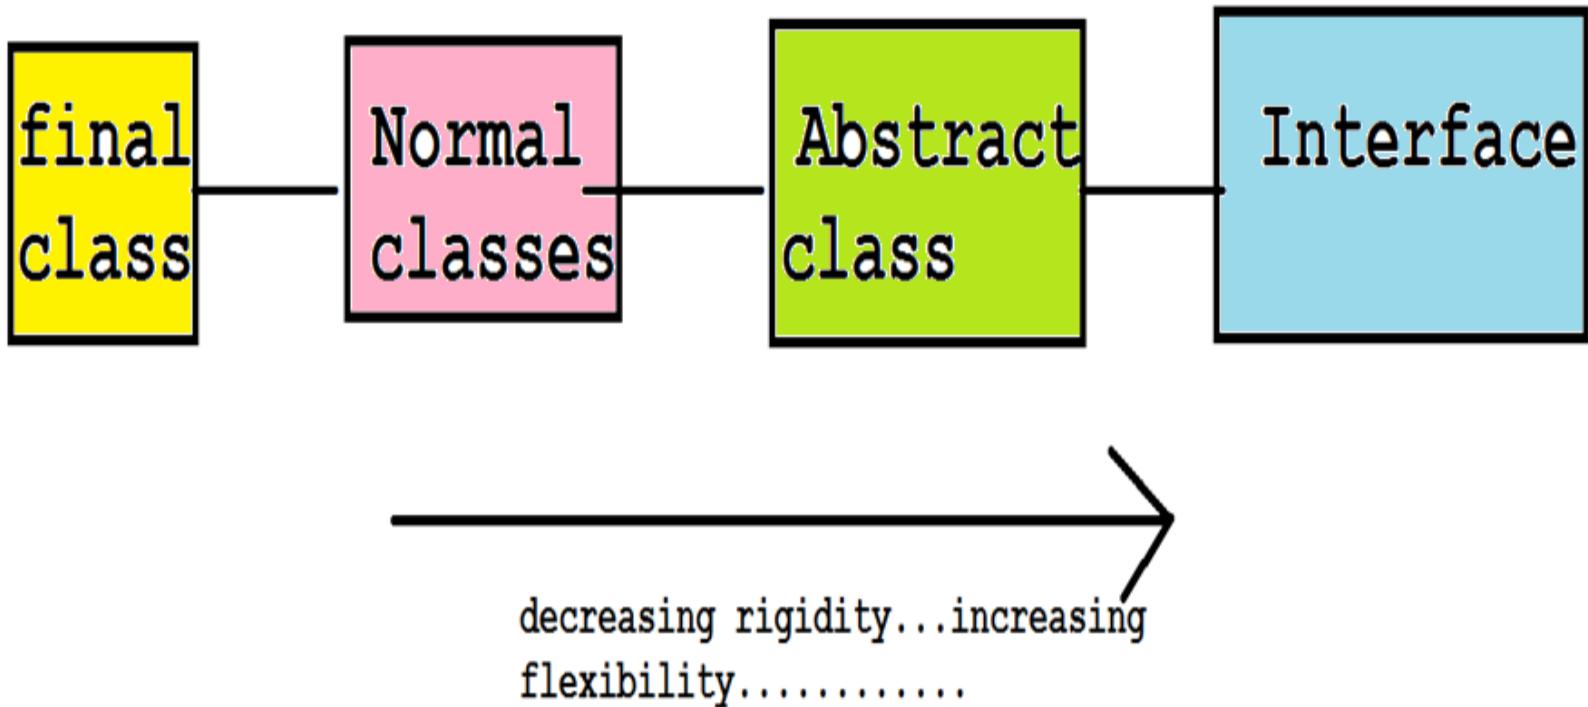

# Type of relationship bw objects

- USE-A
- HAS-A
- IS-A (Most costly ? )

ALWAYS GO FOR LOOSE COUPLING AND HIGH COHESION...


But HOW?

# IS-A

# VS

# HAS-A

## Inheritance [ is a ] Vs Composition [ has a ]

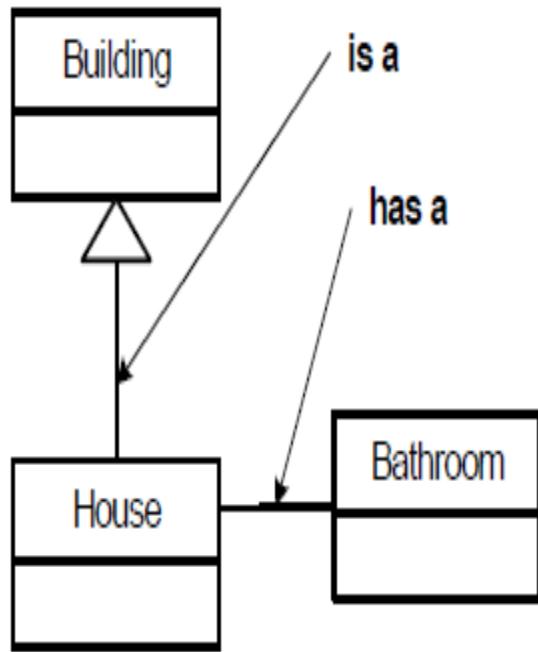

**is a** [House is a Building]

```
class Building{

}

class House extends Building{

}
```

**has a** [House has a Bathroom]

```
class House {
 Bathroom room = new Bathroom();

 public void getTotMirrors(){
 room.getNoMirrors();

 }
}
```



## **Day-4: Strings,Wrapper classes, Immutability, Inner classes,Lambda expression, Java 5 features , IO, Exception Handling**

- String class: Immutability and usages, stringbuilder and stringbuffer
- Wrapper classes and usages, Java 5 Language Features
- AutoBoxing and Unboxing, Enhanced For loop, Varargs, Static Import, Enums
- Inner classes: Regular inner class, method local inner class, anonymous inner class
- Char and byte oriented streams
- BufferedReader and BufferedWriter
- File handling
- Object Serialization and IO [ObjectInputStream / ObjectOutputStream]
- Exception Handling, Types of Exception, Exception Hierarchy, Exception wrapping and re throwing
- Hands On & Lab

# String

- Immutable i.e. once assigned then can't be changed
- Only class in java for which object can be created with or without using **new** operator

Ex: String s="india";  
String s1=new String("india");      **What is the difference?**

- String concatenation can be in two ways:
  - String s1=s+ "paki";    Operator overloading
  - String s3=s1.concat("paki");

# Immutability

- Immutability means something that cannot be changed.
- Strings are immutable in Java. What does this mean?
  - String literals are very heavily used in applications and they also occupy a lot of memory.
  - Therefore for efficient memory management, all the strings are created and kept by the JVM in a place called string pool (which is part of Method Area).
  - Garbage collector does not come into string pool.
  - How does this save memory?
  - 
  - **RULES FOR IMMUTABILITY**

Declare the class as final so it can't be extended.

Make all fields private so that direct access is not allowed.

Don't provide setter methods for variables

Make all mutable fields final so that it's value can be assigned only once.

Initialize all the fields via a constructor performing deep copy.

Perform cloning of objects in the getter methods to return a copy rather than returning the actual object reference.

# How to make copy of an Object?

```
int[] src = new int[]{1,2,3,4,5};
int[] dest = new int[5];
System.arraycopy(src, 0, dest, 0, src.length);
```

```
int[] a = new int[]{1,2,3,4,5};
int[] b = a.clone();
```

```
int[] a = {1,2,3,4,5};
int[] b = Arrays.copyOf(a, a.length);
```

Arrays.copyOfRange():

If you want few elements of an array to be copied

```
public final class ImmutableReminder{
 private final Date remindingDate;

 public ImmutableReminder (Date remindingDate) {
 if(remindingDate.getTime() < System.currentTimeMillis()){
 throw new IllegalArgumentException("Can not set reminder"
 " for past time: " + remindingDate);
 }
 this.remindingDate = new Date(remindingDate.getTime());
 }

 public Date getRemindingDate() {
 return (Date) remindingDate.clone();
 }
}
```

# Some common string methods...

- `charAt()`
  - Returns the character located at the specified index
- `concat()`
  - Appends one String to the end of another ( "+" also works)
- `equalsIgnoreCase()`
  - Determines the equality of two Strings, ignoring case
- `length()`
  - Returns the number of characters in a String
- `replace()`
  - Replaces occurrences of a character with a new character
- `substring()`
  - Returns a part of a String
- `toLowerCase()`
  - Returns a String with uppercase characters converted
- `toString()`
  - Returns the value of a String
- `toUpperCase()`
  - Returns a String with lowercase characters converted
- `trim()`
  - Removes whitespace from the ends of a String

# String comparison

- Two string should never be checked for equality using == operator  
**WHY?**
- Always use equals( ) method....

```
String s1="india";
String s2="paki";
```

```
if(s1.equals(s2))
```

```
.....
```

```
.....
```

|              | String               | StringBuffer   | StringBuilder  |
|--------------|----------------------|----------------|----------------|
| Storage Area | Constant String Pool | Heap           | Heap           |
| Modifiable   | No (immutable)       | Yes( mutable ) | Yes( mutable ) |
| Thread Safe  | Yes                  | Yes            | No             |
| Performance  | Fast                 | Very slow      | Fast           |

## Various memory area of JVM

1. Method area ----- Per JVM
2. heap area ----- Per JVM
3. stack area ----- Per thread
4. PC register area ----- Per thread
5. Native method area ----- Per thread

### String

String is **immutable**: you can't modify a string object but can replace it by creating a new instance. Creating a new instance is rather expensive.

```
//Inefficient version using immutable String
String output = "Some text"
Int count = 100;
for(int i=0; i<count; i++) {
 output += i;
}
return output;
```

The above code would build 99 new String objects, of which 98 would be thrown away immediately. Creating new objects is not efficient.

### StringBuffer / StringBuilder (added in J2SE 5.0)

StringBuffer is **mutable**: use StringBuffer or StringBuilder when you want to modify the contents. **StringBuilder** was added in Java 5 and it is identical in all respects to **StringBuffer** except that it is not synchronized, which makes it slightly faster at the cost of not being thread-safe.



```
//More efficient version using mutable StringBuffer
StringBuffer output = new StringBuffer(110);// set an initial size of 110
output.append("Some text");
for(int i=0; i<count; i++) {
 output.append(i);
}
return output.toString();
```

The above code creates only two new objects, the *StringBuffer* and the final *String* that is returned. *StringBuffer* expands as needed, which is costly however, so it would be better to initialize the *StringBuffer* with the correct size from the start as shown.

~~SOLID+~~

Marker interface

**interface Foo{}**



**Annotation  
aka flag**

**@Override**

**Inner classes:**

# Wrapper classes



- Helps treating primitive data as an object
- But why we should convert primitive to objects?
  - We can't store primitive in java collections
  - Object have properties and methods
  - Have different behavior when passed as argument
- Eight wrapper for eight primitives
  - Integer, Float, Double, Character, ...

```
Integer it=new Integer(33);
int temp=it.intValue();
....
```

rgupta.mtech@gmail.com

**primitive==>object**  
`Integer it=new Integer(i);`

**object==>primitive**  
`int i=it.intValue()`

**primitive ==>string**  
`String s=Integer.toString();`

**String==>Numeric object**  
`Double val=Double.valueOf(str)`

# Boxing / Unboxing Java 1.5

- Boxing

```
Integer iWrapper = 10;
Prior to J2SE 5.0, we use
Integer a = new Integer(10);
```

- Unboxing

```
int iPrimitive = iWrapper;
Prior to J2SE 5.0, we use
int b = iWrapper.intValue();
```

# Java 5 Language Features (I)

- AutoBoxing and Unboxing
- Enhanced For loop
- Varargs
- Covariant Return Types
- Static Import
- Enums

# Enhanced For loop

- Provide easy looping construct to loop through array and collections

```
int x[]={1,2,3,4,5};
....
....
for(int temp:x)
 Sysout("temp:"+temp);
```

```
class Animal{ }
class Cat extends Animal{ }
class Dog extends Animal{ }
```

```
Animal []aa={new Cat(),new Dog(), new Cat()};
```

```
for(Animal a:aa)

```

# Varargs

- Java starts supporting variable argument method in Java 1.5

```
class Foo{

 public void foo(int ...j)
 {
 for(int temp:j)
 Sysout(temp);
 }

}
```

- Discuss function overloading in case of Varargs and wrapper classes

# Static Import

- Handy feature in Java 1.5 that allow something like this:
- ```
import static java.lang.Math.PI;
import static java.lang.Math.cos;
```
- Now rather then using
 - ***double r = Math.cos(Math.PI * theta);***
- We can use something like
 - ***double r = cos(PI * theta);*** - looks more readable
 - Avoid abusing static import like
 - *import static java.lang.Math.*;*

General guidelines to use static java import:

- 1) Use it to declare local copies of java constants
- 2) When you require frequent access to static members from one or two java classes

Enums


- Enum is a special type of classes.
- enum type used to put restriction on the instance values

```
public enum myCars{  
    HONDA,BMW,TOYOTA  
};  
.....  
.....  
myCars currentcar=myCars.BMW;  
System.out.println("My Current Cars : "+ myCars.BMW);
```

its optional !!!

```
enum Day {  
    SUNDAY, MONDAY, TUESDAY, WEDNESDAY, THURSDAY,  
    FRIDAY, SATURDAY  
}  
  
//used  
Day today = Day.WEDNESDAY;  
switch(today){  
    case SUNDAY:  
        break;  
    //...  
}
```

Inner classes

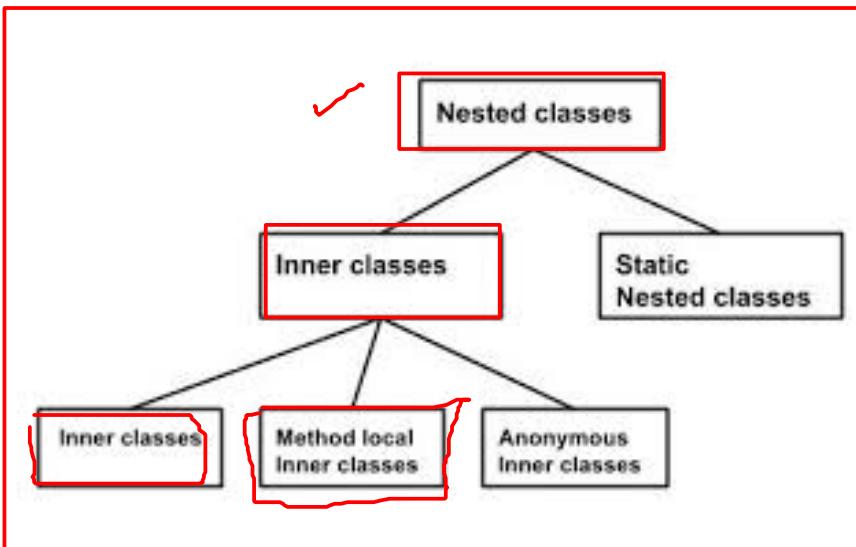

- Inner class?
 - A class defined inside another class.
 - Why to define inner classes
- Inner classes
 - Top level inner class
 - Method local inner class
 - Anonymous Inner class
 - Method local argument inner class
- Static inner classes

- Inner class : a class inside another class?

```
class LinkList{  
    class Node{  
    }  
}
```

Top level inner class

```
class Outer{
```

```
    class Inner{  
    }
```

Object of inner class is not
possible without outer class object*

```
}
```


Method local inner class:

```
class Foo{
```


```
void foof(){  
    class ImpClass{  
    }  
}
```

Ann inner class: a class without name?

Ann inner class is heavily used
in gui programming in java to imp
call back

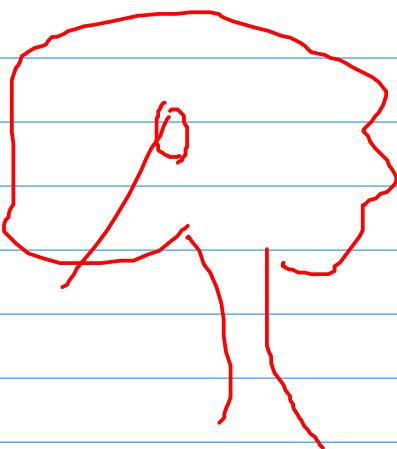

Event handling: call back

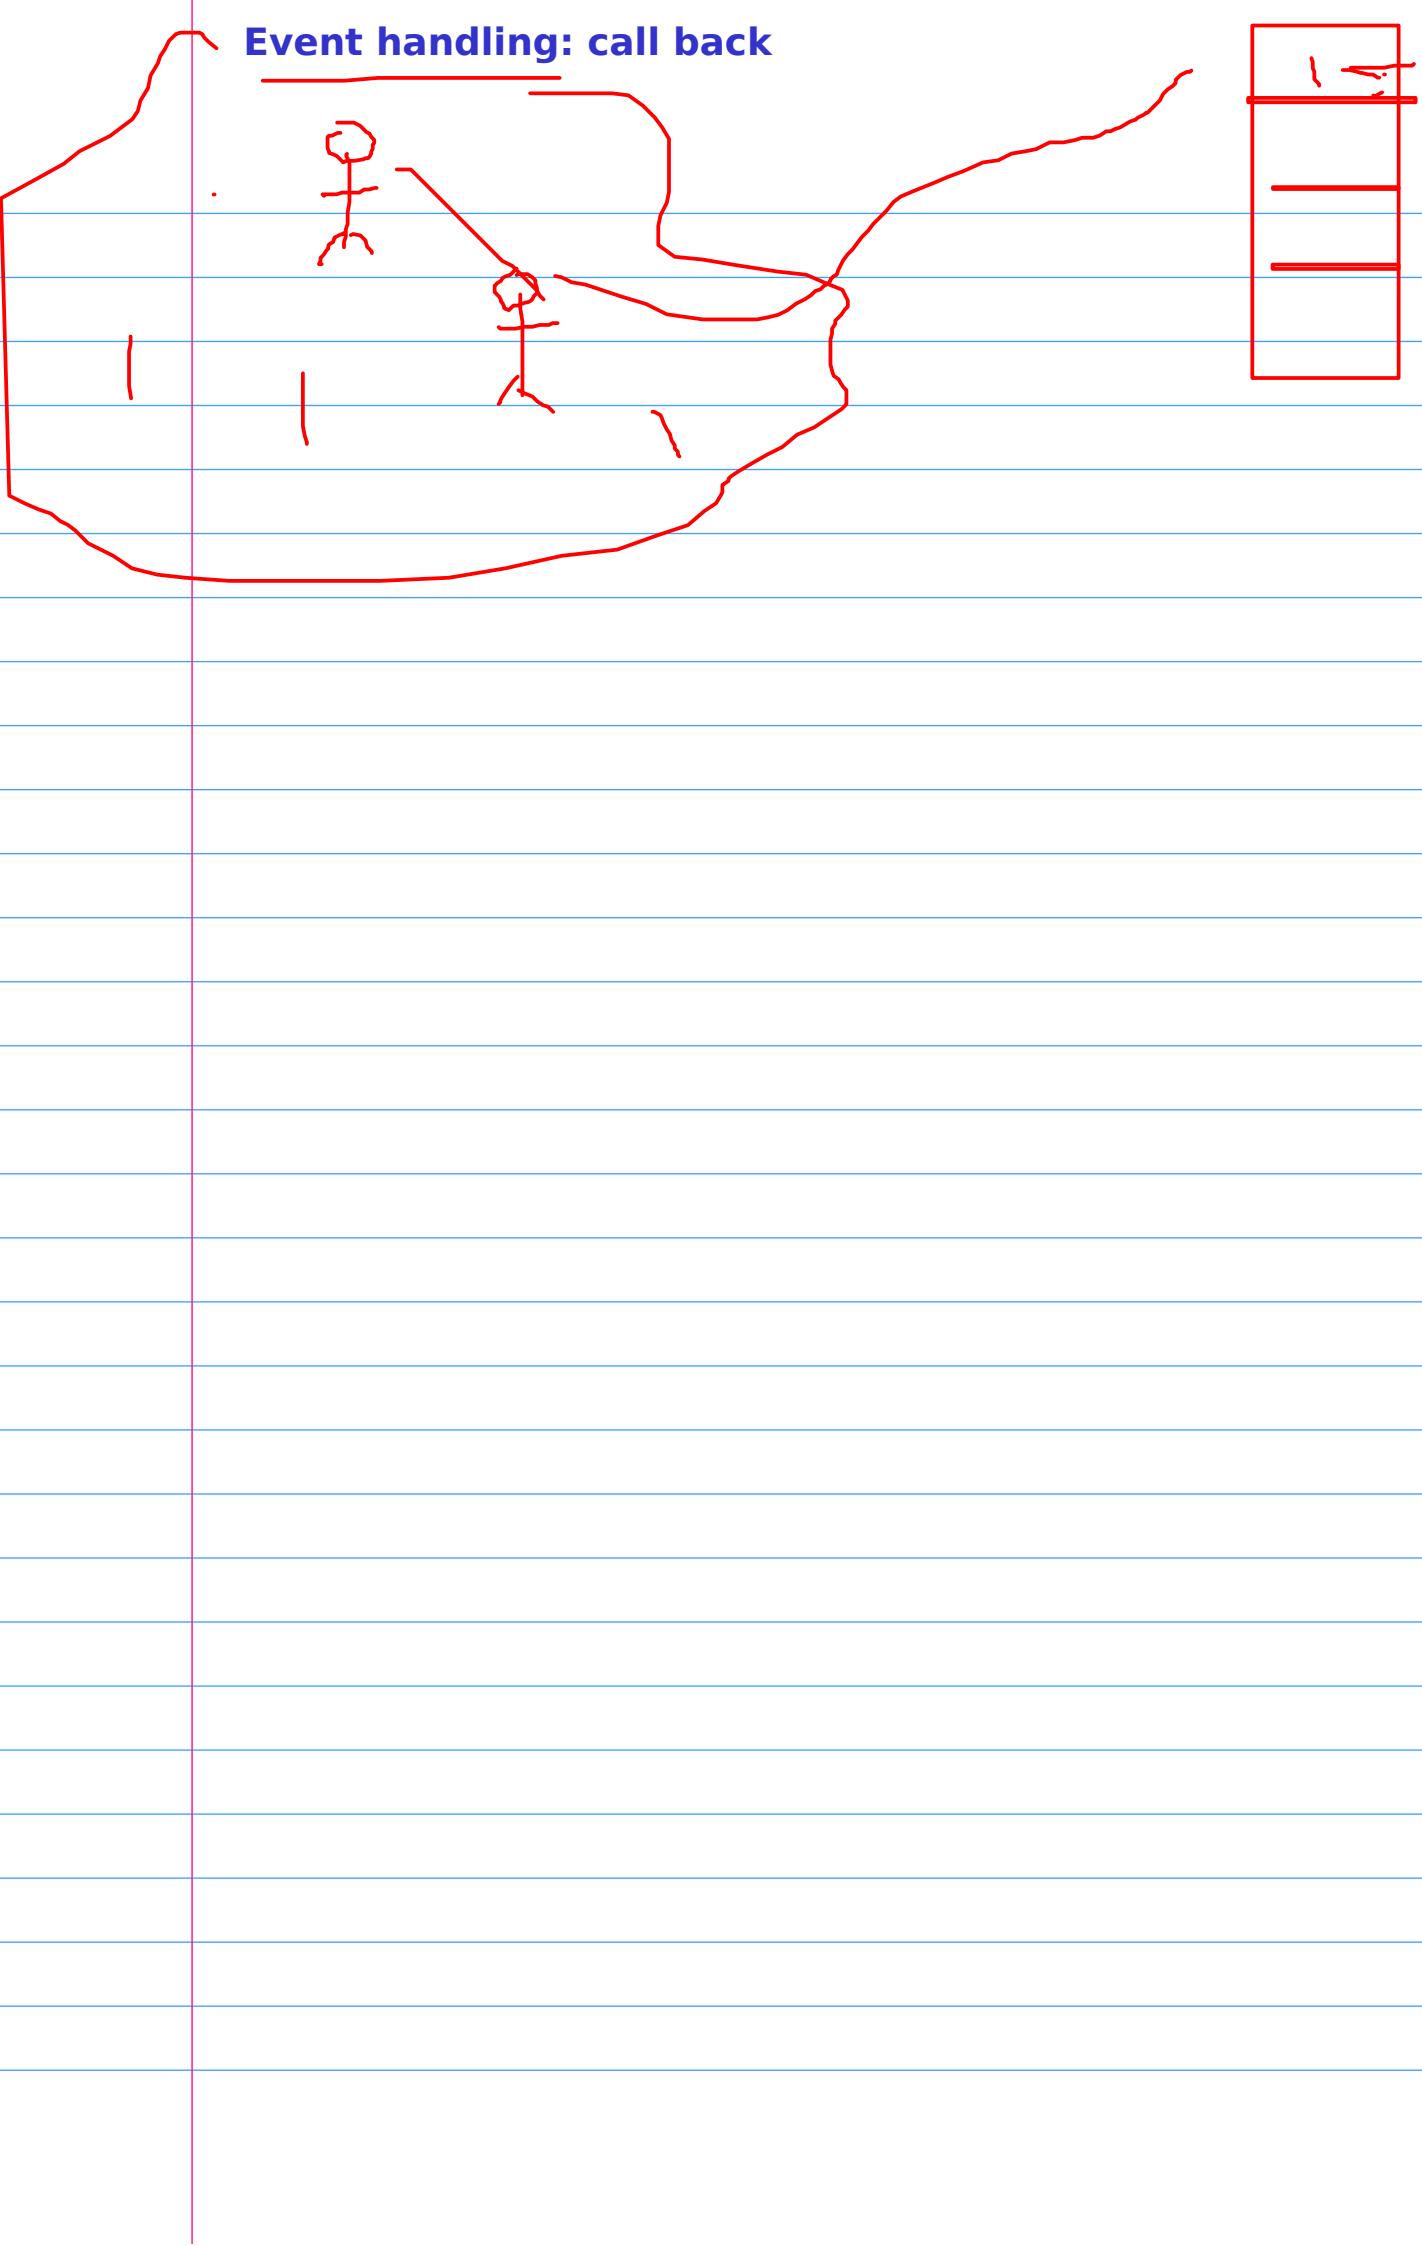

Top level inner class

- Non static inner class object can't be created without outer class instance
- All the private data of outer class is available to inner class
- Non static inner class can't have static members
 - <http://www.avajava.com/tutorials/lessons/iterator-pattern.html>

```
class A
{
    private int i=90;

    class B
    {
        int i=90;//
        void foo()
        {
            System.out.println("instance value of outer class:"+ A.this.i);

            System.out.println("instance value of inner class:"+this.i);
        }
    }
    public class Inner1 {

        public static void main(String[] args) {

            A.B objectB=new A().new B();

            objectB.foo();
        }
    }
}
```

Method local inner class

- Class define inside an method
- Can not access local data define inside method
- Declare local data final to access it

```
class A
{
    private int i=90;
    void foo()
    {
        int i=22;
        final int j=44;
        class B
        {
            void foofy()
            {
                //System.out.println("value of method local variable cant be access:"+i);
                System.out.println("value of method local" +
                    " can be accessed if it is declared final:"+ j);
            }
        }
        B b=new B();
        b.foofy();
    }
}
```

Anonymous Inner class

- A way to implement polymorphism
- “On the fly”

```
interface Cookable
{
    public void cook();
}

class Food
{
    Cookable c=new Cookable() {
        @Override
        public void cook() {
            System.out.println("Cooked.....");
        }
    };
}
```

What is Exception?

- An exception is an abnormal condition that arises while running a program.

Examples:

- Attempt to divide an integer by zero causes an exception to be thrown at run time.
- Attempt to call a method using a reference that is null.
- Attempting to open a nonexistent file for reading.
- JVM running out of memory.
- Exception handling do not correct abnormal condition rather it make our program robust i.e. make us enable to take remedial action when exception occurs...Help in recovering...


Exception :

Checked Ex

Unchecked Ex

All Ex happens at run time

try
catch
throw
throws
finally

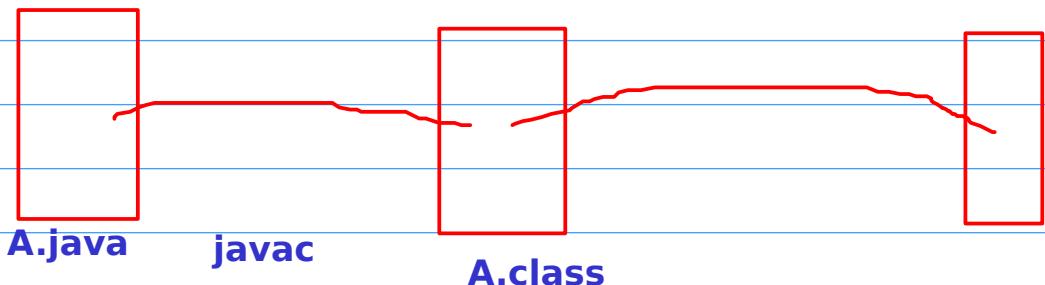

**BufferedReader br=new BufferedReader
(new FileReader(new File("data2.txt")));**

Decorator design pattern IO

IO (Stream) flow of data from S--> D

Char stream
unicode char



Byte stream
ascaii

data + meta data

XXXReader


XXXWrite

XXXStream

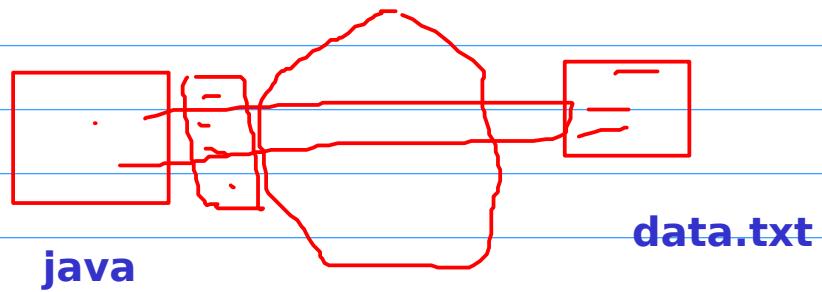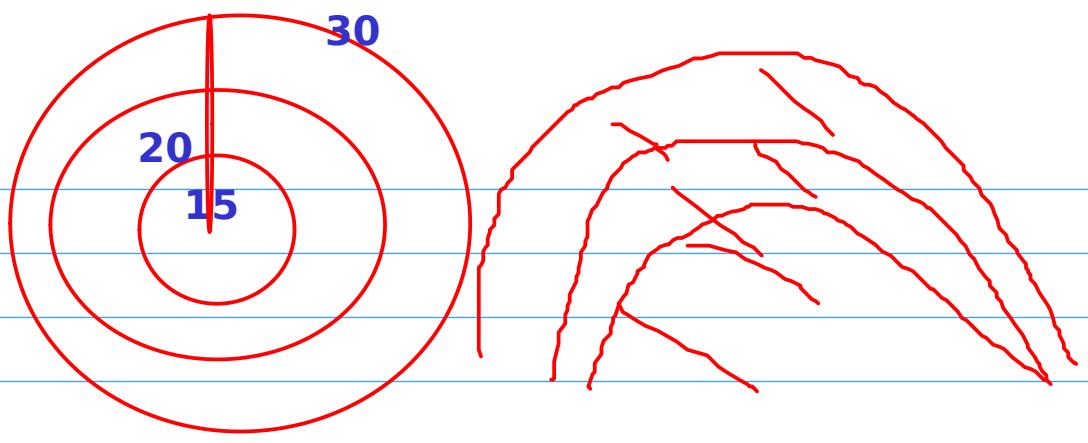

```
try{  
    risky code  
} catch(...){  
}  
catch(...){  
}  
}
```

MR pk

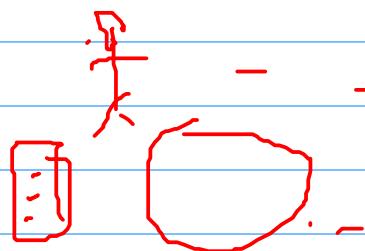

```
finally{  
    to clean up the resourser... close the stream  
    jdbc conn, hib conn.. memory leak  
}
```

Type of exceptions

1. Unchecked Exception

- Also called Runtime Exceptions

2. Checked Exception

- Also called Compile time Exceptions

3. Error

- Should not be handled by programmer..like JVM crash

□ All exceptions happens at run time in programming and also in real life.....

□ for checked ex, we need to tell java we know about those problems for example readLine() throws IOException

- Exception key words

- Catch

- Throw

Exception Hierarchy



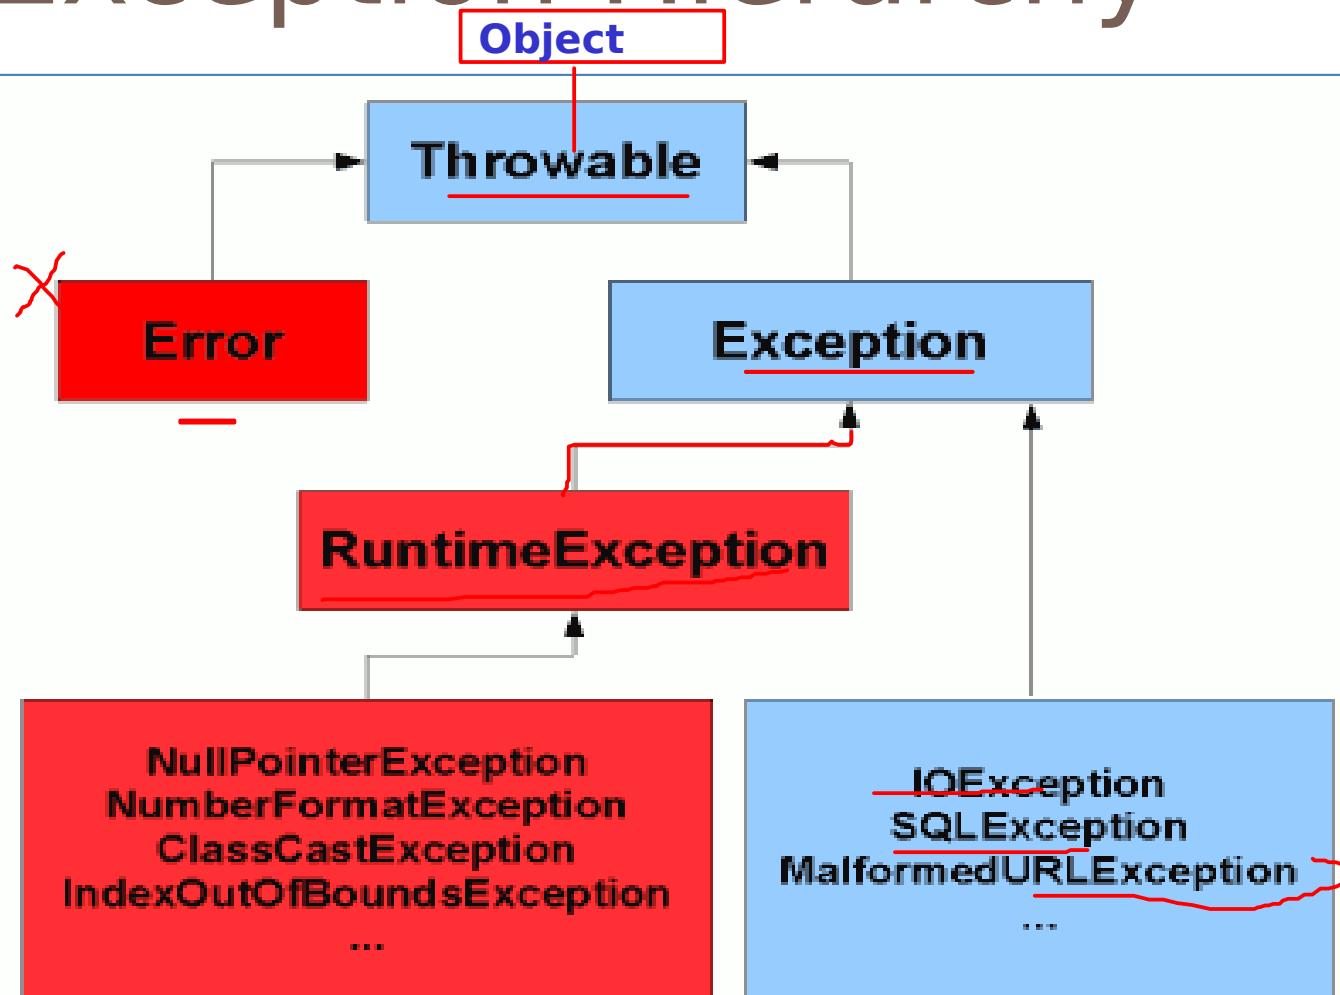


Figure: Exception Hierarchy in Java


BenchResources.Net

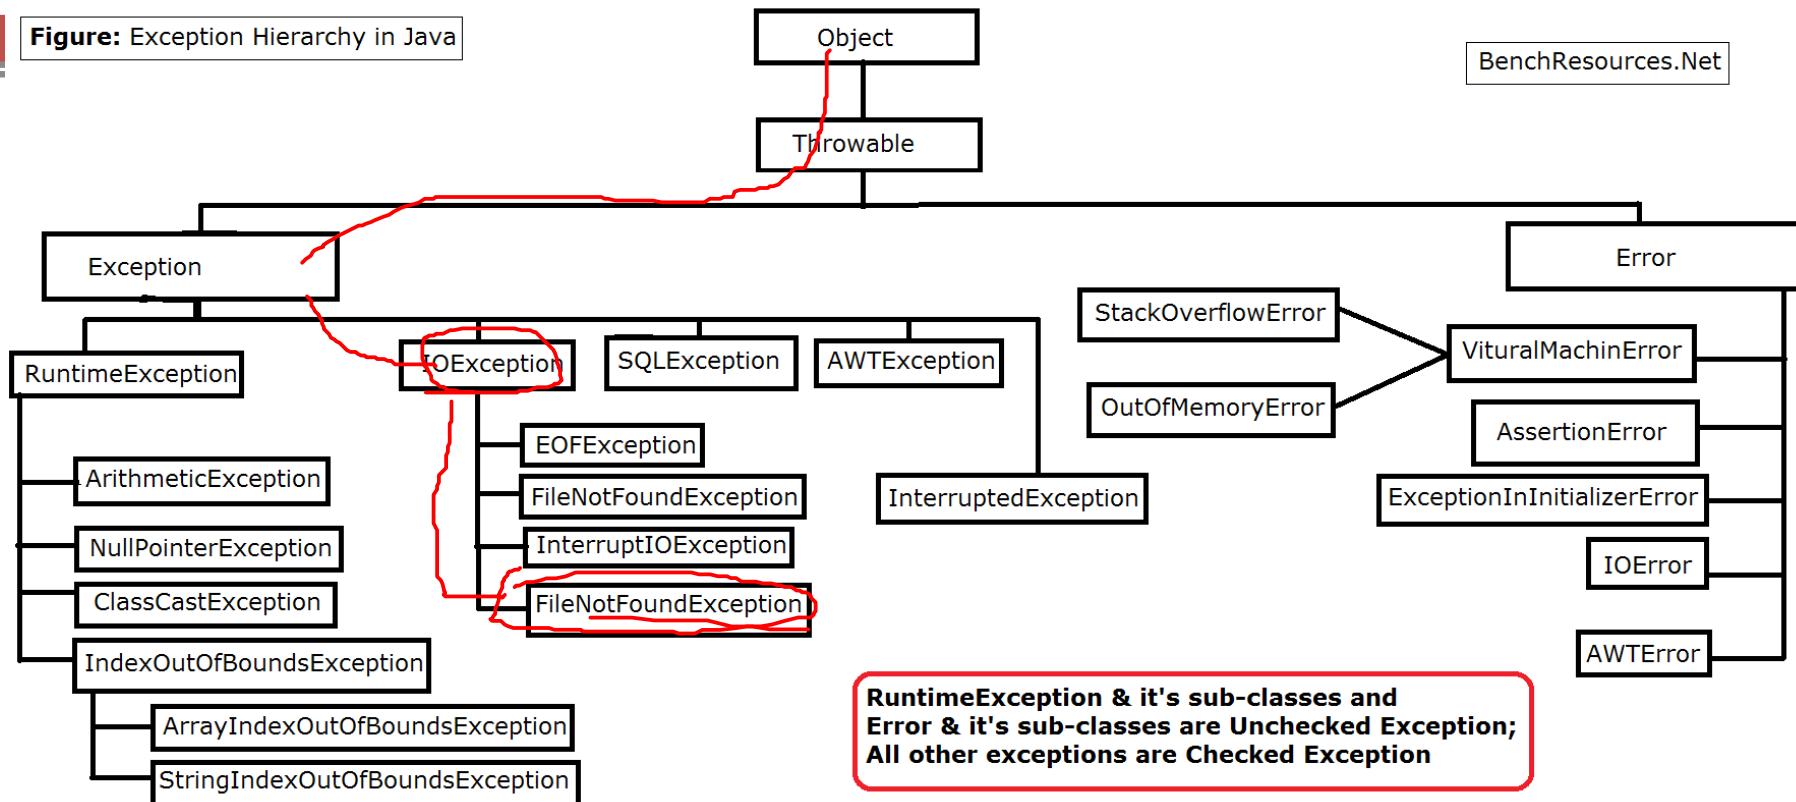

```
catch (FileNotFoundException e) {  
    System.out.println("file is not found");  
}  
}  
catch(IOException e) {  
    System.out.println("some io ex");  
}  
}  
}  
}  
}  
}  
}  
}
```



```
catch(Exception e) {  
    System.out.println("some other ex");  
}  
}  
X  
catch (FileNotFoundException e) {  
    System.out.println("file is not found");  
}  
}  
}  
}  
}  
}  
}
```

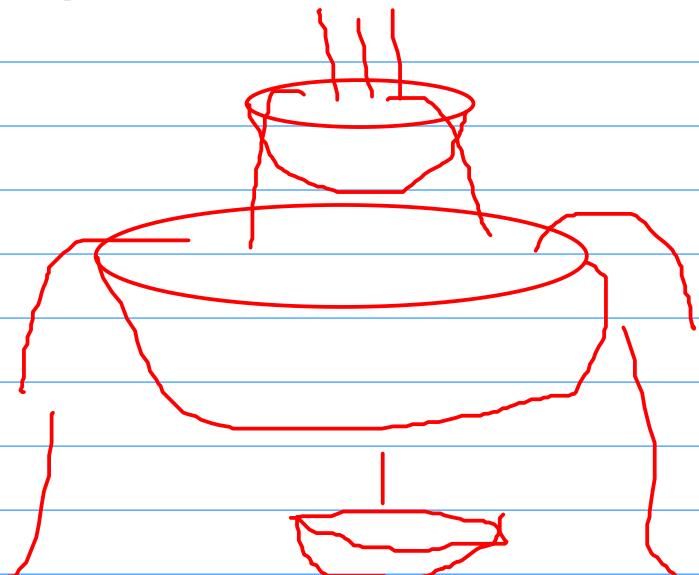


Some gpp about finally:

u should never return the values from finally block
u s..... throws ex from finally block

throw vs throws

when to go for try catch and when to for throws

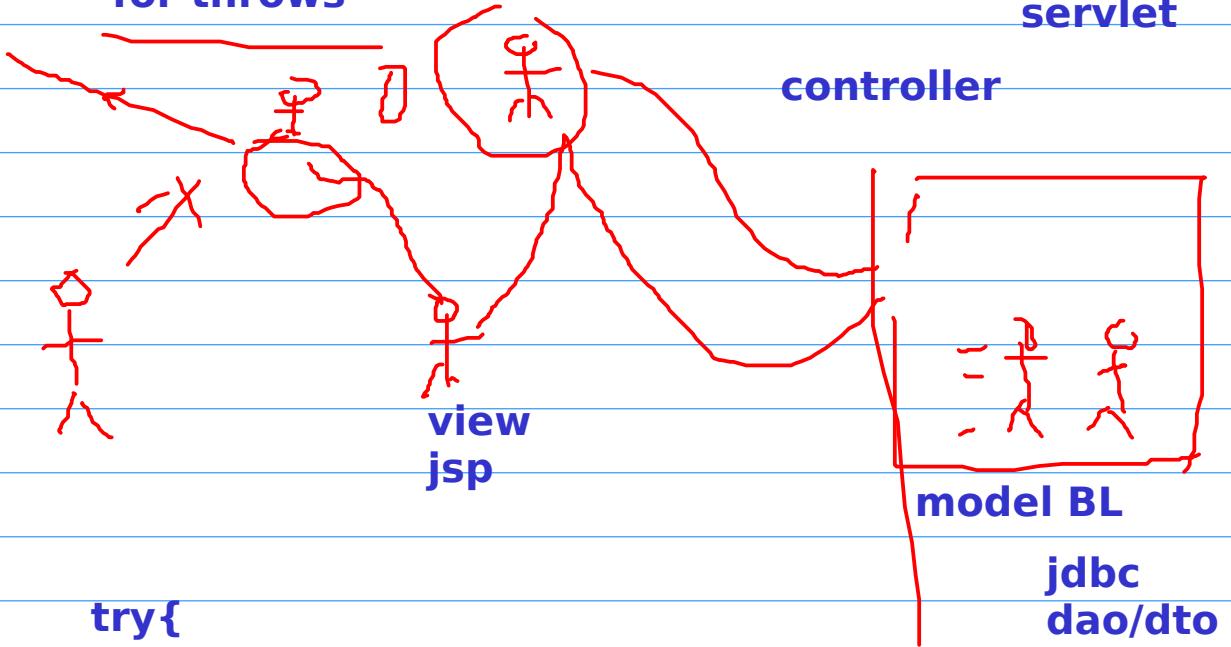

```
}catch(PaneerNotFEx e){    throws new PNFEx(...);  
    //offer alternative  
}
```

throw and throws used in model layer...

throw: used to throw an ex explicitly


throws : comes on method sign...

Account
balance

:AccCreationEx

withdraw : NotSufficientFundEx
deposit : OverfundExceptoin

```
public class Test  
{  
    public static void main(String [] args)  
    {  
        Test t1 = new Test();  
        Test t2 = m1(t1); // line 6  
        Test t3 = new Test();  
        t2 = t3; // line 8  
    }  
    static Test m1(Test temp)  
    {  
        temp = new Test();  
        return temp;  
    }  
}
```

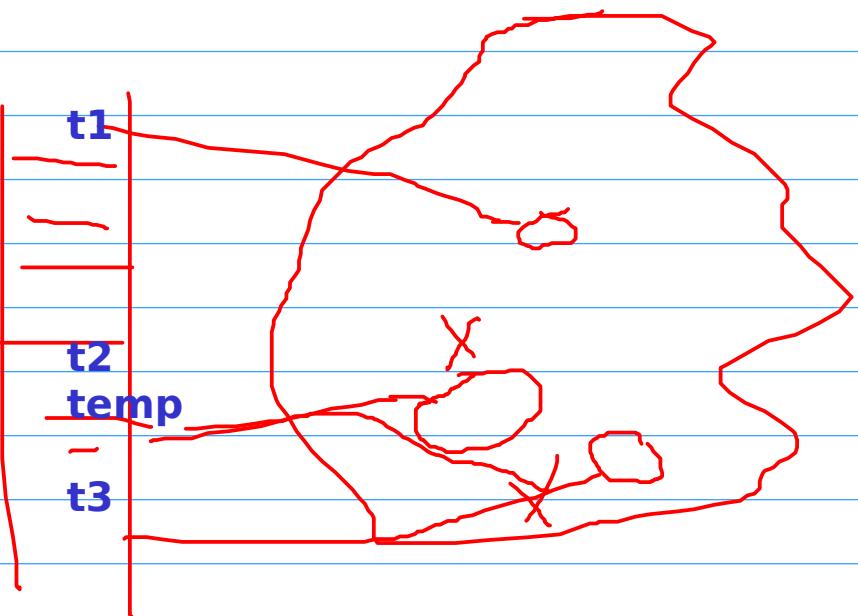

```
    catch (FileNotFoundException | IOException e) {  
        System.out.println("file is not found");
```

```
}
```


IOEx

FNotEx

```
    catch(InputMismatchException | ArithmeticException ex)  
        System.out.println(ex);
```


```
}
```

.

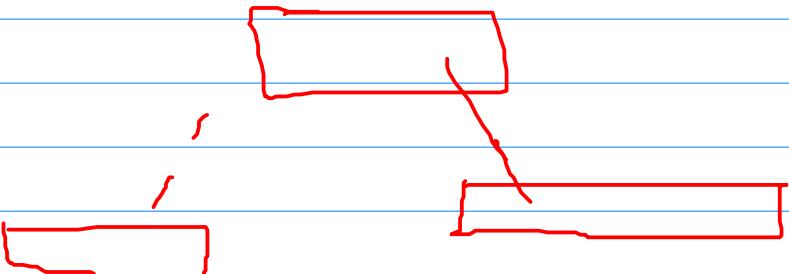

java 7: ARM: automatic resource mgt?

**java 7 says if u are using a special syntax
u dnot have to close the resouce i will do for you**

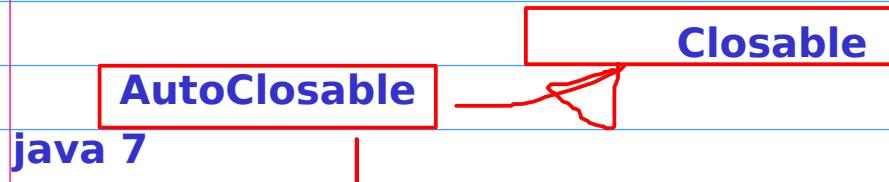

**Rule of overriding and overloading in the case of
Exception handling!**

How to write our own autoclosable?

take the topics:

11

**abs encapsulation
immu
string
inner class
so
lid
interface vs ab class
static concepts
jvm arch , diff memory area
ex handing
Object class methods**

AEx



BEx


Exceptions and their Handling

- ▶ When the JVM encounters an error such as divide by zero, it creates an exception object and throws it – as a notification that an error has occurred.
- ▶ If the ~~exception~~ object is not caught and handled properly, the ~~interpreter~~ will display an error and terminate the program.
- ▶ If we want the program to continue with execution of the remaining code, then we should try to catch the exception object thrown by the error condition and then take appropriate corrective actions. This task is known as *exception handling*.


~~Common Java Exceptions~~

- ArithmeticException
- ~~ArrayIndexOutOfBoundsException~~
- ArrayStoreException
- FileNotFoundException
- IOException - general I/O failure
- NullPointerException - referencing a null object
- OutOfMemoryError
- SecurityException - when applet tries to perform an action not allowed by the browser's security setting.
- StackOverflowError
- StringIndexOutOfBoundsException

Rules for throwing exception from overridden methods

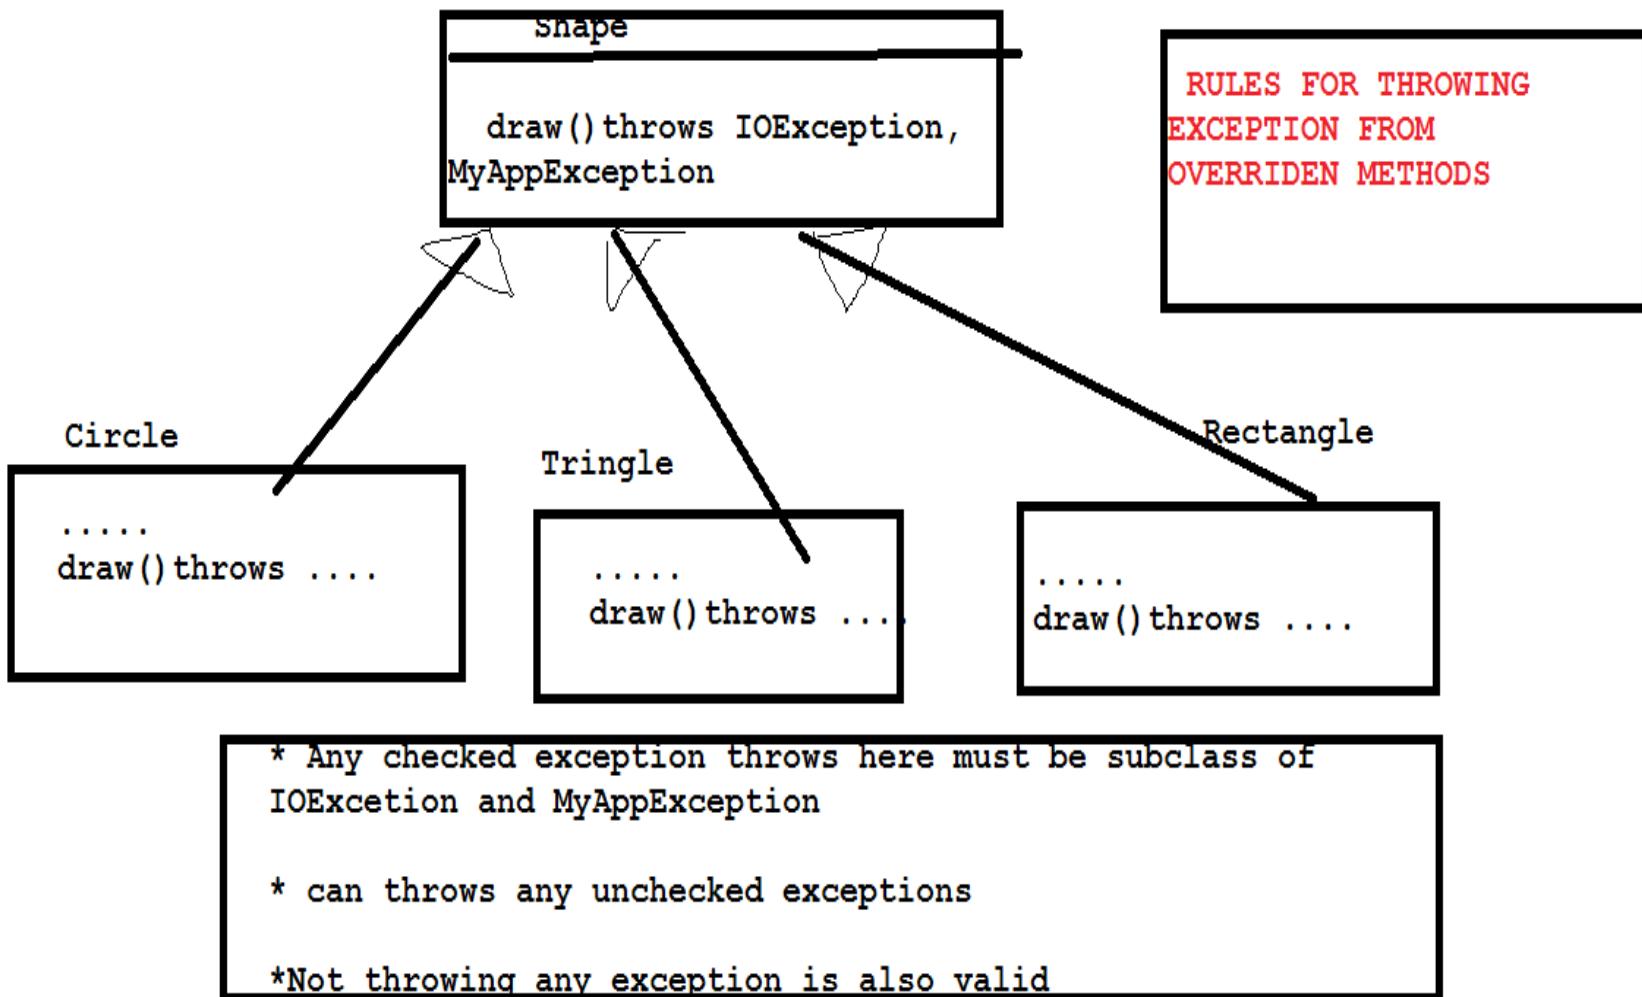

Rules for throwing exception from constructors

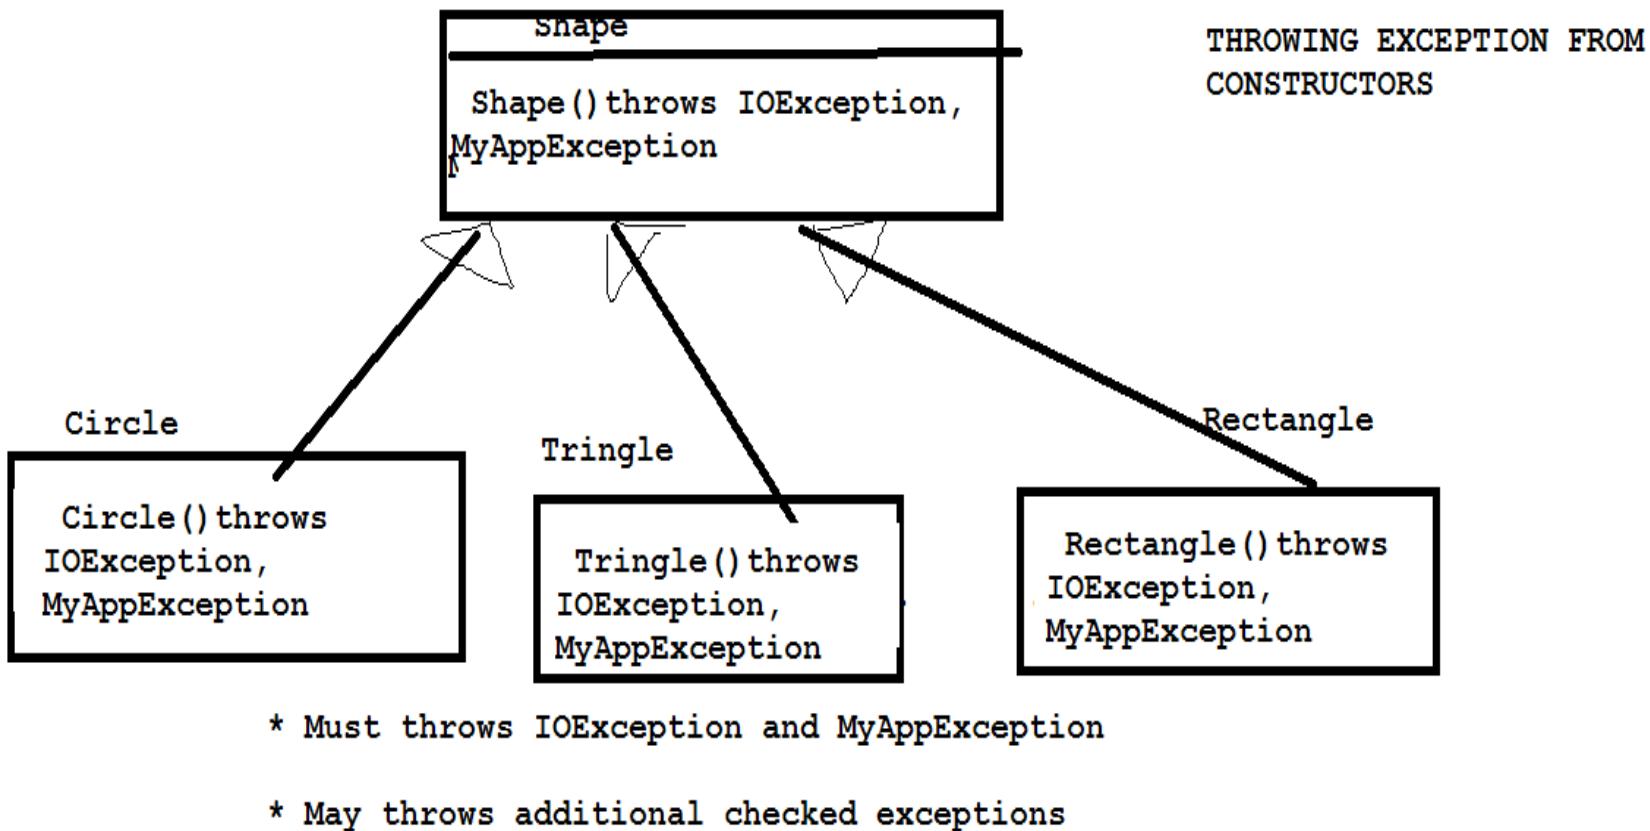

Rules for throwing exception from overloaded and other methods

Throwing Exception from Overloaded
and other methods...

```
class MyClass{  
    ...  
    void MyMethod(...) throws ....{}  
    void MyMethod(...,...) throws ....{}  
    void MyOtherMethod(...) throws ....{}  
}
```

*Not an overriden method
*also not a const


hence can throw any
exception
irrespective of
exception thrown by
other overloaded
methods


Can throw any
exception...





Stream and IO

- Stream is logical connection bw source and destination
- Stream is an abstraction that either produces or consumes information.
- A stream is linked to a physical device by the Java I/O system.
- All streams behave in the same manner, even if the actual physical devices to which they are linked differ.
- **2 types of streams:**
 - byte : for binray data, contain 0,1 sequence
 - All byte stream class are like XXXXXXXXStream
 - character: for text data
 - All char stream class are like XXXXXXXXReader/ XXXXXXWriter

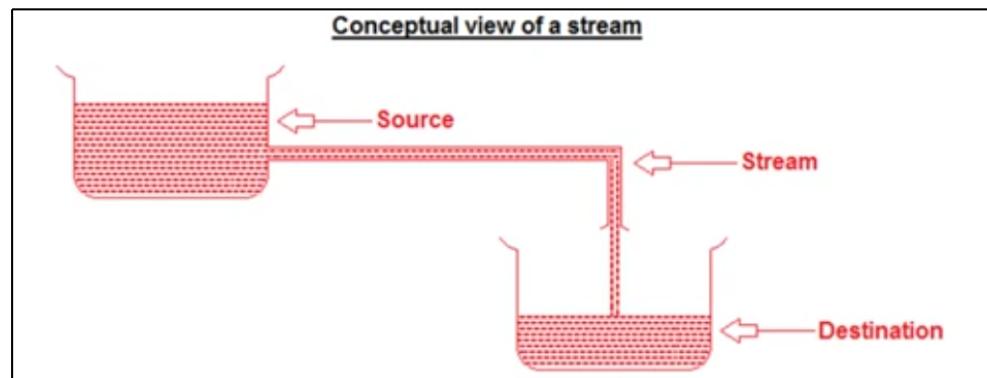

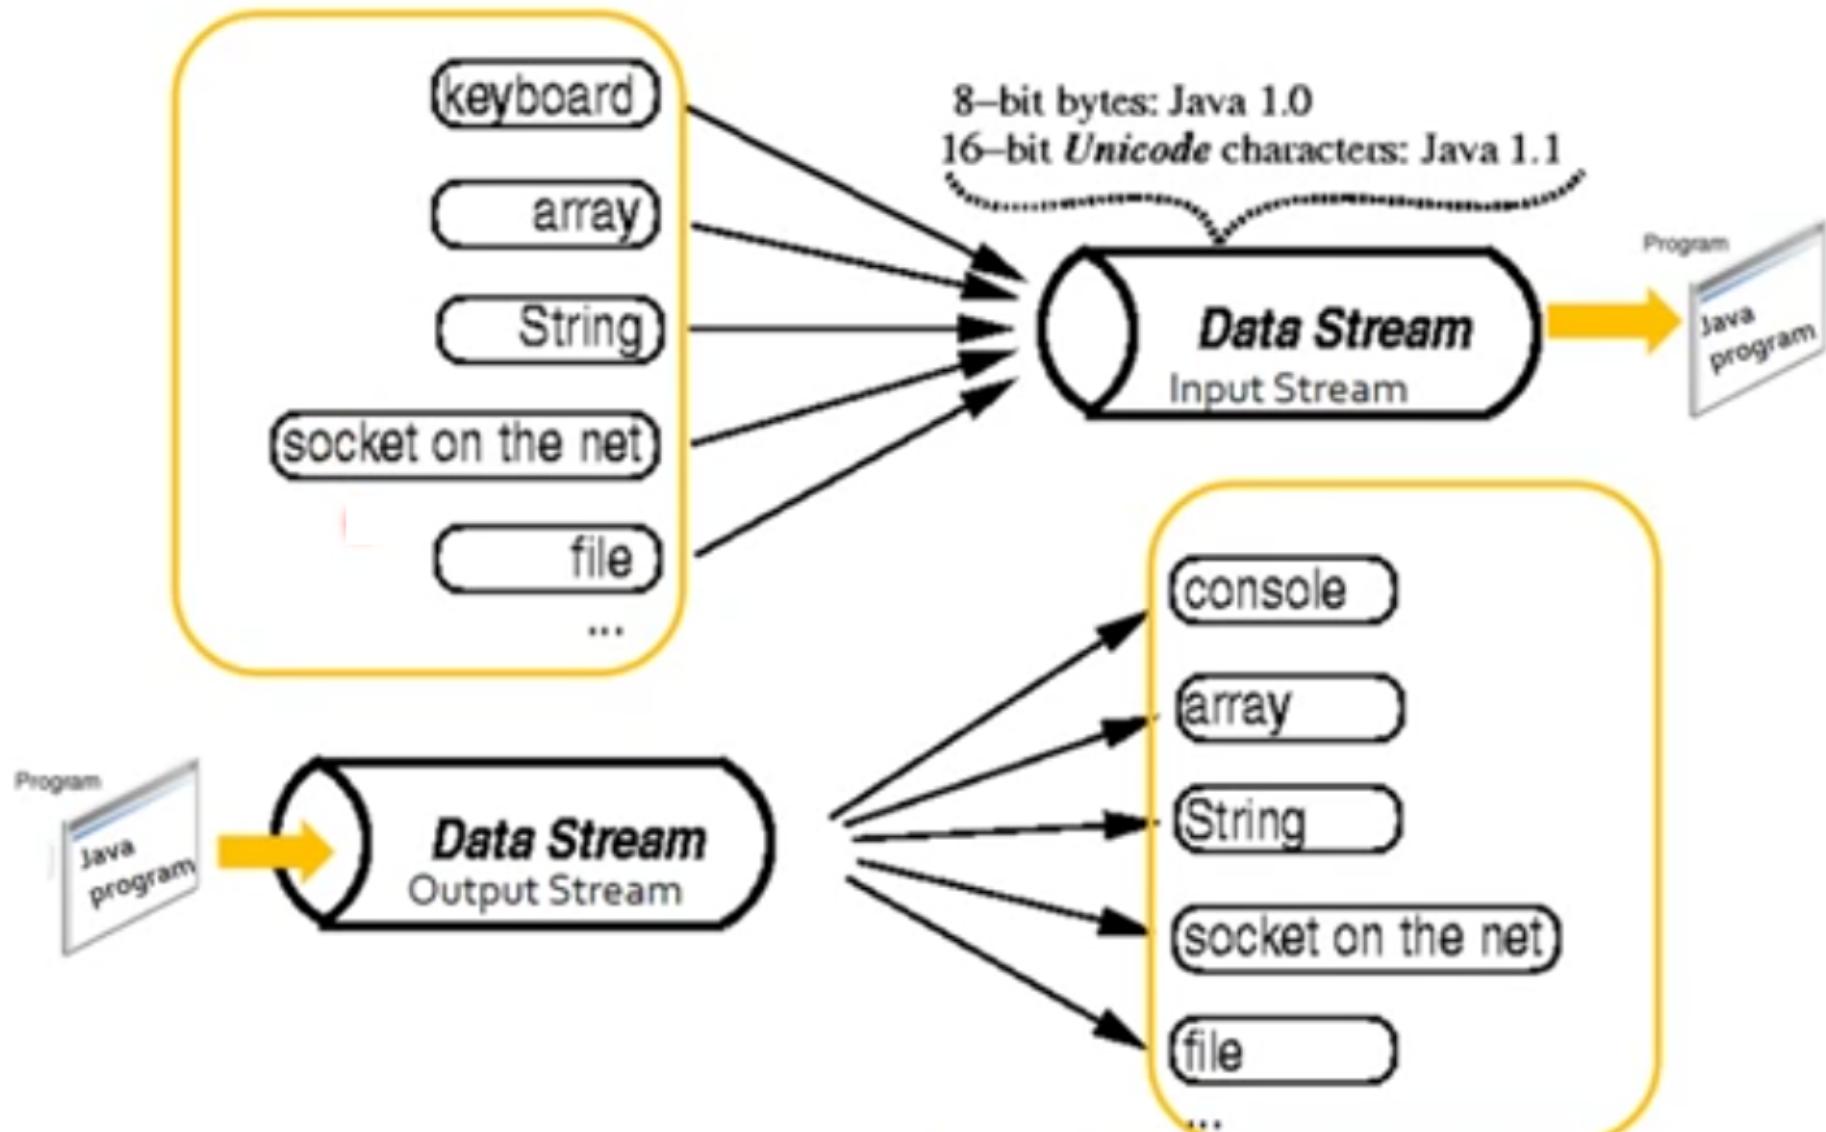

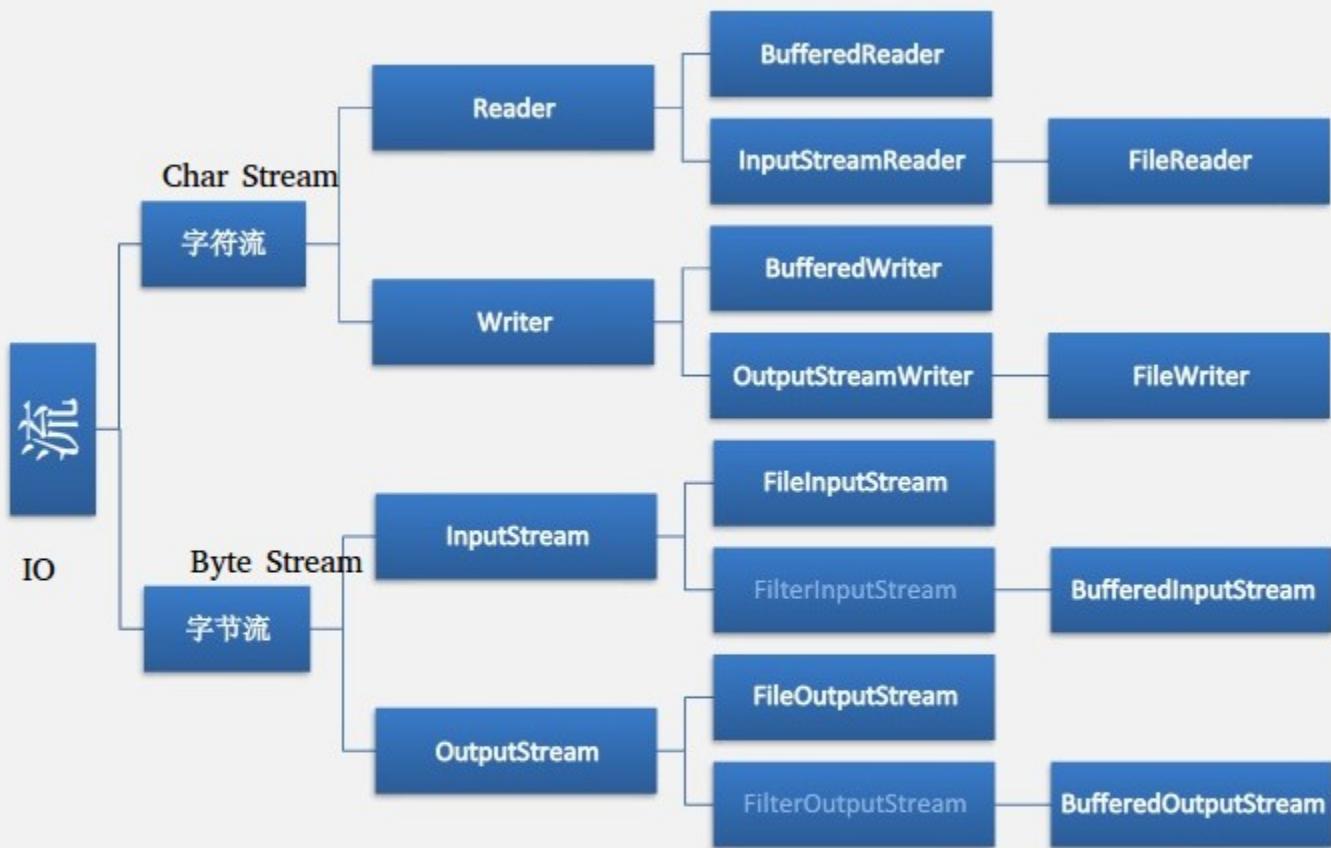

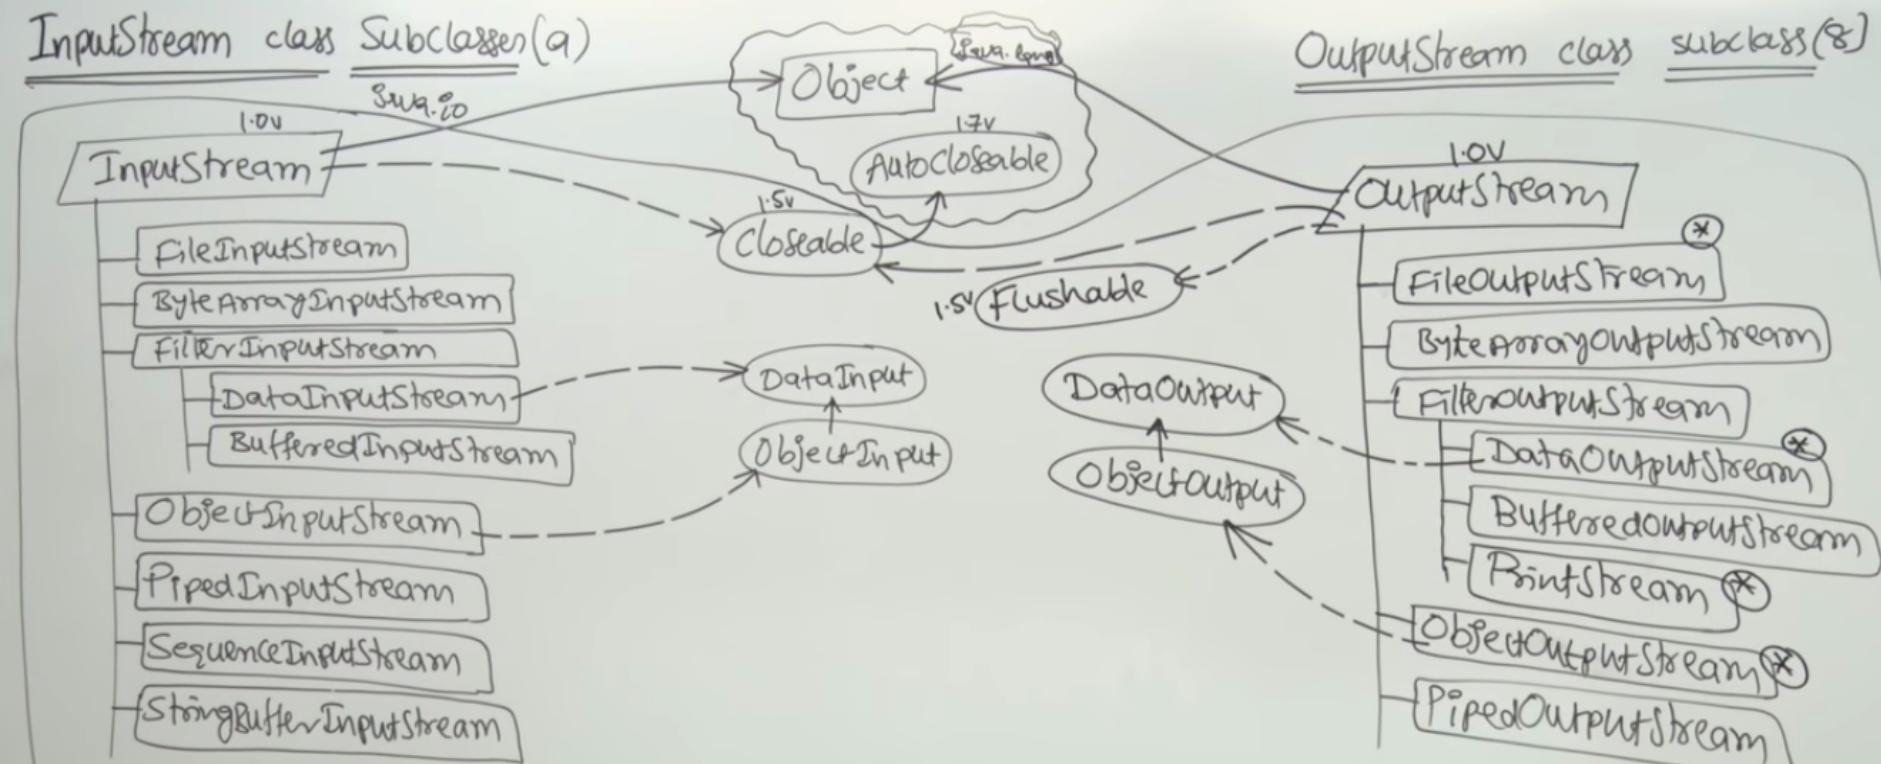



System class in java

- System class defined in `java.lang` package
- It encapsulate many aspect of JRE
- System class also contain 3 predefine stream variables
 - `in`
 - `System.in(InputStream)`
 - `out`
 - `System.out(PrintStream)`
 - `err`
 - `System.err(console)`

BufferedReader and BufferedWriter

- Reading from console
 - `BufferedReader br=new BufferedReader(new InputStreamReader(System.in));`
- Reading from file
 - `BufferedReader br=new BufferedReader(new FileReader(new File("c:\\raj\\foo.txt")));`

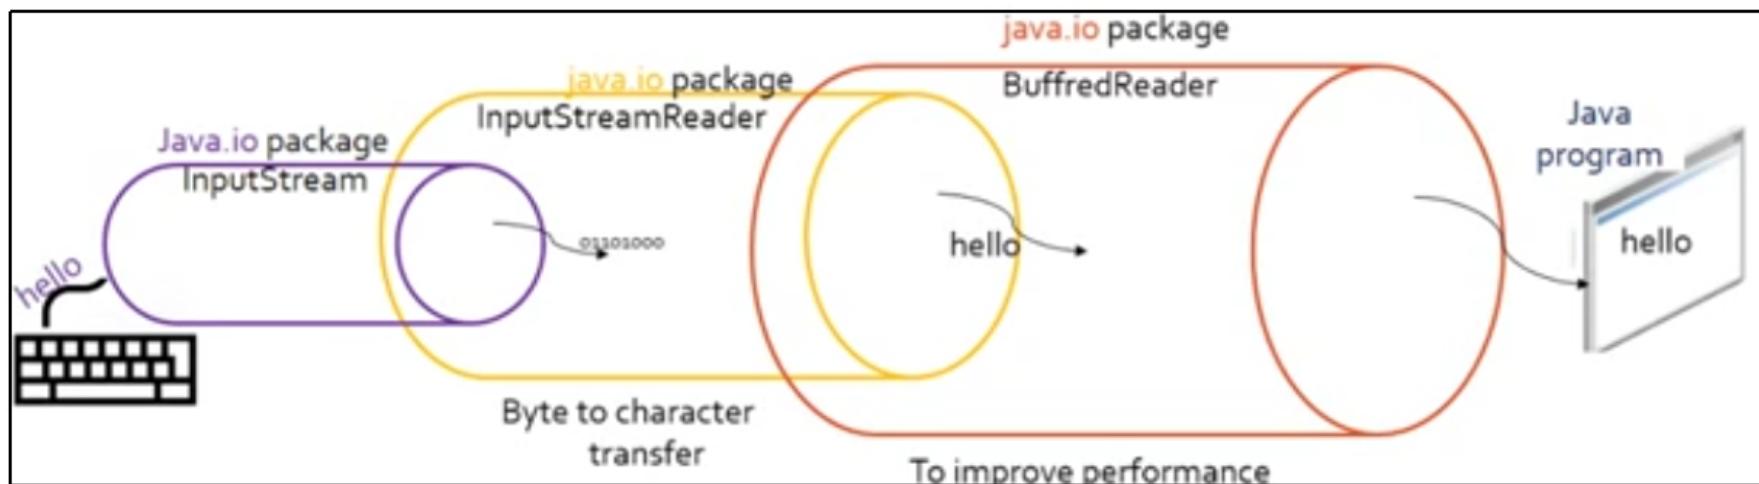

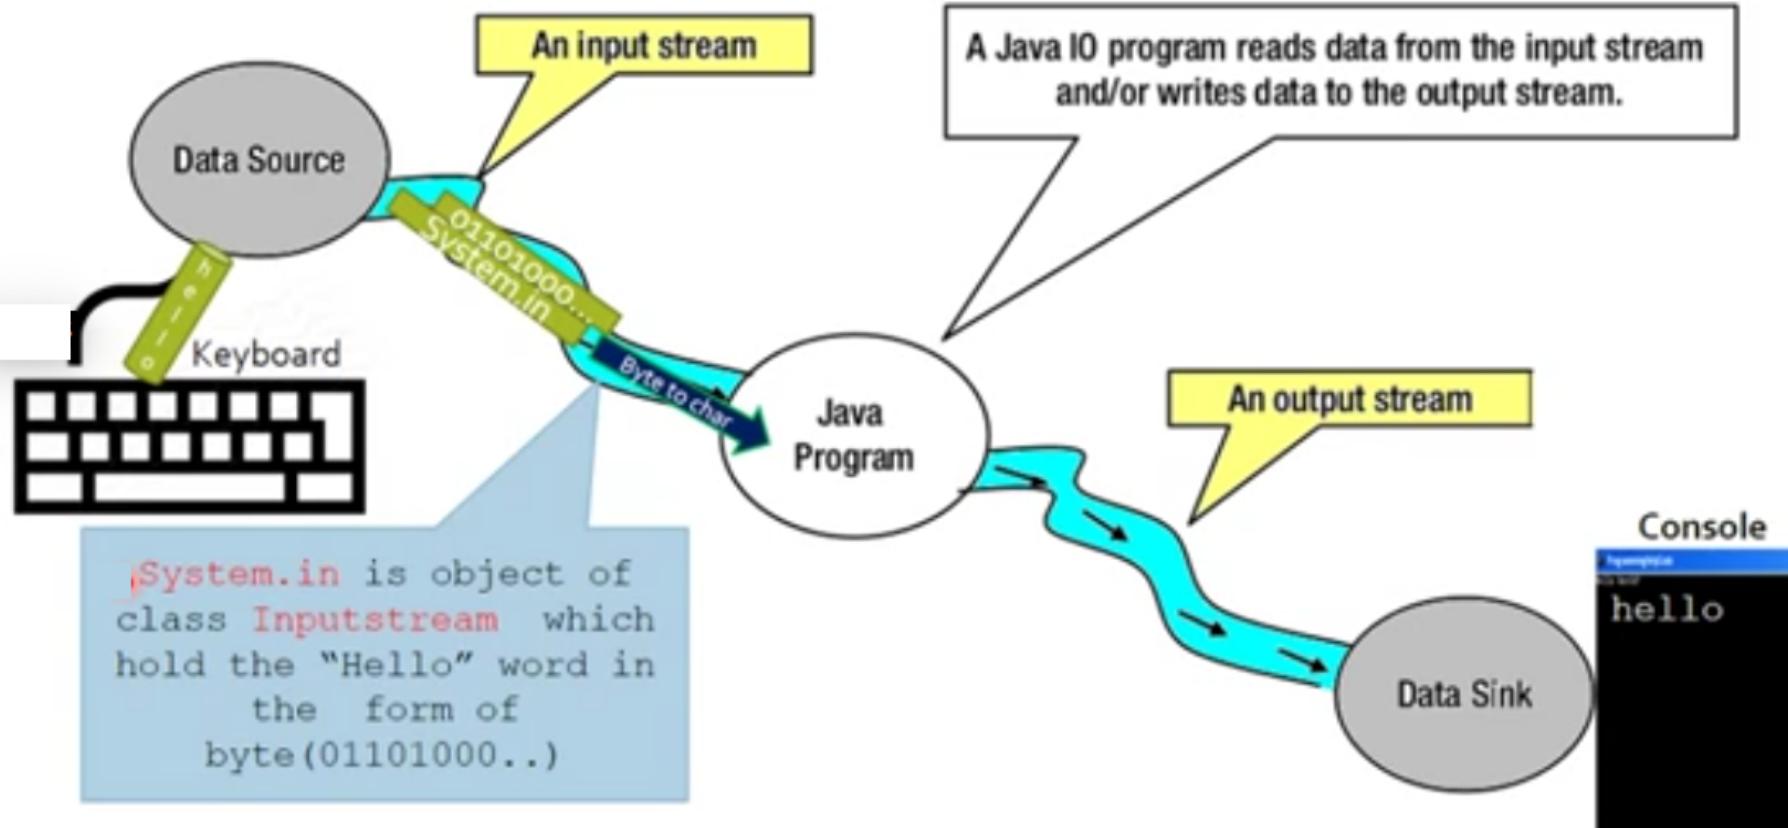

Flow of data using an input/output stream in a Java program

File: using file, creating directories

- File abstraction that represent file and directories

- File f=new File("....");
- boolean flag= file.createNewFile();
- boolean flag= file.mkdir();
- boolean flag=file.exists();

-

```
public class DemoFileWriter {  
  
    public static void main(String[] args) {  
        try {  
            BufferedWriter bw=new BufferedWriter  
                (new FileWriter("demo5.txt"));  
  
            bw.write("java is key");  
            bw.flush();  
        } catch (IOException e) {  
            e.printStackTrace();  
        }  
    }  
}
```

Using DataOutputStream and DataInputStream




```
try {
    //writing in file
    DataOutputStream dos = new DataOutputStream
        (new FileOutputStream(
            new File("foo.txt")));
    for(int i=0; i<10;i++){
        dos.writeInt(i);
        dos.writeDouble(6.6);
        dos.writeShort(i);
    }
} catch (FileNotFoundException e) {
    e.printStackTrace();
} catch (Exception ex) {
    ex.printStackTrace();
}
```

```
try {
    //reading from file
    DataInputStream dis = new DataInputStream
        (new FileInputStream(
            new File("foo.txt")));
    for(int i=0; i<10;i++){
        System.out.println(dis.readFloat());
        System.out.println(dis.readInt());
    }
} catch (FileNotFoundException e) {
    e.printStackTrace();
} catch (Exception ex) {
    ex.printStackTrace();
}
```

Serialization




- Storing the state of the object on a file along some metadata....so that it Can be recovered back.....
- Serialization used in RMI (Remote method invocation) while sending an object from one place to another in network...

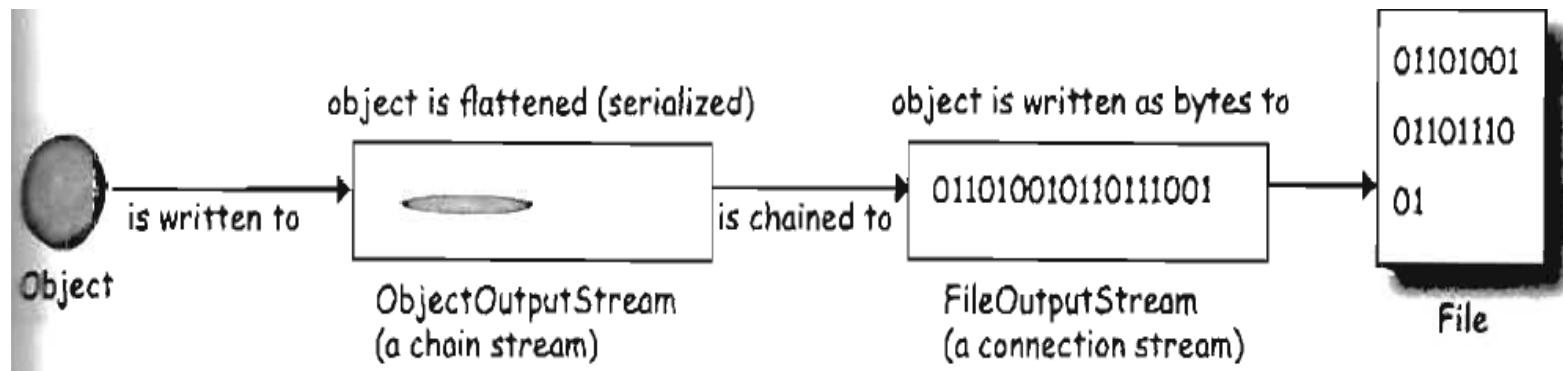

What actually happens during Serialization


- The state of the object from heap is sucked and written along with some meta data in a file....

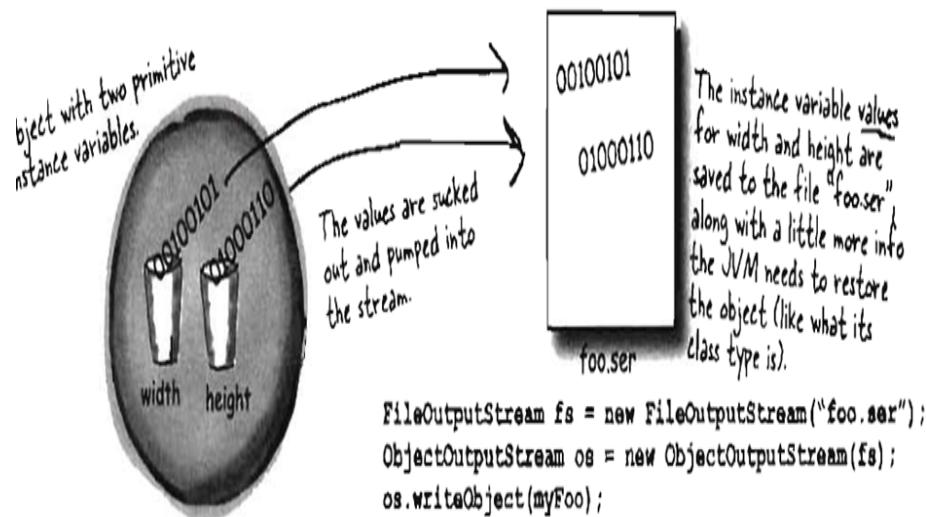

When an object is serialized, all the objects it refers to from instance variables are also serialized. And all the objects those objects refer to are serialized. And all the objects those objects refer to are serialized... and the best part is, it happens automatically!

De- Serialization

- When an object is de-serialized, the JVM attempts to bring object back to the life by making a new object on the heap that have the same state as original object
- Transient variable don't get saved during serialization hence come with null !!!

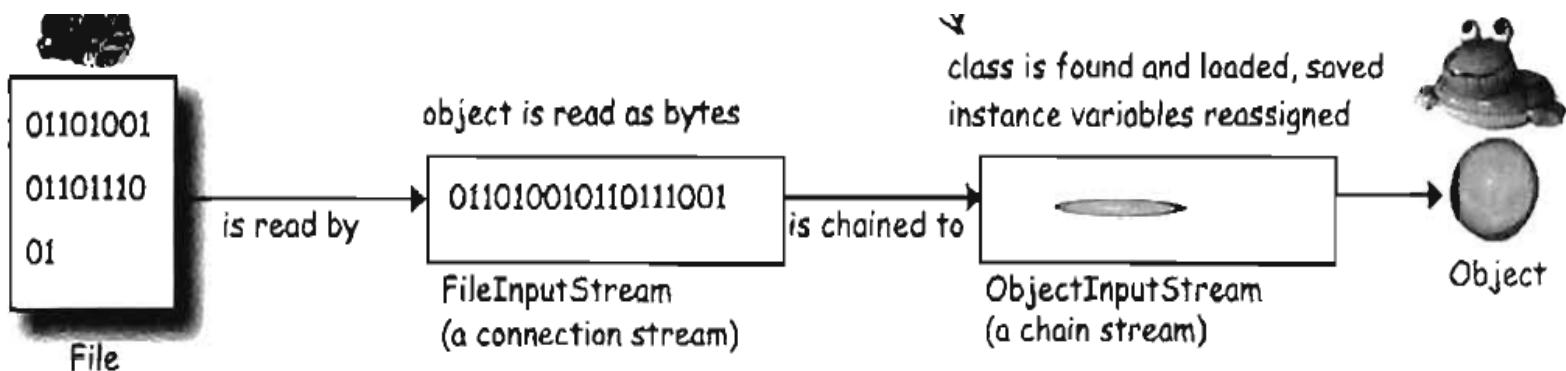

Hello world Example...

```
class Box implements Serializable{
    private static final long serialVersionUID = 1L;
    int l,b;

    public Box(int l, int b) {
        super();
        this.l = l;
        this.b = b;
    }

    public String toString() {
        return "Box [l=" + l + ", b=" + b + "]";
    }
}
```

```
Box box=new Box(22, 33);
```

```
FileOutputStream fo=new FileOutputStream("c:\\raj\\foofoo.ser");
ObjectOutputStream os=new ObjectOutputStream(fo);

os.writeObject(box);
```

```
box=null;//nullify to prove that object come by de-ser...
```

```
FileInputStream fi=new FileInputStream("c:\\raj\\foofoo.ser");
ObjectInputStream oi=new ObjectInputStream(fi);
```

```
box=(Box)oi.readObject();
```

```
System.out.println(box);
```

Differences between Serialization and Externalization?

Serialization	Externalization
It is Meant for Default Serialization.	It is Meant for Customized Serialization.
Here Everything Takes Care by JVM and Programmer doesn't have any Control.	Here Everything Takes Care by Programmer and JVM doesn't have any Control.
In Serialization Total Object will be Saved to the File Always whether it is required OR Not.	In Externalization Based on Our Requirement we can Save Either Total Object OR Part of the Object.
Relatively Performance is Low. Serialization is the best choice if we want to save total object to the file.	Relatively Performance is High. Externalization is the best choice if we want to save part of the Object to the file.
Serializable Interface doesn't contain any Method. It is a <i>Marker</i> Interface.	Externalizable Interface contains 2 Methods, <i>wrtExternal()</i> and <i>readExternal()</i>. So it is Not Marker Interface.
Serializable implemented Class Not required to contain public No - Argument Constructor.	Externalizable implemented Class should Compulsory contain public No - Argument Constructor. Otherwise we will get Runtime Exception Saying <i>InvalidClassException</i>.
transient Key Word will Play Role in Serialization.	transient Key Word won't Play any Role in Externalization. Of Course it is Not Required.




DAY 5

Day 5: Introduction to Java threads, thread life cycle, synchronization, dead lock

- Program vs process
- Thread as LWP
- Creating and running thread
- Thread life cycle
- Need of synchronization
- Producer consumer problem
- dead lock
- Hands on & Lab

What is threads? LWP

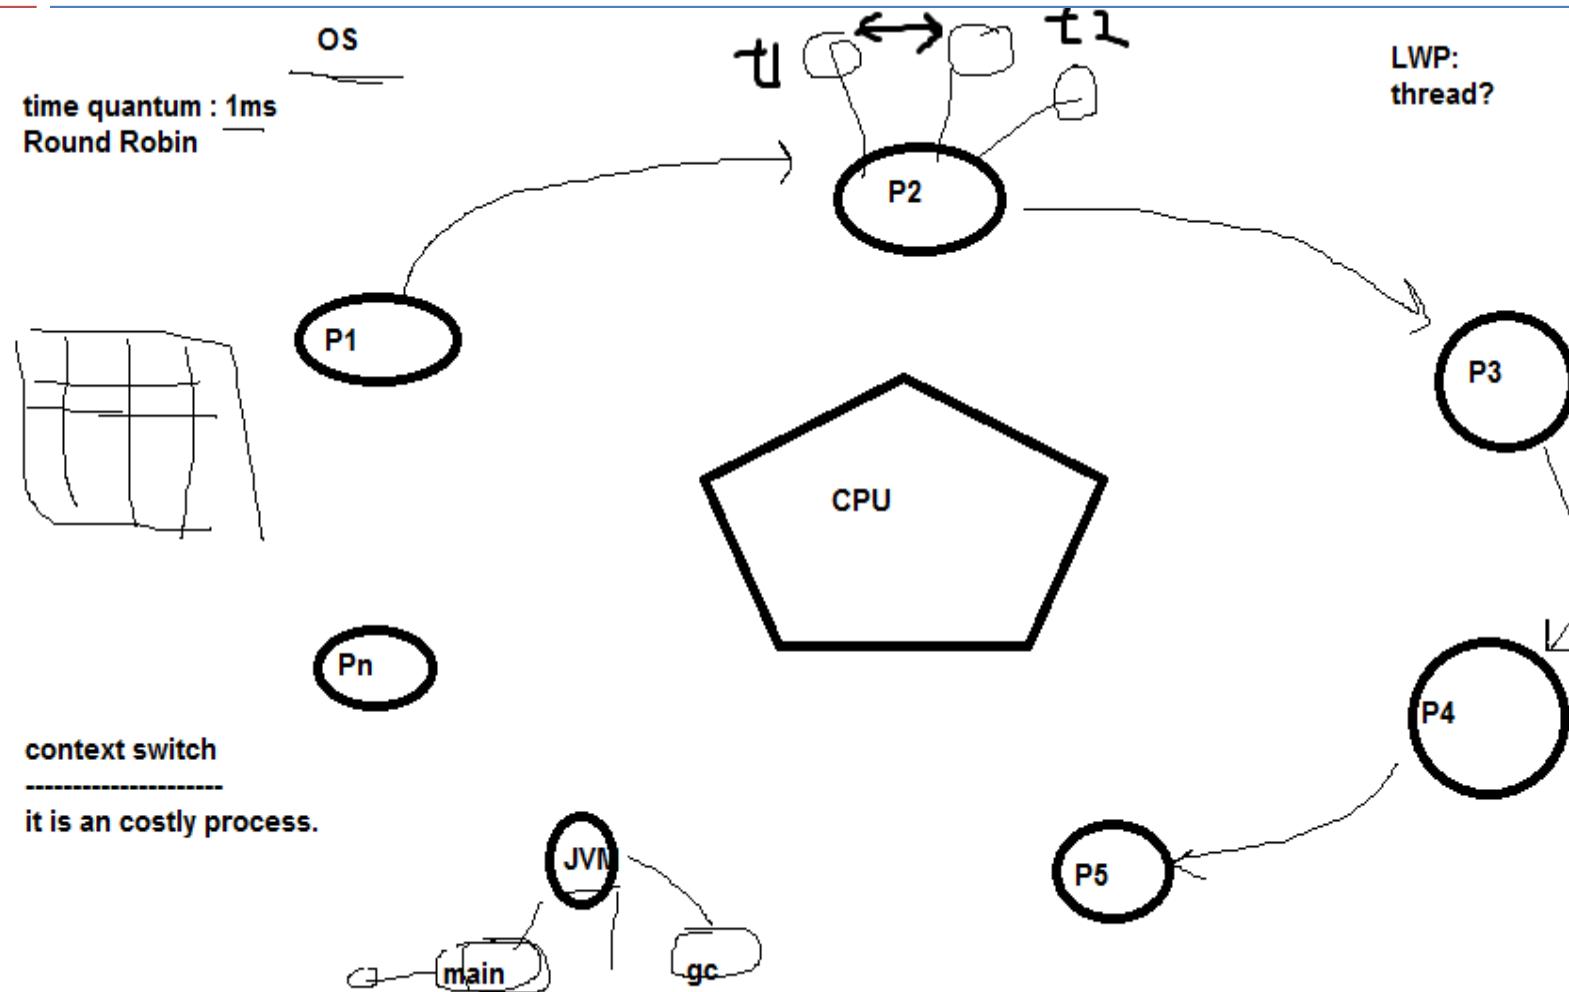

Basic fundamentals

- Thread: class in java.lang
- thread: separate thread of execution

What happens during multithreading?


1. JVM calls main() method
2. main() starts a new thread. Main thread is temporary frozen while new thread starts running so JVM switches between created thread and main thread till both complete

Creating threads Java?

- Implements Runnable interface
- Extending Thread class.....
- Job and Worker analogy...


```
class Job implements Runnable{  
  
    public void run() {  
        // TODO Auto-generated method stub  
    }  
  
}
```

```
class MyThread extends Thread{  
    public void run() {  
        // TODO Auto-generated method stub  
    }  
}
```

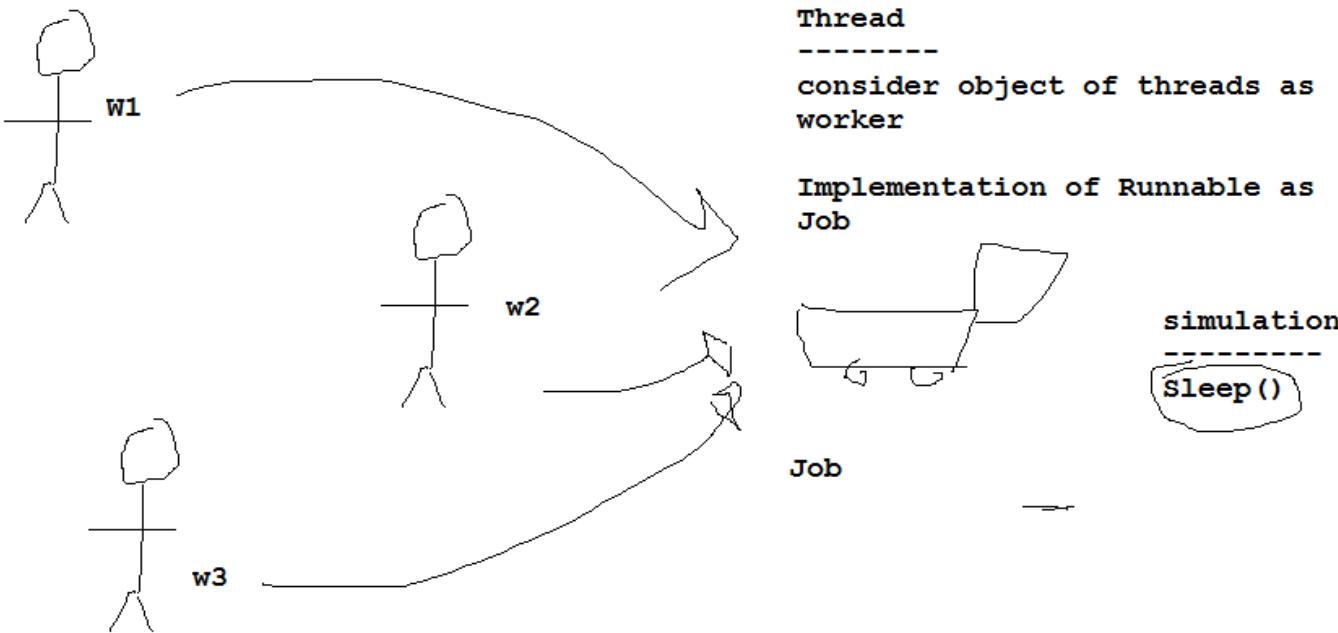

Thread life cycle...

- If a thread is blocked (put to sleep) specified no of ms should expire
- If thread waiting for IO that must be over..
- If a thread calls wait() then another thread must call notify() or notifyAll()
- If a thread is suspended() some one must call resume()

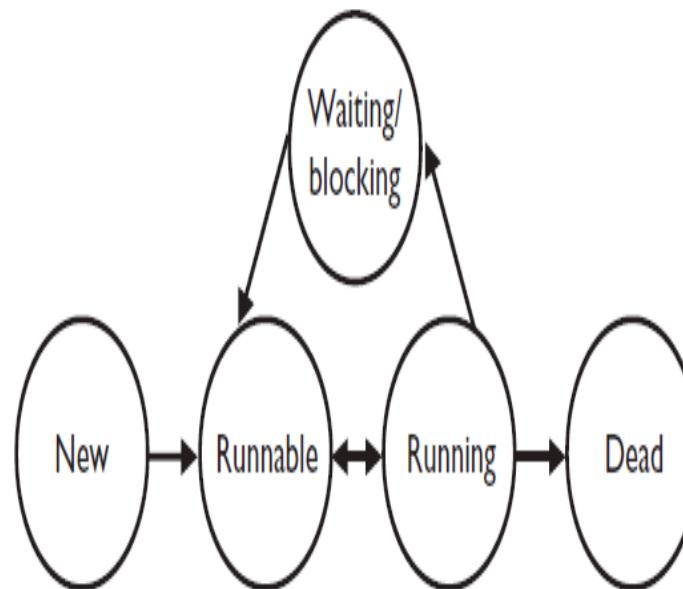

Java.lang.Thread

- **Thread()**
 - construct new thread
- **void run()**
 - must be overriden
- **void start()**
 - start thread call run method
- **static void sleep(long ms)**
 - put currently executing thread to sleep for specified no of millisecond
- **boolean isAlive()**
 - return true if thread is started but not expired
- **void stop()**
- **void suspend() and void resume()**
 - Suspend thread execution....

Java.lang.Thread

- void join(long ms)
 - Main thread Wait for specified thread to complete or till specified time is not over
- void join()
 - Main thread Wait for specified thread to complete
- static boolean interrupted()
- boolean isInterrupted()
- void interrupt()
 - Send interrupt request to a thread

Creating Threads



- By extending Thread class

```
class MyThread extends Thread
{
    @Override
    public void run()
    {
    }
}
```

- Implementing the Runnable interface

```
class MyRunnable implements Runnable
{
    @Override
    public void run()
    {
    }
}
```

Understanding join() method

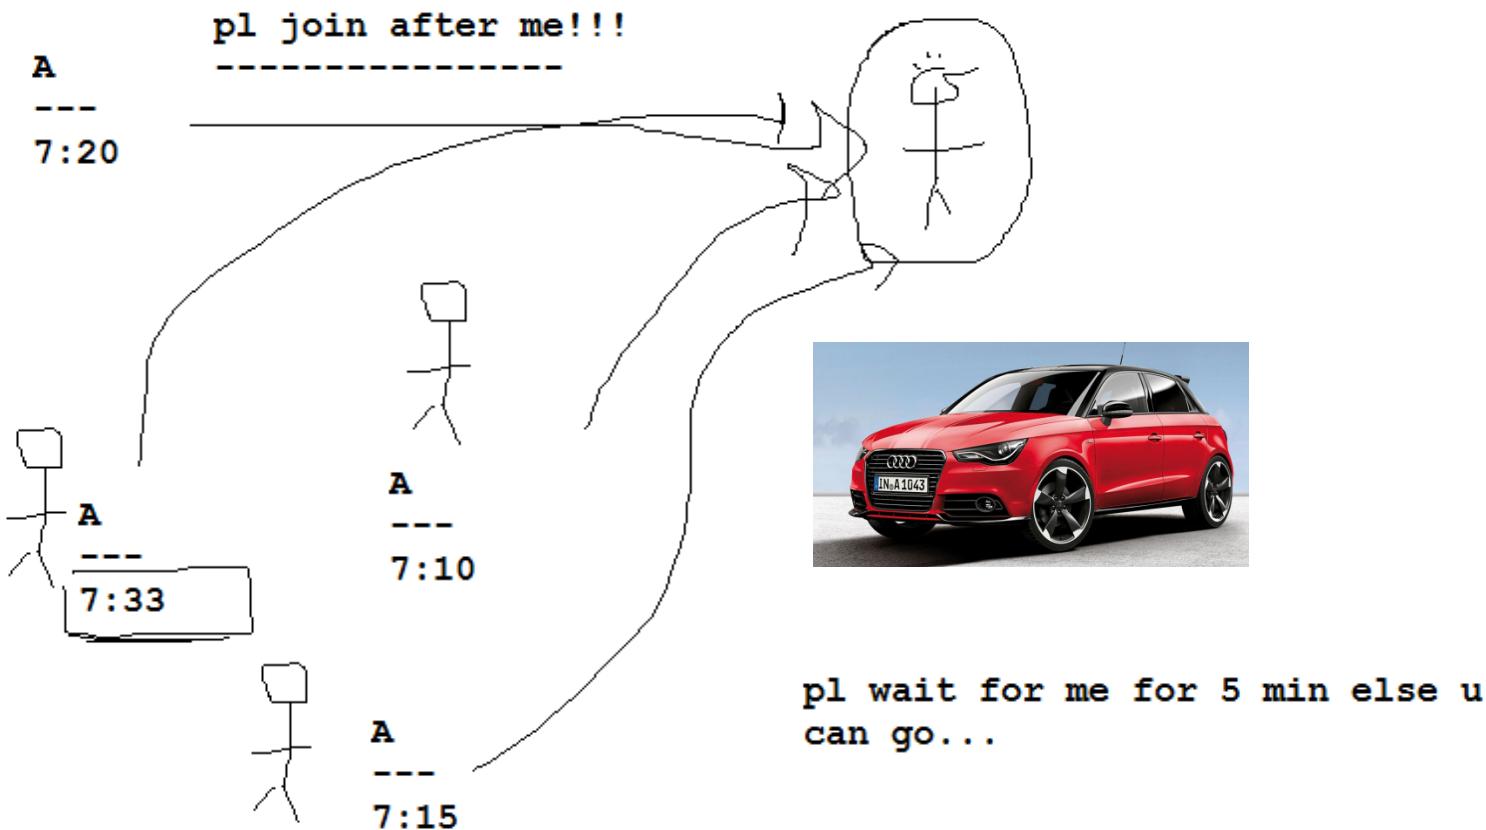


Checking thread priorities

```
class Clicker implements Runnable
{
    int click=0;
    Thread t;
    private volatile boolean running=true;
    public Clicker(int p)
    {
        t=new Thread(this);
        t.setPriority(p);
    }
    public void run()
    {
        while(running)
            click++;
    }
    public void stop()
    {
        running=false;
    }
    public void start()
    {
        t.start();
    }
}
```

```
.....
Thread.currentThread().setPriority(Thread.MAX_PRIORITY);
Clicker hi=new Clicker(Thread.NORM_PRIORITY+2);
Clicker lo=new Clicker(Thread.NORM_PRIORITY-2);
lo.start();
hi.start();
try
{
    Thread.sleep(10000);
}
catch(InterruptedException ex){}
lo.stop();
hi.stop();
//wait for child to terminate
try
{
    hi.t.join();
    lo.t.join();
}
catch(InterruptedException ex)
{
}

System.out.println("Low priority thread:"+lo.click);
System.out.println("High priority thread:"+hi.click);
.....
....
```

Understanding thread synchronization

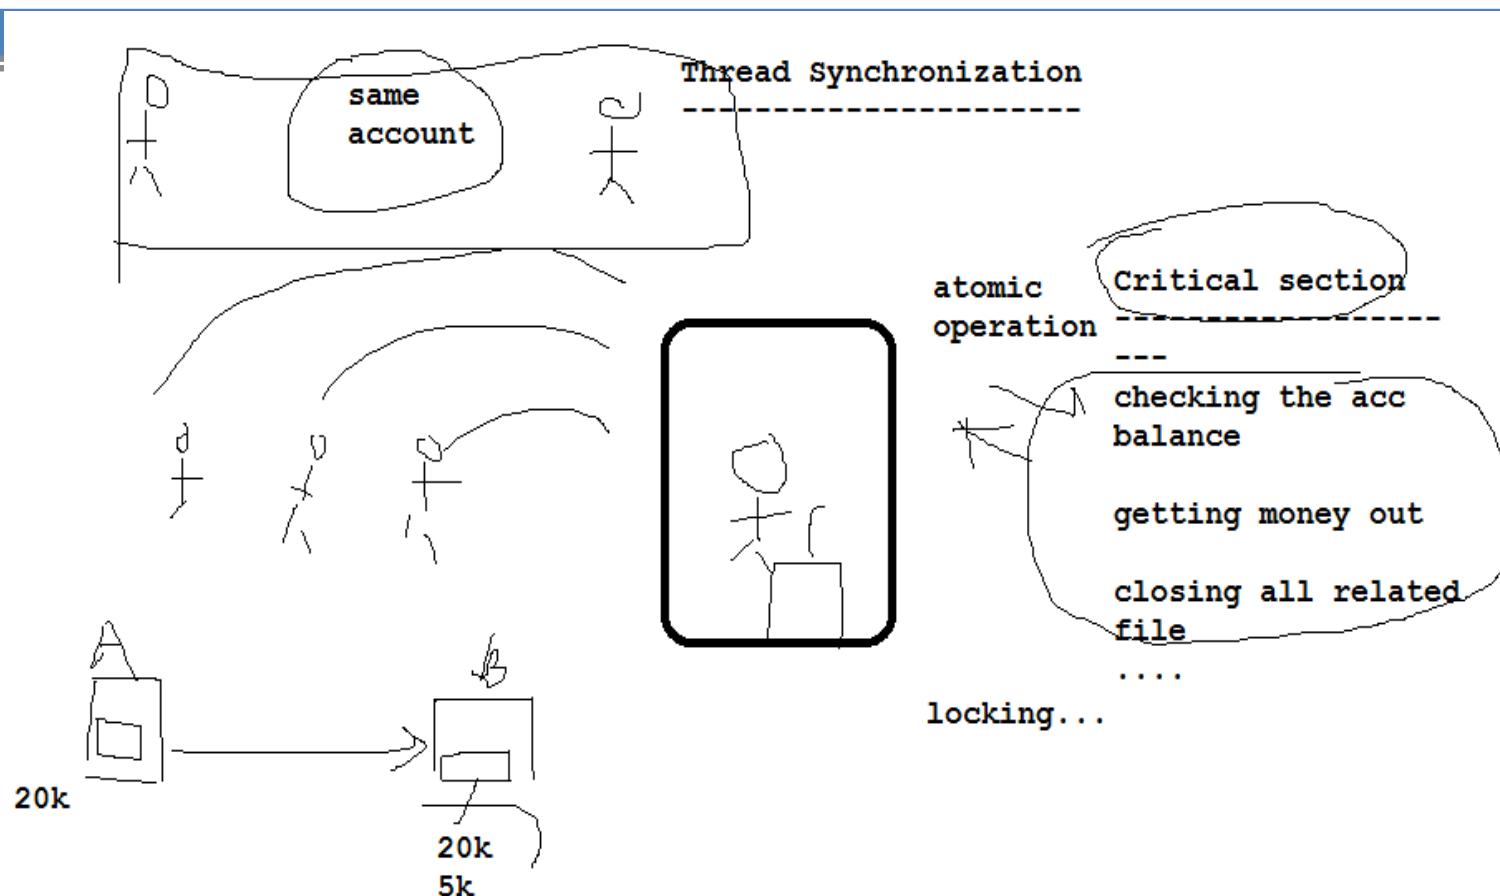


Synchronization

- Synchronization
 - Mechanism to controls the order in which threads execute
 - Competition vs. cooperative synchronization
- Mutual exclusion of threads
 - Each synchronized method or statement is guarded by an object.
 - When entering a synchronized method or statement, the object will be locked until the method is finished.
 - When the object is locked by another thread, the current thread must wait.

volatile

CPU Cache Hierarchy

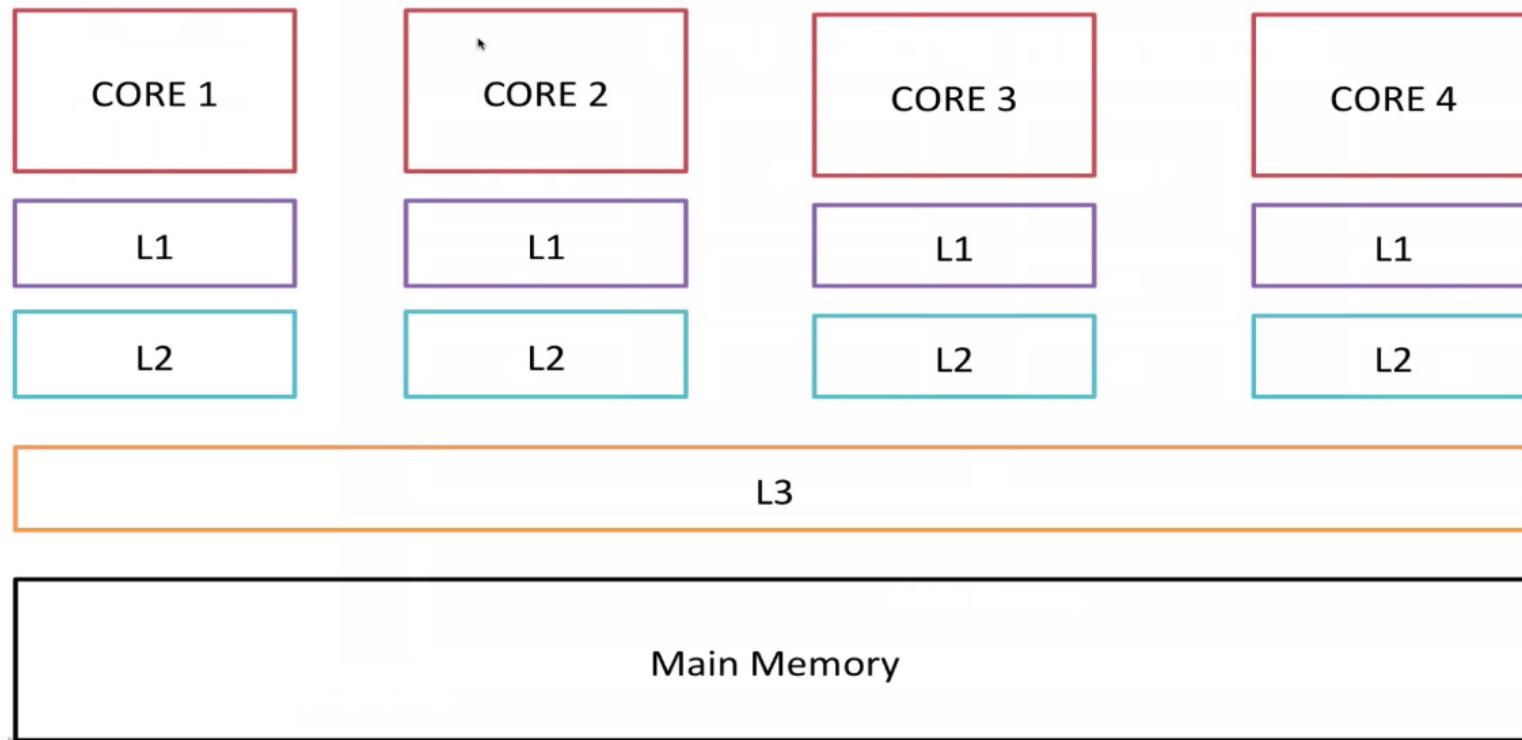

Using thread synchronization

```
class CallMe
{
    synchronized void call(String msg)
    {
        System.out.print("[ "+msg);
        try
        {
            Thread.sleep(500);
        }
        catch(InterruptedException ex) {}
        System.out.println(" ]");
    }
}
```

```
class Caller implements Runnable
{
    String msg;
    CallMe target;
    Thread t;
    public Caller(CallMe targ,String s)
    {
        target=targ;
        msg=s;
        t=new Thread(this);
        t.start();
    }
    public void run()
    {
        target.call(msg);
    }
}
```

```
Caller ob1=new Caller(target, "Hello");
Caller ob2=new Caller(target,"Synchronized");
Caller ob3=new Caller(target,"Java");
```

Inter thread communication

- Java have elegant Interprocess communication using `wait()` `notify()` and `notifyAll()` methods
- All these method defined final in the Object class
- Can be only called from a synchronized context

wait() and notify(), notifyAll()

□ wait()

- Tells the calling thread to give up the monitor and go to the sleep until some other thread enter the same monitor and call notify()

□ notify()

- Wakes up the first thread that called wait() on same object

□ notifyAll()

- Wakes up all the thread that called wait() on same object, highest priority thread is going to run first

Incorrect implementation of

```
class Q
{
    int n;
    synchronized int get()
    {
        System.out.println("got:"+n);
        return n;
    }
    synchronized void put(int n)
    {
        this.n=n;
        System.out.println("Put:"+n);
    }
}
```

```
public class PandC {
public static void main(String[] args) {
    Q q=new Q();
    new Producer(q);
    new Consumer(q);
    System.out.println("ctrl C for exit");
}
}
```

S

```
class Producer implements Runnable
{
    Q q;
    public Producer(Q q) {
        this.q=q;
        new Thread(this,"Producer").start();
    }
    public void run()
    {
        int i=0;
        while(true)
            q.put(i++);
    }
}
```

```
class Consumer implements Runnable
{
    Q q;
    Consumer(Q q)
    {
        this.q=q;
        new Thread(this,"consumer").start();
    }
    public void run()
    {
        while(true)
            q.get();
    }
}
```

Correct implementation of producer consumer ...

```
class Q
{   int n;
    boolean valueSet=false;
    synchronized int get()
    {
        if(!valueSet)
            try
            {
                wait();
            }
        catch(InterruptedException ex){}
        System.out.println("got:"+n);
        valueSet=false;
        notify();
        return n;
    }
    synchronized void put(int n)
    {
        if(valueSet)
            try
            {
                wait();
            }
        catch(InterruptedException ex){}
        this.n=n;
        valueSet=true;
        System.out.println("Put:"+n);
        notify();
    }
}
```




Day 6:Java Collection, Generics

- Collections Framework introduction
- List, Set, Map
- Iterator, ListIterator and Enumeration
- Collections and Array classes
- Sorting and searching, Comparator vs Comparable
- Generics, wildcards, using extends and super, bounded type
- Hands on & Lab

Object

- Object is an special class in java defined in `java.lang`
 - Every class automatically inherit this class whether we say it or not...

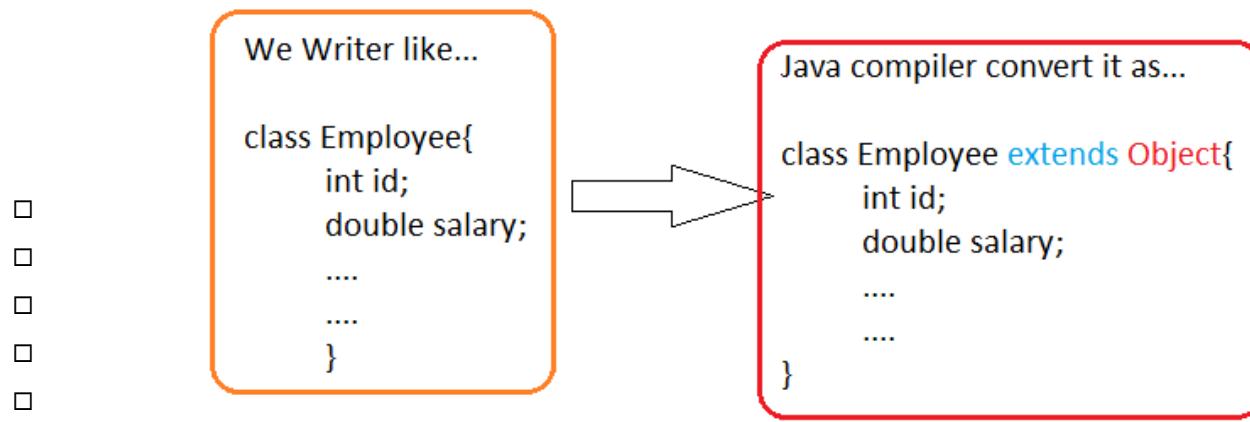

- Why Java has provided this class?

Method defined in Object class...



- String `toString()`
- boolean `equals()`
- int `hashCode()`
- `clone()`
- `void finalize()`
- `getClass()`
- Method that can't be overridden
 - `final void notify()`
 - `final void notifyAll()`
 - `final void wait()`

toString()

- If we do not override `toString()` method of `Object` class it print Object Identification number by default
- We can override it to print some useful information....

```
class Employee{  
    private int id;  
    private double salary;  
  
    public Employee(int id, double salary) {  
        this.id = id;  
        this.salary = salary;  
    }  
  
    .....  
    .....  
    Employee e=new Employee(22, 333333.5);  
    System.out.println(e);  
    .....  
    ....
```

O/P

com.Employee@addbf1

Java simply print object identification number not so useful message for client

toString()

```
class Employee{  
    private int id;  
    private double salary;  
  
    public Employee(int id, double salary) {  
        this.id = id;  
        this.salary = salary;  
    }  
  
    @Override  
    public String toString() {  
        return "Employee [id=" + id + ", salary=" + salary + "]";  
    }  
}  
public class DemoToString {  
    public static void main(String[] args) {  
        Employee e=new Employee(22, 333333.5);  
        System.out.println(e);  
    }  
}
```


equals

- What O/P do you expect in this case.....

```
Employee e1=new Employee(22, 333333.5);
Employee e2=new Employee(22, 333333.5);

if(e1==e2)
    System.out.println("two employees are equals....");
else
    System.out.println("two employees are      ");
```

- O/P would be two employees are not equals.... ???
 - Problem is that using == java compare object id of two object and that can never be equals, so we are getting meaningless result...

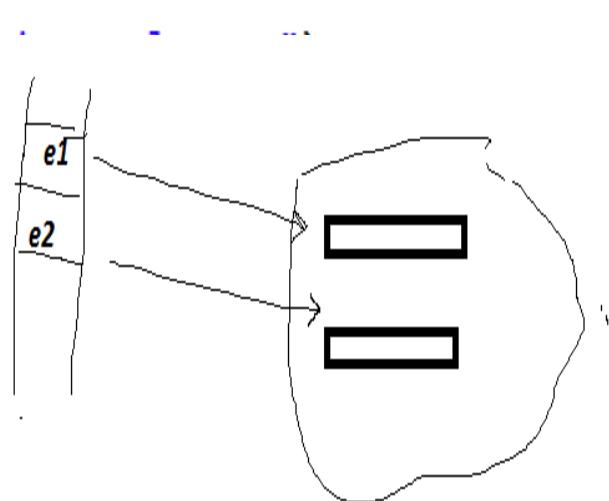

Overriding equals()

- Don't forget DRY run.....

```
@Override
    public boolean equals(Object obj) {
        if (this == obj)
            return true;
        if (obj == null)
            return false;
        if (getClass() != obj.getClass())
            return false;
        Employee other = (Employee) obj;
        if (id != other.id)
            return false;
        if (Double.doubleToLongBits(salary) != Double
                .doubleToLongBits(other.salary))
            return false;
        return true;
    }
```

hashCode()



- Whenever you override equals() for an type don't forget to override hashCode() method...
- hashCode() make DS efficient
- What hashCode does
 - HashCode divide data into buckets
 - Equals search data from that bucket...

```
@Override
    public int hashCode() {
        final int prime = 31;
        int result = 1;
        result = prime * result + id;
        long temp;
        temp = Double.doubleToLongBits(salary);
        result = prime * result + (int) (temp ^ (temp >>> 32));
        return result;
    }
```

clone()



- Lets consider an object that creation is very complicated, what we can do we can make an clone of that object and use that
- Costly , avoid using cloning if possible, internally depends on serialization
- Must make class supporting cloning by implementing an marker interface ie Cloneable

```
class Employee implements Cloneable{  
    private int id;  
    private double salary;  
  
    public Employee(int id, double salary) {  
        this.id = id;  
        this.salary = salary;  
    }  
  
    @Override  
    protected Object clone() throws CloneNotSupportedException {  
        // TODO Auto-generated method stub  
        return super.clone();  
        //can write more code  
    }  
}
```

finalize()


- As you are aware ..Java don't support destructor
- Programmer is free from memory management
- Memory mgt is done by an component of JVM ie called Garbage collector GC
- GC runs as low priority thread..
- We can override finalize() to request java
 - “Please run this code before recycling this object”
- Cleanup code can be written in finalize() method
- Not reliable, better not to use...
- **Demo programm**
 - WAP to count total number of employee object in the memory at any moment of time if an object is nullified then reduce count....

Java collection

- Java collections can be considered a kind of readymade data structure, we should only need to know how to use them and how they work....
 - collection
 - Name of topic
 - Collection
 - Base interface
 - Collections
 - Static utility class provide various useful algorithm

collection

- collection
 - Why it is called an framework?
 - Readymade Data structure in Java...

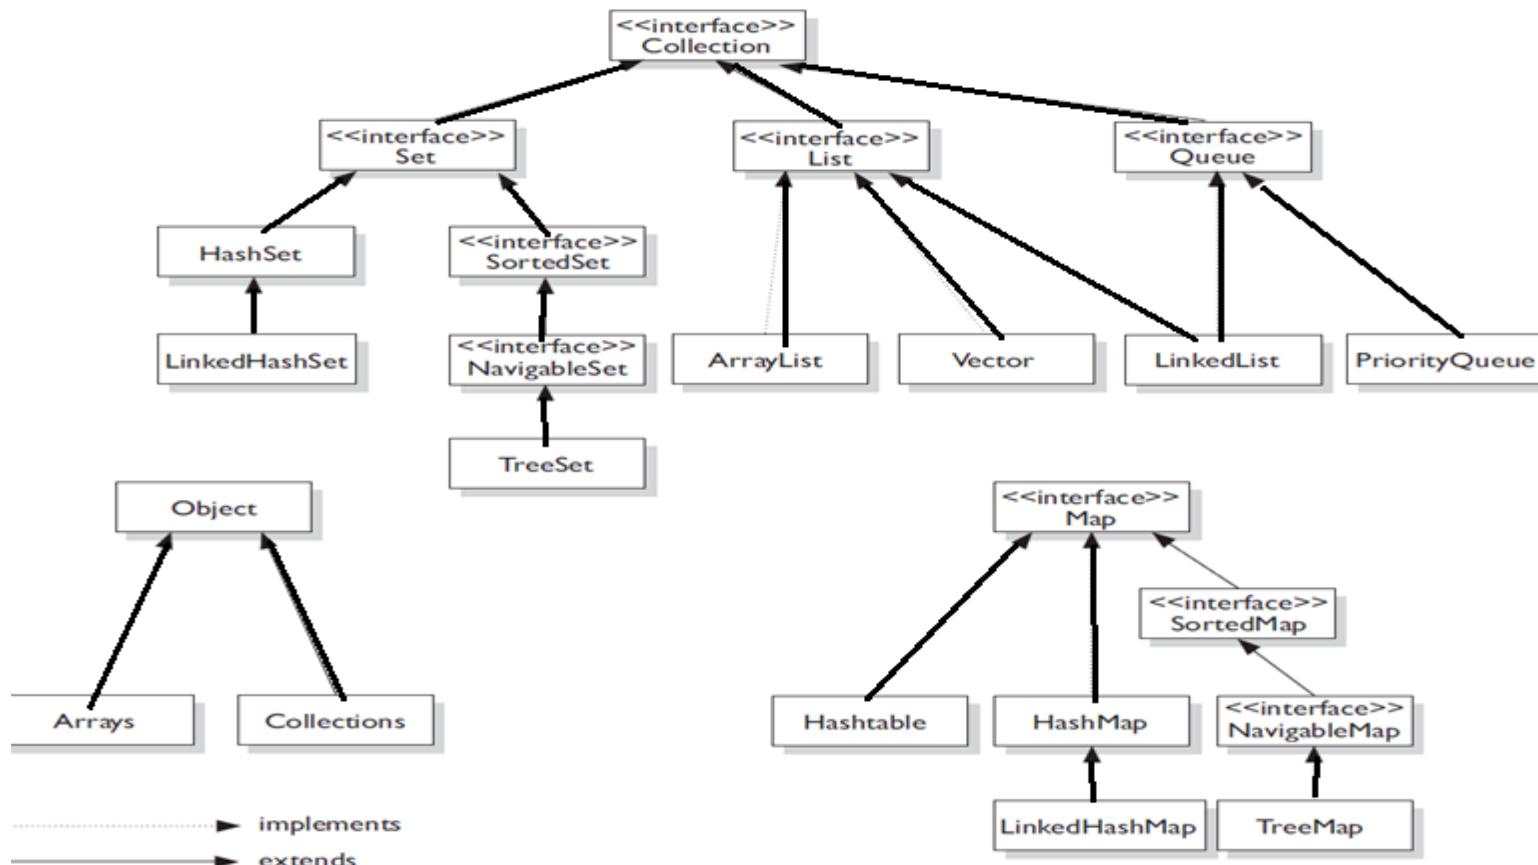

Four type of collections

Collections come in four basic flavors:

- Lists Lists of things (classes that implement List).
- Sets Unique things (classes that implement Set).
- Maps Things with a *unique* ID (classes that implement Map).
- Queues Things arranged by the order in which they are to be processed.

Iterator in Java

```
List<String>list=new LinkedList<String>();
list.add("a");
list.add("b");

ListIterator<String> it = list.listIterator();
while(it.hasNext()){
    String val=it.next();
    if(val.equals("raj"))
        it.remove();
    else if(val.equals("a"))
        it.add("aa");
    else if(val.equals("b"))
        it.set("b1");
}
```

ArrayList: aka growable

```
List<String>list=new ArrayList<String>();  
...  
...  
list.size();  
list.contains("raj");  
  
test.remove("hi");  
  
Collections.sort(list);
```

Note:

Collections.sort(list,Collections.reverseOrder());

Collections.addAll(list2,list1);

Add all elements from list1 to end of list2

Collections.frequency(list2,"foo");

print frequency of "foo" in the list2 collection

boolean flag=Collections.disjoint(list1,list);

return "true" if nothing is common in list1 and list2

Sorting with the Arrays Class

Arrays.sort(arrayToSort)

Arrays.sort(arrayToSort, Comparator)

Iterator in Java

```
List<String>list=new LinkedList<String>();
list.add("a");
list.add("b");

ListIterator<String> it = list.listIterator();
while(it.hasNext()){
    String val=it.next();
    if(val.equals("raj"))
        it.remove();
    else if(val.equals("a"))
        it.add("aa");
    else if(val.equals("b"))
        it.set("b1");
}
```

ArrayList of user defined object

```
class Employee{  
    int id;  
    float salary;  
    //getter setter  
    //const  
    //toString  
}  
  
List<Employee>list=new ArrayList<Employee>();  
  
list.add(new Employee(121,"rama"));  
list.add(new Employee(121,"rama"));  
list.add(new Employee(121,"rama"));  
  
System.out.println(list);  
  
Collections.sort(list);
```

How java can decide how
to sort?

Comparable and Comparator interface

- We need to teach Java how to sort user define object
- Comparable and Comparator interface help us to tell java how to sort user define object....

Comparable	Comparator
java.lang	java.util
Natural sort	secondary sorts
Only one sort sequence is possible	as many as you want
need to change the design of the class	Dont need to change desing of the class
need to override	need to override
public int compareTo(Employee o)	public int compare(Employee o1, Employee o2)

Implementing Comparable

```
class Employee implements Comparable<Employee>{
    private int id;
    private double salary;
    .....
    .....
    .....

    @Override
    public int compareTo(Employee o) {
        // TODO Auto-generated method stub
        Integer id1=this.getId();
        Integer id2=o.getId();
        return id1.compareTo(id2);
    }
}
```

Comparator

- Don't need to change Employee class

```
class SalarySorter implements Comparator<Employee>{

    @Override
    public int compare(Employee o1, Employee o2) {
        // TODO Auto-generated method stub
        Double sal1=o1.getSalary();
        Double sal2=o2.getSalary();

        return sal1.compareTo(sal2);
    }

}
```

Useful stuff

Converting Arrays to Lists

```
String[] sa = {"one", "two", "three", "four"};
List sList = Arrays.asList(sa);
```

Converting Lists to Arrays

```
List<Integer> iL = new ArrayList<Integer>();

for(int x=0; x<3; x++)
iL.add(x);

Object[] oa = iL.toArray(); // create an Object array

Integer[] ia2 = new Integer[3];

ia2 = iL.toArray(ia2); // create an Integer array
```

Arrays.binarySearch(arrayFromWhichToSearch,"to search"))

return -ve no if no found

array must be sorted before hand otherwise o/p is not predictiale

Useful examples...

user define funtion to print the arraylist/linkedlist

```
printMe(list1);
...
...

public void printMe(List<String> list){
    for(String s:list)
    {
        System.out.println(s);
    }
}
```

user define funtion to remove stuff from a arraylist /linkedlist

```
removeStuff(list,2,5);
...
...

public void removeStuff(List<String> l, int from, int to)
{
    l.subList(from,to).clear();
}
```

Useful examples...

Merging two link lists

```
ListIterator ita=a.listIterator();
Iteratory itb=b.iterator();

while(itb.hasNext())
{
    if(ita.hasNext())
        ita.next();

    ita.add(itb.next());
}
```

Removing every second element from an linkedList

```
itb=b.iterator();

while(itb.hasNext())
{
    itb.next();

    if(itb.hasNext())
    {
        itb.next();

        itb.remove();
    }
}
```

LinkedList : AKA Doubly Link list..... can move back and forth.....

Imp methods

```
boolean hasNext()  
Object next()  
boolean hasPrevious()  
Object previous()
```

More methods

```
void addFirst(Object o);  
  
void addLast(Object o);  
  
Object getFirst();  
  
Object getLast();  
  
add(int pos, Object o);
```

Useful examples...

user define funtion to print linkedlist in reverse order

```
reversePrint(list);
...
...

public void reversePrint(list<String>l ){

    ListIterator<String>it=l.iterator(l.size());

    while(it.hasPrevious())
        Sysout(it.previous());
}
```

fundamental diff bw ArrayList and LinkedList

- ArrayLists manage arrays internally.
[0][1][2][3][4][5]
- List<Integer> arrayList = new ArrayList<Integer>();
- LinkedLists consists of elements where each element has a reference to the previous and next element
[0]->[1]->[2]
 <- <-

ArrayList vs LinkedList

- Java implements ArrayList as array internally
 - Hence good to provide starting size
 - i.e. `List<String> s=new ArrayList<String>(20);` is better than `List<String> s=new ArrayList<String>();`
- Removing element from starting of arraylist is very slow?
 - `list.remove(0);`
 - if u remove first element, java internally copy all the element (shift by one)
- Adding element at middle in ArrayList is very inefficient...

Performance ArrayList vs LinkedList !!!

```
import java.util.ArrayList;
import java.util.LinkedList;
import java.util.List;

public class App
{
    public static void main(String[] args)
    {
        List<Integer> arrayList = new ArrayList<Integer>();
        List<Integer> linkedList = new LinkedList<Integer>();

        doTimings("ArrayList", arrayList);
        doTimings("LinkedList", linkedList);
    }
}
```

```
private static void doTimings(String type, List<Integer> list)
{
    for(int i=0; i<1E5; i++)
        list.add(i);

    long start = System.currentTimeMillis();

    /*
     * Add items at end of list
     */
    for(int i=0; i<1E5; i++)
    {
        list.add(i);
    }

    /*
     * Add items elsewhere in list
     */
    for(int i=0; i<1E5; i++)
    {
        list.add(0, i);
    }

    long end = System.currentTimeMillis();

    System.out.println("Time taken: " + (end - start) + " ms for " + type);
}
```

```
Time taken: 7546 ms for ArrayList
Time taken: 76 ms for LinkedList
```

HashMap

- Key ---->Value
- declaring an hashmap
 - `HashMap<Integer, String> map = new HashMap<Integer, String>();`
- Populating values
 - `map.put(5, "Five");`
 - `map.put(8, "Eight");`
 - `map.put(6, "Six");`
 - `map.put(4, "Four");`
 - `map.put(2, "Two");`
- Getting value
 - `String text = map.get(6);`
 - `System.out.println(text);`

Looping through HashMap

```
for(Integer key: map.keySet())
{
    String value = map.get(key);

    System.out.println(key + ": " + value);
}
```

most imp thing to remember

order of getting key value is not maintained

ie hashMap dont keep key and value in any particular order

Other map variants

- LinkedHashMap
 - Aka. Doubly link list
 - key and value are in same order in which you have inserted.....
- TreeMap
 - sort keys in natural order(what is natural order?)
 - for int
 - 1,2,3.....
 - for string
 - "a","b".....
 - For user define key
 - Define sorting order using Comparable /Comparator
-

set

- Don't allow duplicate element

three types:

hashset
linkedhashset
treeset

HashSet does not retain order.

`Set<String> set1 = new HashSet<String>();`

LinkedHashSet remembers the order you added items in

`Set<String> set1 = new LinkedHashSet<String>();`

TreeSet sorts in natural order

`Set<String> set1 = new TreeSet<String>();`

Printing freq of unique words
from a file in increasing order of freq

words	freq
Apple	7
Ball	5
...	

User define key in HashMap

- If you are using user define key in HashMap do not forget to override hashCode for that class
- Why?
 - We may not find that content again !

HashMap vs Hashtable

- Hashtable is threadsafe, slow as compared to HashMap
- Better to use HashMap

- Some more interesting difference
 - Hashtable give runtime exception if key is “null” while HashMap don’t

PriorityQueue

```
public class DemoPQ {  
    public static void main(String[] args) {  
        PriorityQueue<String> queue=new PriorityQueue<String>();  
        queue.add("Amit");  
        queue.add("Vijay");  
        queue.add("Karan");  
        queue.add("Jai");  
        queue.add("Rahul"); //same as offer  
        //retrieved not remove, throw exp  
        System.out.println("head:"+queue.element());  
        //retrieved not remove , return null  
        System.out.println("head:"+queue.peek());  
  
        System.out.println("iterating the queue elements:");  
        Iterator<String> itr=queue.iterator();  
        while(itr.hasNext()){  
            System.out.println(itr.next());  
        }  
        //remove from head, throws ex if empty  
        System.out.println(queue.remove());  
        //remove from head, return null if empty  
        System.out.println(queue.poll());  
    }  
}
```

Generics

□ Before Java 1.5

- `List list=new ArrayList();`
 - Can add anything in that list
 - Problem while retrieving

□ Now Java 1.5 onward

- `List<String> list=new ArrayList<String>();`
`list.add("foo");//ok`
`list.add(22);// compile time error`
- Generics provide type safety
- Generics is compile time phenomena...

Issues with Generics

- Try not to mix non Generics code and Generics code...we can have strange behaviour.

```
package com;
import java.util.*;

public class DemoGen1 {
    public static void main(String[] args) {

        List<String> list=new ArrayList<String>();
        list.add("foo");
        list.add("bar");

        strangMethod(list);

        for(String temp:list)
            System.out.println(temp);
    }

    private static void strangMethod(List list) {
        list.add(new Integer(22)); // OMG.....
    }
}
```

Polymorphic behaviour

```
class Animal {  
}  
  
class Cat extends Animal{  
}  
  
class Dog extends Animal{  
}
```

```
Animal []aa=new Cat[4] ;// allowed
```



```
List<Animal>list=new ArrayList<Cat>()
```



<? extends XXXXXX>

```
package com;
import java.util.*;

public class DemoGen1 {
    public static void main(String[] args) {

        List<Integer> list=new ArrayList<Integer>();
        list.add(22);
        list.add(33);

        strangMethod(list);

        for(Integer temp:list)
            System.out.println(temp);
    }

    private static void strangMethod(List<? extends Number> list) {
        list.add(new Integer(22)); //Compile time error..... Good
    }
}
```

in strangMethod() we can pass any derivative of Number class but we are not allowed to modify the list

<? Super XXXXX>

```
class Animal {  
}  
  
class Cat extends Animal{  
}  
  
class Dog extends Animal{  
}  
  
class CostlyDog extends Dog{  
}  
.....  
.....  
List<Dog>list=new ArrayList<Dog>();  
list.add(new Dog("white"));  
list.add(new Dog("red"));  
list.add(new Dog("black"));  
strangMethod(list);  
  
private static void strangMethod(List<? super Dog> list) {  
    list.add(new CostlyDog());  
}  
.....  
.....
```

Anytype of Dog is allowed and can also modify list

Generic class

```
class MyObject<T>{
    T myObject;

    public T getMyObject() {
        return myObject;
    }

    public void setMyObject(T myObject) {
        this.myObject = myObject;
    }

}
public class GenClass {

    public static void main(String[] args) {
        MyObject<String> o=new MyObject<String>();
        o.setMyObject(new Integer(22));
        //System.out.println(it.intValue());
    }
}
```

will not compile !!!

Generic method

```
class MaxOfThree{  
  
    public static <T extends Comparable<T>> T maxi(T a,T b, T c){  
        T max=a;  
        if(b.compareTo(a)>0)  
            max=b;  
        if(c.compareTo(max)>0)  
            max=c;  
        return max;  
    }  
  
}
```



Day-7: Annotation, Java Reflection

- Introduction to java reflection
- Java Annotation, JDK annotation, creating custom annotation, Annotation and reflection
- Introduction to Design pattern
- Hands on & Lab

Java Reflection

Java Reflection:

- => Reflection is aka class manipulator?
 - => Used to manipulate classes and everything in a class
 - => Can slow down a program because the JVM can not optimize the code
 - => Can not used with applets
 - => Should be used sparingly
- What is Java reflection?

"Reflection is the process of analysing the capabilities of a class at runtime"

That is analysing the details about the class which include the methods in the class, the variables of the class, the constructors in the class, the interface that the class is implementing, the methods that are coming from the interface

To gather all the above details is provided by reflection api

Reflection api is not the project development but used for PRODUCT development

Example application area:

JVM development, server design, framework design, tool design, compiler

Java Reflection

```
Private class A {  
}  
}
```



Comment: An outer class cannot have a PRIVATE declaration. An inner class can have PRIVATE declaration. A class can be declared as PUBLIC and DEFAULT; it cannot HAVE PRIVATE or PROTECTED access modifier

COMPILER:

The compiler will read this class according to the CLASS RULES defined in the compiler.

CLASS RULES

Can have only PUBLIC and DEFAULT access modifier in outer class. Will not allow PRIVATE OR PROTECTED access modifier for outer class. This rule is analysed by the REFLECTION API present in the compiler and it shows an error “MODIFIER PRIVATE not allowed”

Similarly rules for methods in the class, constructors in the class, interfaces inherited by the class, super classes extended by the class are also present and their access modifiers are also checked by REFLECTION API present in the compiler

Java Reflection

Reflection Package

`java.lang.reflect` package provides classes for performing reflection api.

Some classes in this reflect packages are :

`java.lang.Class` :

base class to perform reflection api.

This is used together to get metadata information about class

`java.lang.reflect.Field`:

Complete declarative information of a particular variable ie.
metadata of a particular variable like access modifier, datatype,
value and name of variable etc

`java.lang.reflect.Method`:

complete declarative information about a method ie. is able to store metadata
about methods, method names, access modifier, return type, parameters in method,
exception thrown etc

`java.lang.reflect.Constructor`:

information about constructs like name of constructors, access modifier, parameter type

`java.lang.reflect.Modifier`:

complete metadata about access modifier


Java Reflection

```
public class Employee implements Serializable, Cloneable{
    // variable ==4
    public int empNo;
    public static int companyName;
    public String name;
    public final String add="delhi";

    // ctr==2
    public Employee(int empNo, String name) {
        this.empNo = empNo;
        this.name = name;
    }
    public Employee() {}

    // methods==2
    public void add(int id, String name, String address){
    }
    public Employee search(int id){return new Employee();}
}
```

Java Reflection

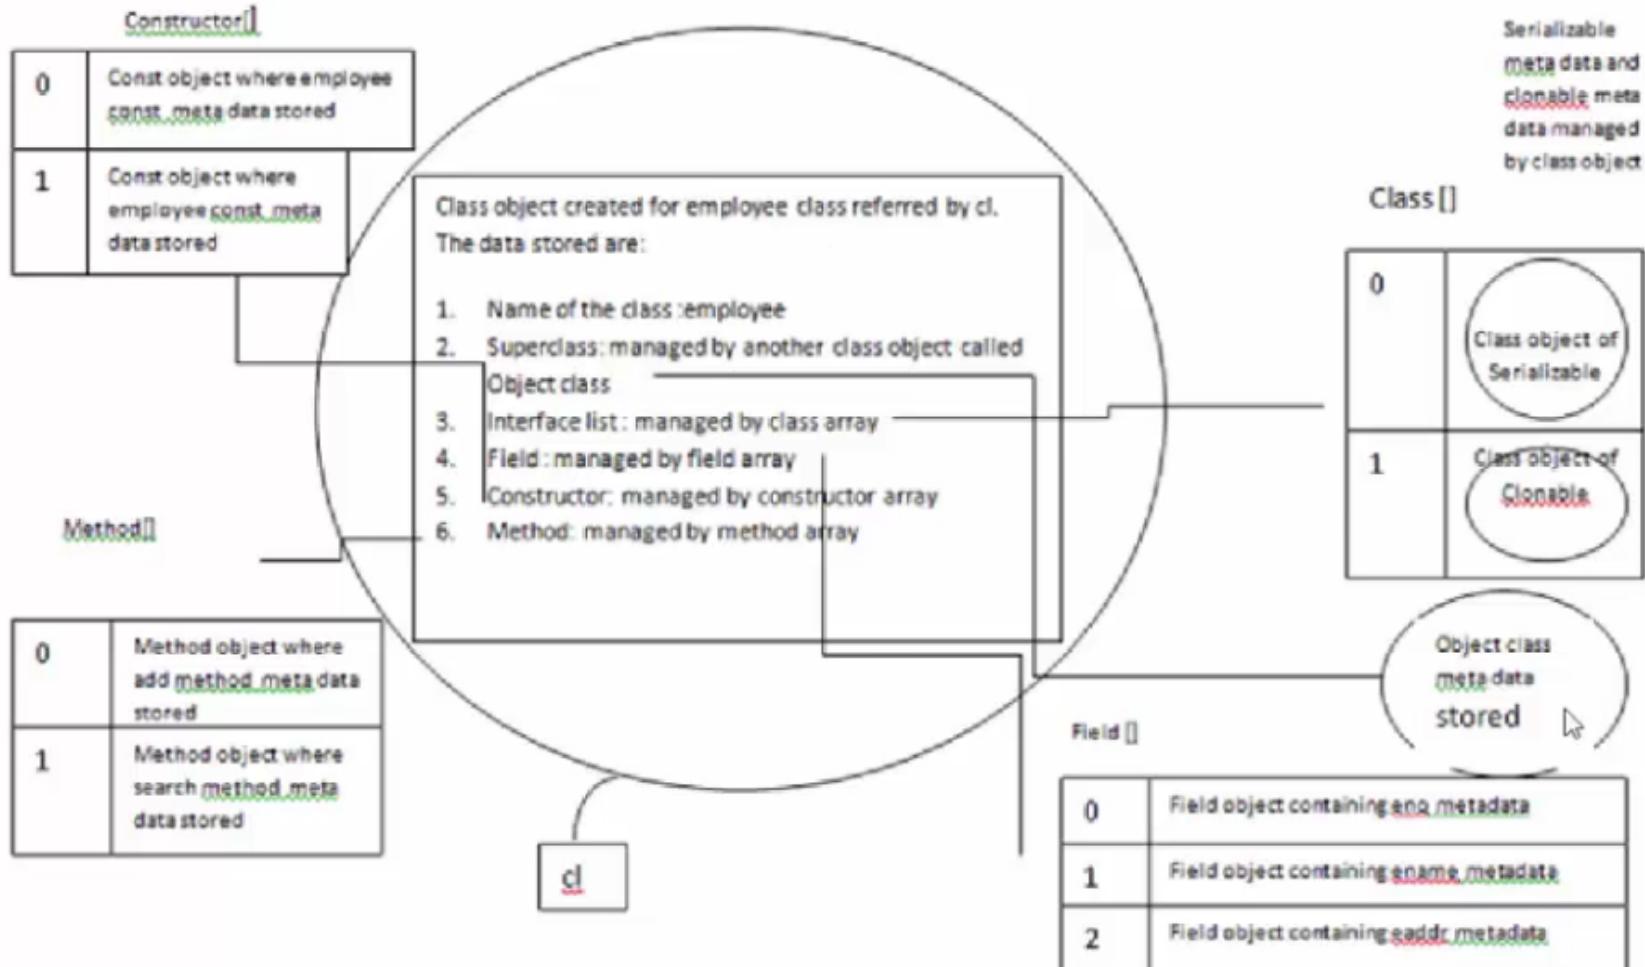

Changing behaviour at runtime

Anyway, reflection does not allow you to change code behaviour, it can only explore current code, invoke methods and constructors, change fields values, that kind of things.

If you want to actually change the behaviour of a method you would have to use a bytecode manipulation library such as ASM. But this will not be very easy, probably not a good idea...

Patterns that might help you :

- If the class is not final and you can modify the clients, extend the existing class and overload the method, with your desired behaviour. Edit : that would work only if the method were not static !
- Aspect programming : add interceptors to the method using AspectJ

Anyway, the most logical thing to do would be to find a way to modify the existing class, work-arounds will just make your code more complicated and harder to maintain.

Annotation

Annotations starting from 5.0.

This feature was added to Java 5.0 as a result of the JSR 175 namely “A Metadata Facility for the JavaTM Programming Language”.

Built-in Annotations in Java

@Override
@Deprecated
@SuppressWarnings
@Target
@Retention
@FunctionalInterface

User-defined Annotations

```
Target({ElementType.FIELD, ElementType.LOCAL_VARIABLE})
public @interface Persistable{
    String fileName() default "defaultMovies.txt";
}
```

Top 10 Object Oriented Design Principles

1. DRY (Don't repeat yourself) - avoids duplication in code.
2. Encapsulate what changes - hides implementation detail, helps in maintenance
3. Open Closed design principle - open for extension, closed for modification
4. SRP (Single Responsibility Principle) - one class should do one thing and do it well
5. DIP (Dependency Inversion Principle) - don't ask, let framework give to you
6. Favor Composition over Inheritance - Code reuse without cost of inflexibility
7. LSP (Liskov Substitution Principle) - Sub type must be substitutable for super type
8. ISP (Interface Segregation Principle) - Avoid monolithic interface, reduce pain on client side
9. Programming for Interface - Helps in maintenance, improves flexibility
10. Delegation principle - Don't do all things by yourself, delegate it



S

Single responsibility
principle

O

Open/closed principle

L

Liskov substitution principle

I

Interface segregation
principle

D

Dependency inversion
principle



Day 8: GOF design patterns

- Pattern categories: Creational, Structural, Behavioral
- Creational Patterns: Singleton, Factory, Builder, Prototype
- Structural Patterns: Decorator, Facade Pattern, Proxy
- Behavioral Patterns: Iterator, Observer, Strategy,Template Method
- Hands on & Lab


Design pattern

- Proven way of doing things
- **Gang of 4 design patterns ???**
- **total 23 patterns**
- **Classification patterns**
 1. **Creational**
 2. **Structural**
 3. **Behavioral**


“In software engineering, a software design pattern is a general **reusable solution** to a commonly occurring problem within a **given context** in software design. It is not a **finished design** that can be transformed directly into source or machine code. It is a **description** or **template** for how to solve a problem that can be used in many different situations.”





WIKIPEDIA
The Free Encyclopedia

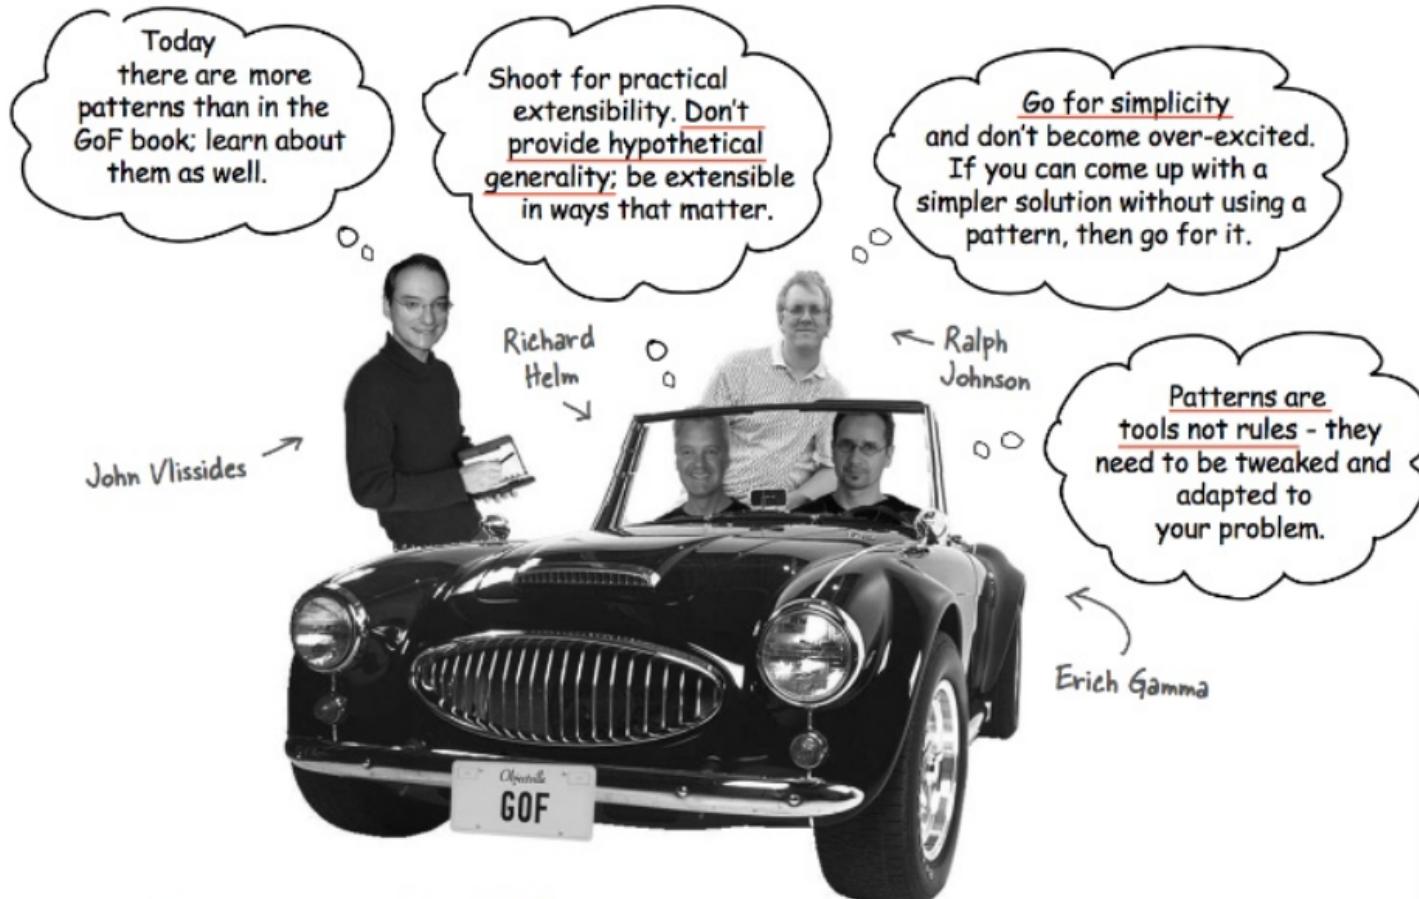

Keep it simple (KISS)



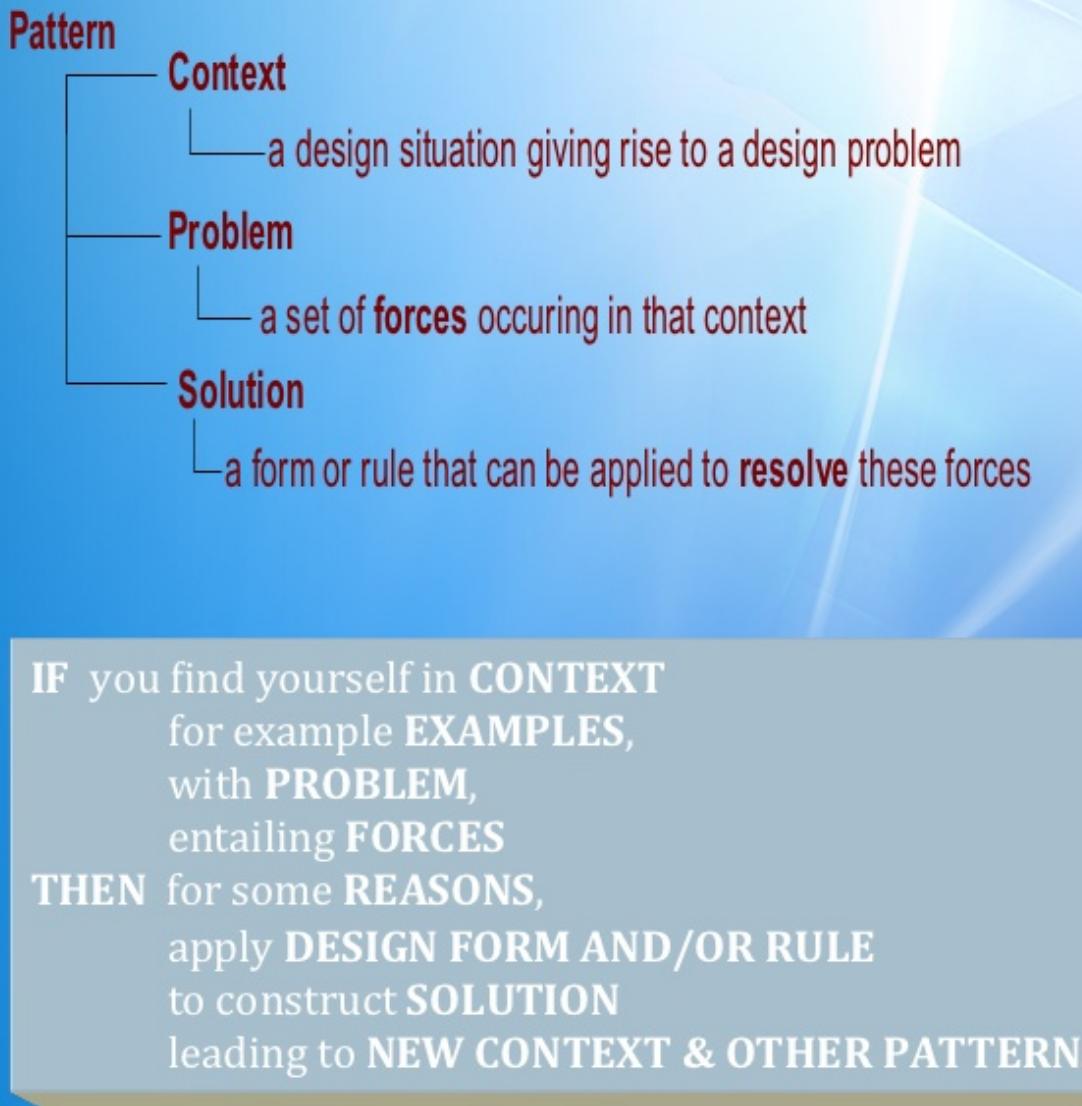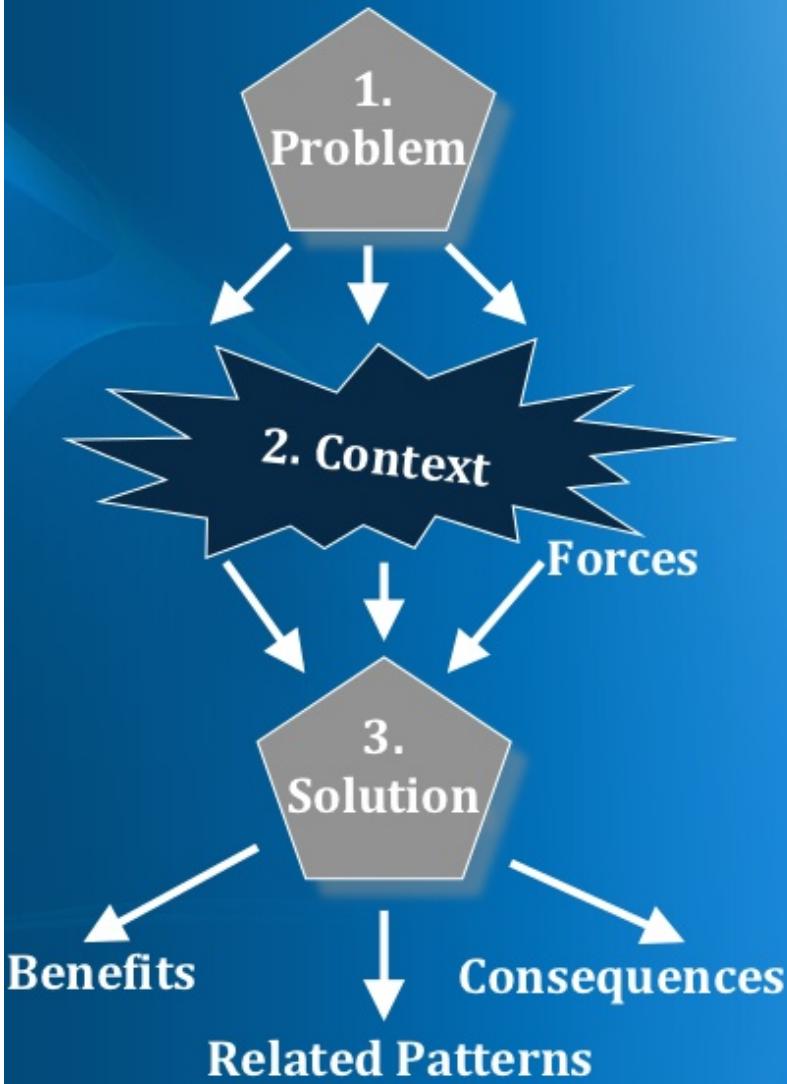

DESIGN PATTERNS – CLASSIFICATION

Structural Patterns

- 1. Decorator
- 2. Proxy
- 3. Bridge
- 4. Composite
- 5. Flyweight
- 6. Adapter
- 7. Facade

Creational Patterns

- 1. Prototype
- 2. Factory Method
- 3. Singleton
- 4. Abstract Factory
- 5. Builder

Behavioral Patterns

- 1. Strategy
- 2. State
- 3. TemplateMethod
- 4. Chain of Responsibility
- 5. Command
- 6. Iterator
- 7. Mediator
- 8. Observer
- 9. Visitor
- 10. Interpreter
- 11. Memento

Patterns classification

- Creational patterns?
 - What is the best way to create object, new is not the best option
- structural patterns
 - Structural Patterns describe how objects and classes can be combined to form larger structures
- Behavioral Patterns
 - Behavioral patterns are those which are concerned with interactions between the objects (talking to each other still loosely coupled)



Creatioal Patterns


Creational Patterns

```
Book book = new Book();
```

All the Creational patterns define the best possible way in which an object can be instantiated.

- The new Operator creates the instance of an object, but this is hard-coding.
- we can make use of Creational Patterns to give this a more general and flexible approach.

Simple Factory

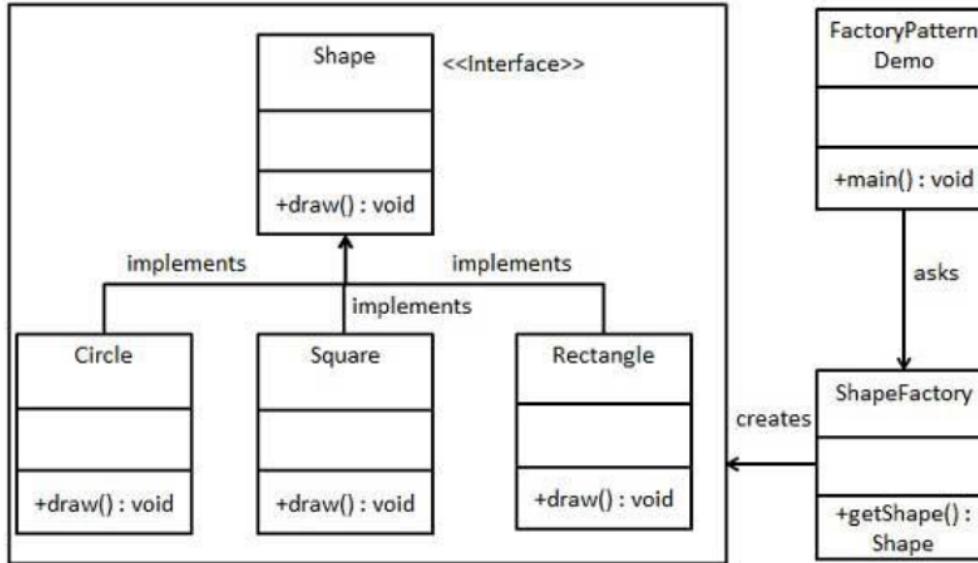

- **Factory of what? of classes. ..**
- In simple words,**
“if we have a super class and an sub-classes, and based on data provided, we have to return the object of one of the sub-classes, we use a simple factory”


Factory Method Design Pattern

Define an **interface** for creating an object, but let **subclasses** decide which object to **instantiate**. Factory Method lets a class defer instantiation to subclasses.

Abstract Factory Pattern

- This pattern is one level of abstraction higher than factory pattern. This means that the abstract factory returns the factory of classes
- Like Factory pattern returned one of the several sub-classes, this returns such factory which later will return one of the sub-classes.

Abstract Factory Pattern

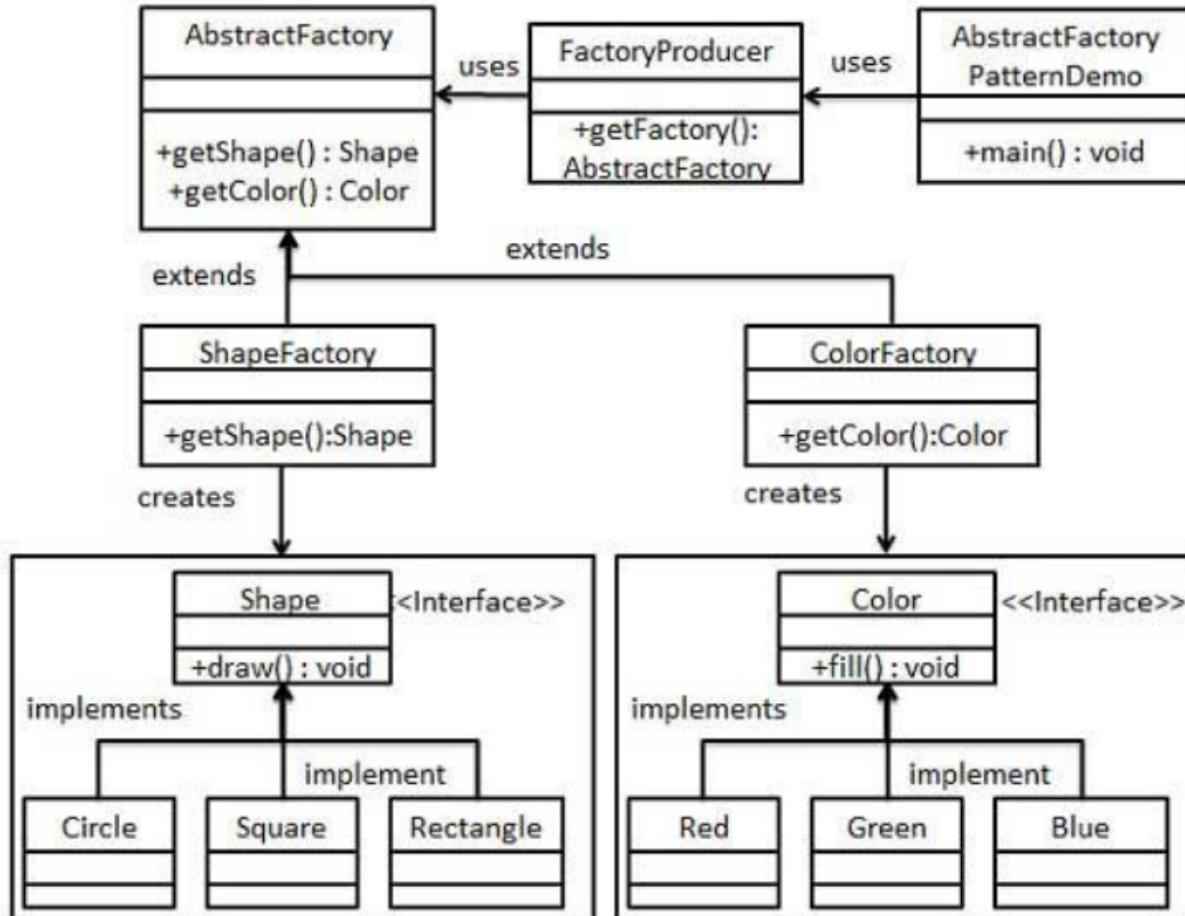

Singleton Design Pattern


Singleton pattern restricts the instantiation of a class and ensures that only one instance of the class exists in the java virtual machine.

The singleton class must provide a global access point to get the instance of the class.

Singleton pattern is used for logging, drivers objects, caching and thread pool.

Singleton design pattern is also used in other design patterns like Abstract Factory, Builder, Prototype, Facade etc.

Singleton design pattern is used in core java classes also, for example `java.lang.Runtime`, `java.awt.Desktop`.

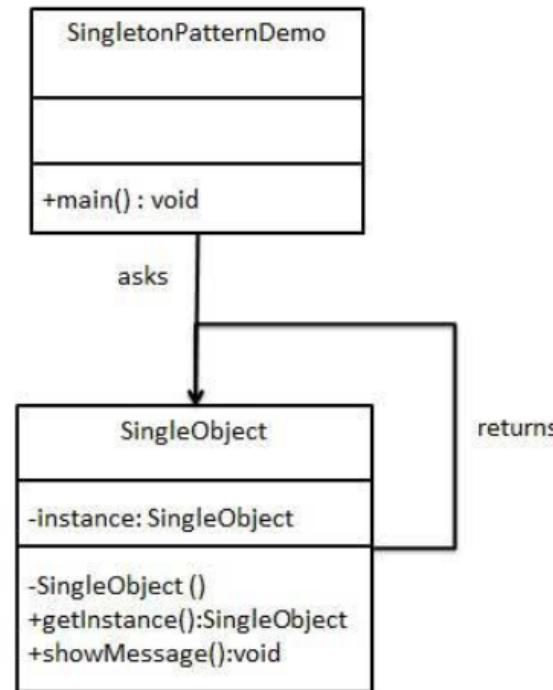

Singleton Design Consideration

Eager initialization

Static block initialization

Lazy Initialization

Thread Safe Singleton

Serialization issue

Cloning issue

Using Reflection to destroy Singleton Pattern

Enum Singleton

Best programming practices

Builder Pattern

- The Builder pattern can be used to ease the construction of a complex object from simple objects.
- The Builder pattern also separates the construction of a complex object from its representation so that the same construction process can be used to create another composition of objects.
- Need of builder is more than that of factory pattern because we aren't returning objects which are simple descendants of a base display object, but totally different user interfaces made up of different combinations of display objects
- **Separates object construction from its representation**
- Builder pattern is useful when the construction of the object is very complex.
- The main objective is to separate the construction of objects and their representations. If we are able to separate the construction and representation, we can then get many representations from the same construction.
-

Prototype Pattern

- The prototype means making a clone.
- This implies cloning of an object to avoid creation. If the cost of creating a new object is large and creation is resource intensive, we clone the object.
- We use the interface Cloneable and call its method clone() to clone the object.



Structural Patterns

Adapter Pattern

The Adapter pattern is used so that two unrelated interfaces can work together.

When you want to create a reusable class that cooperates with unrelated or unforeseen classes, that is, classes that don't necessarily have compatible interfaces.

- A class adapter
 - uses multiple inheritance (by extending one class and/or implementing one or more classes) to adapt one interface to another.
- An object adapter
 - relies on object aggregation.



Decorator design pattern


- Series of wrapper class that define functionality
- In the Decorator pattern, a decorator object is wrapped around the original object.
- The decorator must conform to the interface of the original object (the object being decorated).

Adding behaviour statically or dynamically

Extending functionality without effecting the behaviour of other objects.


Adhering to Open for extension, closed for modification.

java.io.*

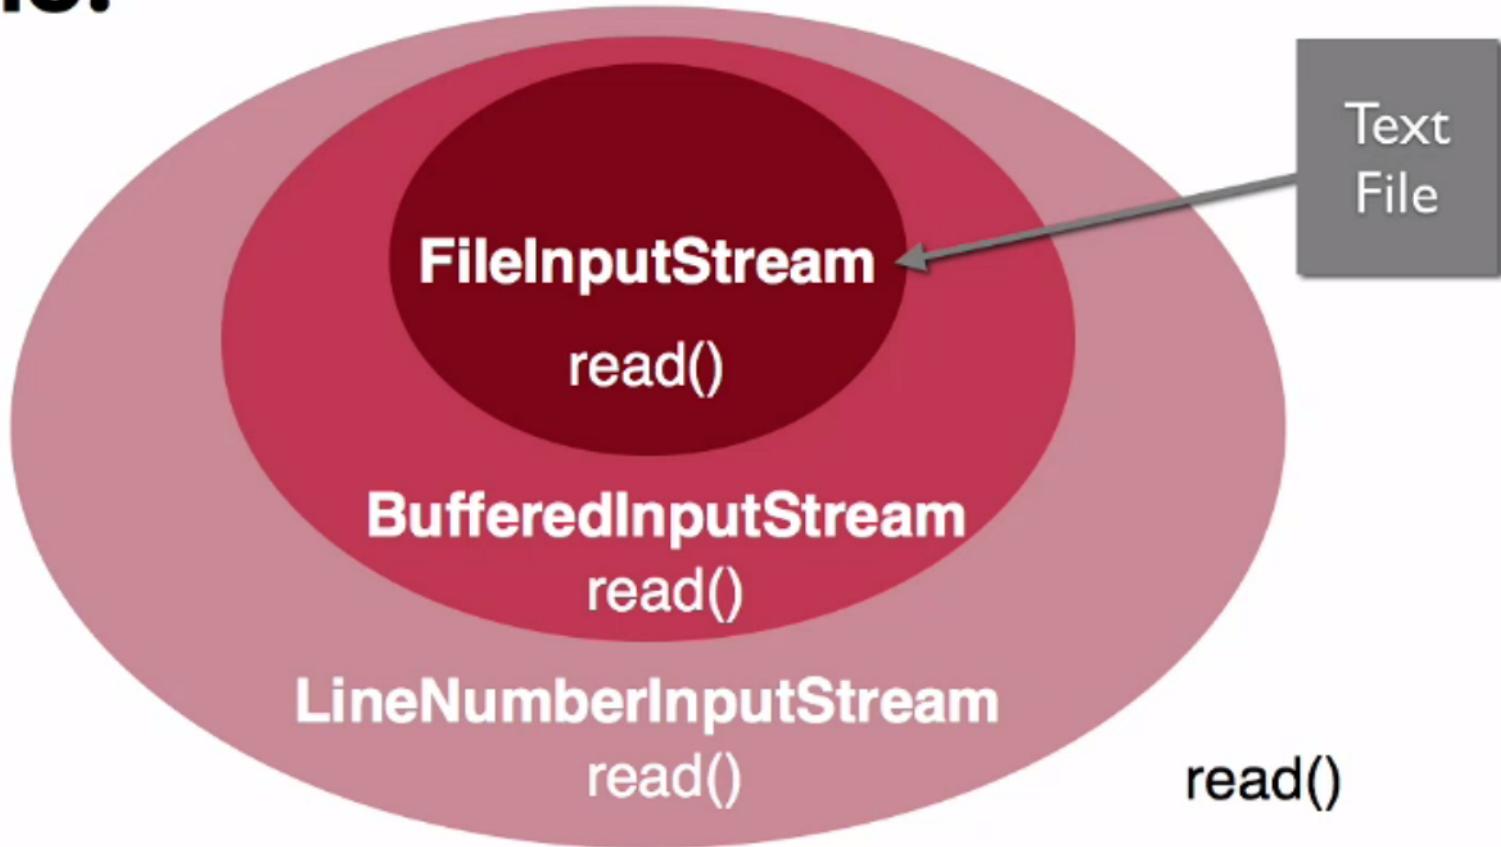

Proxy design pattern

Proxy pattern, a class represents functionality of another class. This type of design pattern comes under structural pattern. In short, a proxy is a wrapper or agent object that is being called by the client to access the real serving object behind the scenes.

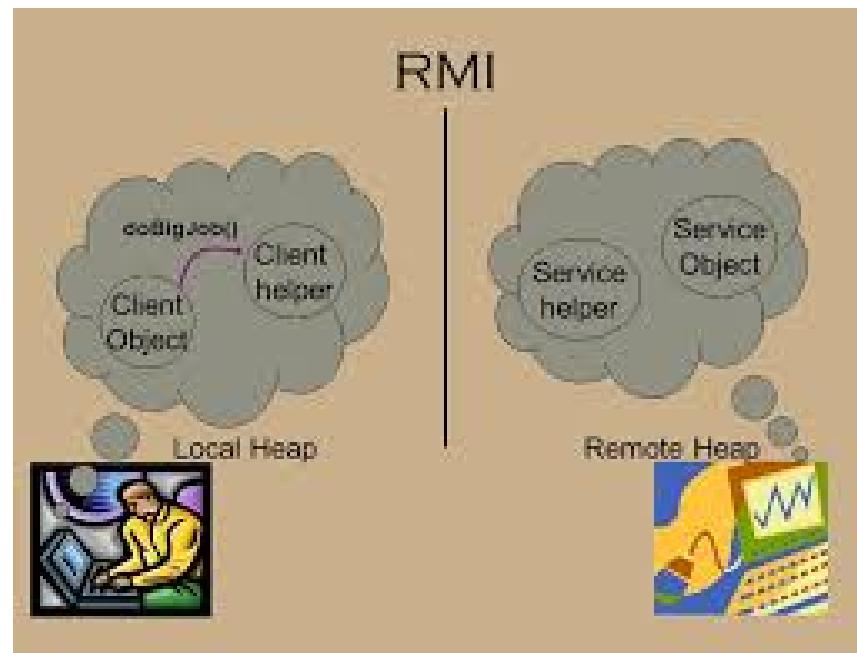


Facade pattern

The **facade pattern** (also spelled *façade*) is a [software design pattern](#) commonly used with [object-oriented programming](#). The name is an analogy to an architectural *façade*.

A facade is an object that provides a simplified interface to a larger body of code, such as a [class library](#). A facade can

- make a [software library](#) easier to use, understand, and test, since the facade has convenient methods for common tasks,
- make the library more readable, for the same reason,
- reduce [dependencies](#) of outside code on the inner workings of a library, since most code uses the facade, thus allowing more flexibility in developing the system,
- wrap a poorly designed collection of [APIs](#) with a single well-designed API.

The Facade design pattern is often used when a system is very complex or difficult to understand because the system has a large number of interdependent classes or its source code is unavailable. This pattern hides the complexities of the larger system and provides a simpler interface to the client. It typically involves a single wrapper class that contains a set of members required by the client. These members access the system on behalf of the facade client and hide the implementation details.

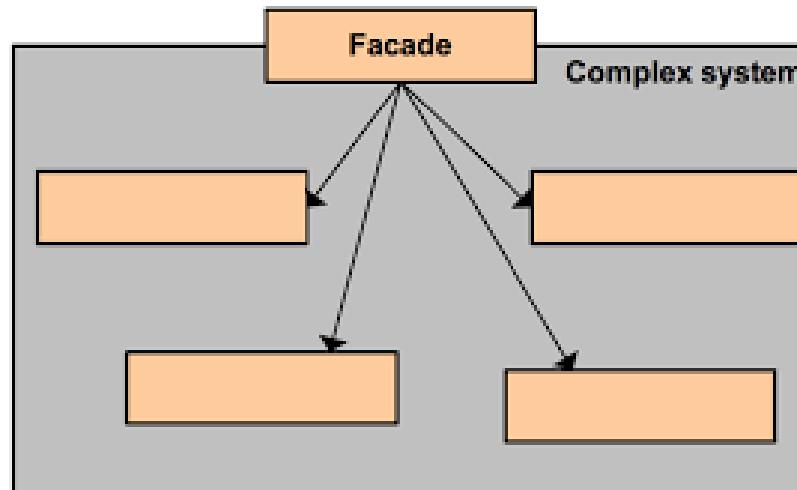




Behavioural Patterns

Strategy pattern /policy pattern


- The strategy pattern is intended to provide a means to define a family of algorithms, encapsulate each one as an object, and make them interchangeable
- It is useful for situations where it is necessary to dynamically swap the algorithms used in an application.
- select algo at run time
- convert IS-A to HAS-A

Client makes use of an encapsulated family of algorithms for both flying and quacking.


Client

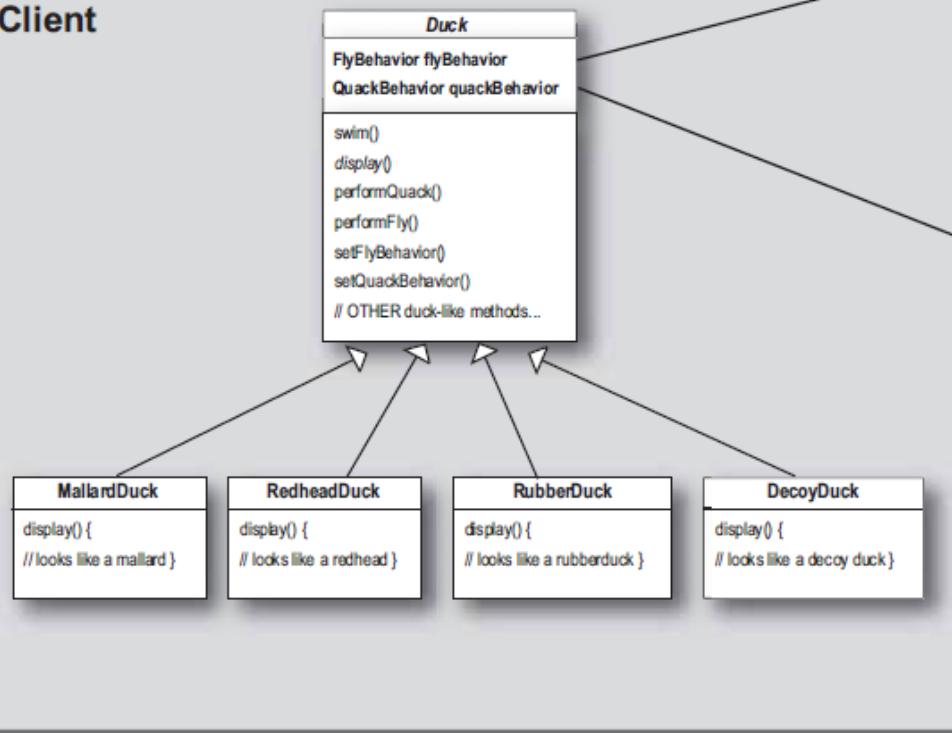

Encapsulated fly behavior

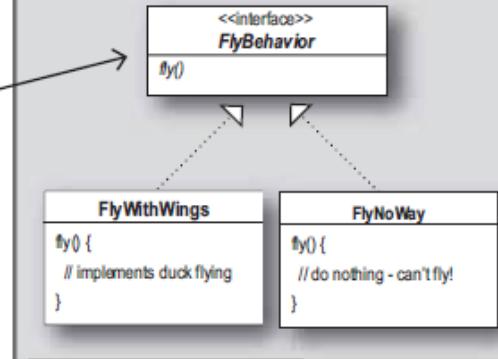

Encapsulated quack behavior

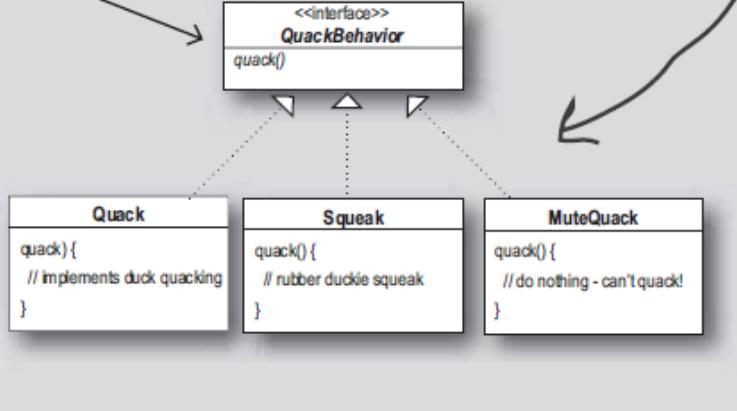

Think of each set of behaviors as a family of algorithms.

I learn,
therefore
I am...



Iterator Design Pattern

- The iterator pattern encapsulates iteration.
- The iterator pattern requires an interface called *Iterator*.
- The *Iterator* interface has two methods:
 - *hasNext()*
 - *next()*
- Iterators for different types of data structures are implemented from this interface.






Day 9:Java Database Connectivity

- JDBC Fundamentals
- JDBC Drivers and architectures
- CURD operations using JDBC
- Autogenerated PK
- ResultSetMetaData, DataBaseMetaData
- Transaction management with JDBC

JDBC

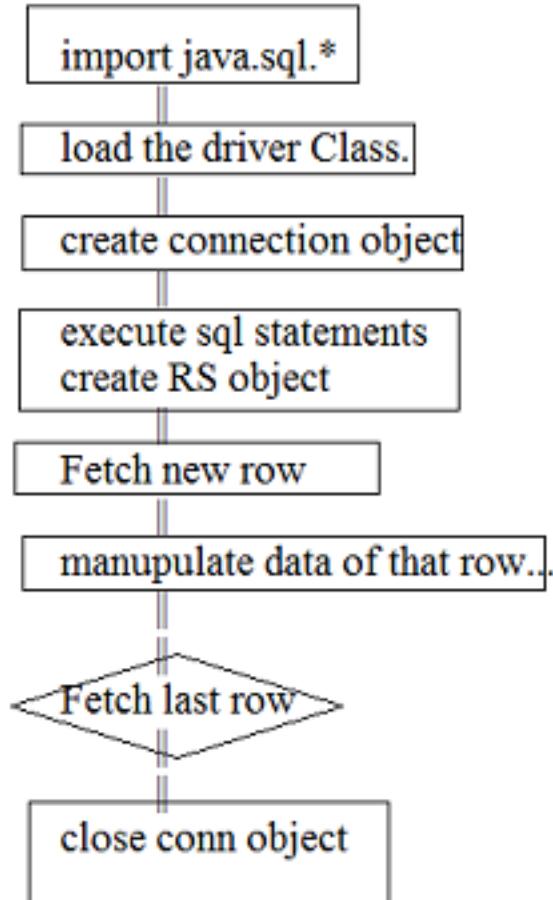

DAO DTO design Pattern

DAO / DTO design pattern

