
A modular solution for storing large steel sheets under your enclosure or table top. This version is **FULLY ADJUSTABLE** in width and depth.

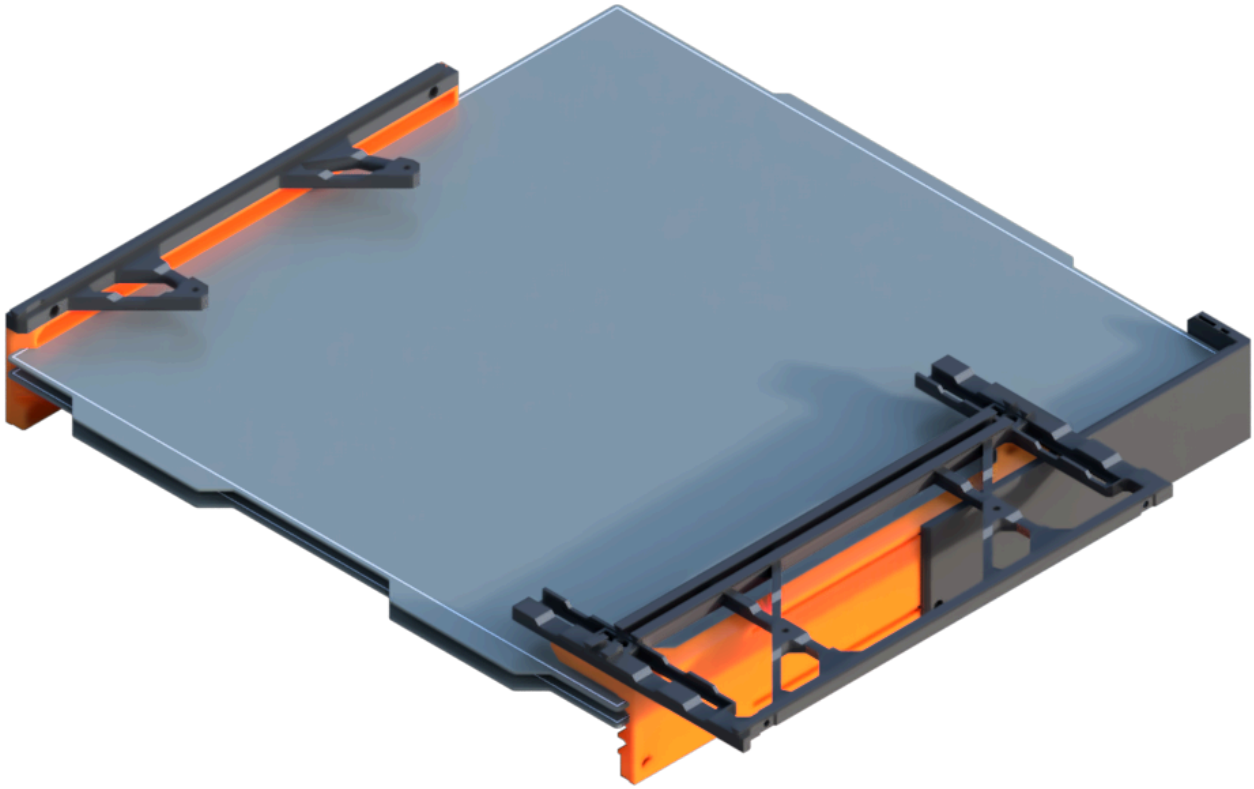

Supported Printer Sheet Sizes

Ex. Prusa XL, Voron, etc.


Minimum sheet size: Any width x 260mm depth
Maximum sheet size: Any width x 420mm depth

For smaller printers such as the Prusa Mini or Bambu A1 Mini you'll want the **GEN2 Adjustable Steel Sheet Holder**

HARDWARE

- Screwdriver
- Countersunk woodscrews: (Metric: 4x25mm to 4x16mm) or (SAE: #16 or #18 up to 1" long)
- Drill bit that is smaller diameter than the wood screws
- Pen, Marker, or Scratch Awl
- Magnets *(Optional)*: 10x5x2mm or 10x2mm
- M3 nuts
- M3 Screws M3x8 - M3x10

INSTRUCTIONS

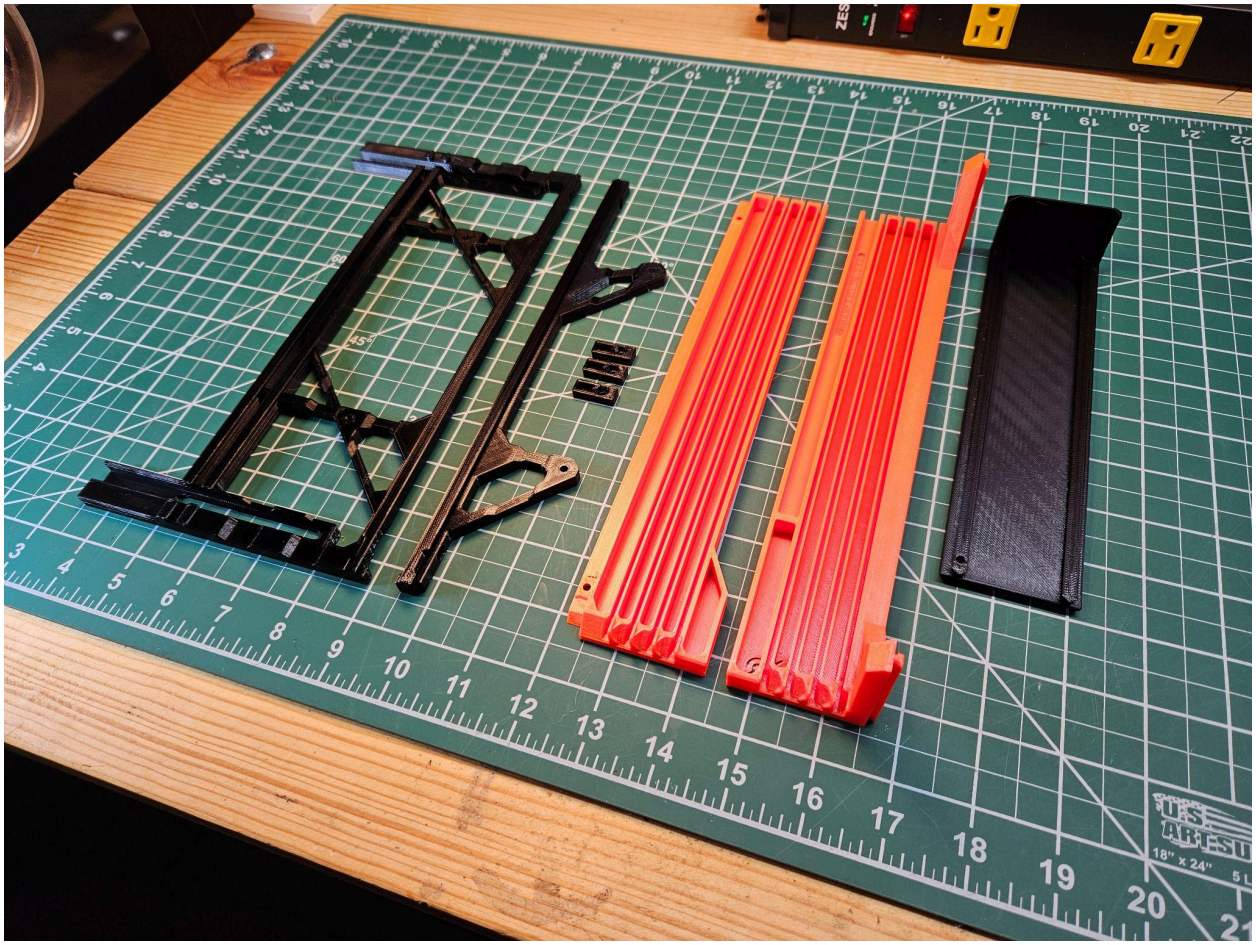

SEE VIDEOS ABOVE FOR DETAILED INSTRUCTIONS (note they are the same as the original GEN2 Steel Sheet Holder other than the rails size is LARGE, meaning this will only work below LARGE rails or LARGE Drawers)

GEN2 Large Adjustable Steel Sheet Holder for 3D Printers

Note: You can also add magnets to the sliding backer slots to create mild attraction to hold steel sheets in place.

INSTALLING RAILS IF NEEDED

• The GEN2 Adjustable Steel Sheet Holder requires 5 rail units. The easiest way to add 5 units is by printing a **GEN2 Large Rails - Quad** Rail and a **GEN2 Large Rails – Single**

• With a marker or pen use the GEN2-QL rail to mark the hole locations on the surface you are mounting.

• Drill out marked locations using a drill bit smaller than the diameter of the wood screw you will be using.

• Drill out marked locations using a drill bit smaller than the diameter of the wood screw you will be using. (Optional) On Lack tables you can create pilot holes simply using a small scratch awl by applying pressure and rotation.

• Prep the rail for installation by installing M3 nuts into the hexagonal holes. You can use a M3 screw to position and tighten the nut in place.

• Install the rail using wood screws, use at least 1 screw per corner, but add more to prevent bowing of the rails and better surface connection. (extra screw holes are available if you plan to stack more than 2 rows of drawers or contents of heavier than normal weight.)



RECOMMENDED PRINT SETTINGS

Filament: PLA (PETG or ABS for heavier duty storage)
Nozzle Size: 0.4mm
Print Height: 0.2-0.35mm
Infill: 10-20%