

LAPORAN PRAKTIKUM PEMROGRAMAN MOBILE

Pertemuan 1



Disusun oleh:

1. Fijriati Rahmatur Rizqi (244107020069)

**D-IV Teknik Informatika
Jurusan Teknologi Informasi
Politeknik Negeri Malang**

Membuat project dart melalui cmd dengan command dart create

```
> dart create /home/rahma/Documents/rhma2026/pemrograman_mobile/prak1
The Dart CLI developer tool uses Google Analytics to report usage and diagnostic
data along with package dependencies, and crash reporting to send basic crash
reports. This data is used to help improve the Dart platform, Flutter framework,
and related tools.

Telemetry is not sent on the very first run. To disable reporting of telemetry,
run this terminal command:

  dart --disable-analytics

If you opt out of telemetry, an opt-out event will be sent, and then no further
information will be sent. This data is collected in accordance with the Google
Privacy Policy (https://policies.google.com/privacy).

Creating prak1 using template console...


.gitignore
analysis_options.yaml
CHANGELOG.md
pubspec.yaml
README.md
bin/prak1.dart
lib/prak1.dart
test/prak1_test.dart

Running pub get... 5.9s
  Resolving dependencies...
  Downloading packages...
  Changed 48 dependencies!
  1 package has newer versions incompatible with dependency constraints.
  Try 'dart pub outdated' for more information.


Created project prak1 in Documents/rhma2026/pemrograman_mobile/prak1! In order to get started, run the following commands:

  cd Documents/rhma2026/pemrograman_mobile/prak1
  dart run
```

Membuka project pada code editor

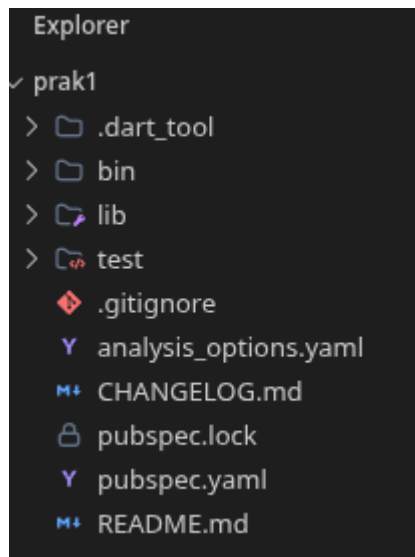

Melakukan percobaan menulis variabel dan print hasilnya

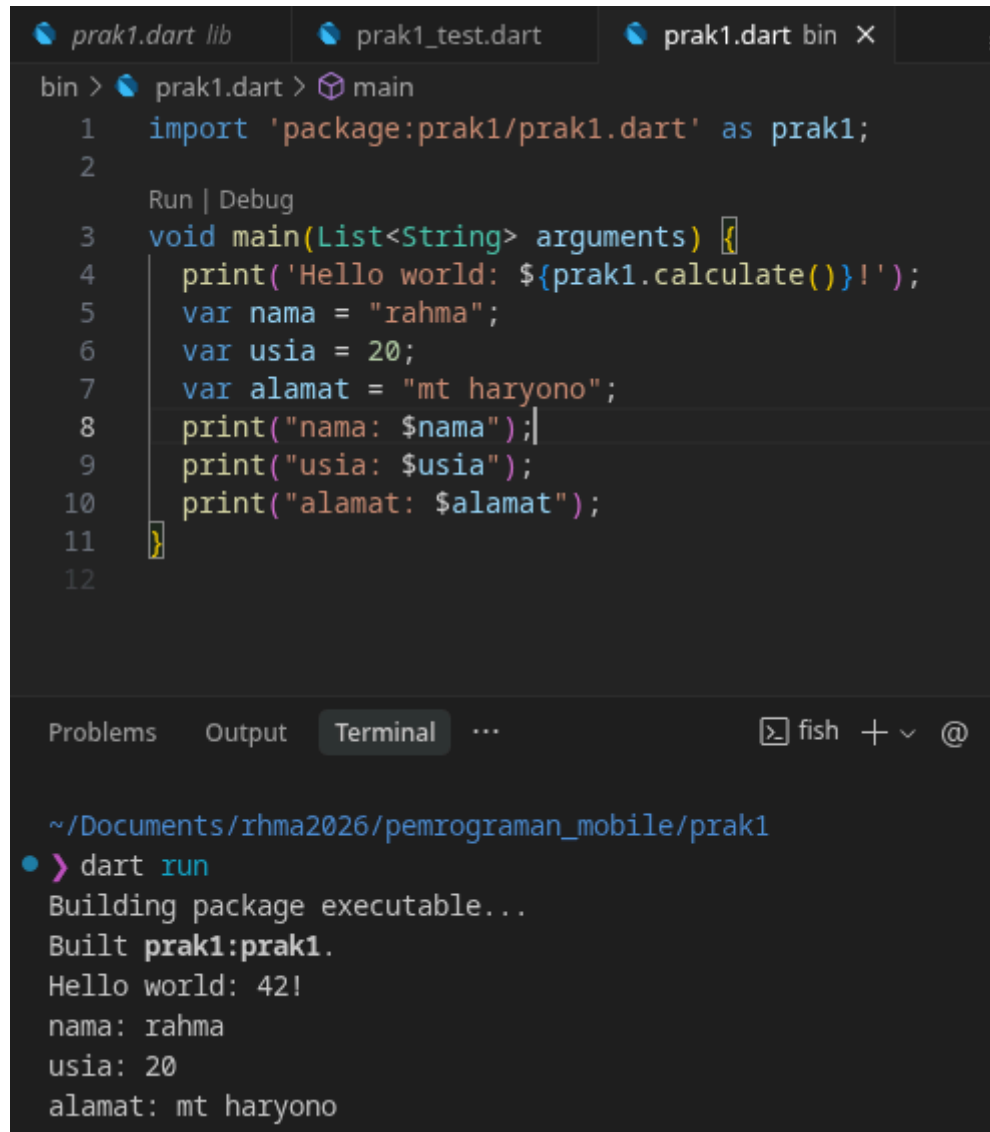

The image shows a screenshot of an IDE with two tabs: `prak1.dart lib` and `prak1_test.dart`. The `prak1.dart` tab is active, showing the following Dart code:

```
bin > prak1.dart > main
1  import 'package:prak1/prak1.dart' as prak1;
2
3  void main(List<String> arguments) {
4      print('Hello world: ${prak1.calculate()}!');
5      var nama = "rahma";
6      var usia = 20;
7      var alamat = "mt haryono";
8      print("nama: $nama");
9      print("usia: $usia");
10     print("alamat: $alamat");
11 }
12
```

Below the code editor, the `Terminal` tab is active, showing the output of running the program:

```
~/Documents/rhma2026/pemrograman_mobile/prak1
> dart run
Building package executable...
Built prak1:prak1.
Hello world: 42!
nama: rahma
usia: 20
alamat: mt haryono
```

Menambahkan variabel tinggi dengan var lalu mencoba dijumlahkan

```
3 void main(List<String> arguments) {
4   print("Hello world: ${printCalculate}");
5   var nama = "rahma";
6   var usia = 20;
7   var tinggi = "150";
8   var iseng = usia + int.parse(tinggi);
9   var alamat = "mt haryono";
10  print("nama: $nama");
11  print("usia: $usia");
12  print("alamat: $alamat");
13  print("hasil iseng: $iseng");
14 }
15
```

Problems Output Terminal ...

~/Documents/rhma2026/pemrograman_mobile/prak1
> dart run

Built **prak1:prak1**.
Hello world: 42!
nama: rahma
usia: 20
alamat: mt haryono
hasil iseng: 170

Mencoba membuat file baru dan dijalankan

```
bin > rahma.dart > ...
Run | Debug
1 void main(List<String> args) {
2   print("hallo rahma");
3 }
4
```

```
Y pubspec.yaml
1 name: rahma
2 description: A sample command-line appli
3 version: 1.0.0
4 # repository: https://github.com/my_org/
5
6 environment:
7   sdk: ^3.13.2
8
9 # Add regular dependencies here.
10 dependencies:
11   path: ^1.9.0
12
13 dev_dependencies:
14   lints: ^6.0.0
15   test: ^1.25.6
```

Problems S Output Debug Console Terminal Ports

~/Documents/rhma2026/pemrograman_mobile/prak1
> dart run

~/Documents/rhma2026/pemrograman_mobile/prak1
• > dart run
Building package executable...
Built **rahma:rahma**.
hallo rahma

Mencoba variabel const dan final

```
bin > prak1.dart > main
1  import 'package:prak1/prak1.dart' as prak1;
2
3  const nama = "rahma";
4  const umur = 20;
5
Run | Debug
6  void main(List<String> arguments) {
7      print("nama saya $nama dan usia saya $umur");
8      final name = "fijriati";
9      final age = 19;
10     print("my name is $name and my age is $age");
11     // print('Hello world: ${prak1.calculate()}!');
12     // var nama = "rahma";
13     // var usia = 20;
14     // var tinggi = "150";
15     // var iseng = usia + int.parse(tinggi);

```

Problems 1 Output Debug Console Terminal Ports

```
~/Documents/rhma2026/pemrograman_mobile/prak1
> dart run

~/Documents/rhma2026/pemrograman_mobile/prak1
• > dart run
Building package executable...
Built prak1:prak1.
nama saya rahma dan usia saya 20
my name is fijriati and my age is 19
```

Mencoba berbagai macam variabel

```
~/Documents/rhma2026/pemrograman_mobile/prak1
• > dart run bin/variabel.dart
10
3.14
hai
true
14
[alice, bob, charlie]
nama ke 0 adalah alice
[1, 2, 3, 4]
jumlah elemen dalam numbers adalah 4
{alice: 20, bob: 21}
umur alice adalah 20
hello
32
true
[1, 2, 3]
{nama: rahma, usia: 20}

~/Documents/rhma2026/pemrograman_mobile/prak1
```

Mencoba inputan scanner dart

```
bin > operator.dart > main
1  import 'dart:io';
2
   Run | Debug
3  void main(List<String> args) {
4      print("masukan sebuah angka : ");
5      String? inputUser = stdin.readLineSync();
6      print("nilainya adalah $inputUser");
7  }
8

Problems 2 Output Debug Console Terminal Ports

~/Documents/rhma2026/pemrograman_mobile/prak1
> dart run bin/variabel.dart

~/Documents/rhma2026/pemrograman_mobile/prak1
• > dart run bin/operator.dart
masukan sebuah angka :
10
nilainya adalah 10
```

Mencoba nullable variabel

```
bin > nullable.dart > main
Run | Debug
1 void main(List<String> args) {
2   String? name;
3   name = null;
4   print(name);
5 }
6

Problems 2 Output Debug Console Terminal Ports

~/Documents/rhma2026/pemrograman_mobile/prak1 9s
• > dart run bin/nullable.dart
null
```

Mencoba nullable scanner

```
~/Documents/rhma2026/pemrograman_mobile/prak1
• > dart run bin/nullable.dart
null
nama saya tidak diketahui
masukkan nama anda
rahma
nama anda adalah rahma

~/Documents/rhma2026/pemrograman_mobile/prak1
• > dart run bin/nullable.dart
null
nama saya tidak diketahui
masukkan nama anda

nama anda adalah tidak diketahui
```

Mencoba switch case

```
3 void main(List<String> args) {
4   print("masukkan nama");
5   String? nama = stdin.readLineSync();
6   switch (nama) {
7     case null:
8     case "":
9       print("nama anda tidak diketahui");
10      break;
11    default:
12      print("nama anda $nama");
13      break;
14  }
```

Problems 2 Output Debug Console Terminal Ports

~/Documents/rhma2026/pemrograman_mobile/prak1
• > dart run bin/switchcase.dart
masukkan nama

nama anda tidak diketahui

~/Documents/rhma2026/pemrograman_mobile/prak1
• > dart run bin/switchcase.dart
masukkan nama
fijri
nama anda fijri

Mencoba melakukan checking

```
Run | Debug
1 void main(List<String> args) {
2   int a = 10;
3   int b = 10;
4   print(a == b);
5   print(identical(a, b));
6
7   String nama1 = "rahma";
8   String nama2 = "Rahma";
9   print(nama1 == nama2);
10  print(identical(nama1, nama2));
11 }
12
```

Problems 2 Output Debug Console Terminal Ports

```
~/Documents/rhma2026/pemrograman_mobile/prak1
> dart run bin/checking.dart
true
true
false
false
```

Mencoba perulangan while

```
1 void main(List<String> args) {  
2   int i = 0;  
3   while (i < 5) {  
4     print("perulangan ke ${i + 1}");  
5     i++;  
6   }  
7 }  
8
```

Problems 2 Output Debug Console Terminal Ports

```
~/Documents/rhma2026/pemrograman_mobile/prak1  
• > dart run bin/perulangan.dart  
perulangan ke 1  
perulangan ke 2  
perulangan ke 3  
perulangan ke 4  
perulangan ke 5
```

Mencoba perulangan do-while

```
1 void main(List<String> args) {
2   int i = 0;
3   // while (i < 5) {
4   //   print("perulangan ke ${i + 1}");
5   //   i++;
6   // }
7   do {
8     print("perulangan ke ${i + 1}");
9     i++;
10  } while (i == 5);
11 }
12
```

Problems 2 Output Debug Console Terminal Ports

~/Documents/rhma2026/pemrograman_mobile/prak1

- > dart run bin/perulangan.dart

perulangan ke 1

Mencoba perulangan for

```
1 void main(List<String> args) {
2     // int i = 0;
3     // while (i < 5) {
4     //     print("perulangan ke ${i + 1}");
5     //     i++;
6     // }
7     // do {
8     //     print("perulangan ke ${i + 1}");
9     //     i++;
10    // } while (i == 5);
11
12    for (int i = 0; i < 5; i++) {
13        print("perulangan ke ${i + 1}");
14    }
15 }
16
```

Problems 2 Output Debug Console Terminal Ports

~/Documents/rhma2026/pemrograman_mobile/prak1

- > dart run bin/perulangan.dart

perulangan ke 1
perulangan ke 2
perulangan ke 3
perulangan ke 4
perulangan ke 5

Mencoba perulangan tanpa henti dengan break dan mencoba continue

```
void main(List<String> args) {

    for (;;) {
        if (i == 5) {
            break;
        }
        print("perulangan ke ${i + 1}");
        i++;
    }

    for (int j = 1; j < 10; j++) {
        if (j % 2 == 0) {
            continue;
        }
        print(j);
    }
}
```

```
~/Documents/rhma2026/pemrograman_mobile/prak1
• > dart run bin/perulangan.dart
perulangan ke 1
perulangan ke 2
perulangan ke 3
perulangan ke 4
perulangan ke 5
1
3
5
7
9
```