
ACTIVITY PERTEMUAN 7

Nama : Raihan Fathan

NPM : 51421231

Kelas : 4IA28

Folder-A

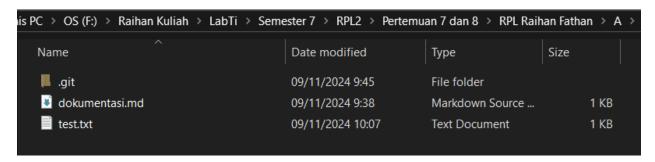

Folder-B



Git bash folder-a

```
MINGW64:/c/Users/bangk/Desktop/kukuh-50421871/folder-a

bangk@Bangkit-Nur-Ahmad MINGW64 ~/Desktop/kukuh-50421871/folder-a (folder-b)
5 git branch
* folder-b
main

bangk@Bangkit-Nur-Ahmad MINGW64 ~/Desktop/kukuh-50421871/folder-a (folder-b)
5 git checkout main
Switched to branch 'main'
Your branch is up to date with 'origin/main'.

bangk@Bangkit-Nur-Ahmad MINGW64 ~/Desktop/kukuh-50421871/folder-a (main)
5 git tag -a v1.0.0 -m "versi 1 baru"

bangk@Bangkit-Nur-Ahmad MINGW64 ~/Desktop/kukuh-50421871/folder-a (main)
5 git push origin v1.0.0
Enumerating objects: 1, done.
Counting objects: 100% (1/1), done.
Writing objects: 100% (1/1), 161 bytes | 80.00 KiB/s, done.
Total 1 (delta 0), reused 0 (delta 0), pack-reused 0
To https://github.com/mkukuhf/pertemuan7-RPL.git
* [new tag] v1.0.0 -> v1.0.0

bangk@Bangkit-Nur-Ahmad MINGW64 ~/Desktop/kukuh-50421871/folder-a (main)
5 |
```

Git bash folder-b

```
MINGW64:/c/Users/bangk/Desktop/kukuh-50421871/folder-b/pertemuan7-RPL  


bangk@Bangkit-Nur-Ahmad MINGW64 ~/Desktop/kukuh-50421871/folder-b/pertemuan7-RPL (folder-b)
$ git add .

bangk@Bangkit-Nur-Ahmad MINGW64 ~/Desktop/kukuh-50421871/folder-b/pertemuan7-RPL (folder-b)
$ git commit -m "branch baru"
On branch folder-b
nothing to commit, working tree clean


bangk@Bangkit-Nur-Ahmad MINGW64 ~/Desktop/kukuh-50421871/folder-b/pertemuan7-RPL (folder-b)
$ git push origin folder-b
Total O (delta O), reused O (delta O), pack-reused O
remote:
remote: Create a pull request for 'folder-b' on GitHub by visiting:
remote: https://github.com/mkukuhf/pertemuan7-RPL/pull/new/folder-b
remote:
To https://github.com/mkukuhf/pertemuan7-RPL.git
* [new branch] folder-b -> folder-b
bangk@Bangkit-Nur-Ahmad MINGW64 ~/Desktop/kukuh-50421871/folder-b/pertemuan7-RPL (folder-b)
$ |
```

Github

Main

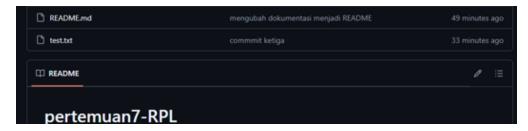

Folder-B

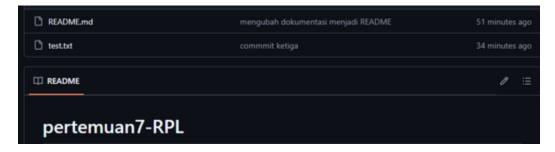

Tag

