
McMASTER-CARR®

Precision Acme Flange Nut

1/2"-10 Thread Size

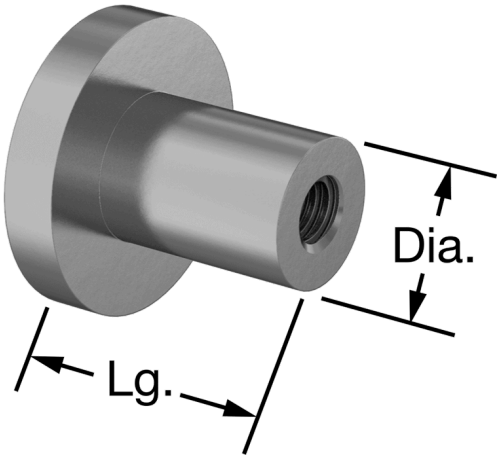

Delivers tomorrow

$178.60 each
97790A110


Nut Type	Flange
Component	Nut
Thread Direction	Right Hand
Material	932 Bearing Bronze
Thread Size	1/2"-10
Length	1 3/4"
Diameter	1"
Flange	
Diameter	2"
Thickness	3/8"
Thread Type	Acme
Speed Ratio	1:1
Number of Thread Starts	1
Travel Distance per Turn	0.1"
Thread Fit	Acme Class 2C
Hardness	Brinell 65
Tensile Strength	35,000 psi
Dynamic Thrust Load Capacity	1,200 lb.
Flange Hardness	Brinell 65
Flange Material	932 Bearing Bronze
Performance	Precision
System of Measurement	Inch
Country of Origin	United States
DFARS Compliance	Specialty Metals COTS-Exempt
Export Control Classification Number (ECCN)	EAR99
REACH Compliance	Not Compliant
RoHS Compliance	Not Compliant
Schedule B Number	848340.9000
U.S.–Mexico–Canada Agreement (USMCA) Qualifying	No

Pair with a motor in automated motion and positioning applications. A tight thread fit allows these lead screws and nuts to make accurate, repeatable starts and stops. Also known as single-start and self-locking lead screws and nuts, they have a single thread that runs the length of the screw. The nut travels only when the screw turns, so your system won't unexpectedly move when the lead screw is at rest. To ensure compatibility, please select components that have the same thread direction, thread size, and number of thread starts.

Flange Nut—Flange nuts have wide, machinable surfaces for custom mounting.

932 Bearing Bronze—932 bearing bronze and 673 bronze nuts are wear resistant. They have good machinability and fair corrosion resistance.

Travel Distance per Turn—Travel distance per turn, also known as screw lead, is the distance a nut moves with one revolution of the lead screw.

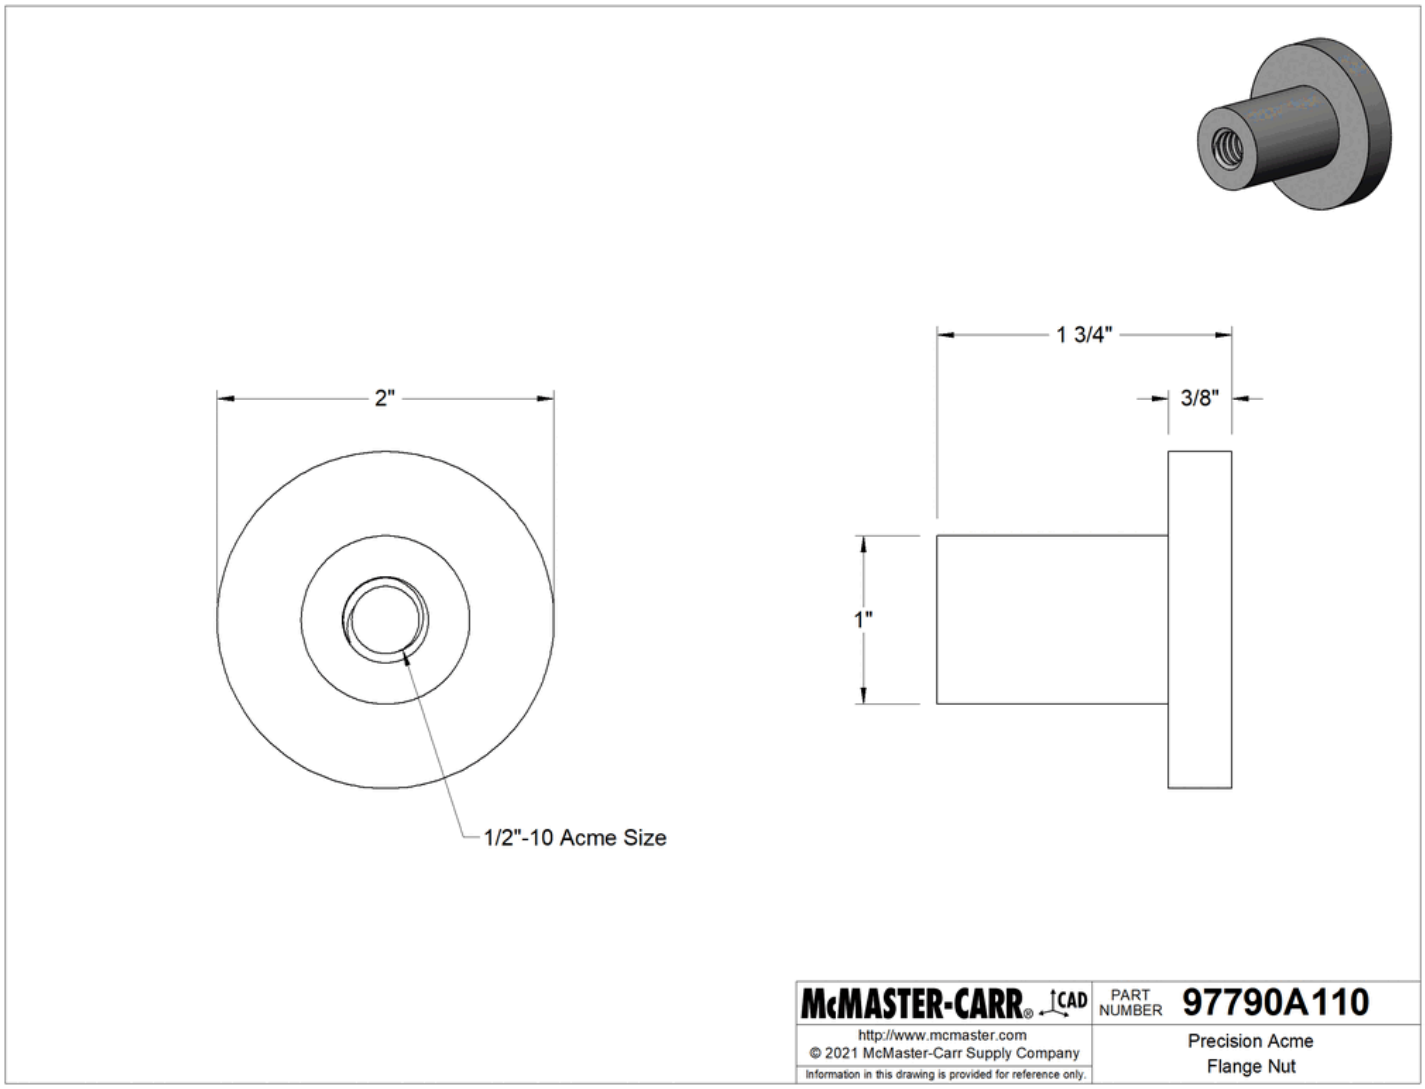

The information in this 3-D model is provided for reference only.