

HTML AND CSS INTRODUCTION LAB (BCSAI111)

B.Tech CSE

SUBMITTED TO:

MR. AMAN

SUBMITTED BY:

RIYA CHAUDHARY

Roll No: 2510303439

Section: C

S.N.	PROGRAM NAME	PAGE	DATE	SIGNATURE
1.	Starting a Git Repository	**3**		
2.	Pushing and Cloning a Repository	**8**		
3.	Your First HTML Page	**11**		
4.	Divs, Attributes and a Small Fix	**14**		
5.	Links and Images	**18**		
6.	Types of HTML Lists	**21**		
7.	About Me Page	**24**		
8.	Sign-Up Forms and Choices	**30**		
9.	Tables with Headers and Footers	**36**		
10.	CSS Fundamentals	**42**		
11.	Units and CSS Variables	**48**		
12.	Box Model, Cards and Scrolling	**54**		
13.	Flexbox Layouts	**58**		
14.	CSS Grid Layouts	**64**		
15.	Responsive Pages with Media Queries	**70**		

Assignment 1: Starting a Git Repository

Assignment Aim / Objective: To start a Git repository for the lab folder, set a local name and email, and save work by making commits.

Question 1

Problem Statement: Create a folder named html-lab and go into it. Run git init to start a Git repository. Set the user name with git config --local user.name. Set the user email with git config --local user.email. Show the values with git config user.name and git config user.email.

Source Code (commands.sh):


```
# Student Name: Riya Chaudhary
# Roll Number: 2510303439
# Course: B.Tech CSE
# Section: C
# Subject: HTML and CSS Introduction Lab (BCSAI111)
# Assignment: 1, Task: 1

mkdir html-lab
cd html-lab
git init

git config --local user.name "Riya Chaudhary"
git config --local user.email "riachaudhary188@gmail.com"

# Show the values
git config user.name
git config user.email
```

Execution Output Screenshot:

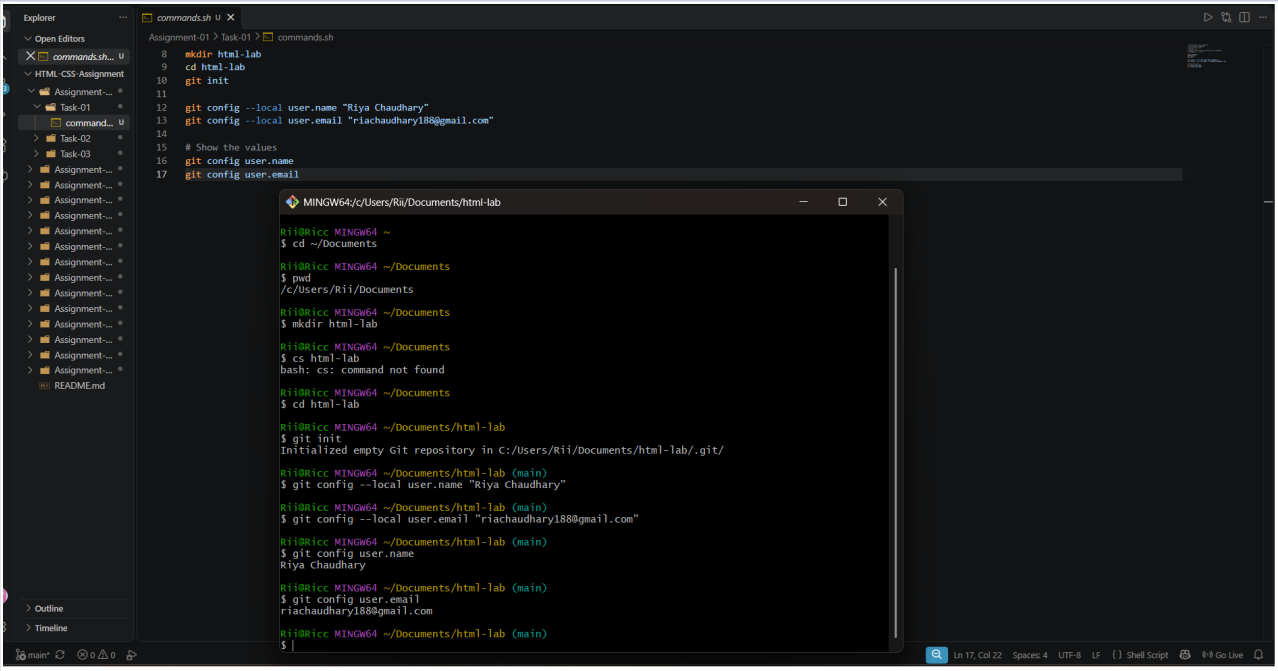

Question 2

Problem Statement: Create index.html inside html-lab with one h1 heading. Run git status to see the untracked file. Add the file with git add index.html. Commit it with the message "Add home page". Run git log --oneline.

Source Code (commands.sh):

```
# Student Name: Riya Chaudhary
# Roll Number: 2510303439
# Course: B.Tech CSE
# Section: C
# Subject: HTML and CSS Introduction Lab (BCSAI111)
# Assignment: 1, Task: 2

cd html-lab
touch index.html
code index.html

git add index.html
git commit -m "Add home page"
git log --oneline
```

Source Code (index.html):

```
<!-- Student Name: Riya Chaudhary
Roll Number: 2510303439
Course: B.Tech CSE
Section: C
Subject: HTML and CSS Introduction Lab (BCSAI111)
Assignment: 1, Task: 2 -->


<!DOCTYPE html>
<html lang="en">

<head>
<meta charset="UTF-8">
<meta name="viewport" content="width=device-width, initial-scale=1.0">
<title>Home Page</title>
</head>


<body>
    <h1>Welcome to the HTML Lab</h1>
</body>

</html>
```

Execution Output Screenshot:

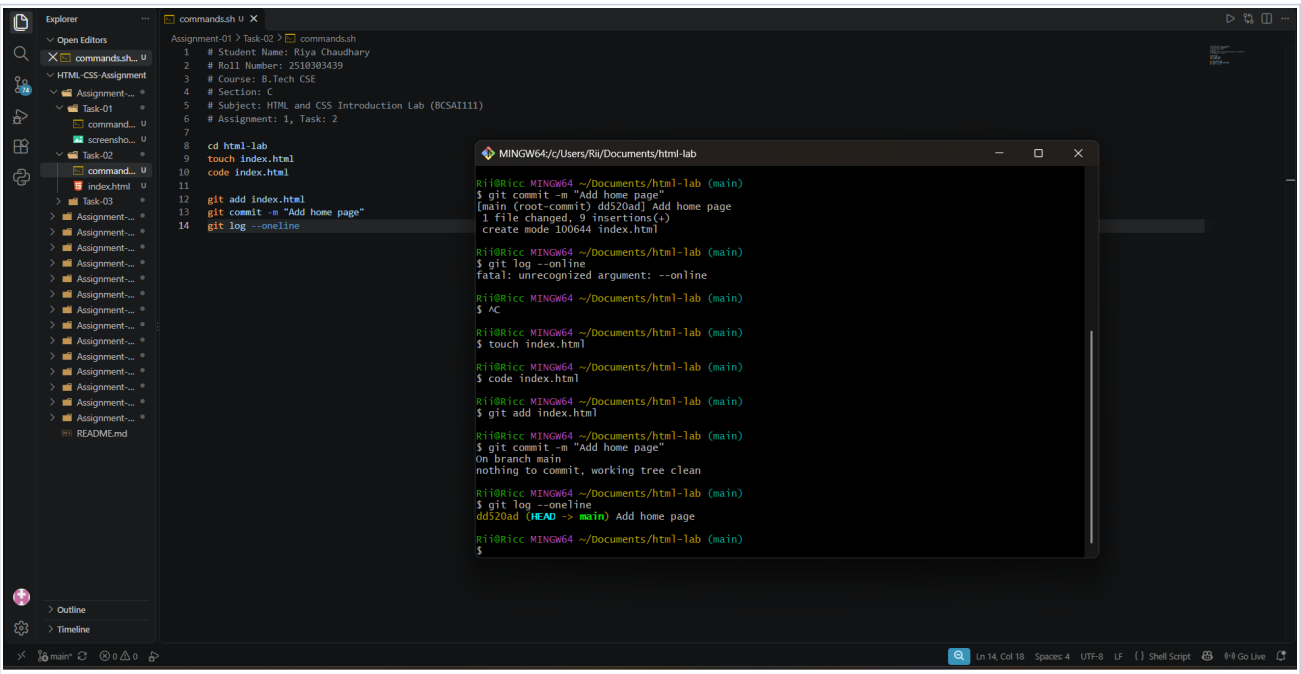

Execution Output Screenshot:

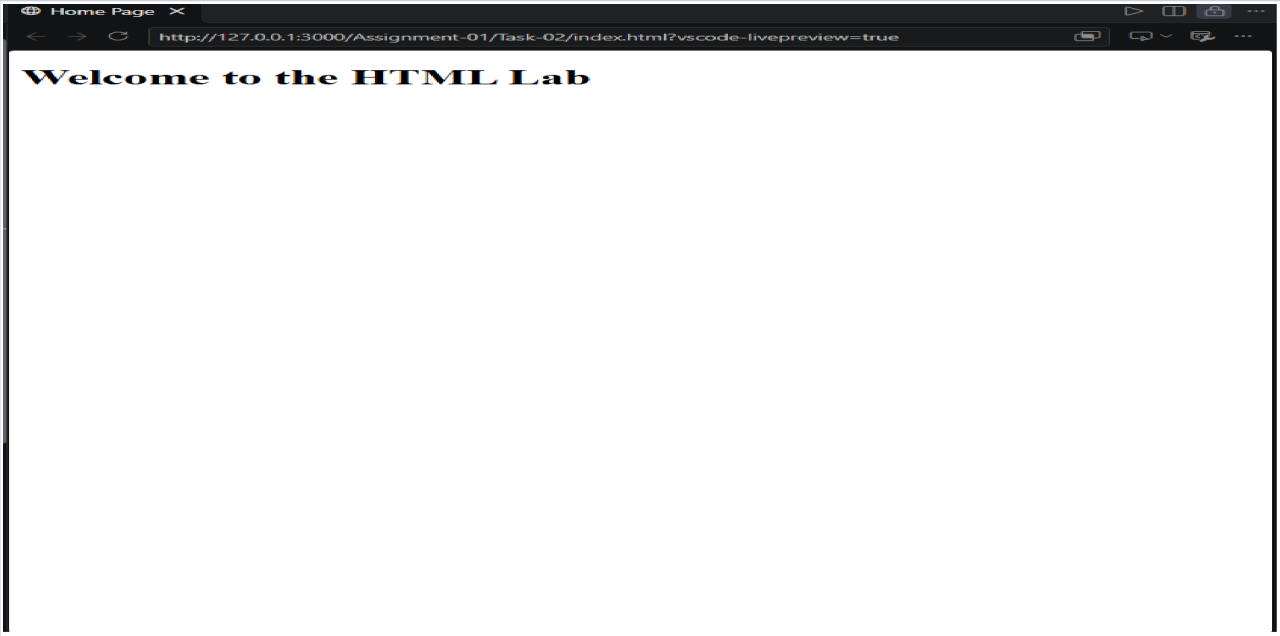

Question 3

Problem Statement: Open index.html and add an h2 heading below the h1 heading. Add the file with git add index.html. Commit it with the message "Add next meeting heading". Run git log --oneline.

Source Code (commands.sh):

```
# Student Name: Riya Chaudhary
# Roll Number: 2510303439
# Course: B.Tech CSE
# Section: C
# Subject: HTML and CSS Introduction Lab (BCSAI111)
# Assignment: 1, Task: 3


cd html-lab
code index.html

git add index.html
git commit -m "Add next meeting heading"
git log --oneline
```

Source Code (index.html):

```
<!--
 * Student Name: Riya Chaudhary
 * Roll Number: 2510303439
 * Course: B.Tech CSE
 * Section: C
 * Subject: HTML and CSS Introduction Lab (BCSAI111)
 * Assignment: 1, Task: 3
-->
<!DOCTYPE html>
<html lang="en">
<head>
<meta charset="UTF-8">
<meta name="viewport" content="width=device-width, initial-scale=1.0">
<title>Home Page</title>
</head>
<body>
<h1>Welcome to the HTML Lab</h1>
<h2>Next meeting</h2>
</body>
</html>
```

Execution Output Screenshot:

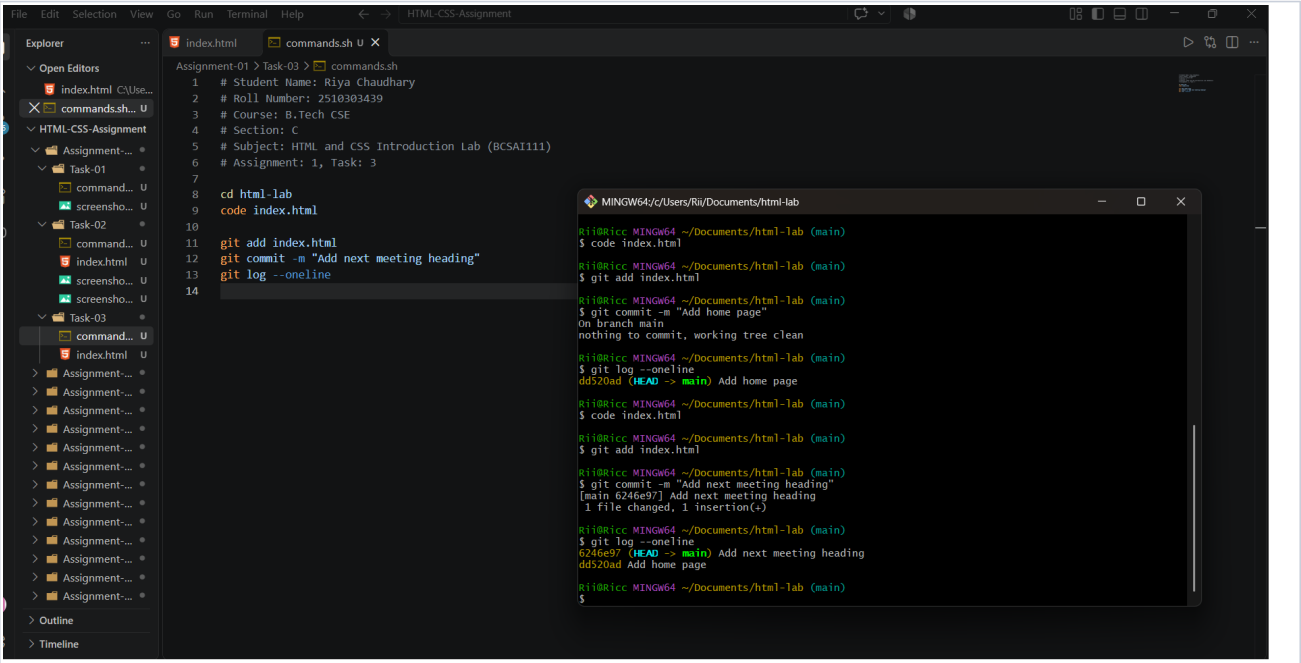

Assignment 2: Pushing and Cloning a Repository

Assignment Aim / Objective: To send the commits to a second repository on the computer and to make a copy of it using clone.

Question 1


Problem Statement: Go into the html-lab folder. Run git init --bare ../html-remote to create an empty repository next to it. Add it as origin with git remote add origin ../html-remote. Run git remote -v to list the remotes.

Source Code (commands.sh):

```
# Student Name: Riya Chaudhary
# Roll Number: 2510303439
# Course: B.Tech CSE
# Section: C
# Subject: HTML and CSS Introduction Lab (BCSAI111)
# Assignment: 2, Task: 1

cd ~/html-lab
git init --bare ../html-remote
git remote add origin ../html-remote
git remote -v
```

Execution Output Screenshot:

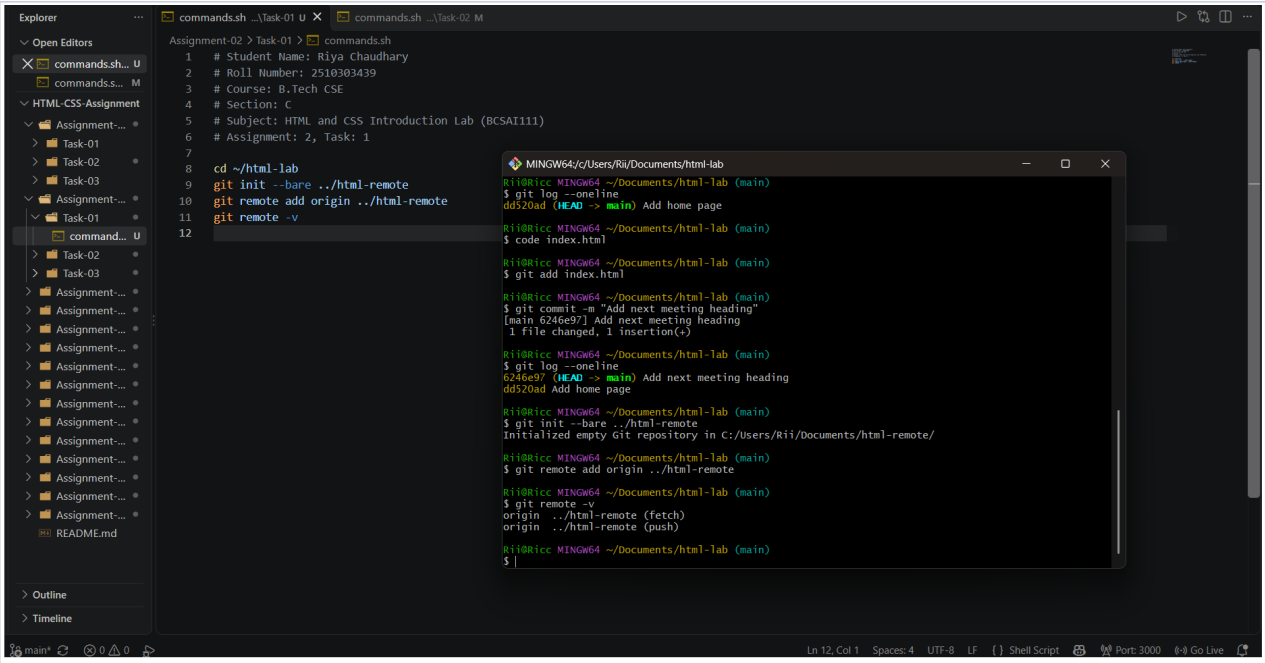

Question 2


Problem Statement: Go into the html-lab folder. Run git status to check the branch name. Run git push origin main (use git push origin master if the branch is master).

Source Code (commands.sh):

```
# Student Name: Riya Chaudhary
# Roll Number: 2510303439
# Course: B.Tech CSE
# Section: C
# Subject: HTML and CSS Introduction Lab (BCSAI111)
# Assignment: 2, Task: 2

cd html-lab
git status
git push origin main
```

Execution Output Screenshot:

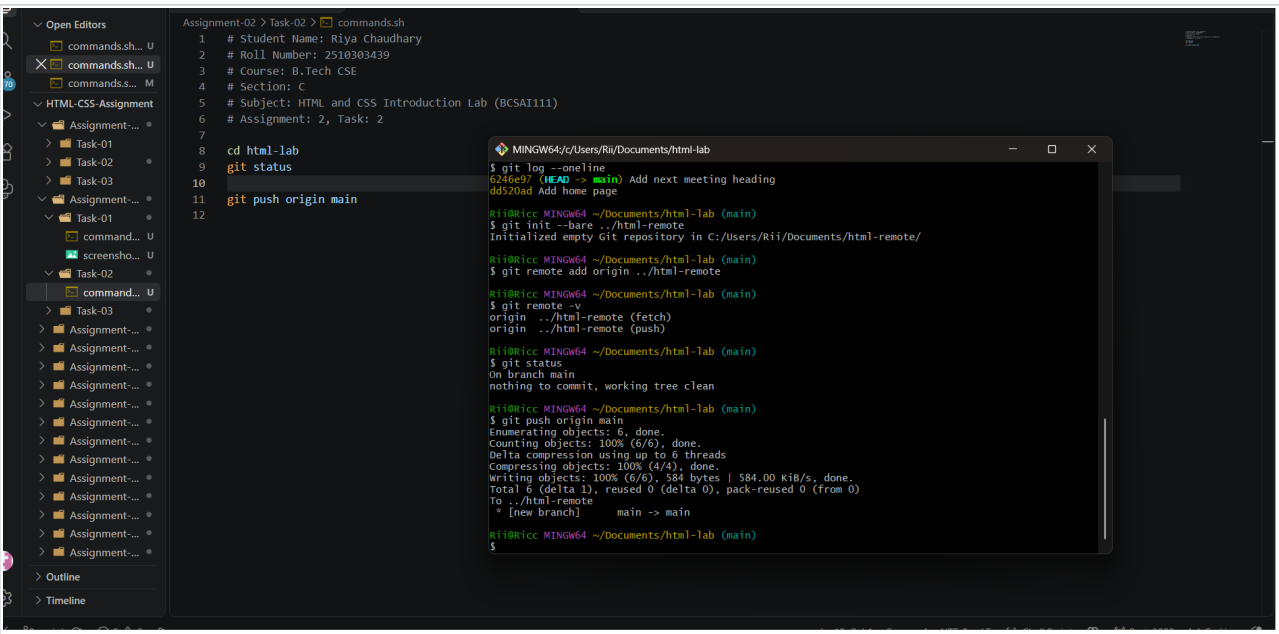

Question 3


Problem Statement: Go up one folder from html-lab using cd ... Run git clone html-remote html-copy. Go into the html-copy folder. Run git log --oneline.

Source Code (commands.sh):

```
# Student Name: Riya Chaudhary
# Roll Number: 2510303439
# Course: B.Tech CSE
# Section: C
# Subject: HTML and CSS Introduction Lab (BCSAI111)
# Assignment: 2, Task: 3

cd ..
git clone html-remote html-copy
cd html-copy
git log --oneline
```

Execution Output Screenshot:

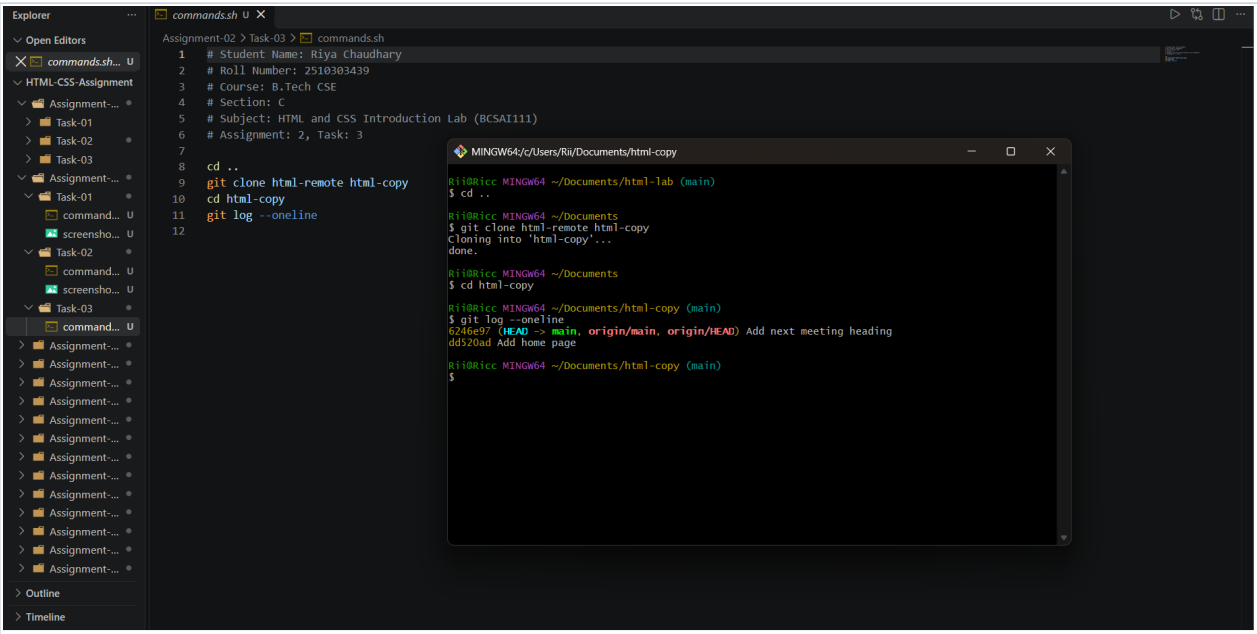

Assignment 3: Your First HTML Page

Assignment Aim / Objective: To write a first HTML page with a title, headings and a paragraph, and to format some text.


Question 1

Problem Statement: Write the document structure with <!DOCTYPE html>, <html>, <head> and <body>. Set the title to My First Page. Add one h1 heading inside the body. Open the file in a browser.

Source Code (index.html):

```
<!--
 * Student Name: Riya Chaudhary
 * Roll Number: 2510303439
 * Course: B.Tech CSE
 * Section: C
 * Subject: HTML and CSS Introduction Lab (BCSAI111)
 * Assignment: 3, Task: 1
-->
<!DOCTYPE html>
<html lang="en">
<head>
<meta charset="UTF-8">
<meta name="viewport" content="width=device-width, initial-scale=1.0">
<title>My First Page</title>
</head>
<body>
<h1>Hello, I am Asha</h1>
</body>
</html>
```

Execution Output Screenshot:

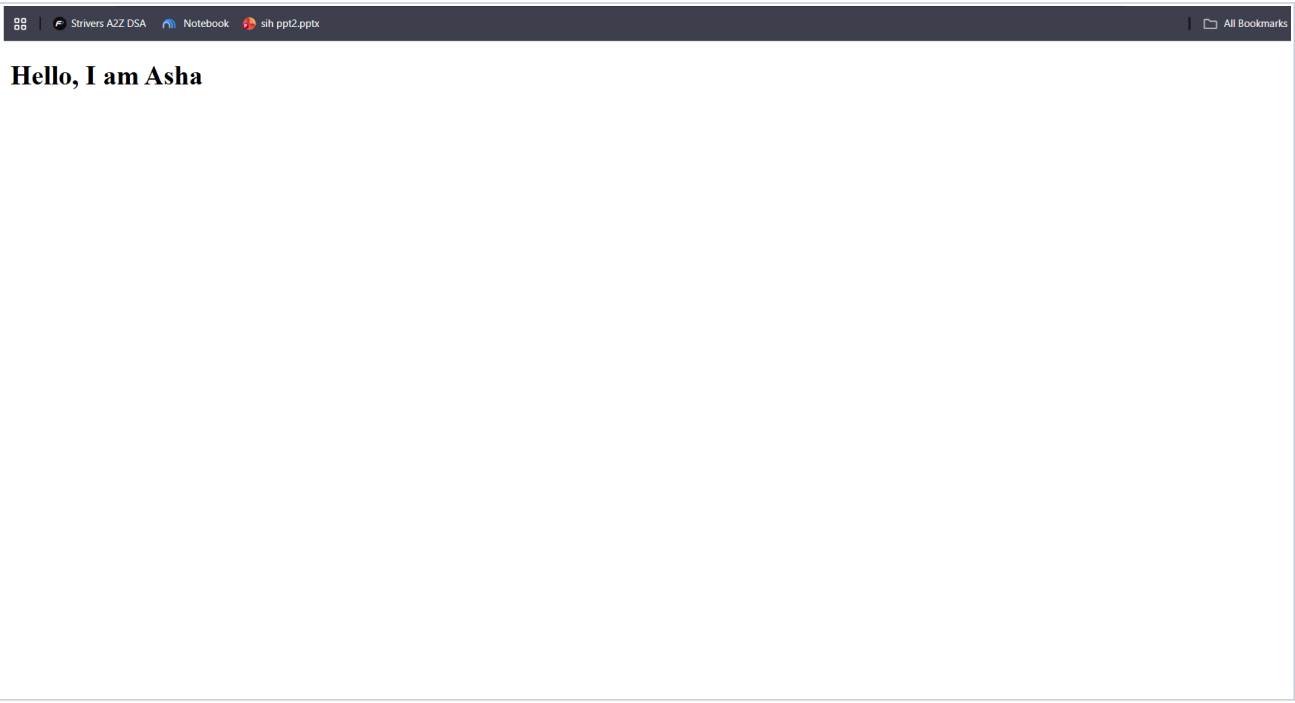


Question 2

Problem Statement: Write the document structure with the title Headings. Add an h1, an h2 and an h3 heading. Add one paragraph below them. Open the file in a browser.

Source Code (index.html):

```
<!--
 * Student Name: Riya Chaudhary
 * Roll Number: 2510303439
 * Course: B.Tech CSE
 * Section: C
 * Subject: HTML and CSS Introduction Lab (BCSAI111)
 * Assignment: 3, Task: 2
-->
<!DOCTYPE html>
<html lang="en">
<head>
<meta charset="UTF-8">
<meta name="viewport" content="width=device-width, initial-scale=1.0">
<title>Headings</title>
</head>
<body>
<h1>Web Development</h1>
<h2>Learning HTML</h2>
<h3>Headings and Paragraphs</h3>
<p>lorem ipsum dolor sit amet, consectetur adipiscing elit.</p>
</body>
</html>
```

Execution Output Screenshot:

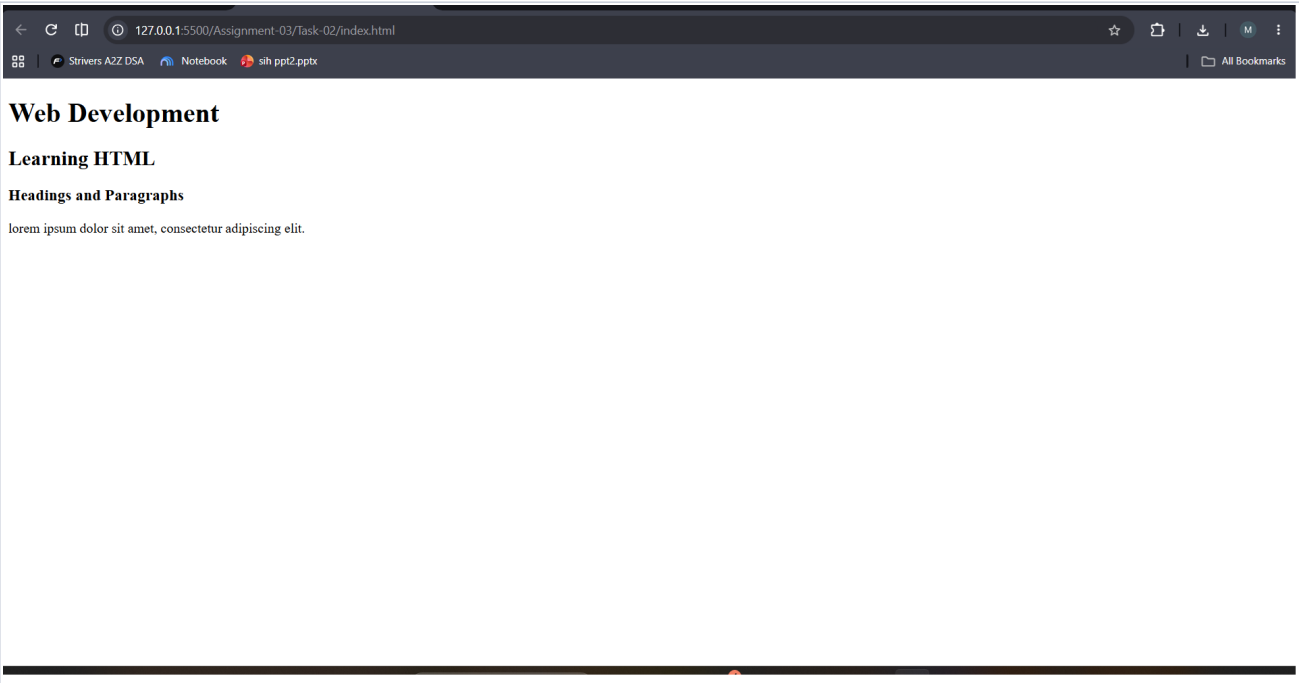


Question 3

Problem Statement: Write the document structure with the title Text Formatting. Add two paragraphs. Wrap one word in and another word in . Put a
 inside one paragraph. Open the file in a browser.

Source Code (index.html):

```
<!DOCTYPE html>
<!--
 * Student Name: Riya Chaudhary
 * Roll Number: 2510303439
 * Course: B.Tech CSE
 * Section: C
 * Subject: HTML and CSS Introduction Lab (BCSAI111)
 * Assignment: 3, Task: 3
-->
<html lang="en">
<head>
<meta charset="UTF-8">
<meta name="viewport" content="width=device-width, initial-scale=1.0">
<title>Text Formatting</title>
</head>
<body>
<p>HTML is an <strong>important</strong> skill for every web developer.<br>This sentence starts on a
    new line.</p>
<p>Practice makes learning <em>easier</em> and faster.</p>
</body>
</html>
```

Execution Output Screenshot:

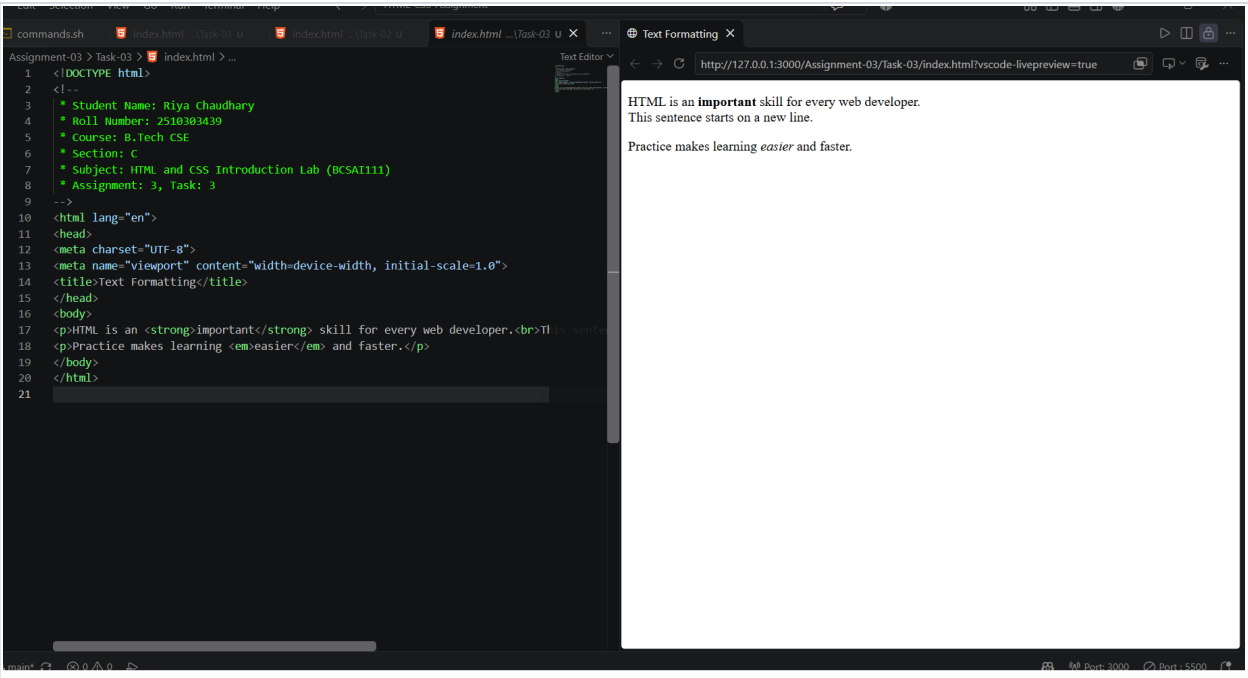

Assignment 4: Divs, Attributes and a Small Fix

Assignment Aim / Objective: To group parts of a page with div elements, add a data attribute, and fix the errors in a broken page.

Question 1

Problem Statement: Create three div elements with the classes header, main and footer. Write some text in each div. Link style.css to give each div a border, padding and margin. Open the file in a browser.


Source Code (index.html):

```
<!--
 * Student Name: Riya Chaudhary
 * Roll Number: 2510303439
 * Course: B.Tech CSE
 * Section: C
 * Subject: HTML and CSS Introduction Lab (BCSAI111)
 * Assignment: 4, Task: 1
-->
<!DOCTYPE html>
<html lang="en">
<head>
<meta charset="UTF-8">
<meta name="viewport" content="width=device-width, initial-scale=1.0">
<title>Layout</title>
<link rel="stylesheet" href="style.css">
</head>
<body>
<div class="header">This is the header</div>
<div class="main">This is the main content</div>
<div class="footer">This is the footer</div>
</body>
</html>
```

Source Code (style.css):

```
div {
    border: 1px solid #333;
    padding: 12px;
    margin-bottom: 8px;
}
```

Execution Output Screenshot:

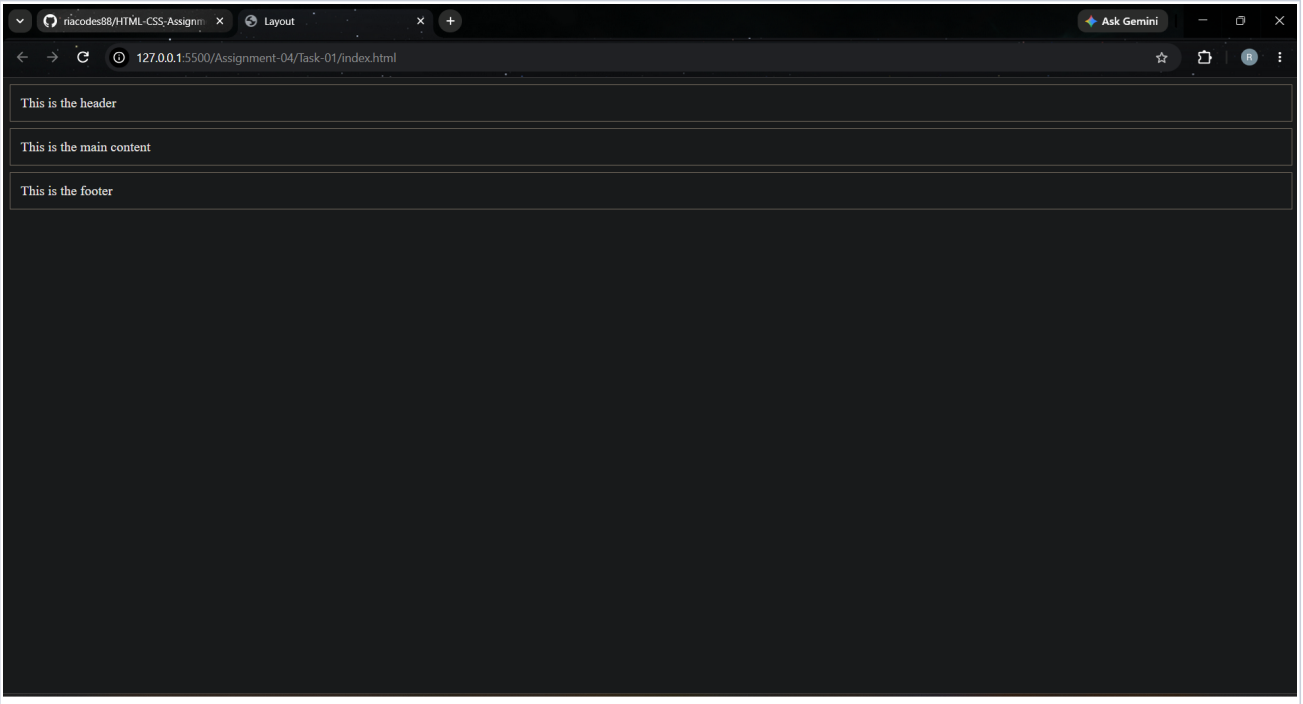


Question 2

Problem Statement: Create a div with the id profile. Add a paragraph inside it. Add the attribute data-topic="hobbies" to the paragraph. Write any text in the paragraph. Open the file in a browser.

Source Code (index.html):

```
<!--
 * Student Name: Riya Chaudhary
 * Roll Number: 2510303439
 * Course: B.Tech CSE
 * Section: C
 * Subject: HTML and CSS Introduction Lab (BCSAI111)
 * Assignment: 4, Task: 2
-->
<!DOCTYPE html>
<html lang="en">
<head>
<meta charset="UTF-8">
<meta name="viewport" content="width=device-width, initial-scale=1.0">
<title>Attributes</title>
</head>
<body>
<div id="profile">
    <p data-topic="hobbies">My hobbies are reading books and playing chess.</p>
</div>
</body>
</html>
```

Execution Output Screenshot:

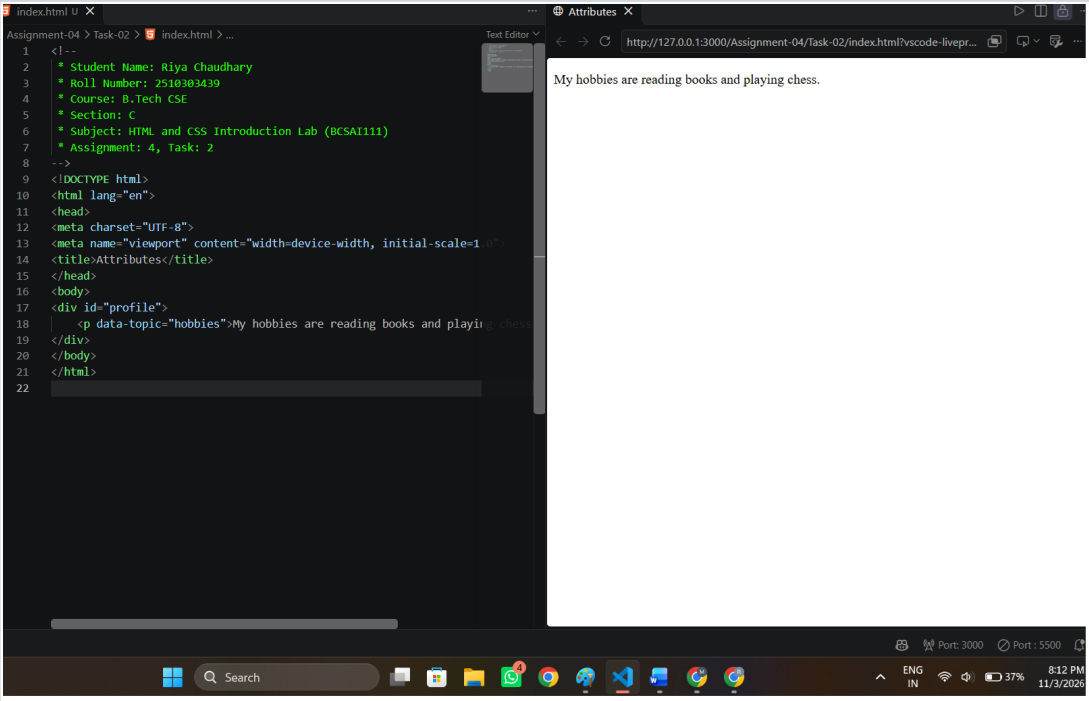


Question 3

Problem Statement: Complete the doctype by adding the missing > in <!DOCTYPE html>. Close the h1 heading with </h1>. In the line Asha: 92% , change the second to the closing tag . Save the corrected page. Open the file in a browser.

Source Code (index.html):

```
<!--
 * Student Name: Riya Chaudhary
 * Roll Number: 2510303439
 * Course: B.Tech CSE
 * Section: C
 * Subject: HTML and CSS Introduction Lab (BCSAI111)
 * Assignment: 4, Task: 3
 -->
<!DOCTYPE html>
<html>
<head>
<title>Attendance</title>
</head>
<body>
<h1>Attendance Report</h1>
<p>Asha: 92%</p>
<p>Rohan: 85%</p>
</body>
</html>
```

Execution Output Screenshot:

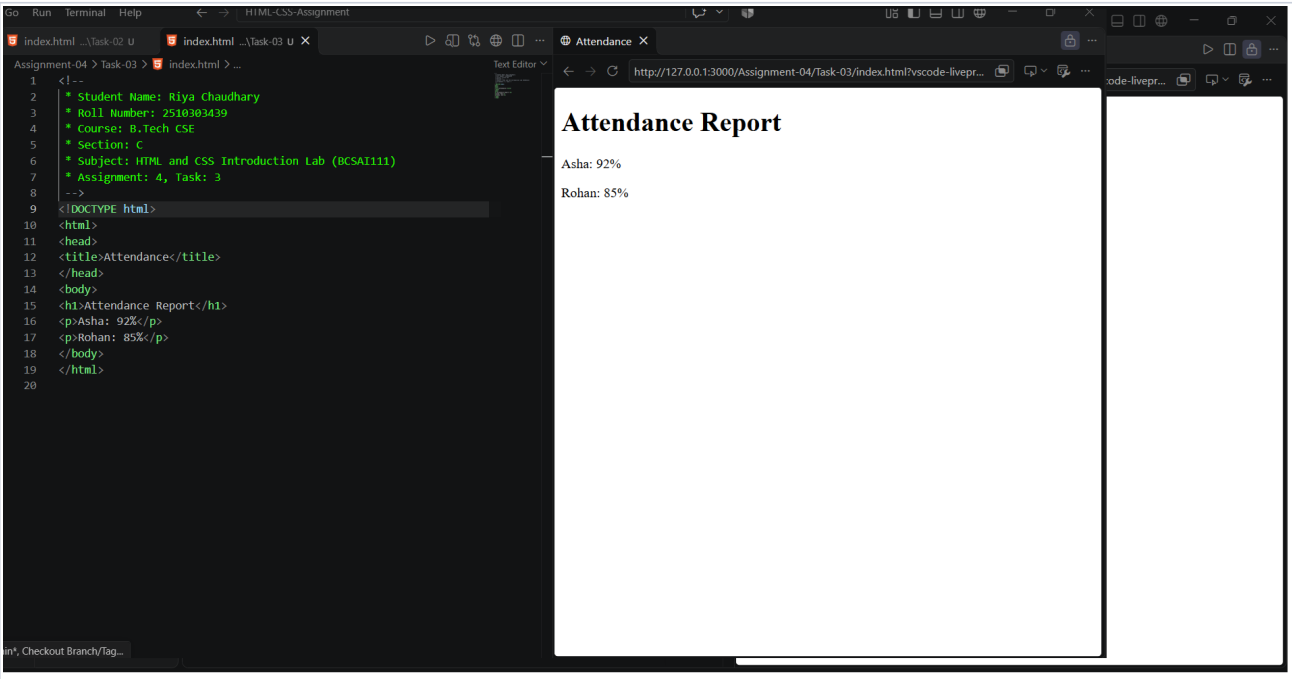

Assignment 5: Links and Images

Assignment Aim / Objective: To link two pages together and to add a picture with alt text.


Question 1

Problem Statement: Create the page with the heading Welcome to My Site. Add a paragraph. Add a link to portfolio.html with the link text portfolio. Open the file in a browser.

Source Code (index.html):

```
<!--
 * Student Name: Riya Chaudhary
 * Roll Number: 2510303439
 * Course: B.Tech CSE
 * Section: C
 * Subject: HTML and CSS Introduction Lab (BCSAI111)
 * Assignment: 5, Task: 1
-->
<!DOCTYPE html>
<html lang="en">
<head>
<meta charset="UTF-8">
<meta name="viewport" content="width=device-width, initial-scale=1.0">
<title>Home</title>
</head>
<body>
<h1>Welcome to My Site</h1>
<p>Please visit my <a href="portfolio.html">portfolio</a>.</p>
</body>
</html>
```

Execution Output Screenshot:

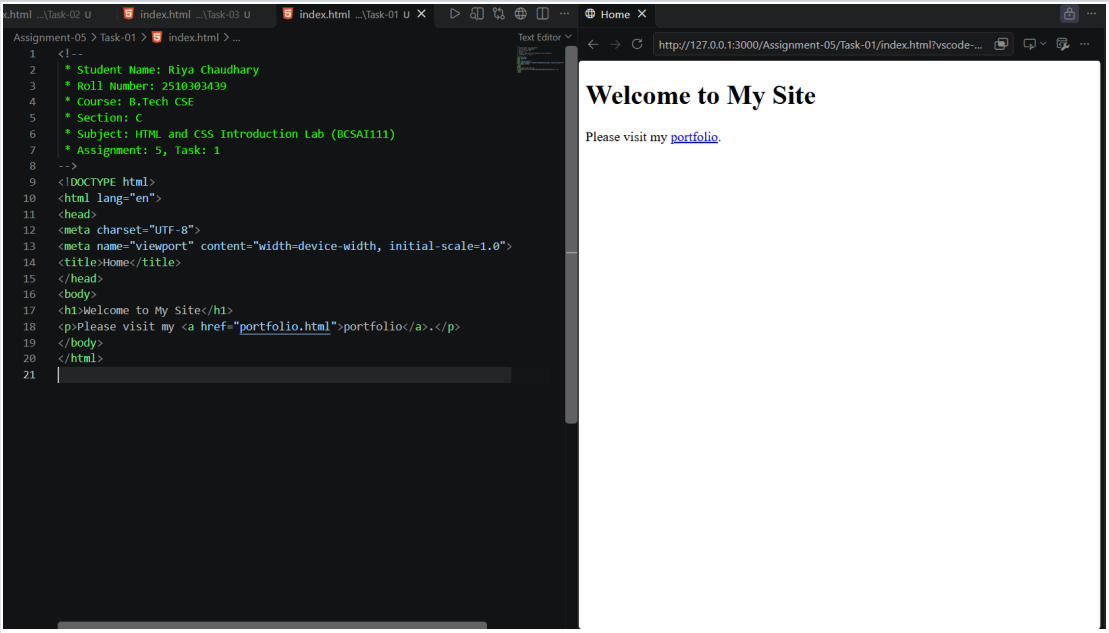


Question 2

Problem Statement: Create the page with a heading. Add a link to home.html with some link text. Open the file in a browser.

Source Code (index.html):

```
<!--
 * Student Name: Riya Chaudhary
 * Roll Number: 2510303439
 * Course: B.Tech CSE
 * Section: C
 * Subject: HTML and CSS Introduction Lab (BCSAI111)
 * Assignment: 5, Task: 2
-->
<!DOCTYPE html>
<html lang="en">
<head>
<meta charset="UTF-8">
<meta name="viewport" content="width=device-width, initial-scale=1.0">
<title>Portfolio</title>
</head>
<body>
<h1>My Portfolio</h1>
<p><a href="home.html">Back to the home page</a></p>
</body>
</html>
```

Execution Output Screenshot:

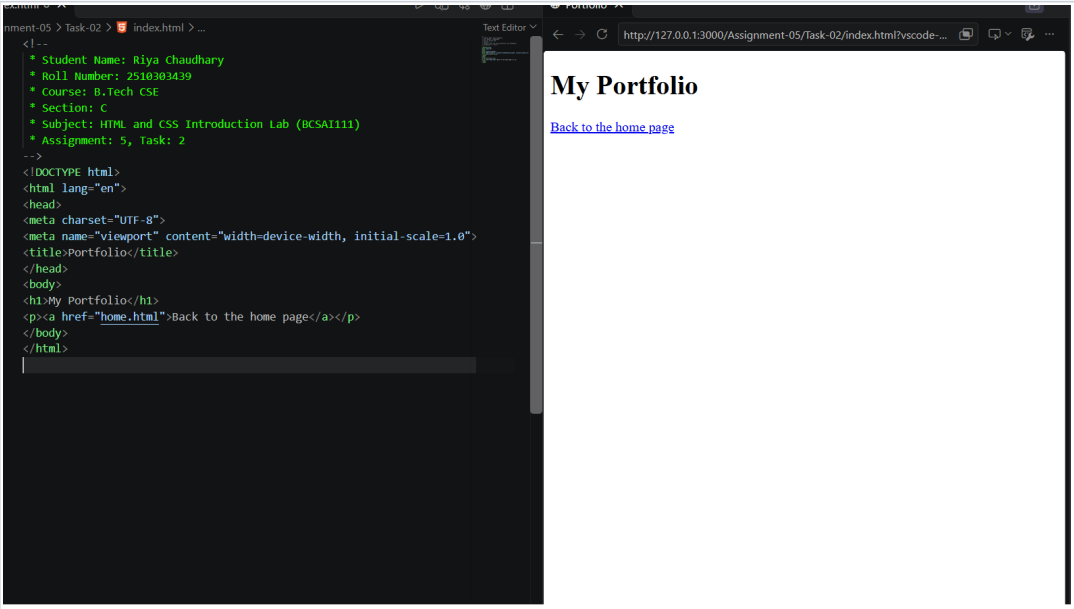


Question 3

Problem Statement: Create the page with a heading. Add an <img> element with the picture address in src. Set the width and height to 200 each. Write alt text that describes the picture. Open the file in a browser.

Source Code (index.html):

```
<!--
 * Student Name: Riya Chaudhary
 * Roll Number: 2510303439
 * Course: B.Tech CSE
 * Section: C
 * Subject: HTML and CSS Introduction Lab (BCSAI111)
 * Assignment: 5, Task: 3
-->
<!DOCTYPE html>
<html lang="en">
<head>
<meta charset="UTF-8">
<meta name="viewport" content="width=device-width, initial-scale=1.0">
<title>Portfolio Image</title>
</head>
<body>
<h1>My Photo</h1>
<img src="https://images.unsplash.com/photo-1791893920857-3f388f13203a?w=600&aut
o=format&fit=crop&q=60&ixlib=rb-4.1.0&ixid=NHwxMjA3fDA%3D"
width="200" height="200" alt=" A beautiful landscape">
</body>
</html>
```

Execution Output Screenshot:

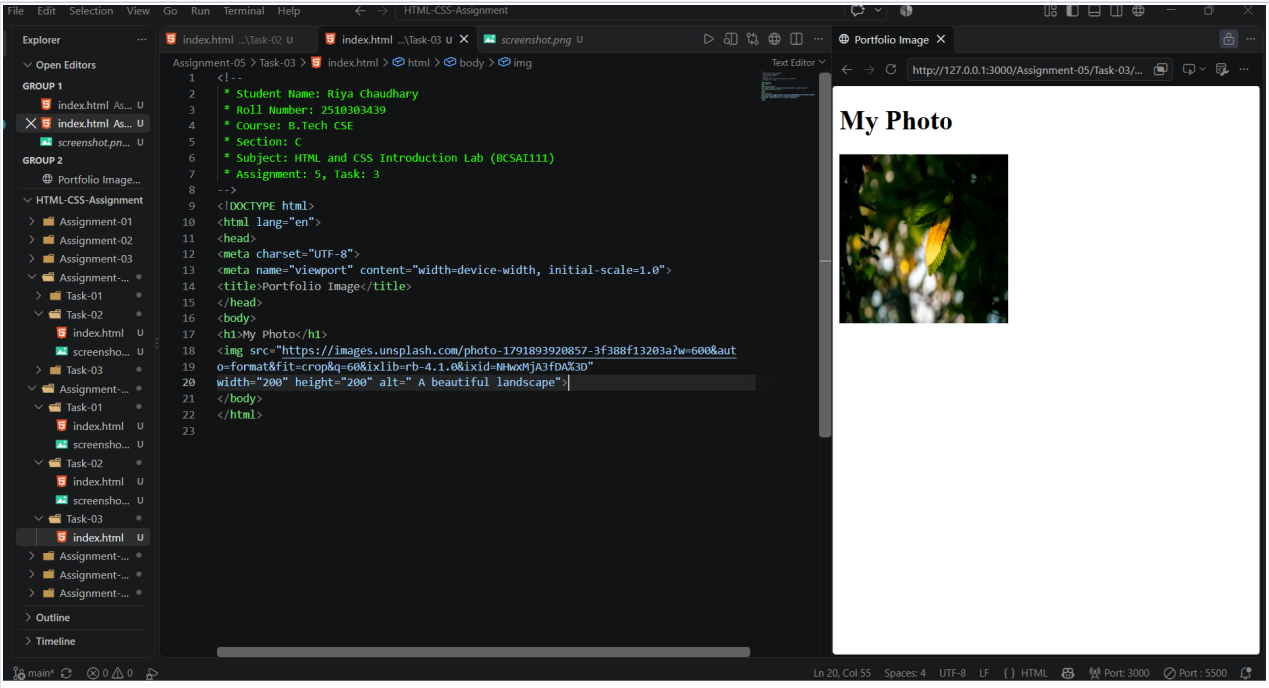

Assignment 6: Types of HTML Lists

Assignment Aim / Objective: To make a bulleted list, a numbered list with a nested list, and a description list.


Question 1

Problem Statement: Create the page with the heading Shopping List. Add a <ul> with three <li> items. Open the file in a browser.

Source Code (index.html):

```
<!--
 * Student Name: Riya Chaudhary
 * Roll Number: 2510303439
 * Course: B.Tech CSE
 * Section: C
 * Subject: HTML and CSS Introduction Lab (BCSAI111)
 * Assignment: 6, Task: 1
-->
<!DOCTYPE html>
<html lang="en">
<head>
<meta charset="UTF-8">
<meta name="viewport" content="width=device-width, initial-scale=1.0">
<title>Shopping List</title>
</head>
<body>
<h1>Shopping List</h1>
<ul>
    <li>Notebook</li>
    <li>Pen</li>
    <li>Bag</li>
</ul>
</body>
</html>
```

Execution Output Screenshot:

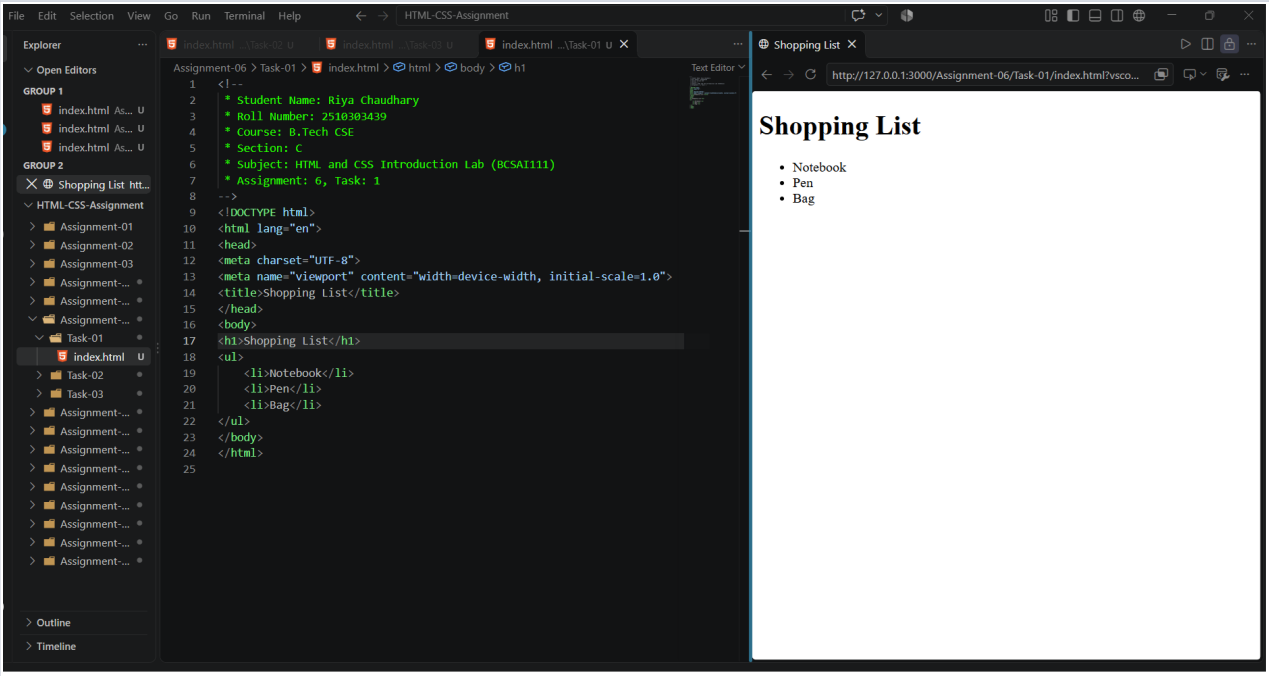


Question 2

Problem Statement: Create the page with the heading Canteen Menu. Add an <ol> with the items Samosa and Sandwich. Inside the Sandwich item, add a nested <ol> with the items Cheese and Vegetable. Open the file in a browser.

Source Code (index.html):

```
<!DOCTYPE html>
<!--
 * Student Name: Riya Chaudhary
 * Roll Number: 2510303439
 * Course: B.Tech CSE
 * Section: C
 * Subject: HTML and CSS Introduction Lab (BCSAI111)
 * Assignment: 6, Task: 2
-->
<html lang="en">
<head>
<meta charset="UTF-8">
<meta name="viewport" content="width=device-width, initial-scale=1.0">
<title>Canteen Menu</title>
</head>
<body>
<h1>Canteen Menu</h1>
<ol>
    <li>Samosa</li>
    <li>Sandwich
        <ol>
            <li>Cheese</li>
            <li>Vegetable</li>
        </ol>
    </li>
</ol>
</body>
</html>
```

Execution Output Screenshot:

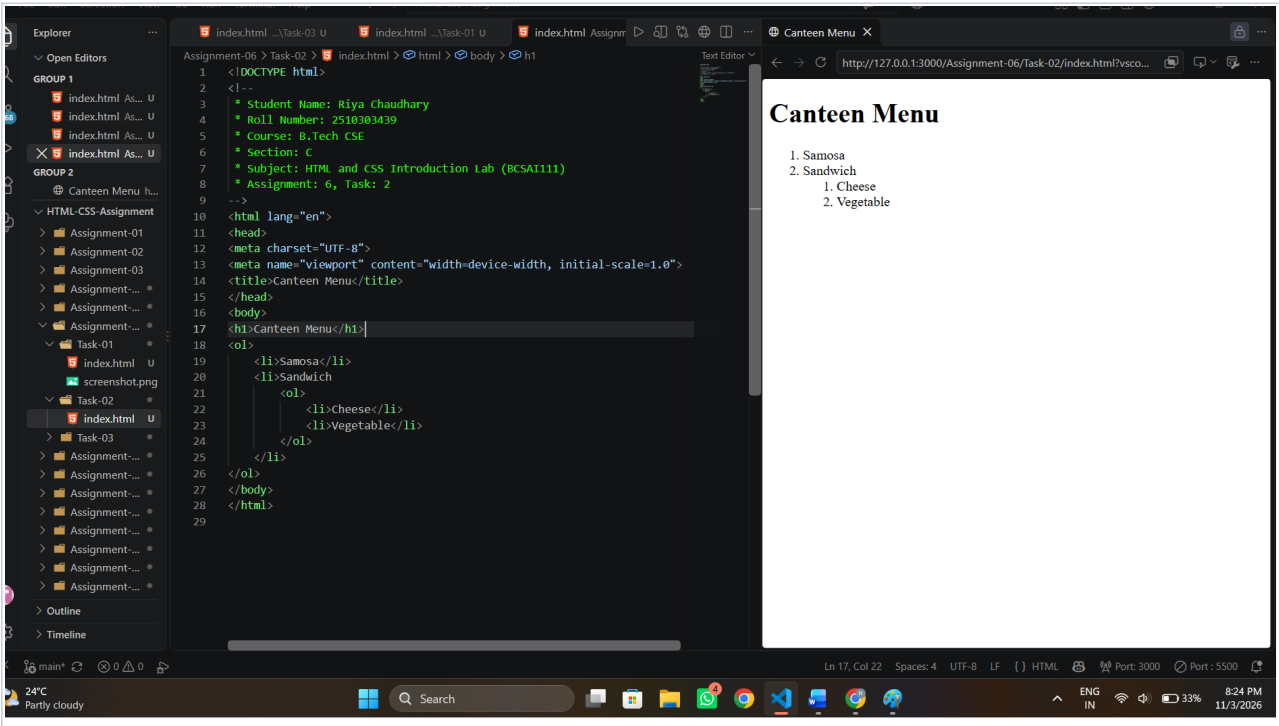


Question 3

Problem Statement: Create the page with a heading. Add a <dl> element. Write each question in a <dt> element. Write each answer in a <dd> element. Open the file in a browser.

Source Code (index.html):

```
<!DOCTYPE html>
<!--
 * Student Name: Riya Chaudhary
 * Roll Number: 2510303439
 * Course: B.Tech CSE
 * Section: C
 * Subject: HTML and CSS Introduction Lab (BCSAI111)
 * Assignment: 6, Task: 3
-->
<html lang="en">
<head>
<meta charset="UTF-8">
<meta name="viewport" content="width=device-width, initial-scale=1.0">
<title>FAQ</title>
</head>
<body>
<h1>Library FAQ</h1>
<dl>
    <dt>How many books can I borrow?</dt>
    <dd>You can borrow up to three books at a time.</dd>
    <dt>Is the library open on Sunday?</dt>
    <dd>No, the library is closed on Sundays.</dd>
</dl>
</body>
</html>
```

Execution Output Screenshot:

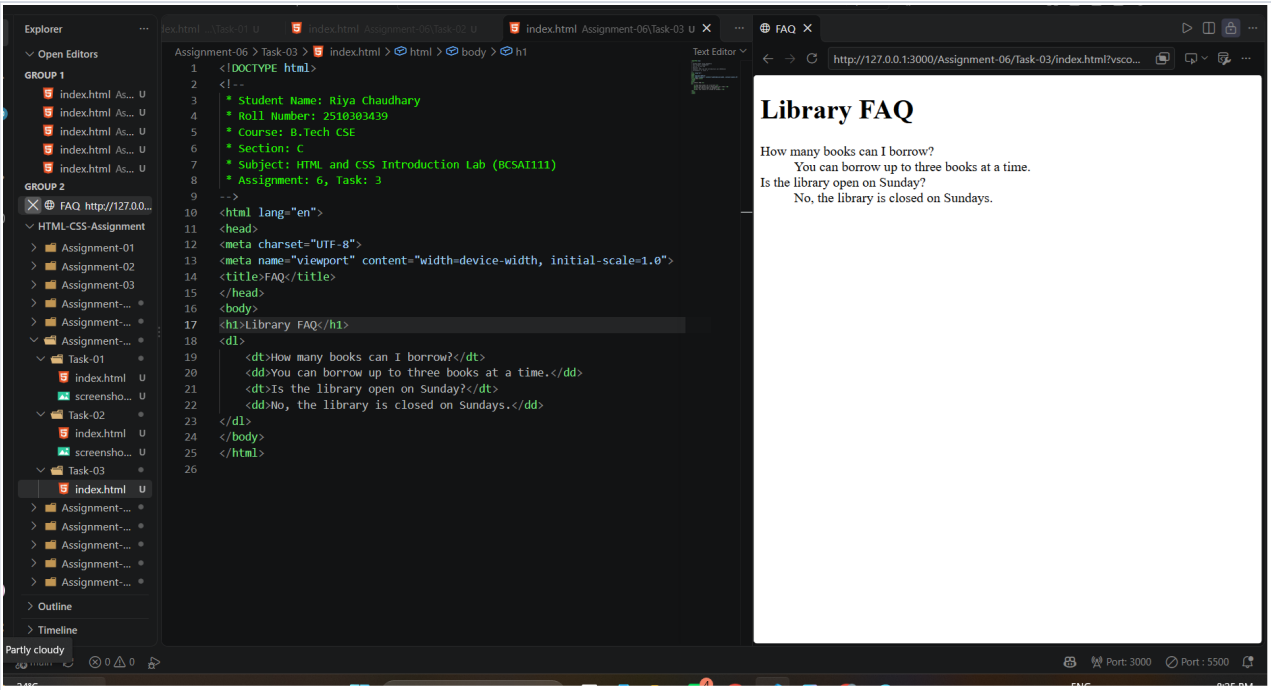

Assignment 7: About Me Page

Assignment Aim / Objective: To build a short About Me page with semantic tags, an about section and a contact link.

Question 1

Problem Statement: Create a <header> with an h1 and a <nav>. Add two links in the nav: About to #about and Contact to #contact. Add an empty <main> and a <footer>. Link style.css to style the page. Open the file in a browser.

Source Code (index.html):

```
<!--
 * Student Name: Riya Chaudhary
 * Roll Number: 2510303439
 * Course: B.Tech CSE
 * Section: C
 * Subject: HTML and CSS Introduction Lab (BCSAI111)
 * Assignment: 7, Task: 1
-->
<!DOCTYPE html>
<html lang="en">
<head>
<meta charset="UTF-8">
<meta name="viewport" content="width=device-width, initial-scale=1.0">
<title>About Me</title>
<link rel="stylesheet" href="style.css">
</head>
<body>

<header>
    <h1>Riya Chaudhary</h1>

    <nav>
        <a href="#about">About</a>
        <a href="#contact">Contact</a>
    </nav>
</header>

<main>
</main>

<footer>
    <p>&copy; 2026 Riya Chaudhary. All rights reserved.</p>
</footer>
</body>
</html>
```

Source Code (style.css):

```
body {
    font-family: Arial, sans-serif;
    margin: 0;
}


header {
    background-color: #1d3557;
    color: white;
    padding: 12px 20px;
}


nav a {
    color: white;
    margin-right: 16px;
}

main {
    padding: 20px;
    min-height: 150px;
}

footer {
    background-color: #f1f1f1;
    padding: 12px 20px;
}
```

Execution Output Screenshot:

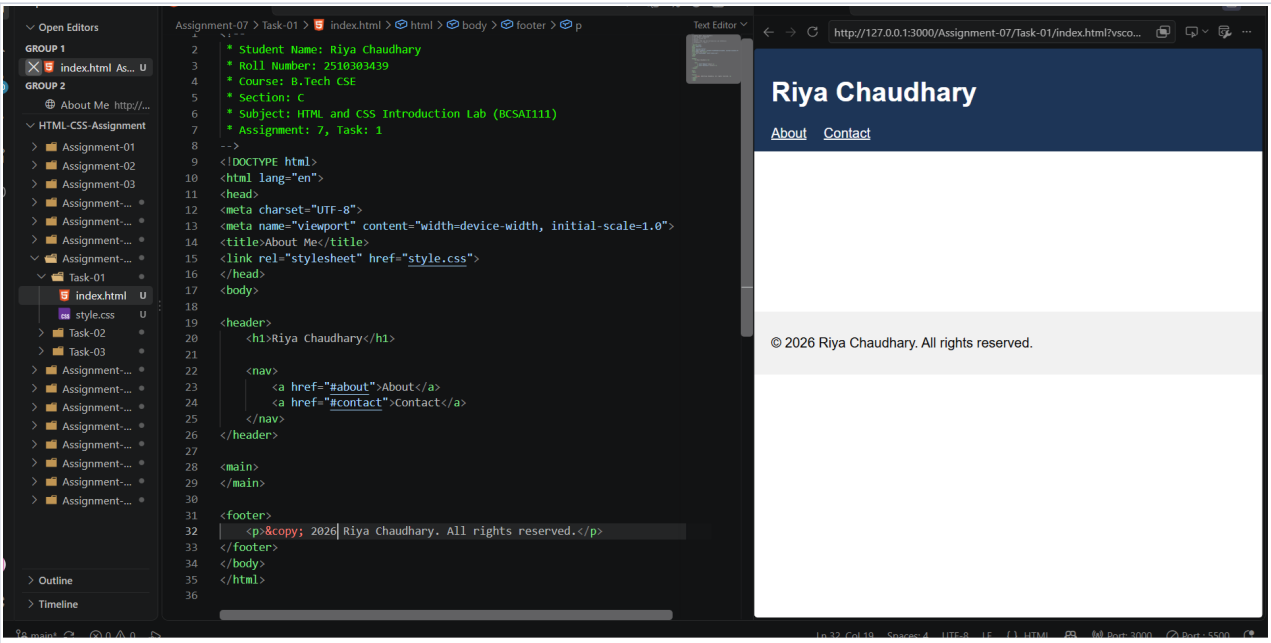

Question 2

Problem Statement: Add a <section> with the id about inside <main>. Add an h2 heading About me. Add one paragraph about yourself. Open the file in a browser.

Source Code (index.html):

```
<!--
 * Student Name: Riya Chaudhary
 * Roll Number: 2510303439
 * Course: B.Tech CSE
 * Section: C
 * Subject: HTML and CSS Introduction Lab (BCSAI111)
 * Assignment: 7, Task: 2
-->
<!DOCTYPE html>
<html lang="en">
<head>
<meta charset="UTF-8">
<meta name="viewport" content="width=device-width, initial-scale=1.0">
<title>About Me</title>
<link rel="stylesheet" href="style.css">
</head>
<body>

<header>
    <h1>Riya Chaudhary</h1>

    <nav>
        <a href="#about">About</a>
        <a href="#contact">Contact</a>
    </nav>
</header>

<main>

    <section id="about">
        <h2>About me</h2>
        <p>I am a B.Tech CSE student who enjoys learning
        web development and solving programming problems.</p>
    </section>
</main>

<footer>
    <p>&copy; 2026 Riya Chaudhary. All rights reserved.</p>
</footer>
</body>
</html>
```

Source Code (style.css):

```
body {
    font-family: Arial, sans-serif;
    margin: 0;
}


header {
    background-color: #1d3557;
    color: white;
    padding: 12px 20px;
}

nav a {
    color: white;
    margin-right: 16px;
}

main {
    padding: 20px;
    min-height: 150px;
}

footer {
    background-color: #f1f1f1;
    padding: 12px 20px;
}
```

Execution Output Screenshot:

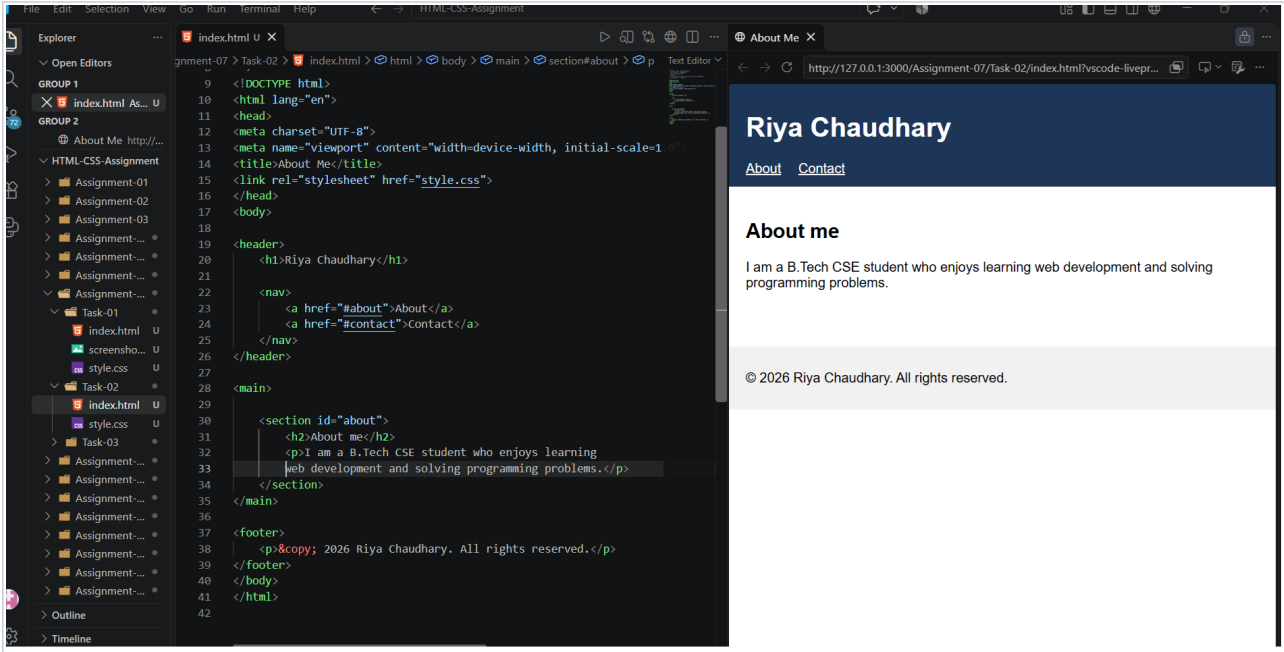

Question 3

Problem Statement: Give the footer the id contact. Add a paragraph inside the footer. Add a link with mailto: in the href and the email address as the link text. Open the file in a browser and click Contact in the nav.

Source Code (index.html):

```
<!DOCTYPE html>
<!--
 * Student Name: Riya Chaudhary
 * Roll Number: 2510303439
 * Course: B.Tech CSE
 * Section: C
 * Subject: HTML and CSS Introduction Lab (BCSAI111)
 * Assignment: 7, Task: 3
-->
<html lang="en">
<head>
<meta charset="UTF-8">
<meta name="viewport" content="width=device-width, initial-scale=1.0">
<title>About Me</title>
<link rel="stylesheet" href="style.css">
</head>
<body>

<header>
    <h1>Riya Chaudhary</h1>
    <nav>
        <a href="#about">About</a>
        <a href="#contact">Contact</a>
    </nav>
</header>

<main>

    <section id="about">
        <h2>About me</h2>
        <p>I am a B.Tech CSE student who enjoys learning web development and solving programming prob
    lems.</p>
    </section>
</main>

<footer id="contact">
    <p>Email me at <a href="mailto:riachaudhary188@gmail.com">riachaudhary188@gmail.com</a></p>
</footer>
</body>
</html>
```

Source Code (style.css):

```
body {
    font-family: Arial, sans-serif;
    margin: 0;
}


header {
    background-color: #1d3557;
    color: white;
    padding: 12px 20px;
}

nav a {
    color: white;
    margin-right: 16px;
}

main {
    padding: 20px;
    min-height: 150px;
}

footer {
    background-color: #f1f1f1;
    padding: 12px 20px;
}
```

Execution Output Screenshot:

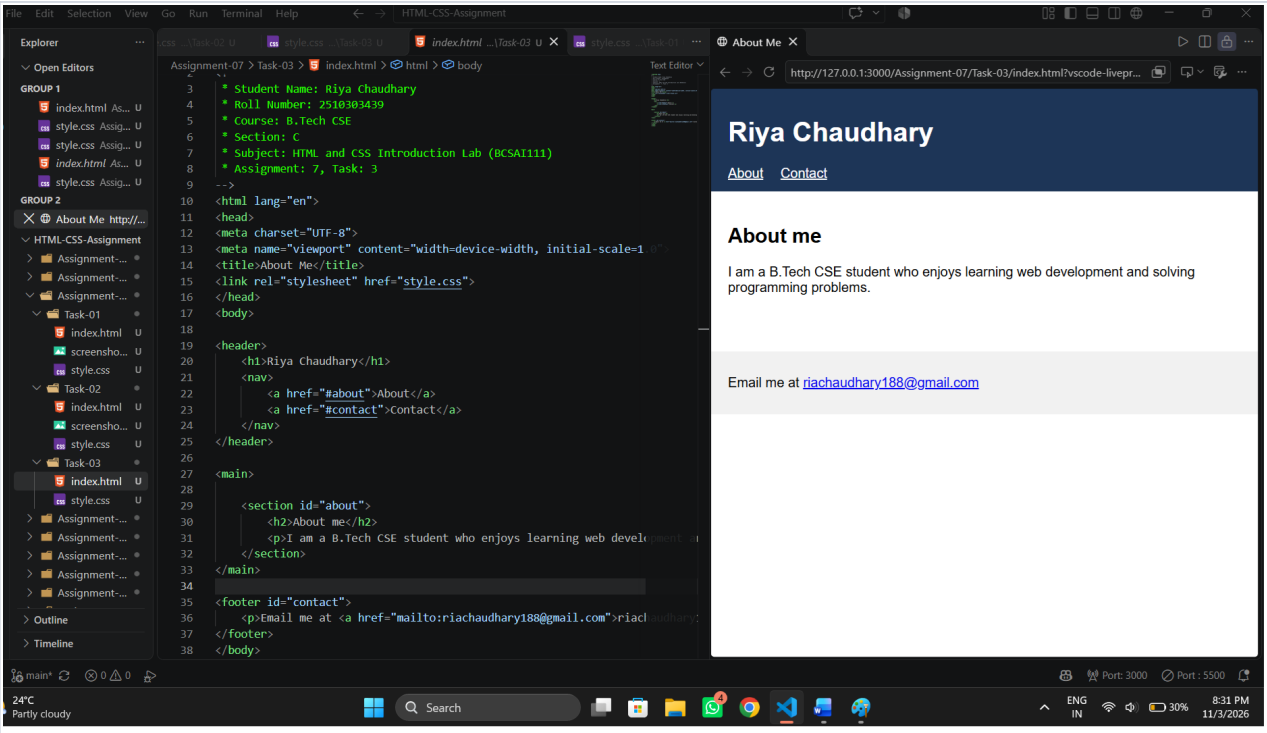

Assignment 8: Sign-Up Forms and Choices

Assignment Aim / Objective: To make a labelled form with text, email and password fields, choices and a submit button.

Question 1

Problem Statement: Create a form with method post and action thanks.html. Add labelled fields for full name, email and password. Link each label to its field with the for and id attributes. Link style.css to align the labels. Open the file in a browser.

Source Code (index.html):

```
<!DOCTYPE html>
<!--
 * Student Name: Riya Chaudhary
 * Roll Number: 2510303439
 * Course: B.Tech CSE
 * Section: C
 * Subject: HTML and CSS Introduction Lab (BCSAI111)
 * Assignment: 8, Task: 1
-->
<html lang="en">
<head>
<meta charset="UTF-8">
<meta name="viewport" content="width=device-width, initial-scale=1.0">
<title>Sign Up</title>
<link rel="stylesheet" href="style.css">
</head>
<body>
<h1>Sign Up</h1>


<form method="post" action="thanks.html">
    <label for="fullname">Full name</label>
    <input type="text" id="fullname" name="fullname"><br>
    <label for="email">Email</label>
    <input type="email" id="email" name="email"><br>
    <label for="password">Password</label>
    <input type="password" id="password" name="password"><br>
</form>
</body>
</html>
```

Source Code (style.css):

```
label {
    display: inline-block;
    width: 120px;
    margin-bottom: 10px;
}

button {
    margin-top: 10px;
}
```

Execution Output Screenshot:

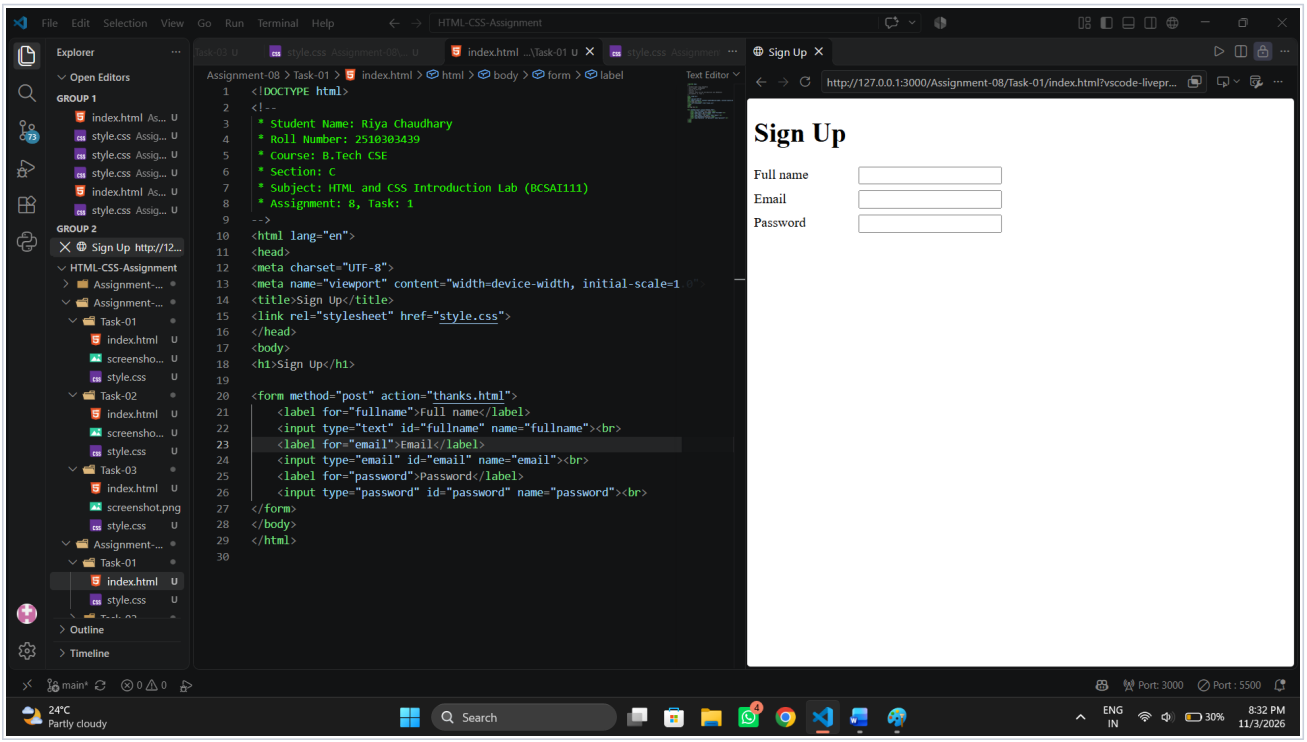

Question 2


Problem Statement: Add two radio buttons with the same name gender: Female and Male. Add a label for each radio button. Add a select dropdown named course with the options BCA and B.Tech. Open the file in a browser.

Source Code (index.html):

```
<!--
 * Student Name: Riya Chaudhary
 * Roll Number: 2510303439
 * Course: B.Tech CSE
 * Section: C
 * Subject: HTML and CSS Introduction Lab (BCSAI111)
 * Assignment: 8, Task: 2
-->
<!DOCTYPE html>
<html lang="en">
<head>
<meta charset="UTF-8">
<meta name="viewport" content="width=device-width, initial-scale=1.0">
<title>Choices</title>
</head>
<body>
<h1>Choices</h1>

<form>
    <p>Gender:</p>
    <input type="radio" id="female" name="gender" value="female">
    <label for="female">Female</label>
    <input type="radio" id="male" name="gender" value="male">
    <label for="male">Male</label>
    <p>
        <label for="course">Course:</label>
        <select id="course" name="course">
            <option value="bca">BCA</option>
            <option value="btech">B.Tech</option>
        </select>
    </p>
</form>
</body>
</html>
```

Execution Output Screenshot:

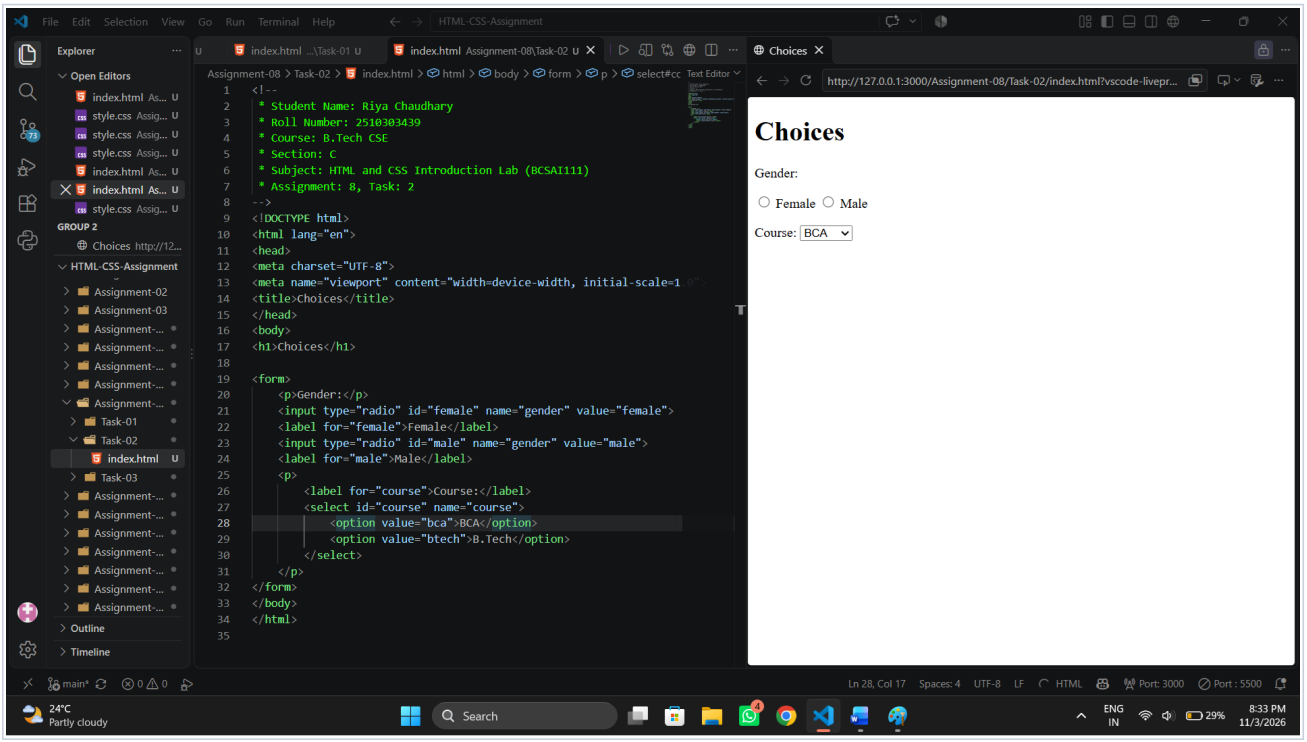

Question 3

Problem Statement: Add a full name field and an email field. Add the required attribute to both fields. Add a placeholder to the name field. Add a Submit button. Open the file in a browser and click Submit with an empty field.

Source Code (index.html):

```
<!--
 * Student Name: Riya Chaudhary
 * Roll Number: 2510303439
 * Course: B.Tech CSE
 * Section: C
 * Subject: HTML and CSS Introduction Lab (BCSAI111)
 * Assignment: 8, Task: 3
-->
<!DOCTYPE html>
<html lang="en">
<head>
<meta charset="UTF-8">
<meta name="viewport" content="width=device-width, initial-scale=1.0">
<title>Sign Up Required</title>
<link rel="stylesheet" href="style.css">
</head>
<body>
<h1>Sign Up</h1>


<form>
    <label for="fullname">Full name</label>
    <input type="text" id="fullname" name="fullname" placeholder="Enter your full name" required><br>
    <label for="email">Email</label>
    <input type="email" id="email" name="email" required><br>
    <button type="submit">Submit</button>
</form>
</body>
</html>
```

Source Code (style.css):

```
label {
    display: inline-block;
    width: 120px;
    margin-bottom: 10px;
}

button {
    margin-top: 10px;
}
```

Execution Output Screenshot:

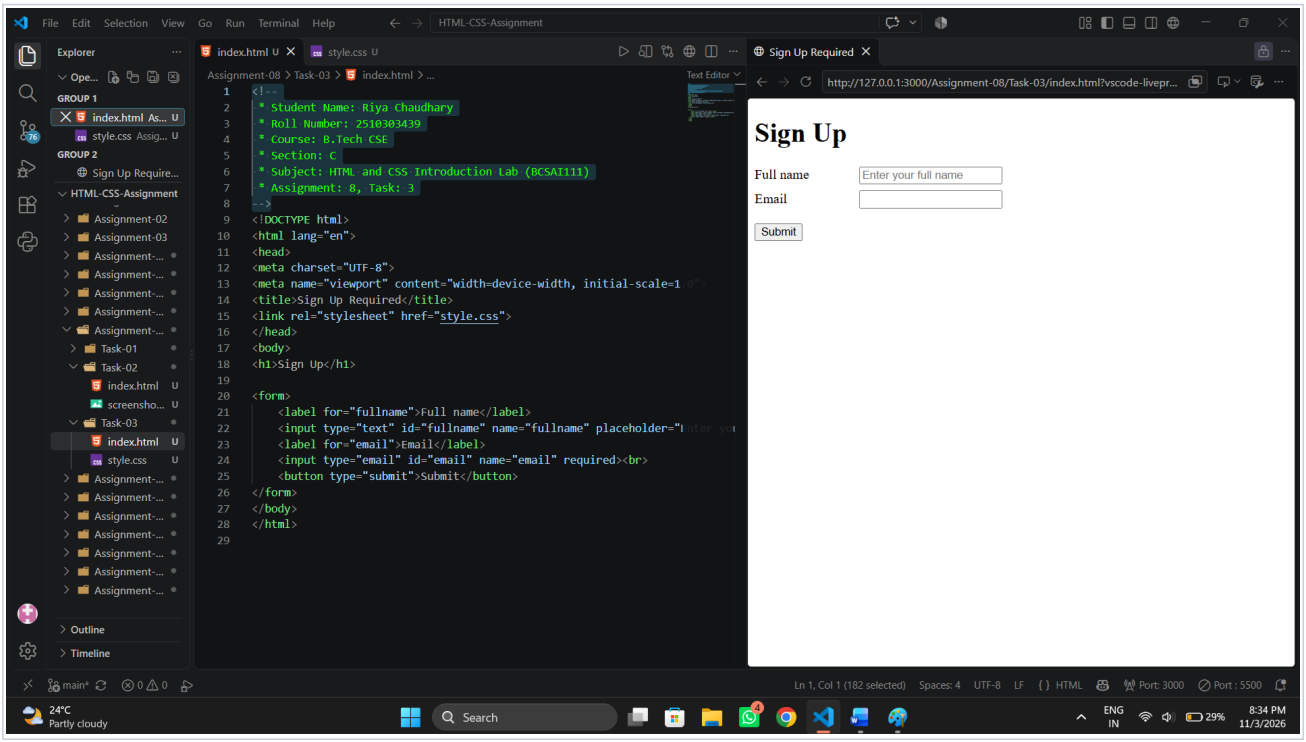

Assignment 9: Tables with Headers and Footers

Assignment Aim / Objective: To build a table with a caption, a header, rows and a footer, and to add scope attributes.

Question 1

Problem Statement: Add a table with the caption Marks of Class A. Put the header row Name, Maths, Science in <thead>. Put three student rows in <tbody>. Link style.css to add borders and padding. Open the file in a browser.

Source Code (index.html):

```
<!--
 * Student Name: Riya Chaudhary
 * Roll Number: 2510303439
 * Course: B.Tech CSE
 * Section: C
 * Subject: HTML and CSS Introduction Lab (BCSAI111)
 * Assignment: 9, Task: 1
-->
<!DOCTYPE html>
<html lang="en">
<head>
<meta charset="UTF-8">
<meta name="viewport" content="width=device-width, initial-scale=1.0">
<title>Marks</title>
<link rel="stylesheet" href="style.css">
</head>
<body>

<table>
    <caption>Marks of Class A</caption>
    <thead>
        <tr><th>Name</th><th>Maths</th><th>Science</th></tr>
    </thead>
    <tbody>
        <tr><td>Asha</td><td>78</td><td>85</td></tr>
        <tr><td>Rohan</td><td>64</td><td>70</td></tr>
        <tr><td>Neha</td><td>91</td><td>88</td></tr>
    </tbody>
</table>
</body>
</html>
```


Source Code (style.css):

```
table {
    border-collapse: collapse;
}

th, td {
    border: 1px solid #333;
    padding: 8px 16px;
    text-align: left;
}

thead, tfoot {
    background-color: #e8eef7;
}
```

Execution Output Screenshot:

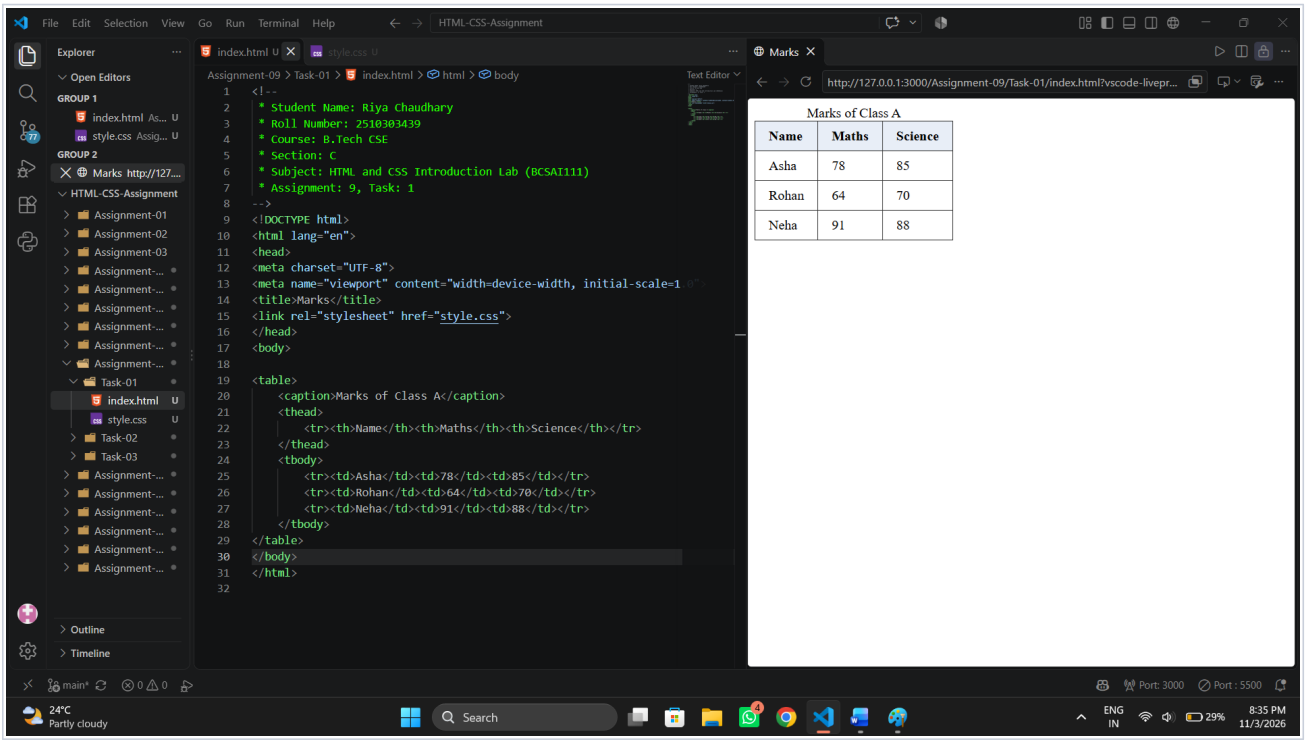

Question 2

Problem Statement: Use the same caption and header as the first table. Keep the Asha and Rohan rows only. Calculate the Maths average = (78 + 64) / 2 = 71. Calculate the Science average = (85 + 70) / 2 = 77.5. Add a <tfoot> row called Class average with the two averages. Open the file in a browser.

Source Code (index.html):

```
<!DOCTYPE html>
<!--
 * Student Name: Riya Chaudhary
 * Roll Number: 2510303439
 * Course: B.Tech CSE
 * Section: C
 * Subject: HTML and CSS Introduction Lab (BCSAI111)
 * Assignment: 9, Task: 2
-->
<html lang="en">
<head>
<meta charset="UTF-8">
<meta name="viewport" content="width=device-width, initial-scale=1.0">
<title>Marks Average</title>
<link rel="stylesheet" href="style.css">
</head>
<body>

<table>
    <caption>Marks of Class A</caption>
    <thead>
        <tr><th>Name</th><th>Maths</th><th>Science</th></tr>
    </thead>
    <tbody>
        <tr><td>Asha</td><td>78</td><td>85</td></tr>
        <tr><td>Rohan</td><td>64</td><td>70</td></tr>
    </tbody>
    <tfoot>
        <tr><th>Class average</th><td>71</td><td>77.5</td></tr>
    </tfoot>
</table>
</body>
</html>
```


Source Code (style.css):

```
table {
    border-collapse: collapse;
}

th, td {
    border: 1px solid #333;
    padding: 8px 16px;
    text-align: left;
}

thead, tfoot {
    background-color: #e8eef7;
}
```

Execution Output Screenshot:

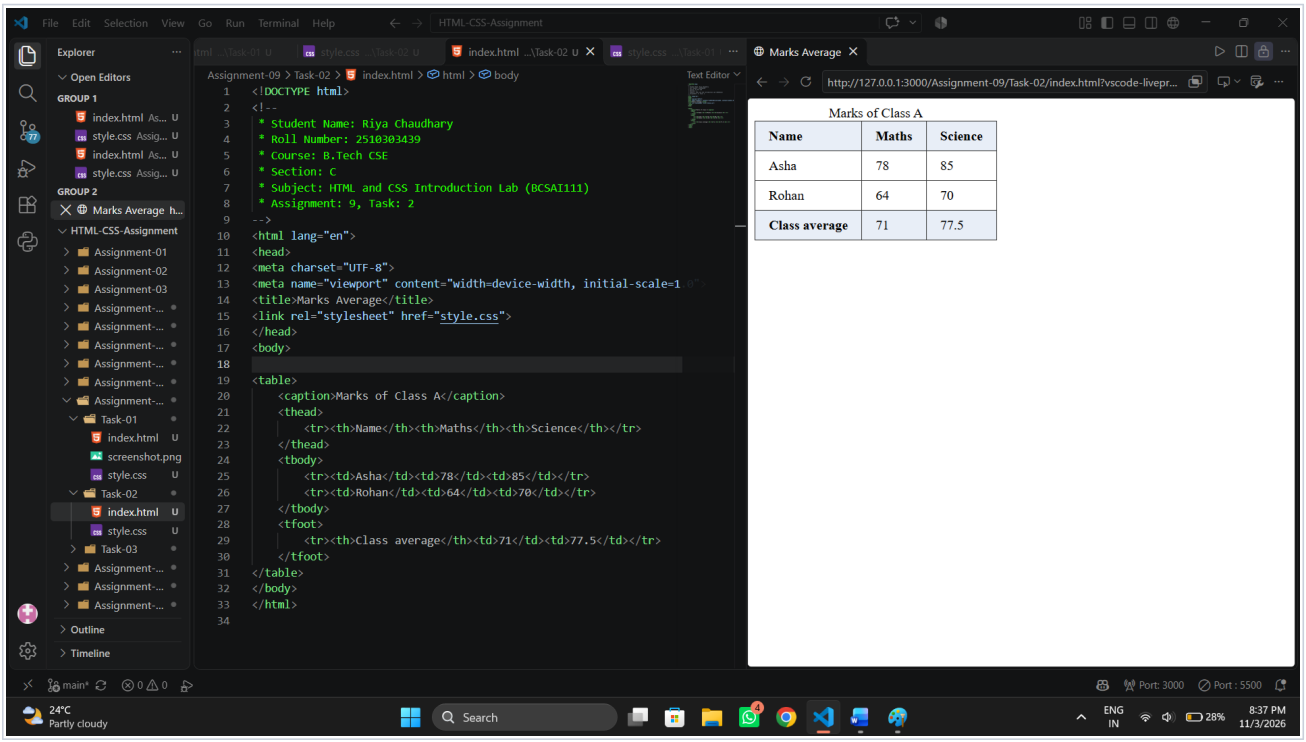

Question 3

Problem Statement: Use the same caption, header and Asha and Rohan rows, without the footer row. Add scope="col" to each header cell. Make each name cell a <th> with scope="row". Open the file in a browser and check the scope attributes in the Elements panel.

Source Code (index.html):

```
<!--
 * Student Name: Riya Chaudhary
 * Roll Number: 2510303439
 * Course: B.Tech CSE
 * Section: C
 * Subject: HTML and CSS Introduction Lab (BCSAI111)
 * Assignment: 9, Task: 3
-->
<!DOCTYPE html>
<html lang="en">
<head>
<meta charset="UTF-8">
<meta name="viewport" content="width=device-width, initial-scale=1.0">
<title>Marks Accessible</title>
<link rel="stylesheet" href="style.css">
</head>
<body>

<table>
    <caption>Marks of Class A</caption>
    <thead>
        <tr><th scope="col">Name</th><th scope="col">Maths</th><th scope="col">Science</th></tr>
    </thead>
    <tbody>
        <tr><th scope="row">Asha</th><td>78</td><td>85</td></tr>
        <tr><th scope="row">Rohan</th><td>64</td><td>70</td></tr>
    </tbody>
</table>
</body>
</html>
```


Source Code (style.css):

```
table {
    border-collapse: collapse;
}

th, td {
    border: 1px solid #333;
    padding: 8px 16px;
    text-align: left;
}

thead, tfoot {
    background-color: #e8eef7;
}
```

Execution Output Screenshot:

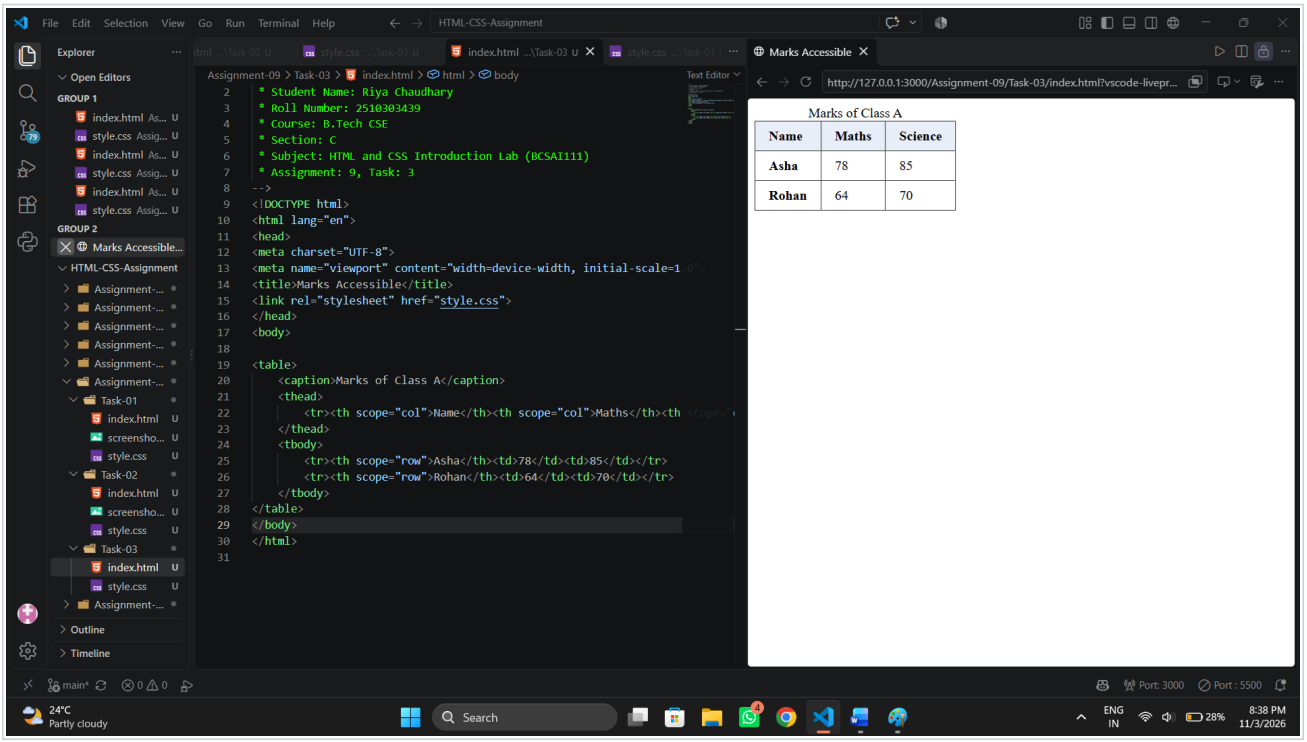

Assignment 10: CSS Fundamentals

Assignment Aim / Objective: To apply CSS in three ways (inline, internal and linked) and to use selectors and text styles.

Question 1


Problem Statement: In the head, add a <style> block that makes h1 navy and gives the class highlight a yellow background. Add an h1 heading in the body. Add a paragraph with an inline style that makes its text red. Add a paragraph with the class highlight. Open the file in a browser.

Source Code (index.html):

```
<!--
 * Student Name: Riya Chaudhary
 * Roll Number: 2510303439
 * Course: B.Tech CSE
 * Section: C
 * Subject: HTML and CSS Introduction Lab (BCSAI111)
 * Assignment: 10, Task: 1
-->
<!DOCTYPE html>
<html lang="en">
<head>
<meta charset="UTF-8">
<meta name="viewport" content="width=device-width, initial-scale=1.0">
<title>Inline and Internal CSS</title>
<style>
    h1 {
        color: navy;
    }

    .highlight {
        background-color: yellow;
    }
</style>
</head>
<body>
<h1>CSS Fundamentals</h1>
<p style="color: red;">This paragraph uses an inline style.</p>
<p class="highlight">This paragraph uses the highlight class.</p>
</body>
</html>
```

Execution Output Screenshot:

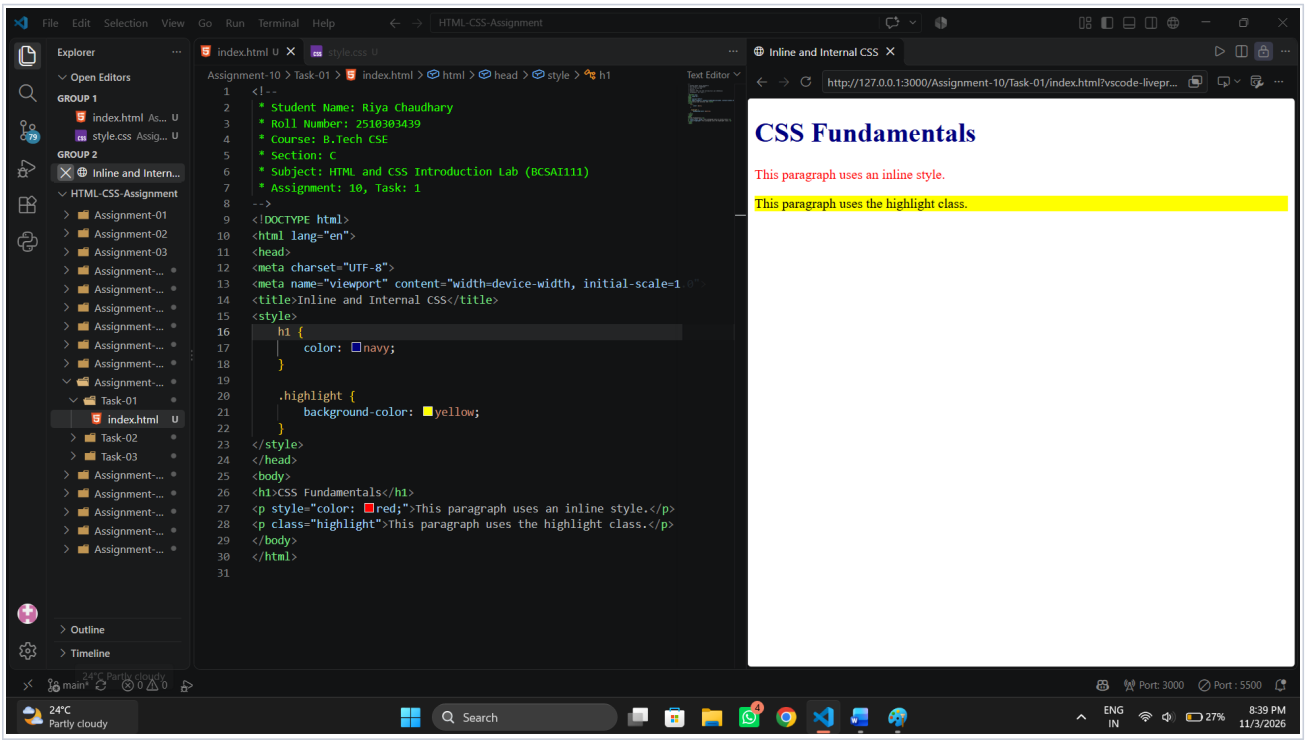

Question 2

Problem Statement: Create style.css. Make all h1 elements navy. Make the class note italic. Underline the id title. Set all p elements to font size 18px and a grey colour. Link the file to a test page and open it in a browser.

Source Code (index.html):

```
<!DOCTYPE html>
<!--
 * Student Name: Riya Chaudhary
 * Roll Number: 2510303439
 * Course: B.Tech CSE
 * Section: C
 * Subject: HTML and CSS Introduction Lab (BCSAI111)
 * Assignment: 10, Task: 2
-->
<html lang="en">
<head>
<meta charset="UTF-8">
<meta name="viewport" content="width=device-width, initial-scale=1.0">
<title>Stylesheet Test</title>
<link rel="stylesheet" href="style.css">
</head>
<body>
<h1 id="title">Stylesheet Test</h1>
<p class="note">This paragraph is italic.</p>
<p>This paragraph is grey and 18px.</p>
</body>
</html>
```

Source Code (style.css):


```
h1 {
    color: navy;
}

.note {
    font-style: italic;
}

#title {
    text-decoration: underline;
}

p {
    font-size: 18px;
    color: grey;
}
```

Execution Output Screenshot:

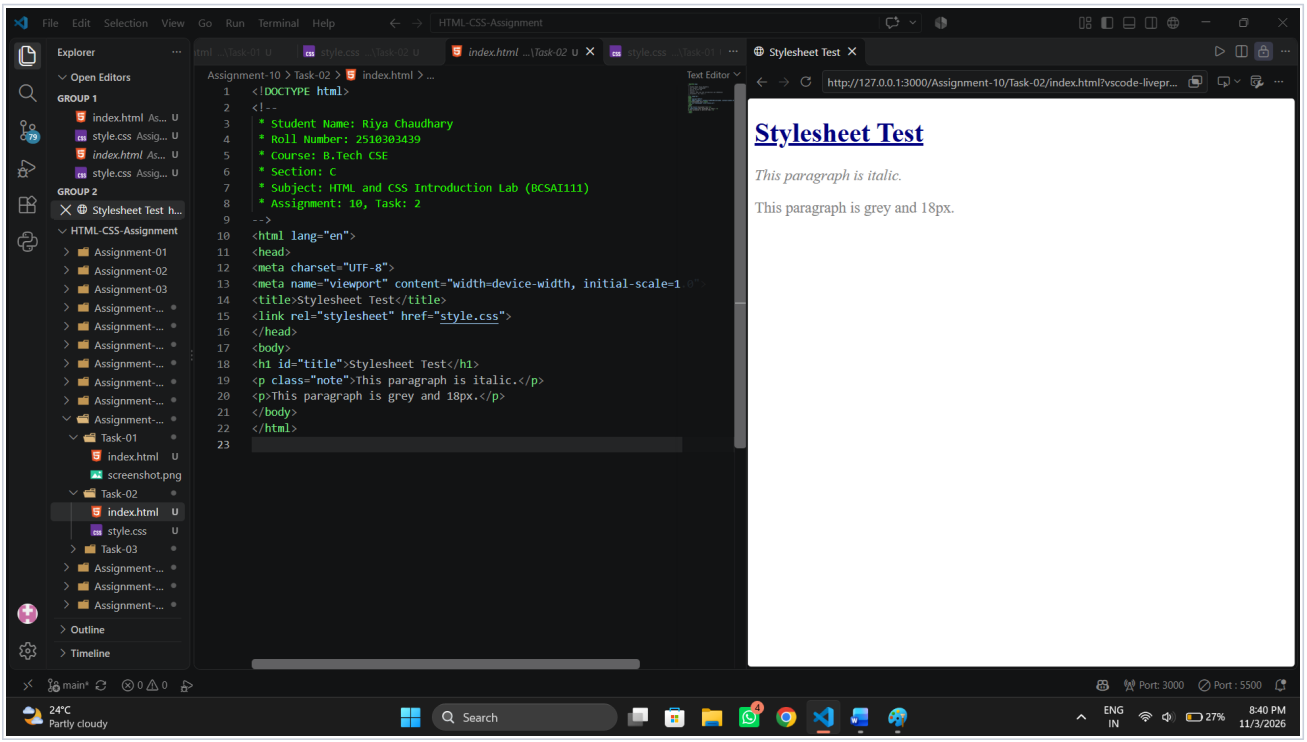

Question 3

Problem Statement: Link style.css in the head. Add an h1 with the id title. Add two paragraphs with the class note. Open the file in a browser.

Source Code (index.html):

```
<!--
 * Student Name: Riya Chaudhary
 * Roll Number: 2510303439
 * Course: B.Tech CSE
 * Section: C
 * Subject: HTML and CSS Introduction Lab (BCSAI111)
 * Assignment: 10, Task: 3
-->
<!DOCTYPE html>
<html lang="en">
<head>
<meta charset="UTF-8">
<meta name="viewport" content="width=device-width, initial-scale=1.0">
<title>Linked CSS</title>
<link rel="stylesheet" href="style.css">
</head>
<body>
<h1 id="title">Linked Stylesheet</h1>
<p class="note">This is the first note.</p>
<p class="note">This is the second note.</p>
</body>
</html>
```

Source Code (style.css):


```
h1 {
    color: navy;
}

.note {
    font-style: italic;
}

#title {
    text-decoration: underline;
}

p {
    font-size: 18px;
    color: grey;
}
```

Execution Output Screenshot:

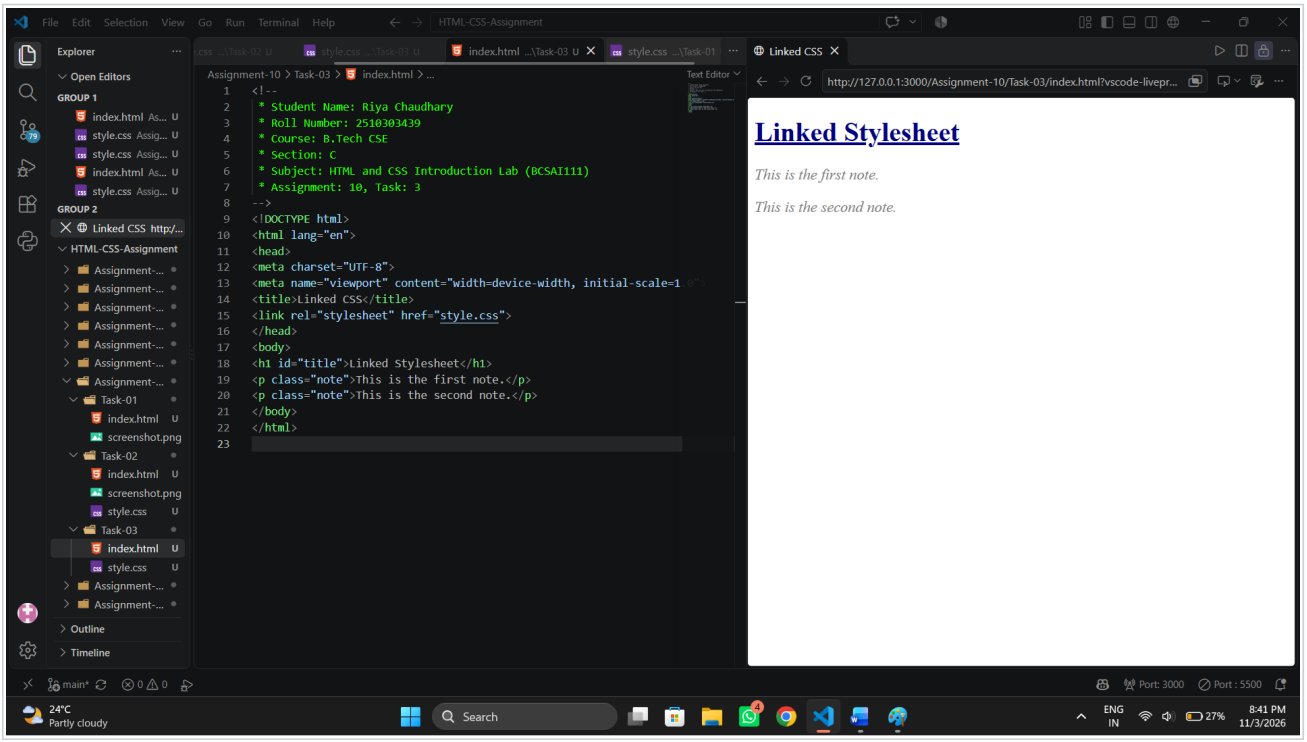

Assignment 11: Units and CSS Variables

Assignment Aim / Objective: To use CSS units and to store colours and spacing in variables.

Question 1

Problem Statement: Add a div box 200px wide and 40px high with a background colour. Add a div box 50% wide and 40px high with a background colour. Add a paragraph of any text. Set the paragraph font size to 1.5rem. Open the file in a browser.

Source Code (index.html):

```
<!--
 * Student Name: Riya Chaudhary
 * Roll Number: 2510303439
 * Course: B.Tech CSE
 * Section: C
 * Subject: HTML and CSS Introduction Lab (BCSAI111)
 * Assignment: 11, Task: 1
-->
<!DOCTYPE html>
<html lang="en">
<head>
<meta charset="UTF-8">
<meta name="viewport" content="width=device-width, initial-scale=1.0">
<title>Units</title>
<link rel="stylesheet" href="style.css">
</head>
<body>
<div class="box1"></div>
<div class="box2"></div>
<p>This text is 1.5rem in size.</p>
</body>
</html>
```


Source Code (style.css):

```
.box1 {
    width: 200px;
    height: 40px;
    background-color: lightblue;
    margin-bottom: 10px;
}

.box2 {
    width: 50%;
    height: 40px;
    background-color: lightgreen;
}

p {
    font-size: 1.5rem;
}
```

Execution Output Screenshot:

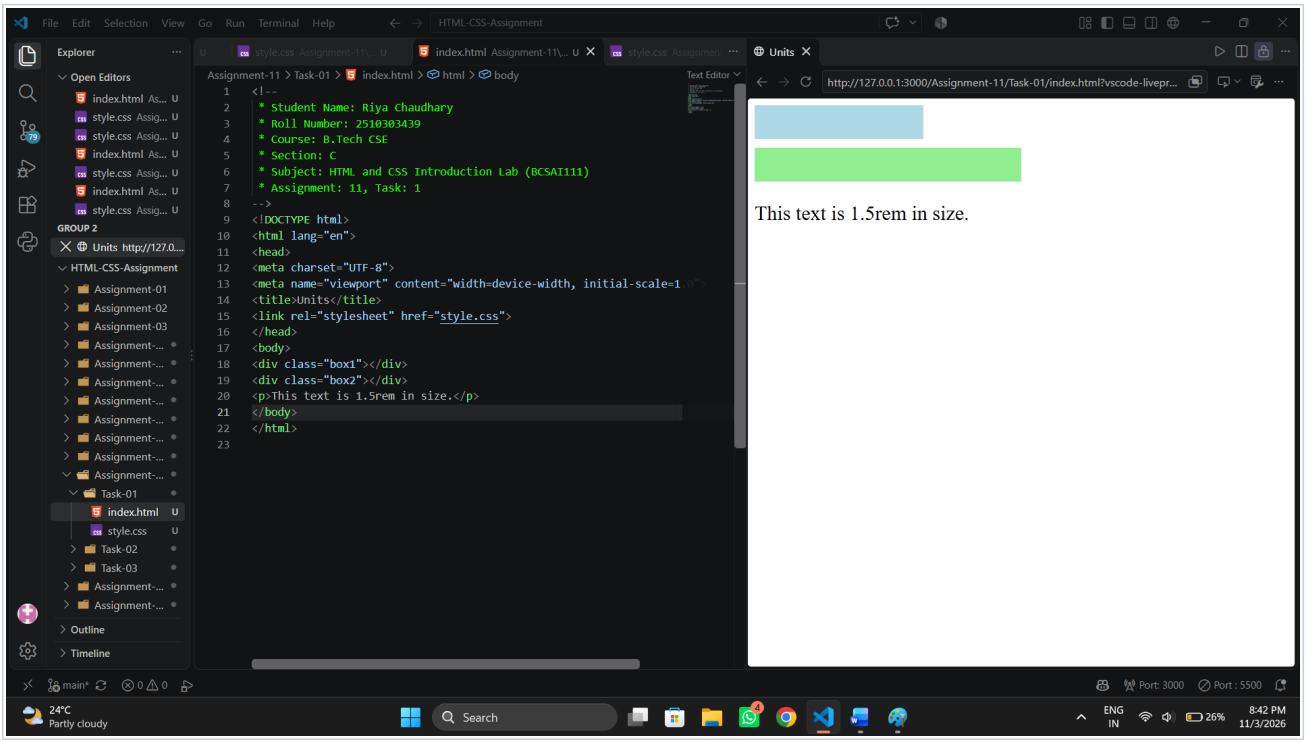

Question 2

Problem Statement: In :root, define --main-color as #1d3557, --accent-color as #e63946 and --page-padding as 20px. Use var() for the body colour and padding. Use var() for the h1 colour. Open the file in a browser.

Source Code (index.html):

```
<!--
 * Student Name: Riya Chaudhary
 * Roll Number: 2510303439
 * Course: B.Tech CSE
 * Section: C
 * Subject: HTML and CSS Introduction Lab (BCSAI111)
 * Assignment: 11, Task: 2
-->
<!DOCTYPE html>
<html lang="en">
<head>
<meta charset="UTF-8">
<meta name="viewport" content="width=device-width, initial-scale=1.0">
<title>Variables</title>
<link rel="stylesheet" href="style.css">
</head>
<body>
<h1>CSS Variables</h1>
<p>This text uses the main colour.</p>
</body>
</html>
```


Source Code (style.css):

```
:root {
    --main-color: #1d3557;
    --accent-color: #e63946;
    --page-padding: 20px;
}

body {
    color: var(--main-color);
    padding: var(--page-padding);
}

h1 {
    color: var(--accent-color);
}
```

Execution Output Screenshot:

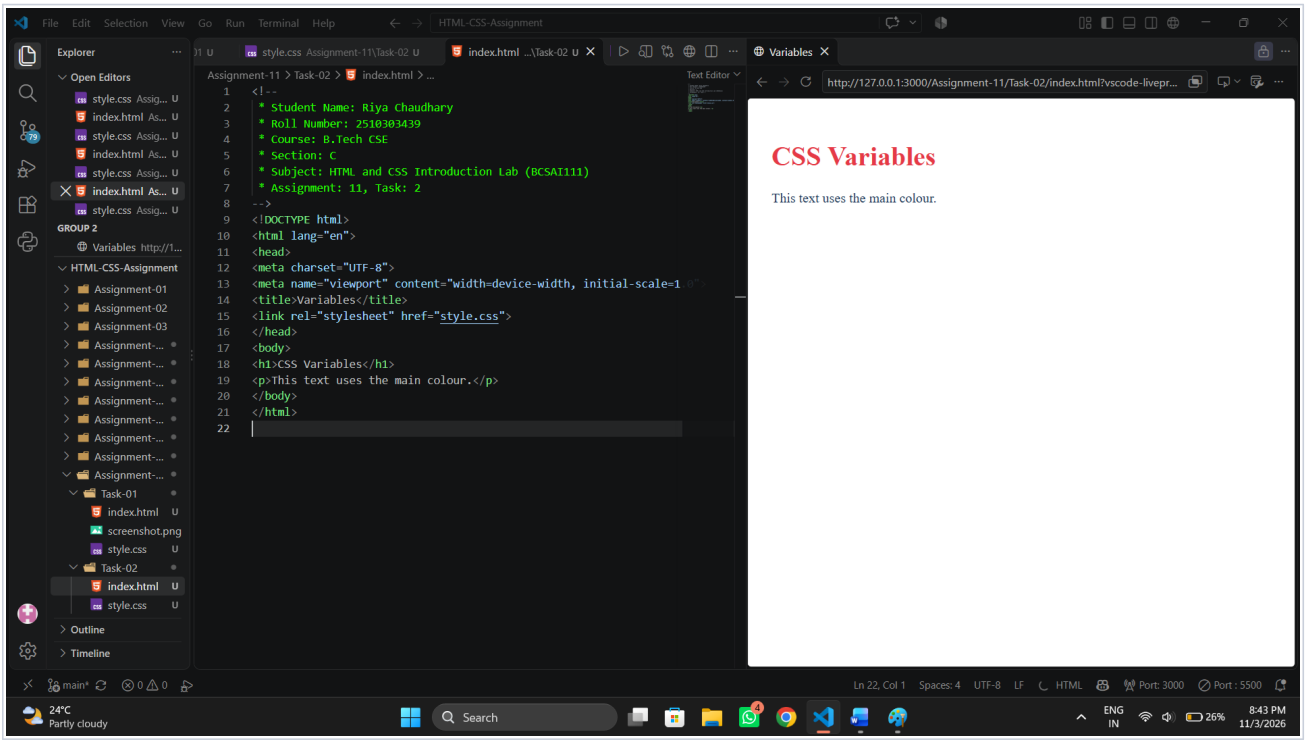

Question 3

Problem Statement: Create tokens.css with variables for the primary colour, accent colour, heading size and spacing. Use the variables for the body colour and padding. Use the variables for the h1 colour and size. Link tokens.css to a page and open it in a browser.

Source Code (index.html):

```
<!--
 * Student Name: Riya Chaudhary
 * Roll Number: 2510303439
 * Course: B.Tech CSE
 * Section: C
 * Subject: HTML and CSS Introduction Lab (BCSAI111)
 * Assignment: 11, Task: 3
-->
<!DOCTYPE html>
<html lang="en">
<head>
<meta charset="UTF-8">
<meta name="viewport" content="width=device-width, initial-scale=1.0">
<title>Tokens</title>
<link rel="stylesheet" href="tokens.css">
</head>
<body>
<h1>Design Tokens</h1>
<p>The colours, heading size and spacing come from tokens.css.</p>
</body>
</html>
```


Source Code (tokens.css):

```
:root {
    --primary-color: #1d3557;
    --accent-color: #e63946;
    --heading-size: 2rem;
    --spacing: 16px;
}

body {
    color: var(--primary-color);
    padding: var(--spacing);
}

h1 {
    color: var(--accent-color);
    font-size: var(--heading-size);
}
```

Execution Output Screenshot:

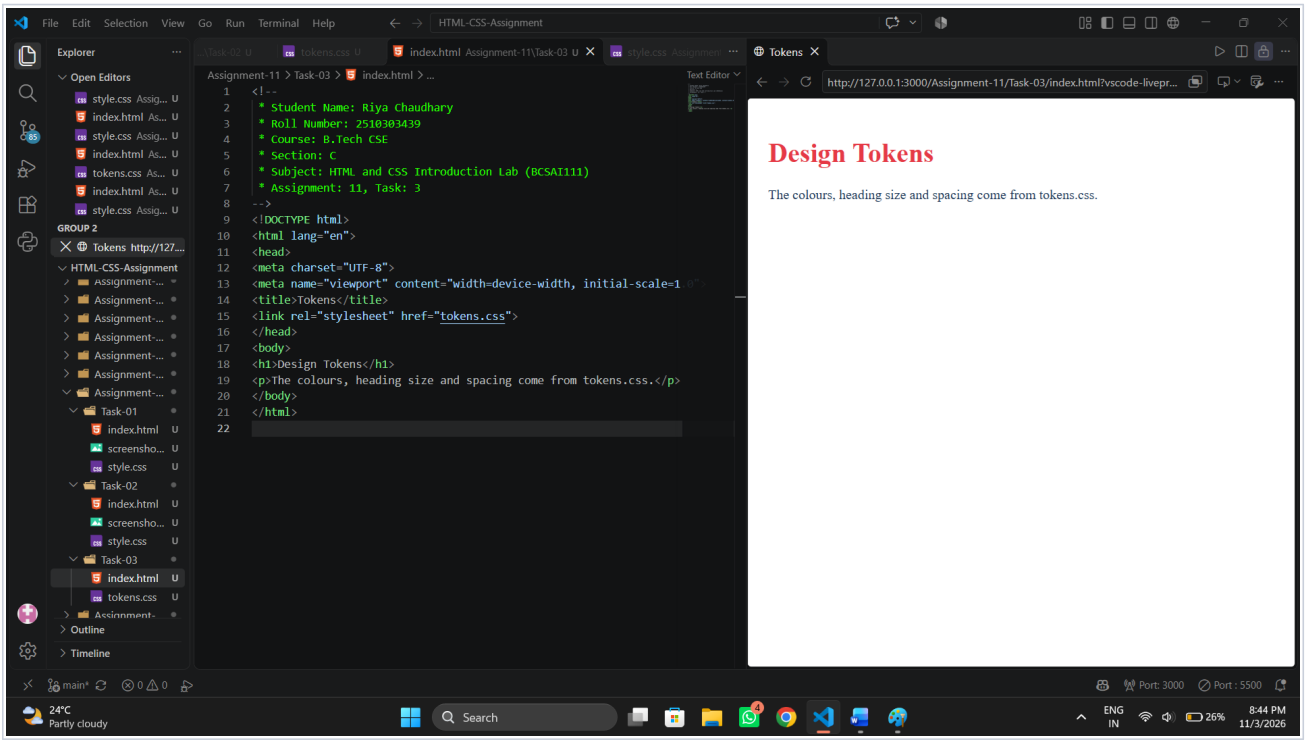

Assignment 12: Box Model, Cards and Scrolling

Assignment Aim / Objective: To compare the box sizing types, to style a card and to make a box scroll.

Question 1

Problem Statement: Create two div boxes. Give both a width of 200px, padding of 20px and a border of 5px. Set box-sizing content-box on the first box. Set box-sizing border-box on the second box. Open the file in a browser.

Source Code (index.html):

```
<!--
 * Student Name: Riya Chaudhary
 * Roll Number: 2510303439
 * Course: B.Tech CSE
 * Section: C
 * Subject: HTML and CSS Introduction Lab (BCSAI111)
 * Assignment: 12, Task: 1
-->
<!DOCTYPE html>
<html lang="en">
<head>
<meta charset="UTF-8">
<meta name="viewport" content="width=device-width, initial-scale=1.0">
<title>Box Model</title>
<link rel="stylesheet" href="style.css">
</head>
<body>
<div class="box content">content-box</div>
<div class="box border">border-box</div>
</body>
</html>
```


Source Code (style.css):

```
.box {
    width: 200px;
    padding: 20px;
    border: 5px solid #1d3557;
    background-color: #dbe7f5;
    margin-bottom: 10px;
}

.content {
    box-sizing: content-box;
}

.border {
    box-sizing: border-box;
}
```

Execution Output Screenshot:

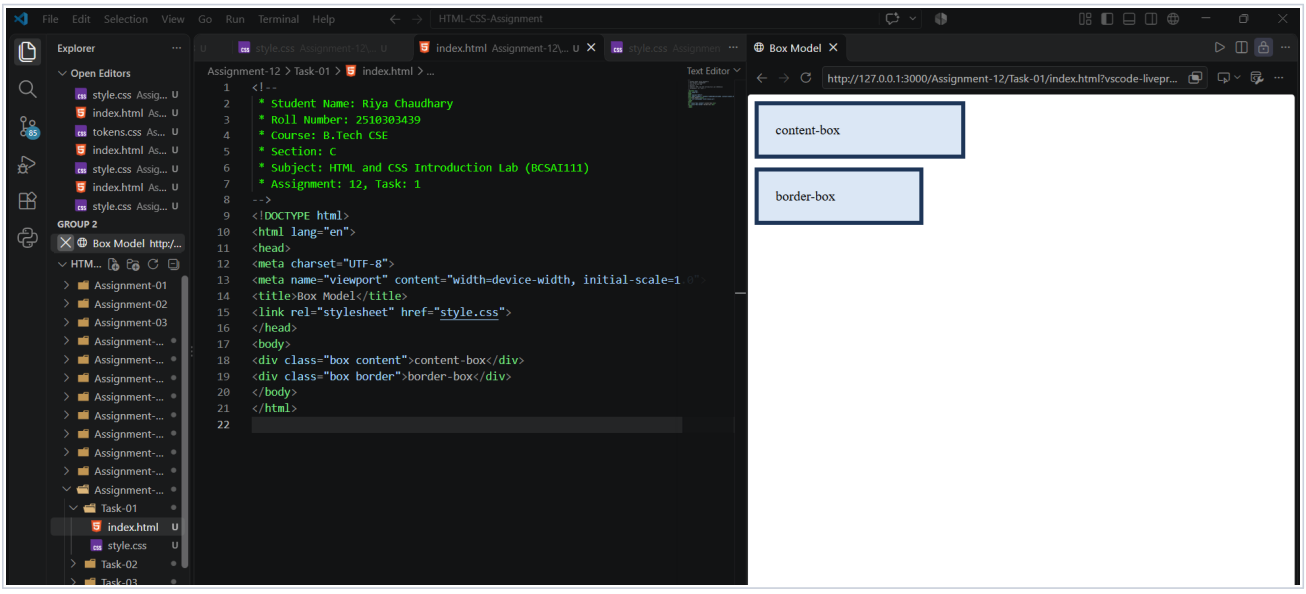

Question 2

Problem Statement: Create a div with the class card. Set a background colour, a 2px border, border-radius 12px and padding 16px. Put an h3 heading and a paragraph inside it. Open the file in a browser.


Source Code (index.html):

```
<!--
 * Student Name: Riya Chaudhary
 * Roll Number: 2510303439
 * Course: B.Tech CSE
 * Section: C
 * Subject: HTML and CSS Introduction Lab (BCSAI111)
 * Assignment: 12, Task: 2
-->
<!DOCTYPE html>
<html lang="en">
<head>
<meta charset="UTF-8">
<meta name="viewport" content="width=device-width, initial-scale=1.0">
<title>Card</title>
<link rel="stylesheet" href="style.css">
</head>
<body>
<div class="card">
    <h3>Web Design</h3>
    <p>This card is styled using the CSS box model.</p>
</div>
</body>
</html>
```

Source Code (style.css):

```
.card {
    background-color: #f1f6fb;
    border: 2px solid #1d3557;
    border-radius: 12px;
    padding: 16px;
    width: 300px;
}
```

Execution Output Screenshot:

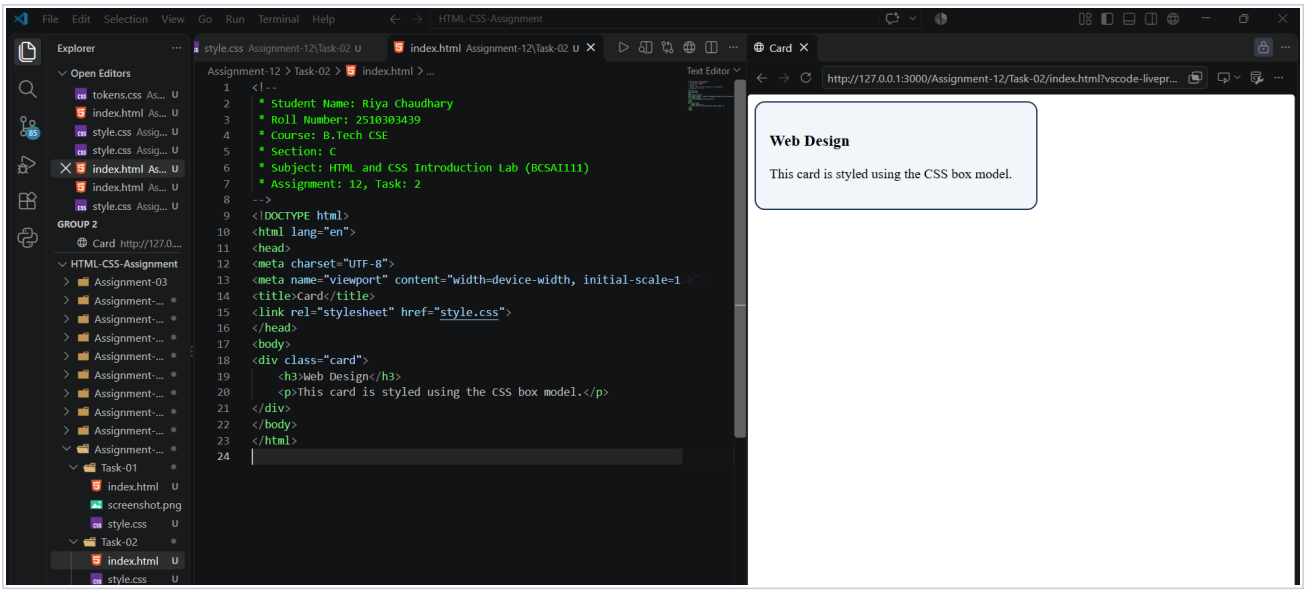

Question 3

Problem Statement: Create a div box with a fixed height of 120px. Set overflow to auto. Add five paragraphs, Line 1 to Line 5, inside the box. Open the file in a browser.


Source Code (index.html):

```
<!--
 * Student Name: Riya Chaudhary
 * Roll Number: 2510303439
 * Course: B.Tech CSE
 * Section: C
 * Subject: HTML and CSS Introduction Lab (BCSAI111)
 * Assignment: 12, Task: 3
-->
<!DOCTYPE html>
<html lang="en">
<head>
<meta charset="UTF-8">
<meta name="viewport" content="width=device-width, initial-scale=1.0">
<title>Scroll</title>
<link rel="stylesheet" href="style.css">
</head>
<body>
<div class="box">
    <p>Line 1</p>
    <p>Line 2</p>
    <p>Line 3</p>
    <p>Line 4</p>
    <p>Line 5</p>
</div>
</body>
</html>
```

Source Code (style.css):

```
.box {
    width: 250px;
    height: 120px;
    overflow: auto;
    border: 2px solid #333;
    padding: 8px;
}
```

Execution Output Screenshot:

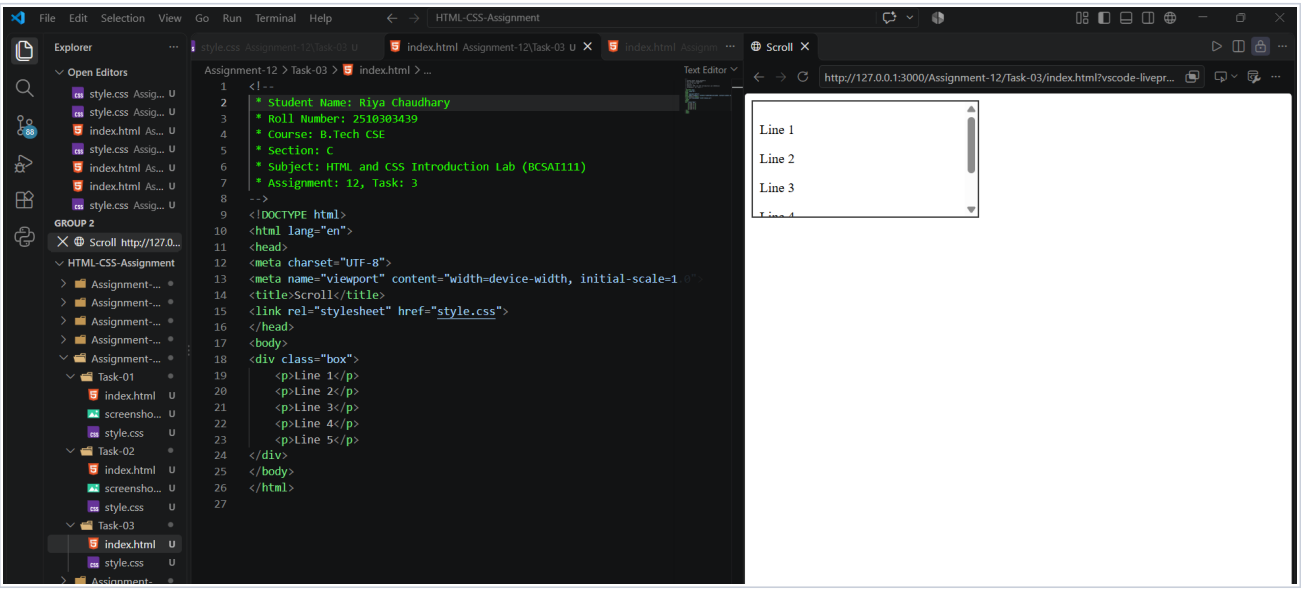

Assignment 13: Flexbox Layouts

Assignment Aim / Objective: To lay out a navigation bar, centred cards and cards that wrap, using Flexbox.

Question 1

Problem Statement: Create a <nav> element with four links: Home, About, Events and Contact. Set display: flex on the nav. Give the nav a dark background. Make the link text white. Open the file in a browser.

Source Code (index.html):

```
<!--
 * Student Name: Riya Chaudhary
 * Roll Number: 2510303439
 * Course: B.Tech CSE
 * Section: C
 * Subject: HTML and CSS Introduction Lab (BCSAI111)
 * Assignment: 13, Task: 1
-->
<!DOCTYPE html>
<html lang="en">
<head>
<meta charset="UTF-8">
<meta name="viewport" content="width=device-width, initial-scale=1.0">
<title>Navigation</title>
<link rel="stylesheet" href="style.css">
</head>
<body>

<nav>
    <a href="#">Home</a>
    <a href="#">About</a>
    <a href="#">Events</a>
    <a href="#">Contact</a>
</nav>
</body>
</html>
```


Source Code (style.css):

```
body {
    margin: 0;
}

nav {
    display: flex;
    background-color: #222;
}

nav a {
    color: white;
    text-decoration: none;
    padding: 14px 20px;
}
```

Execution Output Screenshot:

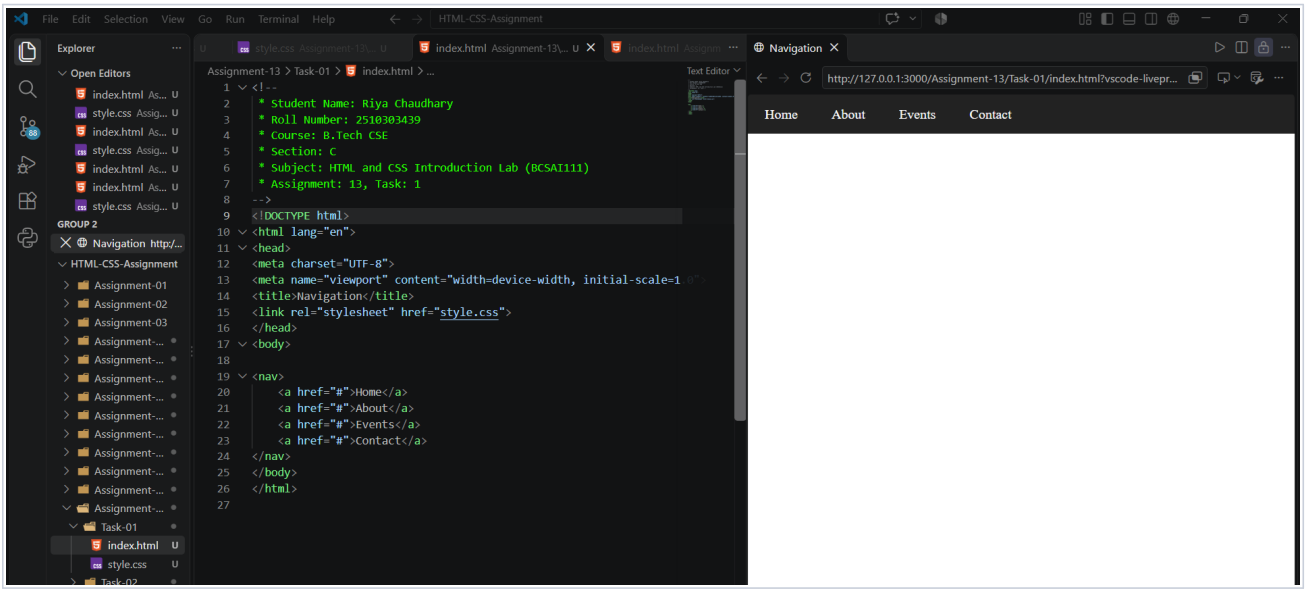

Question 2

Problem Statement: Create a div with the class row and three cards inside it. Write an h3 heading and a price paragraph in each card. Set display: flex on the row. Use justify-content and align-items to centre the cards. Open the file in a browser.

Source Code (index.html):

```
<!--
 * Student Name: Riya Chaudhary
 * Roll Number: 2510303439
 * Course: B.Tech CSE
 * Section: C
 * Subject: HTML and CSS Introduction Lab (BCSAI111)
 * Assignment: 13, Task: 2
-->
<!DOCTYPE html>
<html lang="en">
<head>
<meta charset="UTF-8">
<meta name="viewport" content="width=device-width, initial-scale=1.0">
<title>Centred Cards</title>
<link rel="stylesheet" href="style.css">
</head>
<body>


<div class="row">
    <div class="card">
        <h3>Starter</h3>
        <p>199</p>
    </div>
    <div class="card">
        <h3>Standard</h3>
        <p>349</p>
    </div>
    <div class="card">
        <h3>Premium</h3>
        <p>499</p>
    </div>
</div>
</body>
</html>
```

Source Code (style.css):

```
.row {
    display: flex;
    justify-content: center;
    align-items: center;
    height: 250px;
    background-color: #f1f1f1;
}

.card {
    background-color: white;
    border: 2px solid #1d3557;
    border-radius: 8px;
    padding: 16px;
    margin: 8px;
    width: 160px;
    text-align: center;
}
```

Execution Output Screenshot:

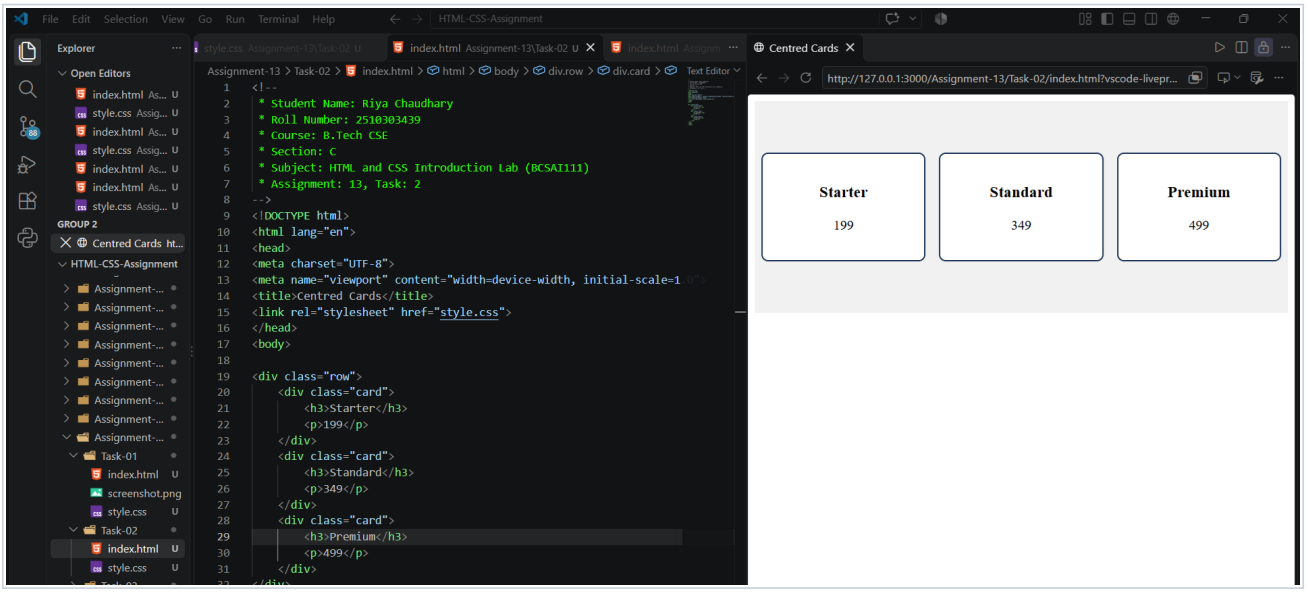

Question 3

Problem Statement: Add the heading Stationery Shop. Create a row with four cards. Set display: flex and flex-wrap: wrap on the row. Open the file in a browser and narrow the window.

Source Code (index.html):

```
<!--
 * Student Name: Riya Chaudhary
 * Roll Number: 2510303439
 * Course: B.Tech CSE
 * Section: C
 * Subject: HTML and CSS Introduction Lab (BCSAI111)
 * Assignment: 13, Task: 3
-->
<!DOCTYPE html>
<html lang="en">
<head>
<meta charset="UTF-8">
<meta name="viewport" content="width=device-width, initial-scale=1.0">
<title>Wrapping Cards</title>
<link rel="stylesheet" href="style.css">
</head>
<body>

<h1>Stationery Shop</h1>


<div class="row">
    <div class="card">
        <h3>Notebook</h3>
        <p>60</p>
    </div>
    <div class="card">
        <h3>Pen</h3>
        <p>15</p>
    </div>
    <div class="card">
        <h3>Bag</h3>
        <p>350</p>
    </div>
    <div class="card">
        <h3>Book</h3>
        <p>120</p>
    </div>
</div>
</body>
</html>
```

Source Code (style.css):

```
.row {
    display: flex;
    flex-wrap: wrap;
}

.card {
    background-color: #f1f6fb;
    border: 2px solid #1d3557;
    border-radius: 8px;
    padding: 16px;
    margin: 8px;
    width: 180px;
}
```

Execution Output Screenshot:

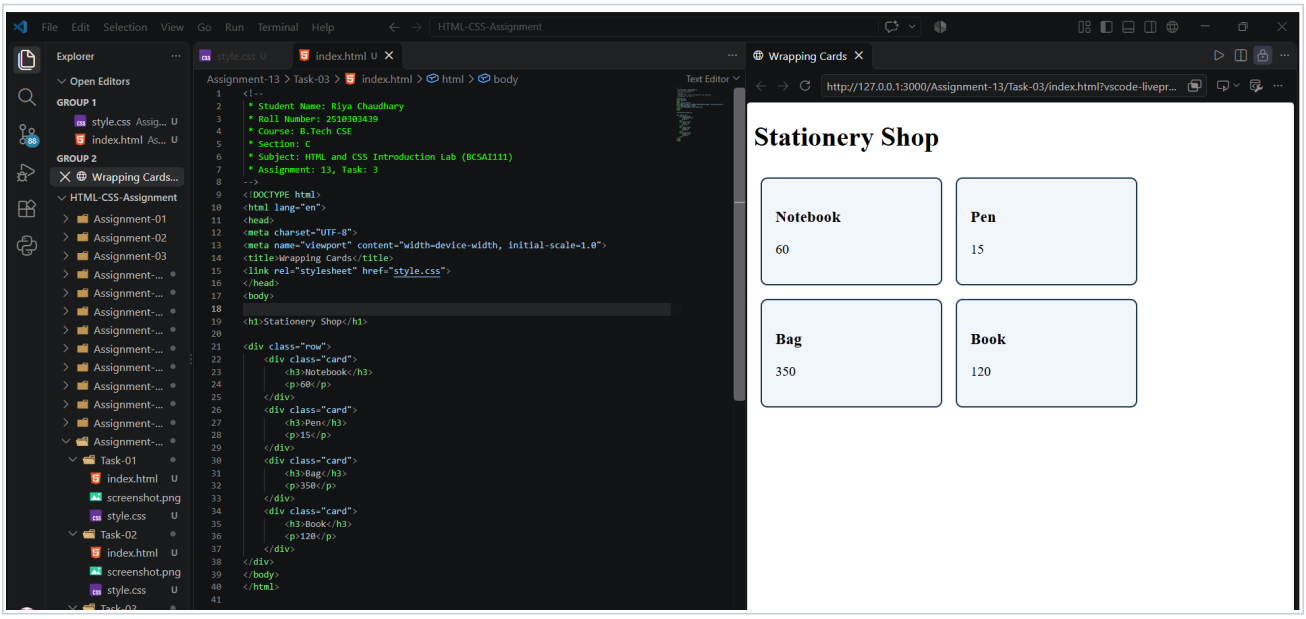

Assignment 14: CSS Grid Layouts

Assignment Aim / Objective: To make a grid with equal columns, a responsive gallery and a layout with named areas.

Question 1

Problem Statement: Create six div boxes with the numbers 1 to 6. Set display: grid on the container. Set grid-template-columns: 1fr 1fr 1fr. Set the gap to 12px. Open the file in a browser.

Source Code (index.html):

```
<!--
 * Student Name: Riya Chaudhary
 * Roll Number: 2510303439
 * Course: B.Tech CSE
 * Section: C
 * Subject: HTML and CSS Introduction Lab (BCSAI111)
 * Assignment: 14, Task: 1
-->
<!DOCTYPE html>
<html lang="en">
<head>
<meta charset="UTF-8">
<meta name="viewport" content="width=device-width, initial-scale=1.0">
<title>Grid</title>
<link rel="stylesheet" href="style.css">
</head>
<body>


<div class="grid">
    <div>1</div>
    <div>2</div>
    <div>3</div>
    <div>4</div>
    <div>5</div>
    <div>6</div>
</div>
</body>
</html>
```

Source Code (style.css):

```
.grid {
    display: grid;
    grid-template-columns: 1fr 1fr 1fr;
    gap: 12px;
}

.grid div {
    background-color: #a8dadc;
    padding: 30px;
    text-align: center;
    font-size: 1.5rem;
}
```

Execution Output Screenshot:

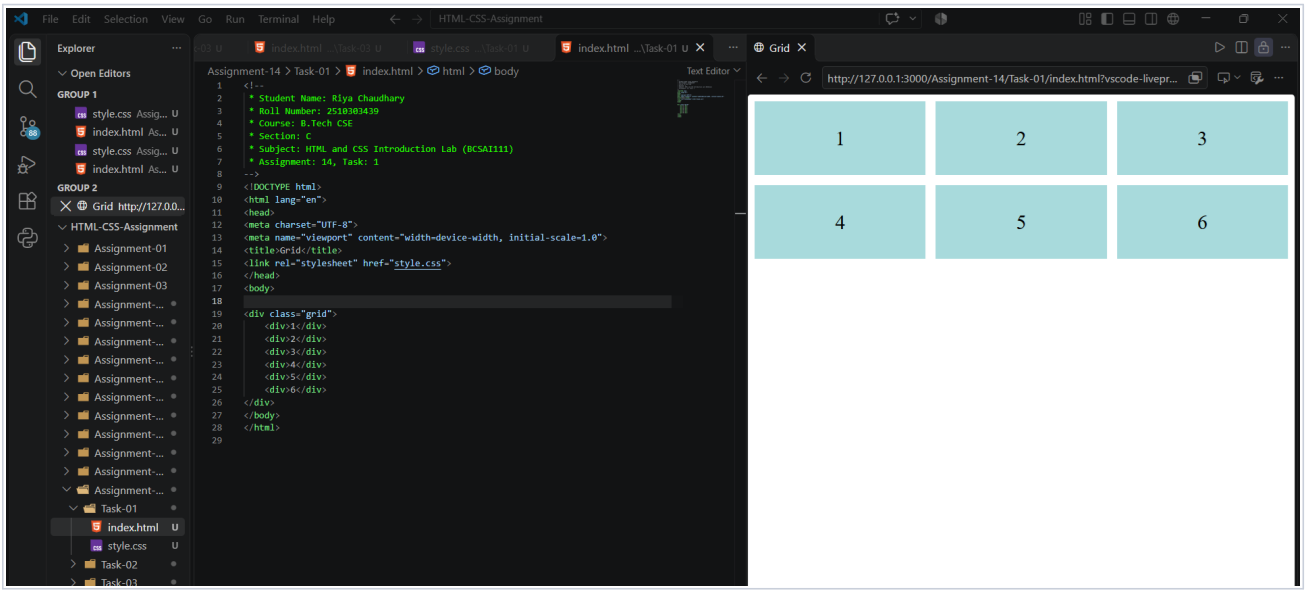

Question 2

Problem Statement: Add the heading Club Photo Gallery. Create six boxes labelled Photo 1 to Photo 6. Set grid-template-columns: repeat(auto-fill, minmax(150px, 1fr)). Set the gap to 10px. Open the file in a browser and change the window width.

Source Code (index.html):

```
<!--
 * Student Name: Riya Chaudhary
 * Roll Number: 2510303439
 * Course: B.Tech CSE
 * Section: C
 * Subject: HTML and CSS Introduction Lab (BCSAI111)
 * Assignment: 14, Task: 2
-->
<!DOCTYPE html>
<html lang="en">
<head>
<meta charset="UTF-8">
<meta name="viewport" content="width=device-width, initial-scale=1.0">
<title>Gallery</title>
<link rel="stylesheet" href="style.css">
</head>
<body>
<h1>Club Photo Gallery</h1>


<div class="gallery">
    <div>Photo 1</div>
    <div>Photo 2</div>
    <div>Photo 3</div>
    <div>Photo 4</div>
    <div>Photo 5</div>
    <div>Photo 6</div>
</div>
</body>
</html>
```

Source Code (style.css):

```
.gallery {
    display: grid;
    grid-template-columns: repeat(auto-fill, minmax(150px, 1fr));
    gap: 10px;
}

.gallery div {
    background-color: #ffd6a5;
    padding: 40px 10px;
    text-align: center;
}
```

Execution Output Screenshot:

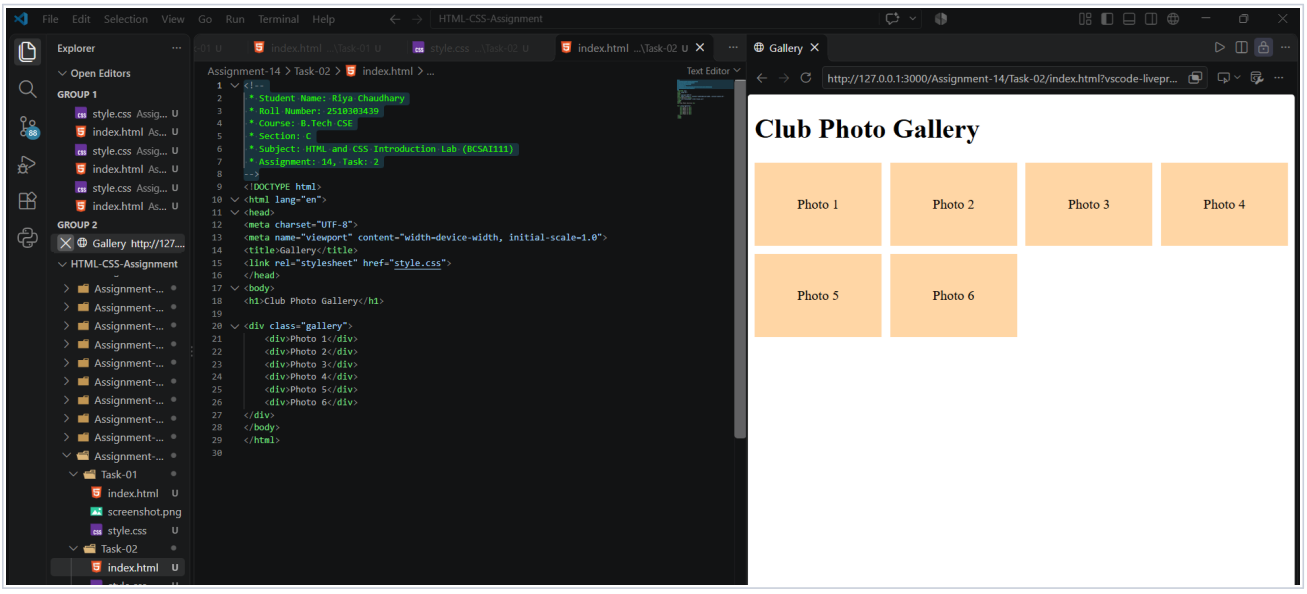

Question 3

Problem Statement: Create four divs: header, sidebar, main and footer. Set a grid with two columns: 200px and 1fr. Define grid-template-areas with the header and footer across both columns. Place each div using grid-area. Open the file in a browser.

Source Code (index.html):

```
<!--
 * Student Name: Riya Chaudhary
 * Roll Number: 2510303439
 * Course: B.Tech CSE
 * Section: C
 * Subject: HTML and CSS Introduction Lab (BCSAI111)
 * Assignment: 14, Task: 3
-->
<!DOCTYPE html>
<html lang="en">
<head>
<meta charset="UTF-8">
<meta name="viewport" content="width=device-width, initial-scale=1.0">
<title>Dashboard</title>
<link rel="stylesheet" href="style.css">
</head>
<body>

<div class="dashboard">
    <div class="header">Header</div>
    <div class="sidebar">Sidebar</div>
    <div class="main">Main</div>
    <div class="footer">Footer</div>
</div>
</body>
</html>
```

Source Code (style.css):

```
body {
    margin: 0;
}

.dashboard {
    display: grid;
    grid-template-columns: 200px 1fr;
    grid-template-areas:
        "header header"
        "sidebar main"
        "footer footer";
    min-height: 100vh;
}


.header {
    grid-area: header;
    background-color: #1d3557;
    color: white;
    padding: 16px;
}

.sidebar {
    grid-area: sidebar;
    background-color: #a8dadc;
    padding: 16px;
}

.main {
    grid-area: main;
    background-color: #f1faee;
    padding: 16px;
}

.footer {
    grid-area: footer;
    background-color: #457b9d;
    color: white;
    padding: 16px;
}
```

Execution Output Screenshot:

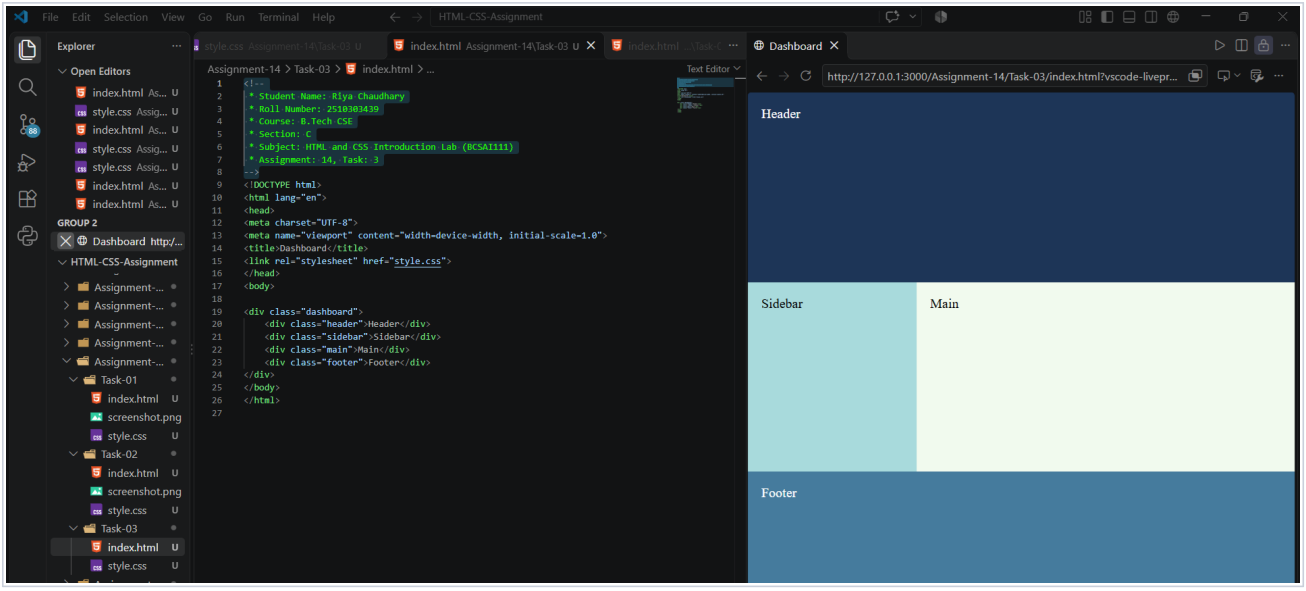

Assignment 15: Responsive Pages with Media Queries

Assignment Aim / Objective: To use a media query to change a layout, to make a picture scale with its box, and to set text sizes with rem units.

Question 1

Problem Statement: Add the viewport meta tag in the head. Create a div with the class cards holding two cards. Write an h2 heading and a paragraph in each card. Write the base styles for phones. Add a media query for 600px and up that sets display: flex on the cards. Open the file in a browser and change the window width.

Source Code (index.html):

```
<!--
 * Student Name: Riya Chaudhary
 * Roll Number: 2510303439
 * Course: B.Tech CSE
 * Section: C
 * Subject: HTML and CSS Introduction Lab (BCSAI111)
 * Assignment: 15, Task: 1
-->
<!DOCTYPE html>
<html lang="en">
<head>
<meta charset="UTF-8">
<meta name="viewport" content="width=device-width, initial-scale=1.0">
<title>Mobile First</title>
<link rel="stylesheet" href="style.css">
</head>
<body>

<div class="cards">
    <div class="card">
        <h2>Card One</h2>
        <p>This is the first card.</p>
    </div>
    <div class="card">
        <h2>Card Two</h2>
        <p>This is the second card.</p>
    </div>
</div>
</body>
</html>
```


Source Code (style.css):

```
.card {
    background-color: #f1f6fb;
    border: 2px solid #1d3557;
    border-radius: 8px;
    padding: 16px;
    margin: 10px;
}

@media (min-width: 600px) {
    .cards {
        display: flex;
    }

    .card {
        flex: 1;
    }
}
```

Execution Output Screenshot:

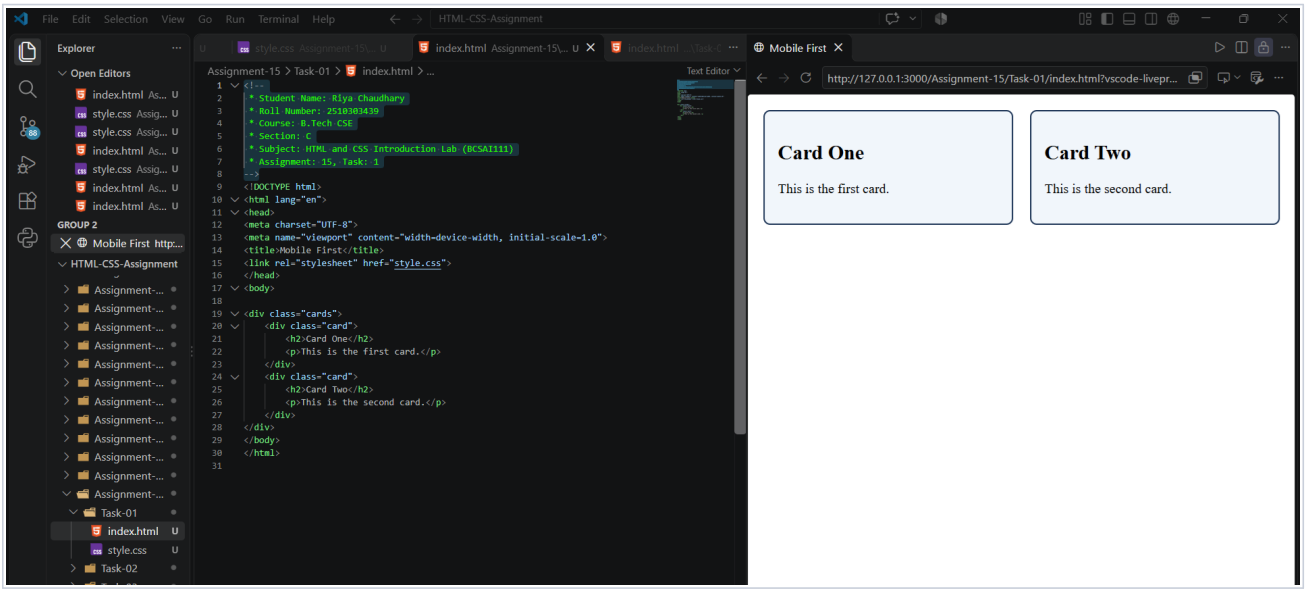

Question 2

Problem Statement: Add a heading and one picture. Set max-width: 100% on the picture. Set height: auto on the picture. Open the file in a browser and change the window width.


Source Code (index.html):

```
<!--
 * Student Name: Riya Chaudhary
 * Roll Number: 2510303439
 * Course: B.Tech CSE
 * Section: C
 * Subject: HTML and CSS Introduction Lab (BCSAI111)
 * Assignment: 15, Task: 2
-->
<!DOCTYPE html>
<html lang="en">
<head>
<meta charset="UTF-8">
<meta name="viewport" content="width=device-width, initial-scale=1.0">
<title>Responsive Image</title>
<link rel="stylesheet" href="style.css">
</head>
<body>
<h1>Responsive Image</h1>
<img src="https://images.unsplash.com/photo-1793539137393-e6e14e196031?
q=80&w=687&auto=format&fit=crop&ixlib=rb-4.1.0&ixid=NHwxMjA3fDA%3Dg" alt="a beautiful landscape">
</body>
</html>
```

Source Code (style.css):

```
img {
    max-width: 100%;
    height: auto;
}
```

Execution Output Screenshot:

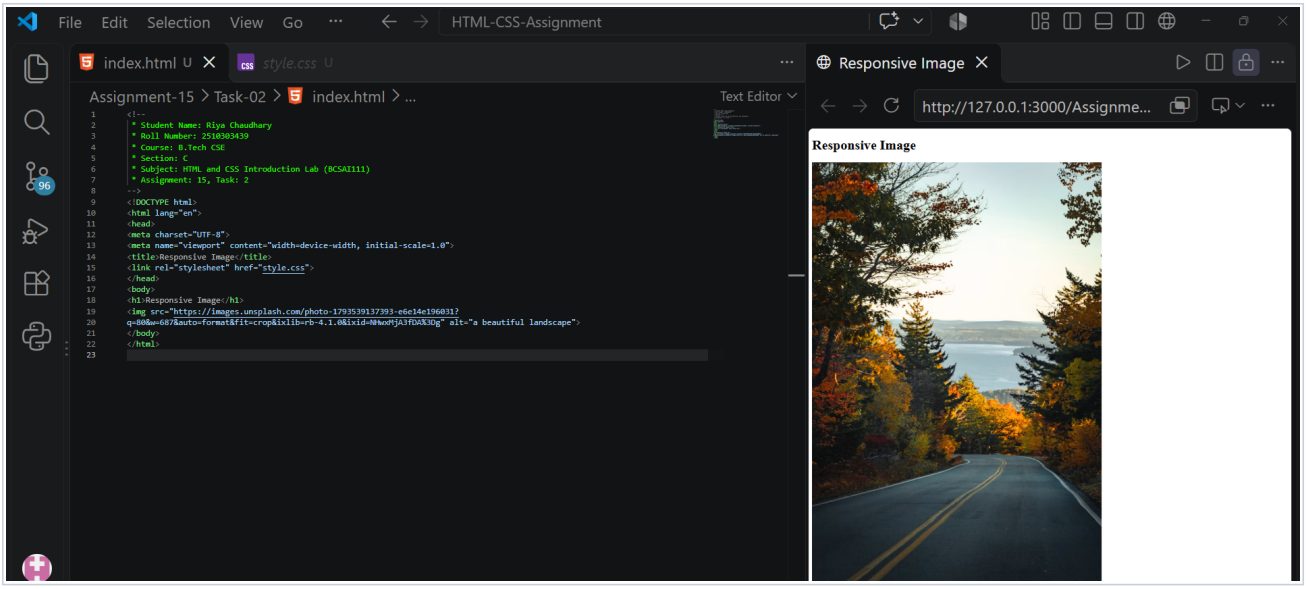

Question 3

Problem Statement: Add an h1 heading and a paragraph. Set the body font size to 1rem and the h1 to 1.5rem. Add a media query for 600px and up that sets the h1 to 2.5rem. Open the file in a browser and change the window width.

Source Code (index.html):

```
<!--
 * Student Name: Riya Chaudhary
 * Roll Number: 2510303439
 * Course: B.Tech CSE
 * Section: C
 * Subject: HTML and CSS Introduction Lab (BCSAI111)
 * Assignment: 15, Task: 3
-->
<!DOCTYPE html>
<html lang="en">
<head>
<meta charset="UTF-8">
<meta name="viewport" content="width=device-width, initial-scale=1.0">
<title>Responsive Text</title>
<link rel="stylesheet" href="style.css">
</head>
<body>
<h1>Responsive Text</h1>
<p>The heading becomes larger on wider screens.</p>
</body>
</html>
```

Source Code (style.css):

```
body {
    font-size: 1rem;
}

h1 {
    font-size: 1.5rem;
}

@media (min-width: 600px) {
    h1 {
        font-size: 2.5rem;
    }
}
```

Execution Output Screenshot:

