Figure 1 — Computational structure of communication reorganization

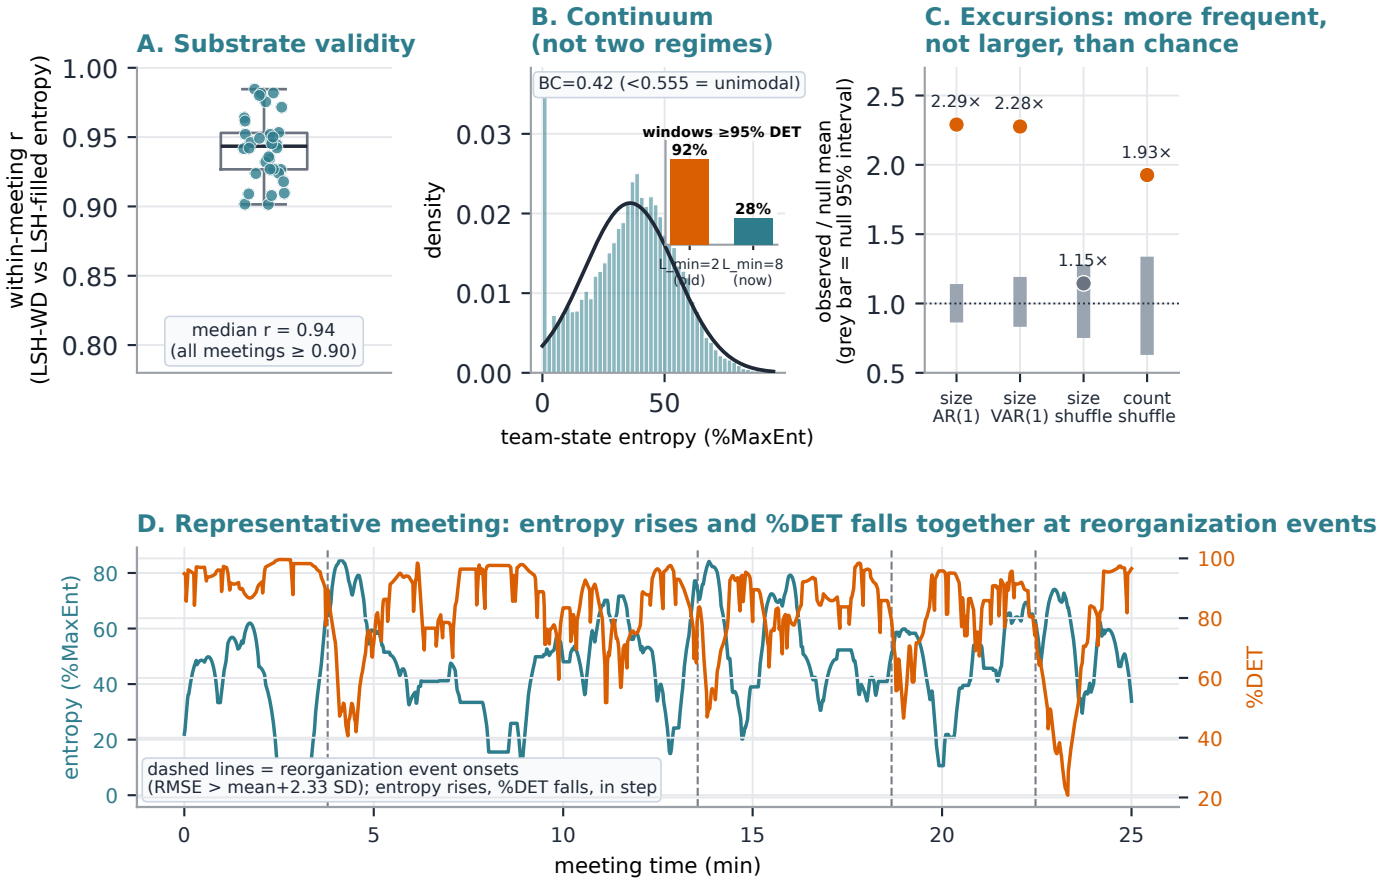


Figure 1. Computational structure of communication reorganization (Study 1). (A) Within-meeting correlation between the word-timed (LSH-WD) team-state series and its pure-LSH counterpart, across 34 meetings (median r = .94; all ≥ .90). (B) Distribution of team-state entropy across pooled meeting-seconds, with Gaussian fit overlay; the Sarle bimodality coefficient (BC = 0.42) falls well below the bimodality threshold (0.555) - a single graded continuum. Inset: the earlier apparent bimodality was a %DET-saturation artefact at L_min=2 (92% of windows ≥95% DET), resolved by the current L_min=8 correction (28% ≥95%). (C) Entropy excursions at peaks, observed relative to the null mean: the amplitude (SD of the pre-to-post change) exceeds AR(1) and VAR(1) surrogates but not the run-order shuffle that keeps the turn-length mix; the number of excursions exceeds the run-order shuffle (200 surrogate corpora). Size = SD of the pre-to-post entropy change at peaks; count = number of peaks; grey bars = null 95% intervals. (D) A representative ~25-minute slice of one meeting: entropy (teal) and %DET (orange) move in step, with entropy rising and %DET falling at each reorganization event onset (dashed lines).