

CSYS5040 Sem2/2020 Assignment 2

S I D :

500386873


Question 1 The dynamics of stochastic differential equation (SDE)

a. Linear SDE, $dx[t] = \mu dt + \epsilon dw[t]$

i) Effects of μ , and x_0

```
In[1]:= 
P = ItoProcess[dx[t] == \mu dt + \epsilon dw[t], x[t], {x, x0}, t, w \[Distributed] WienerProcess[]]
k = 0; (* value of x0 *)
m = 0.1; (* value of \epsilon *)
b1 = b2 = -1; (* value of boundaries *)
b1 = Plot[b1, {t, 0, 3}, PlotStyle -> {Dashed, Red},
  PlotRange -> {{0, 3}, {-3, 3}}, Filling -> Axis];
b2 = Plot[b2, {t, 0, 3}, PlotStyle -> {Dashed, Blue},
  PlotRange -> {{0, 3}, {-3, 3}}, Filling -> Axis];
p1 = ListLinePlot[RandomFunction[P /. {x0 \[Rule] k, \mu \[Rule] 1.0, \epsilon \[Rule] m}, {0, 3, 0.001}, 10],
  PlotStyle -> {Blue}, PlotLegends -> {"\mu=1.0"}, BaseStyle \[Rule] Directive[Opacity[0.8]]];
p2 = ListLinePlot[RandomFunction[P /. {x0 \[Rule] k, \mu \[Rule] 2.0, \epsilon \[Rule] m}, {0, 3, 0.001}, 10],
  PlotStyle -> {Red}, PlotLegends -> {"\mu=2.0"}, BaseStyle \[Rule] Directive[Opacity[0.8]]];
p3 = ListLinePlot[RandomFunction[P /. {x0 \[Rule] k, \mu \[Rule] -0.5, \epsilon \[Rule] m}, {0, 3, 0.001}, 10],
  PlotStyle -> {Orange}, PlotLegends -> {"\mu=-0.5"}, BaseStyle \[Rule] Directive[Opacity[0.8]]];
p4 = ListLinePlot[RandomFunction[P /. {x0 \[Rule] k, \mu \[Rule] -1.5, \epsilon \[Rule] m}, {0, 3, 0.001}, 10],
  PlotStyle -> {Green}, PlotLegends -> {"\mu=-1.5"}, BaseStyle \[Rule] Directive[Opacity[0.8]]];
Show[b1, b2, p2, p1, p3, p4, AxesLabel -> {RawBoxes[RowBox[{"time", ", ", "t"}]], HoldForm[x]}, PlotLabel -> "Figure 1a.1", LabelStyle -> {GrayLevel[0], Bold}]

Out[1]= 
ItoProcess[{\{\mu\}, {\{\epsilon\}}, x[t]}, {\{x\}, {x0\}}, {t, 0}]
```

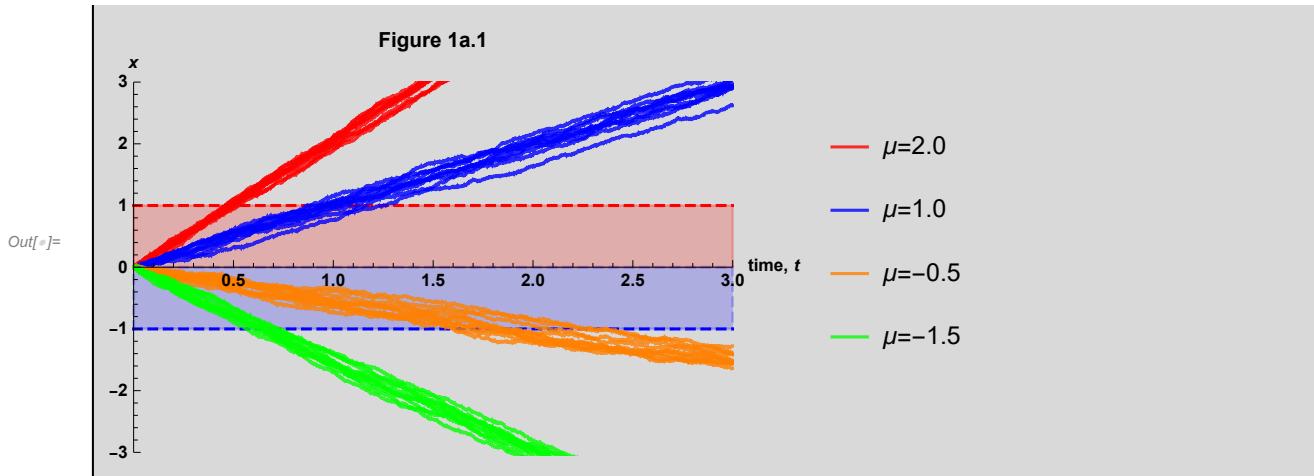

From Figure 1a.1, it is obvious that μ is the gradient of the linear SDE.


Given unbiased initiate point $x_0 = 0$ and fixed noise term ϵ at 0.1:


When μ is positive, the solution will never pass the negative boundary, $b2 = -0.1$. The greater the $+\mu$, the shorter the time it needs to cross $b1$.

Similarly, when the gradient μ is negative, the solution will never cross positive boundary $b1$. The greater the $-\mu$, the shorter the time it needs to cross $b2$.

```
In[=]:= 
P = ItoProcess[dx[t] == μ dt + ε dw[t], x[t], {x, x0}, t, w ~ WienerProcess[]]
l = 1; (* value of μ *)
m = 0.1; (* value of ε *)
b1 = 1; b2 = -1; (* value of boundaries *)
b1 = Plot[b1, {t, 0, 3}, PlotStyle -> {Dashed, Red},
PlotRange -> {{0, 3}, {-3, 3}}, Filling -> Axis];
b2 = Plot[b2, {t, 0, 3}, PlotStyle -> {Dashed, Blue},
PlotRange -> {{0, 3}, {-3, 3}}, Filling -> Axis];
p1 = ListLinePlot[RandomFunction[P /. {x0 -> 0, μ -> l, ε -> m}, {0, 3, 0.001}, 10],
PlotStyle -> {Blue}, PlotLegends -> {"x0=0; μ=1"}, 
BaseStyle -> Directive[Opacity[0.8]]];
p2 = ListLinePlot[RandomFunction[P /. {x0 -> 0.5, μ -> l, ε -> m}, {0, 3, 0.001}, 10],
PlotStyle -> {Red}, PlotLegends -> {"x0=0.5; μ=1"}, 
BaseStyle -> Directive[Opacity[0.8]]];
p3 = ListLinePlot[RandomFunction[P /. {x0 -> -0.5, μ -> l, ε -> m}, {0, 3, 0.001}, 10],
PlotStyle -> {Orange}, PlotLegends -> {"x0=-0.5; μ=1"}, 
BaseStyle -> Directive[Opacity[0.8]]];
p4 = ListLinePlot[RandomFunction[P /. {x0 -> 0.5, μ -> -l, ε -> m}, {0, 3, 0.001}, 10],
PlotStyle -> {Red}, PlotLegends -> {"x0=0.5; μ=-1"}, 
BaseStyle -> Directive[Opacity[0.8]]];
p5 = ListLinePlot[RandomFunction[P /. {x0 -> 0, μ -> -l, ε -> m}, {0, 3, 0.001}, 10],
PlotStyle -> {Blue}, PlotLegends -> {"x0=0; μ=-1"}, 
BaseStyle -> Directive[Opacity[0.8]]];
p6 = ListLinePlot[RandomFunction[P /. {x0 -> -0.5, μ -> -l, ε -> m}, {0, 3, 0.001}, 10],
PlotStyle -> {Green}, PlotLegends -> {"x0=-0.5; μ=-1"}, 
BaseStyle -> Directive[Opacity[0.8]]];
G1 = Show[b1, b2, p1, p3, AxesLabel -> {RawBoxes[RowBox[{"time", ", ", "t"}]], 
HoldForm[x]}, PlotLabel -> "Figure 1a.2", LabelStyle -> {GrayLevel[0], Bold}]
G2 = Show[b1, b2, p4, p5, p6, AxesLabel -> {RawBoxes[RowBox[{"time", ", ", "t"}]], 
HoldForm[x]}, PlotLabel -> "Figure 1a.3", LabelStyle -> {GrayLevel[0], Bold}]

Out[=]=
ItoProcess[{{μ}, {{ε}}, x[t]}, {{x}, {x0}}, {t, 0}]
```

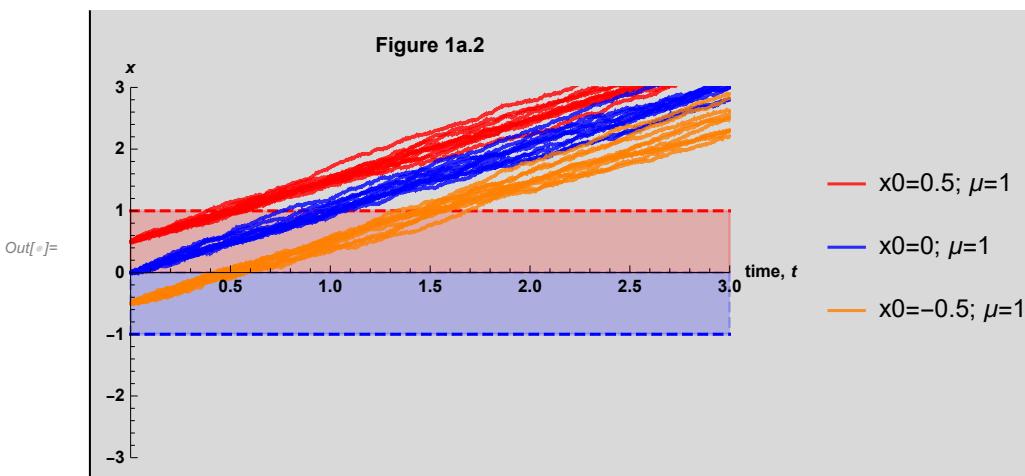

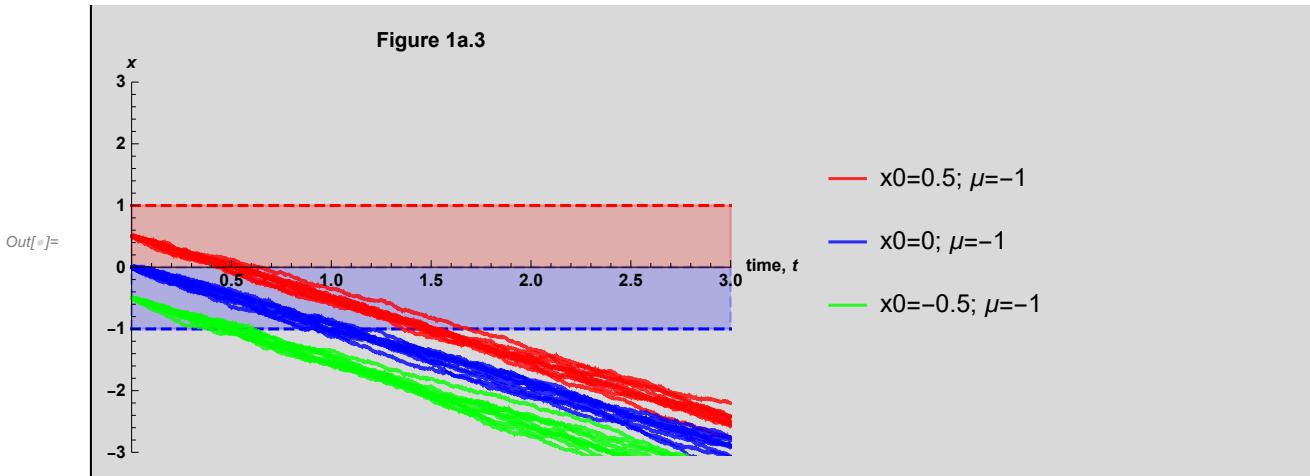

For positive gradient (see Figure 1a.2):

Given a biased initial value $0 < x_0 < b_1$, we observed that the solution crosses the positive boundary earlier than when $x_0 = 0$, given other parameters are set constant. On the other hand, when x_0 is biased at value less than 0, the time needed to cross expected boundary (b_1) is longer.

Similarly, for negative gradient (see Figure 1a.3):

Given a biased initial value $b_2 < x_0 < 0$, we observed that the solution crosses the negative boundary earlier than when $x_0 = 0$, given other parameters are set constant. On the other hand, when x_0 is biased at > 0 , the time needed to cross expected boundary (b_2) is longer.


ii) Effect of ϵ , and x_0

The variance of SDE is $\epsilon^2 t$, and the function $\epsilon^2(t,x)$ is the rate at which the variance of the stochastic process grows in time, which is often called diffusion of SDE.

Noise term ϵ contributes not only to diffusion but also drift of SDE.

```
In[=]:= 
P = ItoProcess[dx[t] == μ dt + ε dw[t], x[t], {x, x0}, t, w ~ WienerProcess[]]
k = 0; (* value of x0 *)
l = 0.7; (* value of μ *)
b1 = 1; b2 = -1; (* value of boundaries *)
b1 = Plot[b1, {t, 0, 3}, PlotStyle -> {Dashed, Red},
  PlotRange -> {{0, 3}, {-3, 3}}, Filling -> Axis];
b2 = Plot[b2, {t, 0, 3}, PlotStyle -> {Dashed, Blue},
  PlotRange -> {{0, 3}, {-3, 3}}, Filling -> Axis];
p1 = ListLinePlot[RandomFunction[P /. {x0 -> k, μ -> l, ε -> 0}, {0, 3, 0.001}, 20],
  PlotLegends -> "ε=0", BaseStyle -> Directive[Opacity[0.5]]];
p2 = ListLinePlot[RandomFunction[P /. {x0 -> k, μ -> l, ε -> 0.1}, {0, 3, 0.001}, 20],
  PlotLegends -> "ε=0.1", BaseStyle -> Directive[Opacity[0.5]]];
p3 = ListLinePlot[RandomFunction[P /. {x0 -> k, μ -> l, ε -> 0.5}, {0, 3, 0.001}, 20],
  PlotLegends -> "ε=0.5", BaseStyle -> Directive[Opacity[0.5]]];
p4 = ListLinePlot[RandomFunction[P /. {x0 -> k, μ -> l, ε -> 1.0}, {0, 3, 0.001}, 20],
  PlotLegends -> "ε=1.0", BaseStyle -> Directive[Opacity[0.5]]];
G1 = Show[b1, b2, p1, AxesLabel -> {RawBoxes[RowBox[{"time", ",", "t"}]], HoldForm[x]},
  PlotLabel -> "Figure 1a.4", LabelStyle -> {GrayLevel[0], Bold}, ImageSize -> 400];
G2 = Show[b1, b2, p2, AxesLabel -> {RawBoxes[RowBox[{"time", ",", "t"}]], HoldForm[x]},
  PlotLabel -> "Figure 1a.5", LabelStyle -> {GrayLevel[0], Bold}, ImageSize -> 400];
G3 = Show[b1, b2, p3, AxesLabel -> {RawBoxes[RowBox[{"time", ",", "t"}]], HoldForm[x]},
  PlotLabel -> "Figure 1a.6", LabelStyle -> {GrayLevel[0], Bold}, ImageSize -> 400];
G4 = Show[b1, b2, p4, AxesLabel -> {RawBoxes[RowBox[{"time", ",", "t"}]], HoldForm[x]},
  PlotLabel -> "Figure 1a.7", LabelStyle -> {GrayLevel[0], Bold}, ImageSize -> 400];
GraphicsGrid[{{G1, G2}, {G3, G4}}, ImageSize -> Full]
Mean[P[t]] /. {x0 -> k, μ -> l, ε -> 0.1}
Simplify[StandardDeviation[P[t]]] /. {x0 -> k, μ -> l, ε -> 0.1}

Out[=]=
ItoProcess[{{μ}, {ε}}, x[t], {{x}, {x0}}, {t, 0}]
```

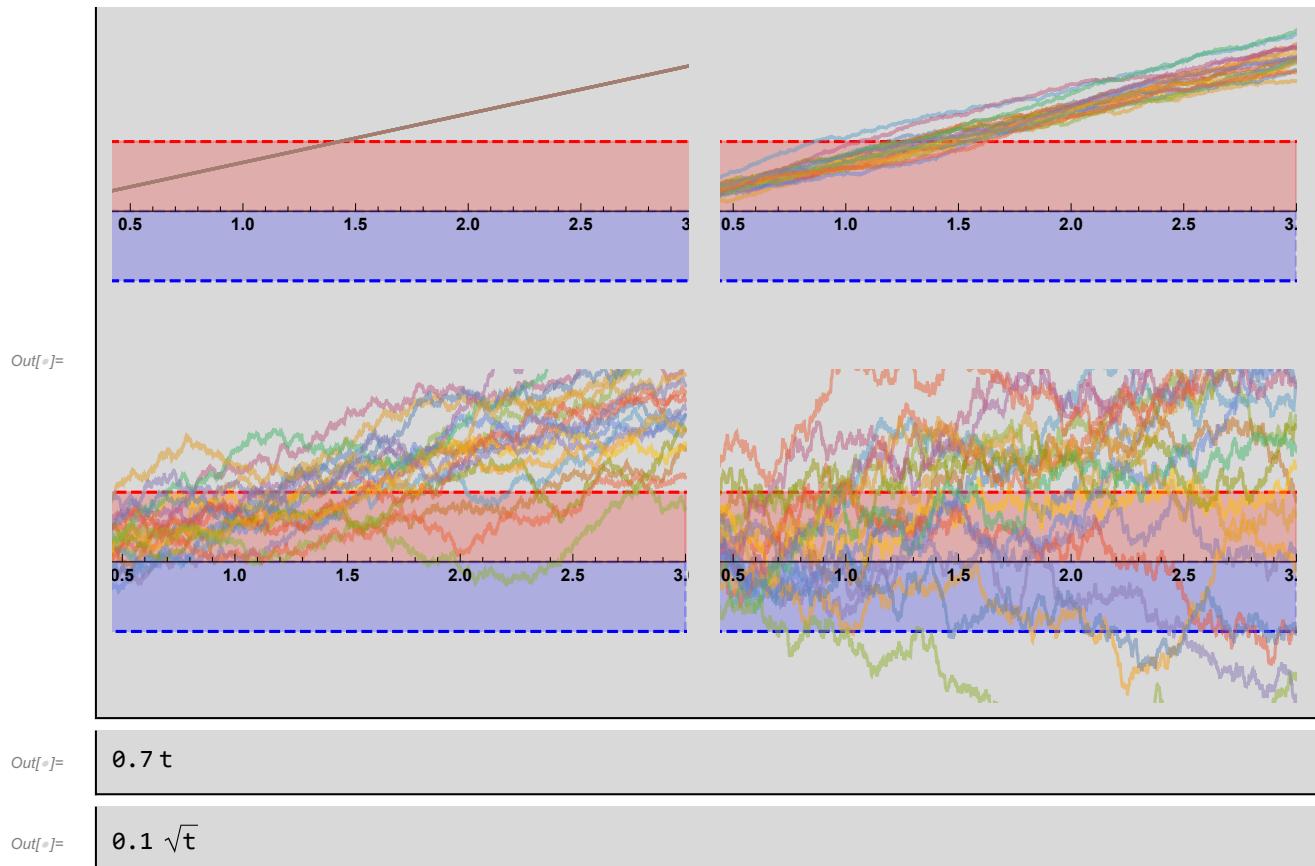

When noise term $\epsilon = 0$, basically it becomes a ordinary differential equation (see Figure 1a.4). All simulations yield exactly the same solution, with initial value x_0 , growing at a gradient μ .

When noise term $\epsilon \neq 0$, the model diffuses over time at value of $\epsilon\sqrt{t}$.

The larger the white noise ϵ , the “noisier” the solution (see Figure 1a.5-7).


When a touch of noise is added (see Figure 1a.5), the first passage time of all simulations are similar. Increasing ϵ makes them less and less likely to cross the boundary at the same time (see Figure 1a.6).

In fact, the solution is more likely to cross the wrong boundary (*b2*) when a very large ϵ is introduced, as shown in Figure 1a.7.

```
In[=]:= 
P = ItoProcess[dx[t] == μ dt + ε dw[t], x[t], {x, x0}, t, w ~ WienerProcess[]]
l = 0.7; (* value of μ *)
b1 = 1; b2 = -1; (* value of boundaries *)
b1 = Plot[b1, {t, 0, 3}, PlotStyle -> {Dashed, Red},
PlotRange -> {{0, 3}, {-3, 3}}, Filling -> Axis];
b2 = Plot[b2, {t, 0, 3}, PlotStyle -> {Dashed, Blue},
PlotRange -> {{0, 3}, {-3, 3}}, Filling -> Axis];
p1 = ListLinePlot[RandomFunction[P /. {x0 -> 0, μ -> l, ε -> 1}, {0, 3, 0.001}, 20],
PlotLegends -> "x0=0; ε=1.0", BaseStyle -> Directive[Opacity[0.5]]];
p2 = ListLinePlot[RandomFunction[P /. {x0 -> 0.5, μ -> l, ε -> 1}, {0, 3, 0.001}, 20],
PlotLegends -> "x0=0.5; ε=1.0", BaseStyle -> Directive[Opacity[0.5]]];
G1 = Show[b1, b2, p1, AxesLabel -> {RawBoxes[RowBox[{"time", ", ", "t"}]], HoldForm[x]},
PlotLabel -> "Figure 1a.7", LabelStyle -> {GrayLevel[0], Bold}, ImageSize -> 400];
G2 = Show[b1, b2, p2, AxesLabel -> {RawBoxes[RowBox[{"time", ", ", "t"}]], HoldForm[x]},
PlotLabel -> "Figure 1a.8", LabelStyle -> {GrayLevel[0], Bold}, ImageSize -> 400];
GraphicsGrid[{G1, G2}], ImageSize -> Full]
```

Out[=]= $\text{ItoProcess}[\{\{\mu\}, \{\{\epsilon\}\}, x[t]\}, \{\{x\}, \{x0\}\}, \{t, 0\}]$

Out[=]=

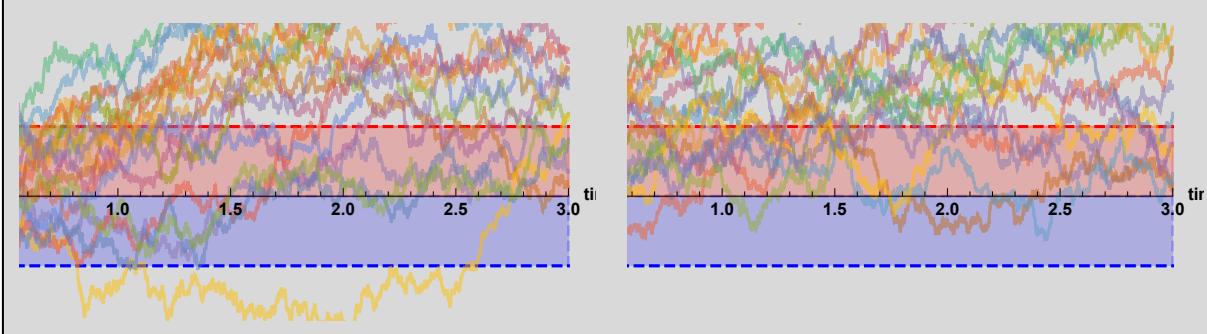

With a biased prior ($x_0 = 0.5$), the solution is more likely to cross expected boundary even the ϵ is high (compare Figure 1a.7 and 1a.8).

iii) Passage time of stochastic diffusion towards a boundary value with some confidence intervals

Adding 95% confidence interval limits to the paths: $\text{mean} \pm 2 \times \text{standard deviation}$
Here, unbiased x_0 is used.

```
In[=]:= 
P = ItoProcess[dx[t] == μ dt + ε dw[t], x[t], {x, x0}, t, w ~ WienerProcess[]];
k = 0; (* value of x0 *)
l = 0.7; (* value of μ *)
m = 0.1; (* value of ε *)
b1 = 1; b2 = -1; (* value of boundaries *)
meanf[t_] = Mean[P[t]] /. {x0 → k, μ → l, ε → m} (* mean function *)
sdf[t_] = StandardDeviation[P[t]] /. {x0 → k, μ → l, ε → m}
(* standard deviation function *)

b1 = Plot[b1, {t, 0, 5}, PlotStyle -> {Dashed, Red},
  PlotRange -> {{0, 5}, {-1.5, 3}}, Filling -> Axis];
b2 = Plot[b2, {t, 0, 5}, PlotStyle -> {Dashed, Blue},
  PlotRange -> {{0, 5}, {-1.5, 3}}, Filling -> Axis];


p1 = ListLinePlot[RandomFunction[P /. {x0 → k, μ → l, ε → m}, {0, 5, 0.001}, 50],
  BaseStyle -> Directive[Opacity[0.5]]];
mean = Plot[meanf[t], {t, 0, 5}, PlotRange -> All,
  PlotStyle -> Directive[Red, Thick, Dashed], PlotLegends -> {"mean"}];
uplmt = Plot[meanf[t] + 2 * sdf[t], {t, 0, 5}, PlotRange -> All,
  PlotStyle -> {Black, Thick, Dashed}, PlotLegends -> {"upper limit"}];
lowlmt = Plot[meanf[t] - 2 * sdf[t], {t, 0, 5}, PlotRange -> All,
  PlotStyle -> {Blue, Thick, Dashed}, PlotLegends -> {"lower limit"}];
Show[{b1, b2, p1, mean, uplmt, lowlmt}, AxesLabel ->
  {RawBoxes[RowBox[{"time", ", ", "t"}]], HoldForm[x]},
  PlotLabel -> "Figure 1a.9", LabelStyle -> {GrayLevel[0], Bold}, ImageSize -> 800]
NSolve[meanf[t] == 1, t]
NSolve[meanf[t] + 2 * sdf[t] == 1, t]
NSolve[meanf[t] - 2 * sdf[t] == 1, t]
```

Out[=]=

0.7 t

Out[=]=

0.1 √t

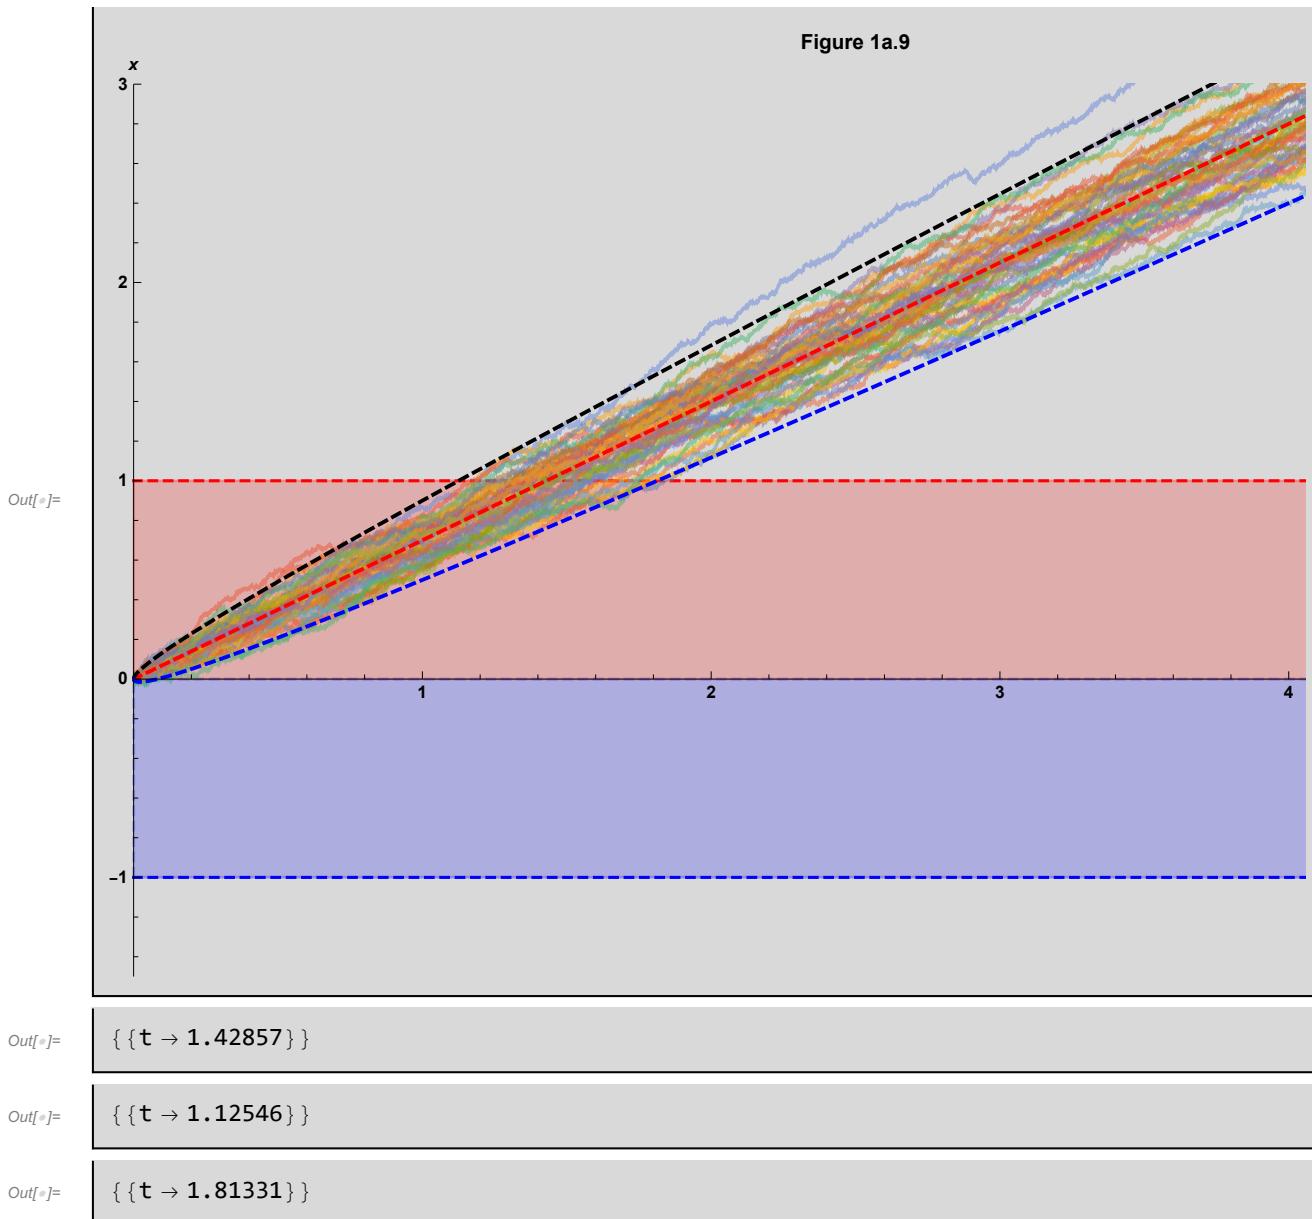

Expectation of the time when the solution cross the boundary is the time when the mean of the solution (red-dashed line) crossing it. Without simulating paths, we could calculate it using equation:

It is known that $x = \mu t + x_0$, hence when x or the expected boundary = 1, $\mu = 0.7$ and $x_0 = 0$, the expected time, t is $(1-0)/0.7 = 1.429$ period.

From Figure 1a.9, the 50 simulated paths cross b1 at a range of time 1.1 to 1.8 period.

b. Non-linear SDE, $dx[t] = -(\beta x[t]^3 + \alpha x[t] + \mu) dt + \epsilon dw[t]$

i) Effect of parameters in deterministic part of equation

Effect of β


```
In[=]
P = ItoProcess[dx[t] == -(\beta * x[t]^3 + \alpha * x[t] + \mu) dt + \epsilon dw[t],
  x[t], {x, x0}, t, w \approx WienerProcess[]]
k = 0; (* value of x0 *)
l = 1; (* value of \mu *)
m = 0.05; (* value of \epsilon *)
r = 1; (* value of \alpha *)
b1 = 1; b2 = -1; (* value of boundaries *)

b1 = Plot[b1, {t, 0, 3}, PlotStyle -> {Dashed, Red},
  PlotRange -> {{0, 3}, {-2, 1.5}}, Filling -> Axis];
b2 = Plot[b2, {t, 0, 3}, PlotStyle -> {Dashed, Blue},
  PlotRange -> {{0, 3}, {-2, 1.5}}, Filling -> Axis];

p1 = ListLinePlot[
  RandomFunction[P /. {x0 \rightarrow k, \beta \rightarrow 0.5, \alpha \rightarrow r, \mu \rightarrow l, \epsilon \rightarrow m}, {0, 3, 0.001}, 5],
  PlotStyle -> {Blue}, PlotLegends -> {"\beta=0.5"}, BaseStyle -> Directive[Opacity[0.8]]];
p2 = ListLinePlot[RandomFunction[P /. {x0 \rightarrow k, \beta \rightarrow 3, \alpha \rightarrow r, \mu \rightarrow l, \epsilon \rightarrow m},
  {0, 3, 0.001}, 5], PlotStyle -> {Red},
  PlotLegends -> {"\beta=3"}, BaseStyle -> Directive[Opacity[0.8]]];

Show[b1, b2, p2, p1, AxesLabel -> {RawBoxes[RowBox[{"time", ", ", "t"}]], HoldForm[x]},
  PlotLabel -> "Figure 2a.1", LabelStyle -> {GrayLevel[0], Bold}, ImageSize -> 800]

Out[=]
ItoProcess[{\{-\mu - \alpha x[t] - \beta x[t]^3\}, {\{\epsilon\}}, x[t]}, {\{x\}, {x0\}}, {t, 0}]
```

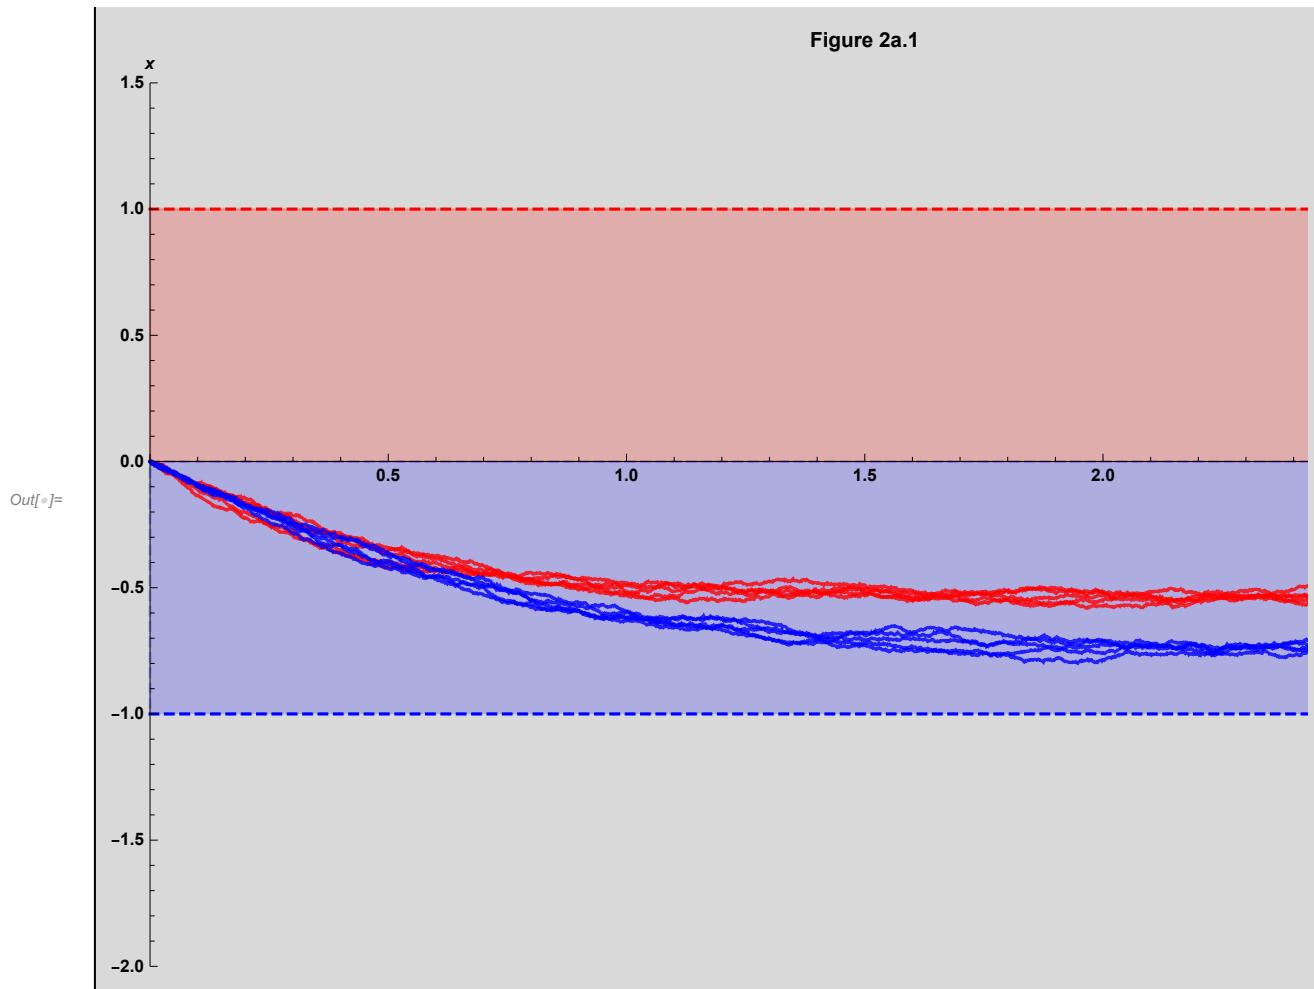

With a negative sign in front of the deterministic part, indicating the actual β in this example is negative. From Figure 2a.1, it is seen that the greater the β , the faster the path converges to the equilibrium state.

```
In[=]:=

$$\begin{aligned} \mathcal{P} = \text{ItoProcess}[dx[t] = -(\beta * x[t]^3 + \alpha * x[t] + \mu) dt + \epsilon dw[t], \\ x[t], \{x, x0\}, t, w \approx \text{WienerProcess[]} ] \\ k = 0; (* \text{ value of } x0 *) \\ l = 1; (* \text{ value of } \mu *) \\ m = 0.05; (* \text{ value of } \epsilon *) \\ r = 1; (* \text{ value of } \alpha *) \\ b1 = 1; b2 = -1; (* \text{ value of boundaries *} ) \\ \\ b1 = \text{Plot}[b1, \{t, 0, 3\}, \text{PlotStyle} \rightarrow \{\text{Dashed, Red}\}, \\ \text{PlotRange} \rightarrow \{\{0, 3\}, \{-2, 1.5\}\}, \text{Filling} \rightarrow \text{Axis}]; \\ b2 = \text{Plot}[b2, \{t, 0, 3\}, \text{PlotStyle} \rightarrow \{\text{Dashed, Blue}\}, \\ \text{PlotRange} \rightarrow \{\{0, 3\}, \{-2, 1.5\}\}, \text{Filling} \rightarrow \text{Axis}]; \\ \\ p3 = \text{ListLinePlot}[\text{RandomFunction}[ \\ \mathcal{P} /. \{x0 \rightarrow k, \beta \rightarrow -1, \alpha \rightarrow r, \mu \rightarrow l, \epsilon \rightarrow m\}, \{0, 3, 0.001\}, 5], \text{PlotStyle} \rightarrow \{\text{Orange}\}, \\ \text{PlotLegends} \rightarrow \{"\beta=-1.0"\}, \text{BaseStyle} \rightarrow \text{Directive}[\text{Opacity}[0.8]]]; \\ (* \\ p4 = \text{ListLinePlot}[\text{RandomFunction}[\mathcal{P} /. \{x0 \rightarrow k, \beta \rightarrow -0.5, \alpha \rightarrow r, \mu \rightarrow l, \epsilon \rightarrow m\}, \{0, 3, 0.001\}, 5], \\ \text{PlotStyle} \rightarrow \{\text{Green}\}, \text{PlotLegends} \rightarrow \{"\beta=-0.5"\}, \text{BaseStyle} \rightarrow \text{Directive}[\text{Opacity}[0.8]]]; \\ *) \\ \\ \text{Show}[b1, b2, p3, \text{AxesLabel} \rightarrow \{\text{RawBoxes}[\text{RowBox}[\{"time", ",", "t"\}]], \text{HoldForm}[x]\}, \\ \text{PlotLabel} \rightarrow \text{"Figure 2a.2"}, \text{LabelStyle} \rightarrow \{\text{GrayLevel}[0], \text{Bold}\}, \text{ImageSize} \rightarrow 800] \\ \\ \text{ItoProcess}[\{\{-\mu - \alpha x[t] - \beta x[t]^3\}, \{\{\epsilon\}\}, x[t]\}, \{\{x\}, \{x0\}\}, \{t, 0\}] \end{aligned}$$

```


Out[=]:=

General: Overflow occurred in computation.

Experimental`NumericalFunction: The function value Overflow[] is not a number at


```
{t, x, RandomProcesses`SimulationDump`dt$1502, RandomProcesses`SimulationDump`dw$1502} =
{1.896, -1.048944434999619 \times 10^{459677841628934}, 0.001, 1.55069}.
```

Show: Could not combine the graphics objects in

Show[ p3, AxesLabel \rightarrow \{time, t, x\}, PlotLabel \rightarrow Figure

2a.2, LabelStyle \rightarrow \{\text{Bold}\}, ImageSize \rightarrow 800].

Out[=]:=

Show[ p3, AxesLabel \rightarrow \{time, t, x\},

PlotLabel \rightarrow Figure 2a.2, LabelStyle \rightarrow \{\text{Bold}\}, ImageSize \rightarrow 800]

Unfortunately, the actual positive β applied by giving a negative value to the same model, could not be handled by Mathematica due to overflow issue.

```
In[=]
P = ItoProcess[dx[t] == -(\beta * x[t]^3 + \alpha * x[t] + \mu) dt + \epsilon dw[t],
  x[t], {x, x0}, t, w \approx WienerProcess[]]
Mean[P[t]] /. {x0 \rightarrow 0.7, \beta \rightarrow 0.5, \alpha \rightarrow 2, \mu \rightarrow 3, \epsilon \rightarrow 0.05}
Simplify[StandardDeviation[P[t]]] /. {x0 \rightarrow -0.7, \beta \rightarrow 0.5, \alpha \rightarrow 2, \mu \rightarrow 3, \epsilon \rightarrow 0.05}

Out[=]
ItoProcess[\{\{-\mu - \alpha x[t] - \beta x[t]^3\}, {\{\epsilon\}}, x[t]\}, {\{x\}, {x0\}}, {t, 0}]

Out[=]
Mean[ItoProcess[\{\{-3 - 2 x[t] - 0.5 x[t]^3\}, {\{0.05\}}, x[t]\}, {\{x\}, {0.7\}}, {t, 0}][t]]

Out[=]
StandardDeviation[
  ItoProcess[\{\{-3 - 2 x[t] - 0.5 x[t]^3\}, {\{0.05\}}, x[t]\}, {\{x\}, {-0.7\}}, {t, 0}][t]]
```

Effect of α

```
In[=]
P = ItoProcess[dx[t] == -(\beta * x[t]^3 + \alpha * x[t] + \mu) dt + \epsilon dw[t],
  x[t], {x, x0}, t, w \approx WienerProcess[]]
k = 0; (* value of x0 *)
l = 1; (* value of \mu *)
m = 0.05; (* value of \epsilon *)
q = 1; (* value of \beta *)
b1 = 1; b2 = -1; (* value of boundaries *)


b1 = Plot[b1, {t, 0, 3}, PlotStyle \rightarrow {Dashed, Red},
  PlotRange \rightarrow {{0, 3}, {-2, 1.5}}, Filling \rightarrow Axis];
b2 = Plot[b2, {t, 0, 3}, PlotStyle \rightarrow {Dashed, Blue},
  PlotRange \rightarrow {{0, 3}, {-2, 1.5}}, Filling \rightarrow Axis];

p1 = ListLinePlot[RandomFunction[P /. {x0 \rightarrow k, \beta \rightarrow q, \alpha \rightarrow -0.5, \mu \rightarrow l, \epsilon \rightarrow m},
  {0, 3, 0.001}, 5], PlotStyle \rightarrow {Orange},
  PlotLegends \rightarrow {"\alpha=-0.5"}, BaseStyle \rightarrow Directive[Opacity[0.8]]];
p2 = ListLinePlot[RandomFunction[P /. {x0 \rightarrow k, \beta \rightarrow q, \alpha \rightarrow -3, \mu \rightarrow l, \epsilon \rightarrow m},
  {0, 3, 0.001}, 5], PlotStyle \rightarrow {Green},
  PlotLegends \rightarrow {"\alpha=-3.0"}, BaseStyle \rightarrow Directive[Opacity[0.8]]];
p3 = ListLinePlot[RandomFunction[P /. {x0 \rightarrow k, \beta \rightarrow q, \alpha \rightarrow 0.5, \mu \rightarrow l, \epsilon \rightarrow m},
  {0, 3, 0.001}, 5], PlotStyle \rightarrow {Blue},
  PlotLegends \rightarrow {"\beta=0.5"}, BaseStyle \rightarrow Directive[Opacity[0.8]]];
p4 = ListLinePlot[RandomFunction[P /. {x0 \rightarrow k, \beta \rightarrow q, \alpha \rightarrow 3, \mu \rightarrow l, \epsilon \rightarrow m},
  {0, 3, 0.001}, 5], PlotStyle \rightarrow {Red},
  PlotLegends \rightarrow {"\beta=3.0"}, BaseStyle \rightarrow Directive[Opacity[0.8]]];

Show[b1, b2, p2, p1, p3, p4,
 AxesLabel \rightarrow {RawBoxes[RowBox[{"time", ", ", "t"}]], HoldForm[x]},
 PlotLabel \rightarrow "Figure 2a.2", LabelStyle \rightarrow {GrayLevel[0], Bold}, ImageSize \rightarrow 800]

Out[=]
ItoProcess[\{\{-\mu - \alpha x[t] - \beta x[t]^3\}, {\{\epsilon\}}, x[t]\}, {\{x\}, {x0\}}, {t, 0}]
```

Figure 2a.2

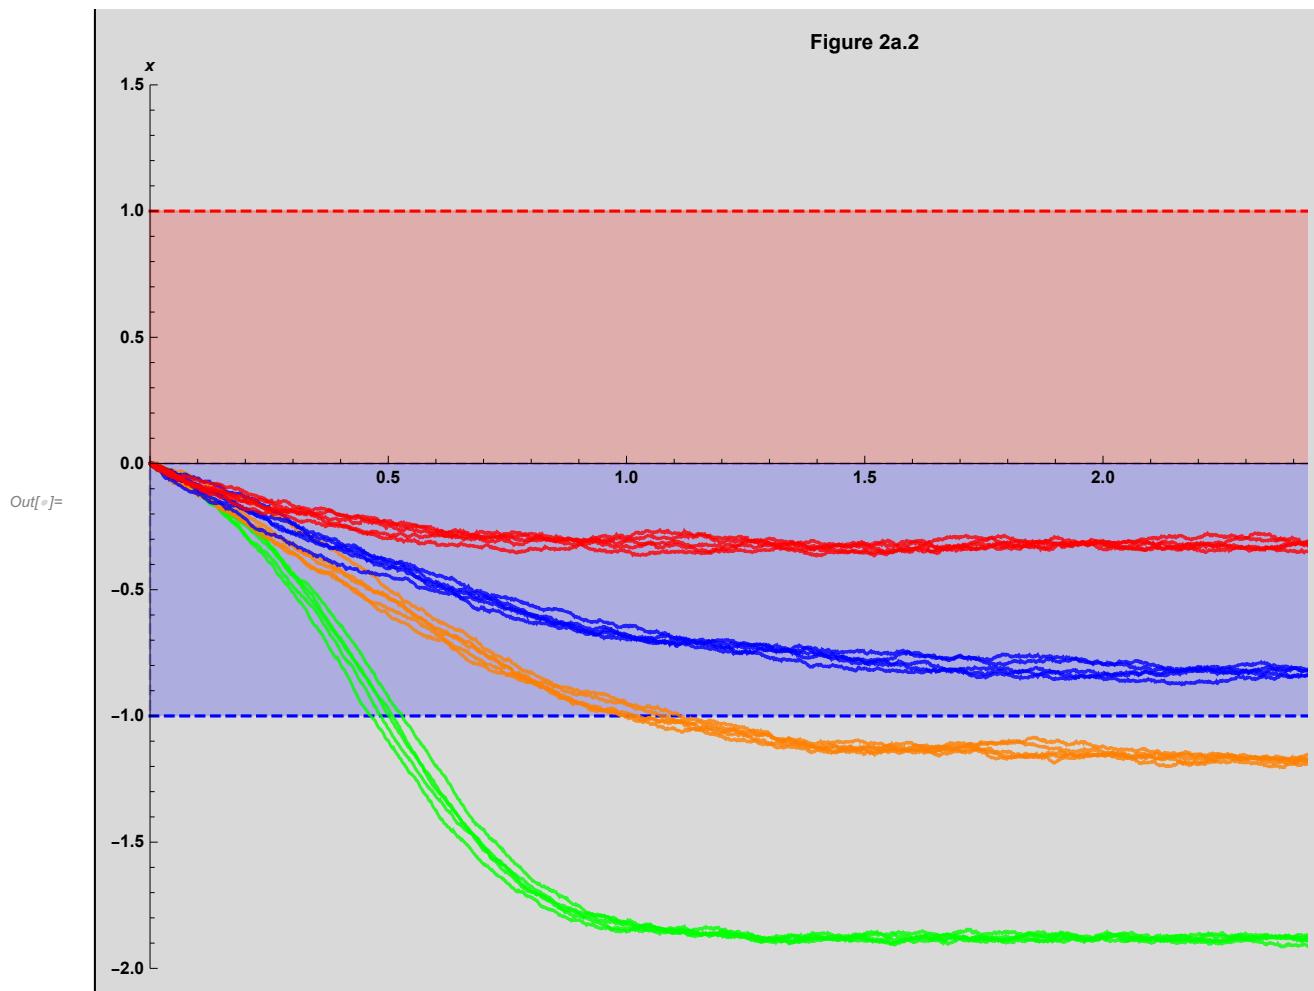

From Figure 2a.2, we could see that actual positive α (with negative input as shown by green and orange paths) has greater effect towards the model, than the actual negative values (blue and red paths). This is told by the fact that they cross the expected threshold (b_2) while the others do not. It is thus concluded that the higher the value of α , the higher the value of x when $t \rightarrow \infty$.

Effect of μ

```
In[5]:= 
P = ItoProcess[dx[t] == -(\beta * x[t]^3 + \alpha * x[t] + \mu) dt + \epsilon dw[t],
  x[t], {x, x0}, t, w \approx WienerProcess[]]
k = 0; (* value of x0 *)
m = 0.05; (* value of \epsilon *)
q = 1; (* value of \beta *)
r = 1; (* value of \alpha *)
b1 = 1; b2 = -1; (* value of boundaries *)


b1 = Plot[b1, {t, 0, 3}, PlotStyle -> {Dashed, Red},
  PlotRange -> {{0, 3}, {-2, 1.5}}, Filling -> Axis];
b2 = Plot[b2, {t, 0, 3}, PlotStyle -> {Dashed, Blue},
  PlotRange -> {{0, 3}, {-2, 1.5}}, Filling -> Axis];

p1 = ListLinePlot[RandomFunction[
  P /. {x0 \rightarrow k, \beta \rightarrow q, \alpha \rightarrow r, \mu \rightarrow 1, \epsilon \rightarrow m}, {0, 3, 0.001}, 5], PlotStyle -> {Orange},
  PlotLegends -> {"\mu=1.0"}, BaseStyle -> Directive[Opacity[0.8]]];
p2 = ListLinePlot[RandomFunction[P /. {x0 \rightarrow k, \beta \rightarrow q, \alpha \rightarrow r, \mu \rightarrow 3, \epsilon \rightarrow m},
  {0, 3, 0.001}, 5], PlotStyle -> {Green},
  PlotLegends -> {"\mu=3.0"}, BaseStyle -> Directive[Opacity[0.8]]];
p3 = ListLinePlot[RandomFunction[P /. {x0 \rightarrow k, \beta \rightarrow q, \alpha \rightarrow r, \mu \rightarrow 0, \epsilon \rightarrow m},
  {0, 3, 0.001}, 5], PlotStyle -> {Blue},
  PlotLegends -> {"\mu=0"}, BaseStyle -> Directive[Opacity[0.8]]];
p4 = ListLinePlot[RandomFunction[P /. {x0 \rightarrow k, \beta \rightarrow q, \alpha \rightarrow r, \mu \rightarrow -3, \epsilon \rightarrow m},
  {0, 3, 0.001}, 5], PlotStyle -> {Red},
  PlotLegends -> {"\mu=-3.0"}, BaseStyle -> Directive[Opacity[0.8]]];

Show[b1, b2, p2, p1, p3, p4,
  AxesLabel -> {RawBoxes[RowBox[{"time", ", ", "t"}]], HoldForm[x]},
  PlotLabel -> "Figure 2a.3", LabelStyle -> {GrayLevel[0], Bold}, ImageSize -> 800]

Out[5]= 
ItoProcess[\{\{-\mu - \alpha x[t] - \beta x[t]^3\}, \{\{\epsilon\}\}, x[t]\}, \{\{x\}, \{x0\}\}, \{t, 0\}]
```

Figure 2a.3

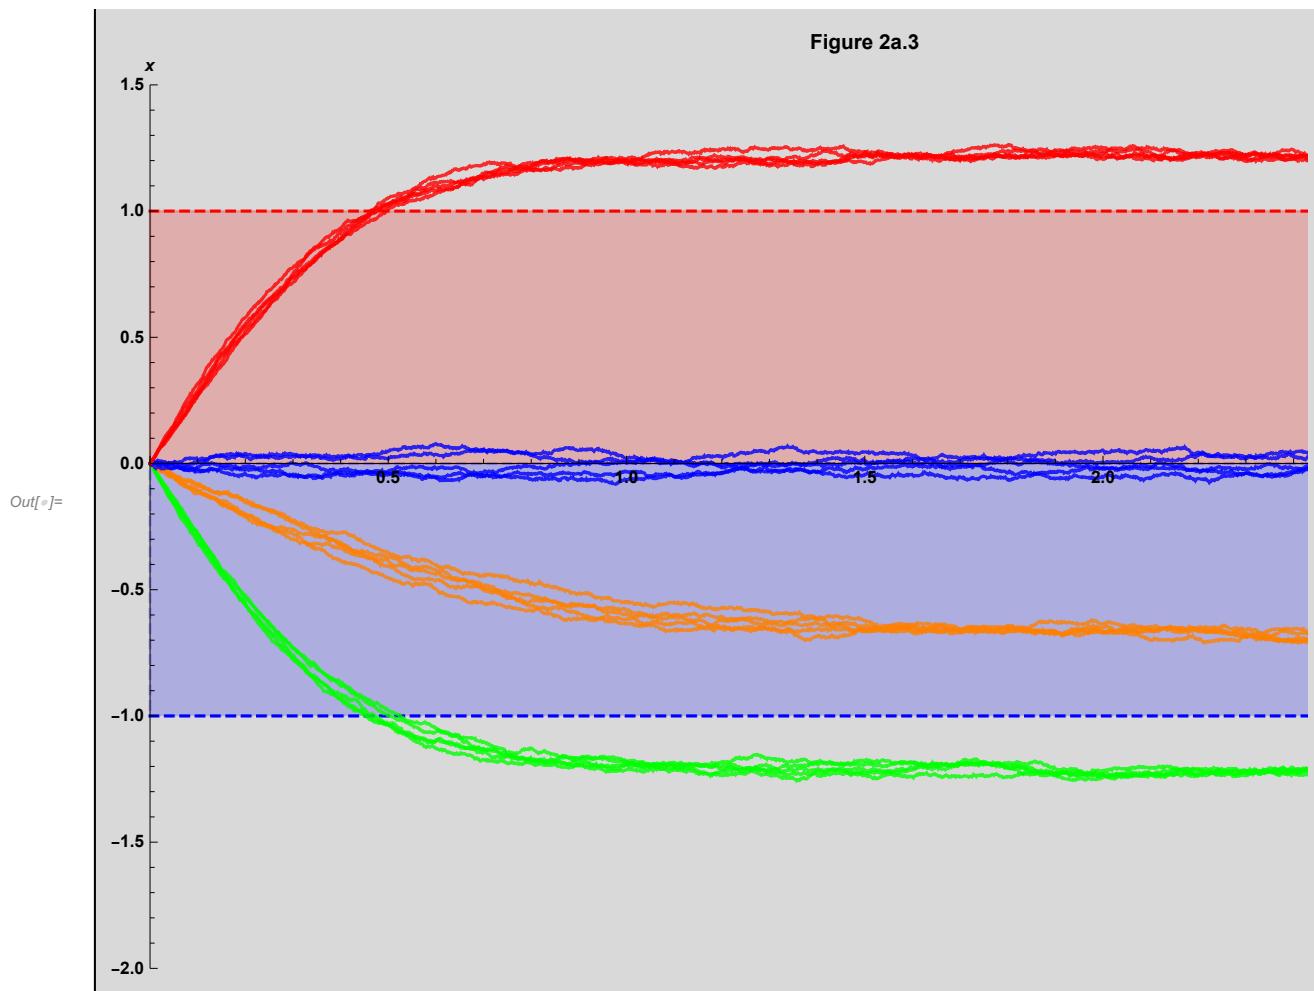

With unbiased x_0 , when $\mu = 0$, the solutions settle in a stationary state of $x = 0$ (see Figure 2a.3 blue paths). The higher magnitude of μ gives higher magnitude of equilibrium state the solution converges to, whereby when $t \rightarrow \infty$, the actual positive μ (red paths) yields positive x and actual negative μ (green and orange paths) negative x .

ii) Effect of ϵ , and x_0

```
In[ $\epsilon$ ]:=  $\mathcal{P} = \text{ItoProcess}[\mathrm{d}x[t] = -(\beta * x[t]^3 + \alpha * x[t] + \mu) \mathrm{d}t + \epsilon \mathrm{d}w[t], x[t], \{x, x_0\}, t, w \approx \text{WienerProcess}[]]$ 
k = 0; (* value of  $x_0$  *)
l = 0.2; (* value of  $\mu$  *)
q = 1; (* value of  $\beta$  *)
r = -3; (* value of  $\alpha$  *)
b1 = 1; b2 = -1; (* value of boundaries *)


b1 = Plot[b1, {t, 0, 3}, PlotStyle -> {Dashed, Red},
  PlotRange -> {{0, 3}, {-2, 2}}, Filling -> Axis];
b2 = Plot[b2, {t, 0, 3}, PlotStyle -> {Dashed, Blue},
  PlotRange -> {{0, 3}, {-2, 2}}, Filling -> Axis];

p1 = ListLinePlot[RandomFunction[ $\mathcal{P}$  /. { $x_0 \rightarrow k$ ,  $\beta \rightarrow q$ ,  $\alpha \rightarrow r$ ,  $\mu \rightarrow l$ ,  $\epsilon \rightarrow 0$ },
  {0, 3, 0.001}, 20], PlotLegends -> " $\epsilon=0$ ", BaseStyle -> Directive[Opacity[0.8]]];
p2 = ListLinePlot[RandomFunction[ $\mathcal{P}$  /. { $x_0 \rightarrow k$ ,  $\beta \rightarrow q$ ,  $\alpha \rightarrow r$ ,  $\mu \rightarrow l$ ,  $\epsilon \rightarrow 0.02$ },
  {0, 3, 0.001}, 20], PlotLegends -> " $\epsilon=0.02$ ", BaseStyle -> Directive[Opacity[0.8]]];
p3 = ListLinePlot[RandomFunction[ $\mathcal{P}$  /. { $x_0 \rightarrow k$ ,  $\beta \rightarrow q$ ,  $\alpha \rightarrow r$ ,  $\mu \rightarrow l$ ,  $\epsilon \rightarrow 0.1$ },
  {0, 3, 0.001}, 20], PlotLegends -> " $\epsilon=0.1$ ", BaseStyle -> Directive[Opacity[0.8]]];
p4 = ListLinePlot[RandomFunction[ $\mathcal{P}$  /. { $x_0 \rightarrow k$ ,  $\beta \rightarrow q$ ,  $\alpha \rightarrow r$ ,  $\mu \rightarrow l$ ,  $\epsilon \rightarrow 0.2$ },
  {0, 3, 0.001}, 20], PlotLegends -> " $\epsilon=0.2$ ", BaseStyle -> Directive[Opacity[0.8]]];

G1 = Show[b1, b2, p1, AxesLabel -> {RawBoxes[RowBox[{"time", ", ", "t"}]], HoldForm[x]}, PlotLabel -> "Figure 2a.4", LabelStyle -> {GrayLevel[0], Bold}, ImageSize -> 400];
G2 = Show[b1, b2, p2, AxesLabel -> {RawBoxes[RowBox[{"time", ", ", "t"}]], HoldForm[x]}, PlotLabel -> "Figure 2a.5", LabelStyle -> {GrayLevel[0], Bold}, ImageSize -> 400];
G3 = Show[b1, b2, p3, AxesLabel -> {RawBoxes[RowBox[{"time", ", ", "t"}]], HoldForm[x]}, PlotLabel -> "Figure 2a.6", LabelStyle -> {GrayLevel[0], Bold}, ImageSize -> 400];
G4 = Show[b1, b2, p4, AxesLabel -> {RawBoxes[RowBox[{"time", ", ", "t"}]], HoldForm[x]}, PlotLabel -> "Figure 2a.7", LabelStyle -> {GrayLevel[0], Bold}, ImageSize -> 400];

GraphicsGrid[{{G1, G2}, {G3, G4}}, ImageSize -> Full]

Out[ $\epsilon$ ]= ItoProcess[{- $\mu - \alpha x[t] - \beta x[t]^3$ ,  $\{\epsilon\}$ ,  $x[t]$ },  $\{x\}$ ,  $\{x_0\}$ ,  $\{t, 0\}$ ]
```

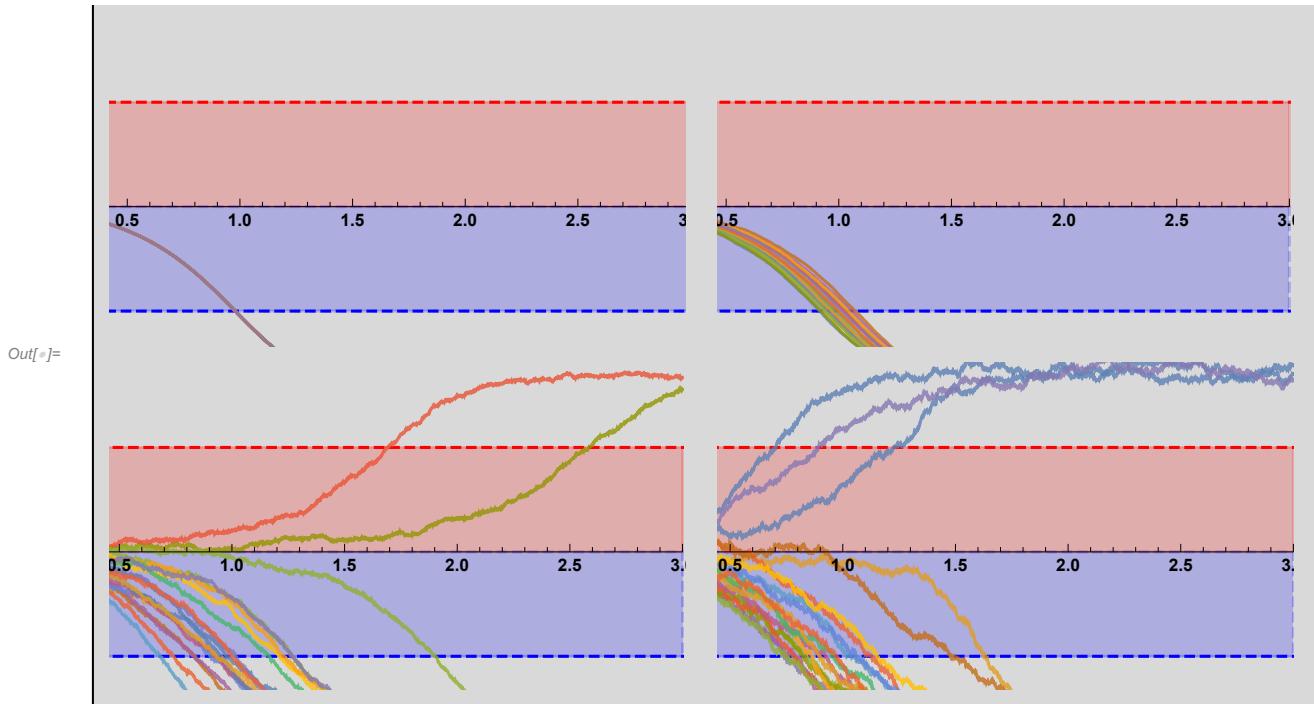

When there is no noise term, the all the simulated paths are deterministic and have the same passage time (see Figure 2a.4).

When a touch of noise is added, the simulations cross the boundary in a small range of period and are attracted to the same stationary state (see Figure 2a.5).

When noise increases, the simulations cross the boundary at deviate times, but eventually settle in and fluctuate around the stationary state when $t \rightarrow \infty$. Notice that in Figure 2a.6 some paths are attracted to another positive equilibrium state and cross the positive boundary; When we further increase the noise, more paths tend to cross the positive threshold as shown in Figure 2a.7.

```
In[=]:= 
P = ItoProcess[dx[t] == -(\beta * x[t]^3 + \alpha * x[t] + \mu) dt + \epsilon dw[t],
  x[t], {x, x0}, t, w \approx WienerProcess[]]
l = 0.2; (* value of \mu *)
m = 0.1; (* value of \epsilon *)
q = 1; (* value of \beta *)
r = -3; (* value of \alpha *)
b1 = 1; b2 = -1; (* value of boundaries *)


b1 = Plot[b1, {t, 0, 3}, PlotStyle -> {Dashed, Red},
  PlotRange -> {{0, 3}, {-2, 2}}, Filling -> Axis];
b2 = Plot[b2, {t, 0, 3}, PlotStyle -> {Dashed, Blue},
  PlotRange -> {{0, 3}, {-2, 2}}, Filling -> Axis];

p1 = ListLinePlot[
  RandomFunction[P /. {x0 \rightarrow 0.05, \beta \rightarrow q, \alpha \rightarrow r, \mu \rightarrow l, \epsilon \rightarrow m}, {0, 3, 0.001}, 50],
  PlotLegends \rightarrow "x0=0.05; \epsilon=0.1", BaseStyle \rightarrow Directive[Opacity[0.5]]];
p2 = ListLinePlot[RandomFunction[P /. {x0 \rightarrow 0.1, \beta \rightarrow q, \alpha \rightarrow r, \mu \rightarrow l, \epsilon \rightarrow m}, {0, 3, 0.001}, 50], PlotLegends \rightarrow "x0=0.1; \epsilon=0.1", BaseStyle \rightarrow Directive[Opacity[0.5]]];
p3 = ListLinePlot[RandomFunction[P /. {x0 \rightarrow -0.05, \beta \rightarrow q, \alpha \rightarrow r, \mu \rightarrow l, \epsilon \rightarrow m}, {0, 3, 0.001}, 50], PlotLegends \rightarrow "x0=-0.05; \epsilon=0.1",
  BaseStyle \rightarrow Directive[Opacity[0.5]]];
p4 = ListLinePlot[RandomFunction[P /. {x0 \rightarrow -0.1, \beta \rightarrow q, \alpha \rightarrow r, \mu \rightarrow l, \epsilon \rightarrow m}, {0, 3, 0.001}, 50], PlotLegends \rightarrow "x0=-0.1; \epsilon=0.1",
  BaseStyle \rightarrow Directive[Opacity[0.5]]];

G1 = Show[b1, b2, p1, AxesLabel \rightarrow {RawBoxes[RowBox[{"time", ", ", "t"}]], HoldForm[x]}, 
  PlotLabel \rightarrow "Figure 2a.8", LabelStyle \rightarrow {GrayLevel[0], Bold}, ImageSize \rightarrow 400];
G2 = Show[b1, b2, p2, AxesLabel \rightarrow {RawBoxes[RowBox[{"time", ", ", "t"}]], HoldForm[x]}, 
  PlotLabel \rightarrow "Figure 2a.9", LabelStyle \rightarrow {GrayLevel[0], Bold}, ImageSize \rightarrow 400];
G3 = Show[b1, b2, p3, AxesLabel \rightarrow {RawBoxes[RowBox[{"time", ", ", "t"}]], HoldForm[x]}, 
  PlotLabel \rightarrow "Figure 2a.10", LabelStyle \rightarrow {GrayLevel[0], Bold}, ImageSize \rightarrow 400];
G4 = Show[b1, b2, p4, AxesLabel \rightarrow {RawBoxes[RowBox[{"time", ", ", "t"}]], HoldForm[x]}, 
  PlotLabel \rightarrow "Figure 2a.11", LabelStyle \rightarrow {GrayLevel[0], Bold}, ImageSize \rightarrow 400];

GraphicsGrid[{{G1, G2}, {G3, G4}}, ImageSize \rightarrow Full]

Out[=]= 
ItoProcess[\{\{-\mu - \alpha x[t] - \beta x[t]^3\}, {\{\epsilon\}}, x[t]\}, {\{x\}, {x0\}}, {t, 0}]
```

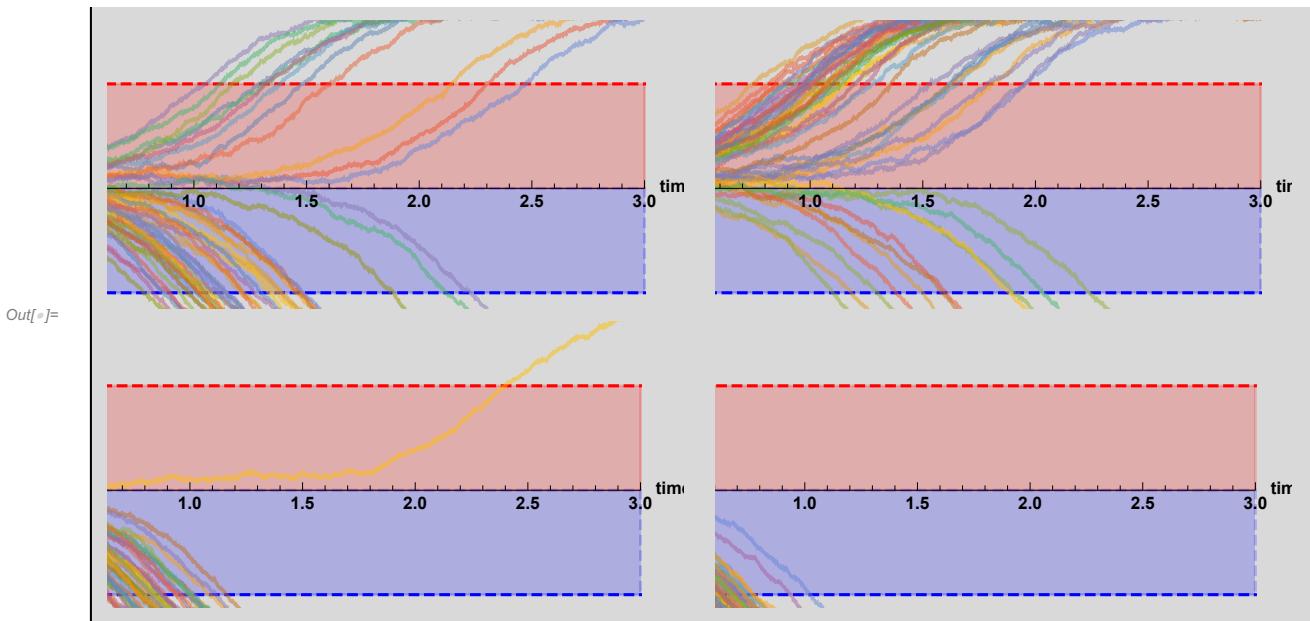

With the same amount of noise used in Figure 2a.6, where $\epsilon = 0.1$, we now repeat the process with priors that are a little biased (both positive and negative).

When a positive biased x_0 is applied, we notice that more paths are attracted to positive stationary state (see Figures 2a.8-9).

While when a slightly negative biased x_0 is used, we observe paths are less likely to cross the positive threshold (see Figures 2a.10-11).

iii) Passage time of stochastic diffusion towards a boundary value

$$dx[t] = -(\beta x[t]^3 + \alpha x[t] + \mu) dt + \epsilon dw[t]$$

```
In[=]=
P = ItoProcess[dx[t] == -(\beta * x[t]^3 + \alpha * x[t] + \mu) dt + \epsilon dw[t],
  x[t], {x, x0}, t, w \[Distributed] WienerProcess[]];
k = 0; (* value of x0 *)
l = 0.05; (* value of \mu *)
m = 0.05; (* value of \epsilon *)
q = 1; (* value of \beta *)
r = -2; (* value of \alpha *)
b1 = 1; b2 = -1; (* value of boundaries *)

meanf[t_] = Mean[P[t]] /. {x0 \[Rule] k, \beta \[Rule] q, \alpha \[Rule] r, \mu \[Rule] l, \epsilon \[Rule] m} (* mean function *)
sdf[t_] = StandardDeviation[P[t]] /. {x0 \[Rule] k, \beta \[Rule] q, \alpha \[Rule] r, \mu \[Rule] l, \epsilon \[Rule] m}
(* standard deviation function *)


b1 = Plot[b1, {t, 0, 5}, PlotStyle \[Rule] {Dashed, Red},
  PlotRange \[Rule] {{0, 5}, {-1.5, 2}}, Filling \[Rule] Axis];
b2 = Plot[b2, {t, 0, 5}, PlotStyle \[Rule] {Dashed, Blue},
  PlotRange \[Rule] {{0, 5}, {-1.5, 2}}, Filling \[Rule] Axis];

p1 = ListLinePlot[RandomFunction[P /. {x0 \[Rule] k, \beta \[Rule] q, \alpha \[Rule] r, \mu \[Rule] l, \epsilon \[Rule] m},
  {0, 5, 0.001}, 50], BaseStyle \[Rule] Directive[Opacity[0.5]]];
(*
mean = Plot[meanf[t], {t, 0, 5}, PlotRange \[Rule] All,
  PlotStyle \[Rule] Directive[Red, Thick, Dashed], PlotLegends \[Rule] {"mean"}];
uplmt = Plot[meanf[t] + 2 * sdf[t], {t, 0, 5}, PlotRange \[Rule] All,
  PlotStyle \[Rule] {Black, Thick, Dashed}, PlotLegends \[Rule] {"upper limit"}];
lowlmt = Plot[meanf[t] - 2 * sdf[t], {t, 0, 5}, PlotRange \[Rule] All,
  PlotStyle \[Rule] {Blue, Thick, Dashed}, PlotLegends \[Rule] {"lower limit"}];
*)
Show[{b1, b2, p1}, AxesLabel \[Rule] {RawBoxes[RowBox[{"time", ", ", "t"}]], HoldForm[x]},
  PlotLabel \[Rule] "Figure 2a.12", LabelStyle \[Rule] {GrayLevel[0], Bold}, ImageSize \[Rule] 800]

Out[=]=
Mean[ItoProcess[{\{-0.05 + 2 x[t] - x[t]^3\}, {{0.05}}, x[t]}, {{x}, {0}}, {t, 0}][t]]
```

```
Out[=]=
StandardDeviation[
ItoProcess[{\{-0.05 + 2 x[t] - x[t]^3\}, {{0.05}}, x[t]}, {{x}, {0}}, {t, 0}][t]]
```

Figure 2a.12

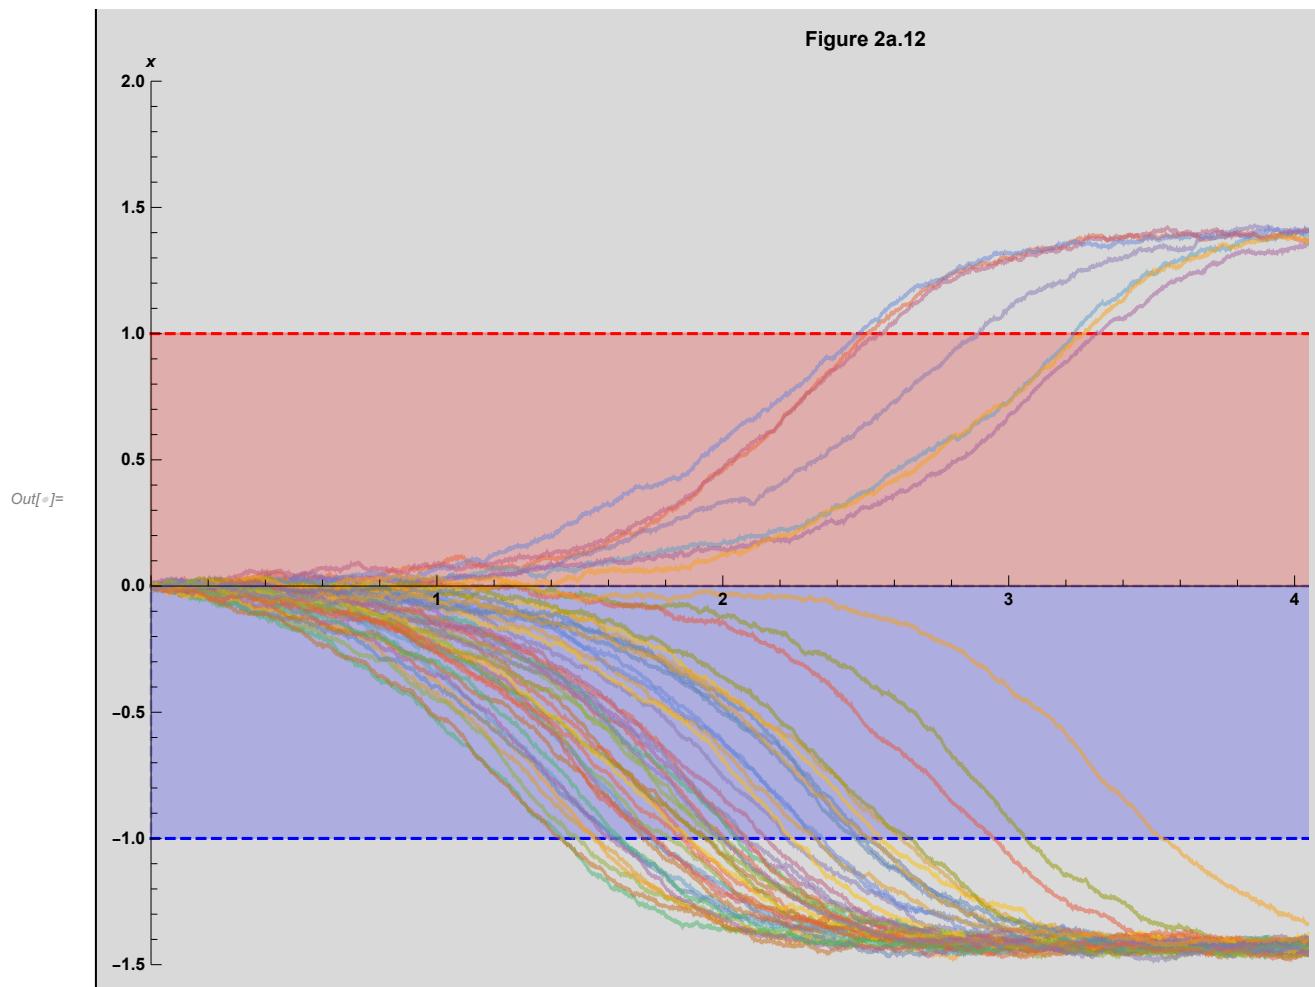

Despite the fact that the time (or range of time) where the solution crosses the boundaries are different for each computation, it is observed that the model in general tends to cross negative boundary more than the positive one, the stationary state or the attractor is said to be around -1.4 (see Figure 2a.12).

```
In[=]:= 

$$\mathcal{P} = \text{ItoProcess}[dx[t] == -(\beta * x[t]^3 + \alpha * x[t] + \mu) dt + \epsilon dw[t], x[t], \{x, x0\}, t, w \approx \text{WienerProcess[]}];$$

k = -1.4; (* value of x0 *)
l = 0.05; (* value of \mu *)
m = 0.05; (* value of \epsilon *)
q = 1; (* value of \beta *)
r = -2; (* value of \alpha *)
b1 = 1; b2 = -1; (* value of boundaries *)

meanf[t_] = Mean[\mathcal{P}[t]] /. {x0 \rightarrow k, \beta \rightarrow q, \alpha \rightarrow r, \mu \rightarrow l, \epsilon \rightarrow m} (* mean function *)
sdf[t_] = StandardDeviation[\mathcal{P}[t]] /. {x0 \rightarrow k, \beta \rightarrow q, \alpha \rightarrow r, \mu \rightarrow l, \epsilon \rightarrow m} (* standard deviation function *)

b1 = Plot[b1, {t, 0, 5}, PlotStyle \rightarrow {Dashed, Red},
PlotRange \rightarrow {{0, 5}, {-1.5, 2}}, Filling \rightarrow Axis];
b2 = Plot[b2, {t, 0, 5}, PlotStyle \rightarrow {Dashed, Blue},
PlotRange \rightarrow {{0, 5}, {-1.5, 2}}, Filling \rightarrow Axis];

p1 = ListLinePlot[RandomFunction[\mathcal{P} /. {x0 \rightarrow k, \beta \rightarrow q, \alpha \rightarrow r, \mu \rightarrow l, \epsilon \rightarrow m},
{0, 5, 0.001}, 50], BaseStyle \rightarrow Directive[Opacity[0.5]]];
(*
mean = Plot[meanf[t], {t, 0, 5}, PlotRange \rightarrow All,
PlotStyle \rightarrow Directive[Red, Thick, Dashed], PlotLegends \rightarrow {"mean"}];
uplmt = Plot[meanf[t] + 2 * sdf[t], {t, 0, 5}, PlotRange \rightarrow All,
PlotStyle \rightarrow {Black, Thick, Dashed}, PlotLegends \rightarrow {"upper limit"}];
lowlmt = Plot[meanf[t] - 2 * sdf[t], {t, 0, 5}, PlotRange \rightarrow All,
PlotStyle \rightarrow {Blue, Thick, Dashed}, PlotLegends \rightarrow {"lower limit"}];
*)
Show[{b1, b2, p1}, AxesLabel \rightarrow {RawBoxes[RowBox[{"time", ", ", "t"}]], HoldForm[x]}, PlotLabel \rightarrow "Figure 2a.13", LabelStyle \rightarrow {GrayLevel[0], Bold}, ImageSize \rightarrow 800]

Out[=]= Mean[ItoProcess[\{\{-0.05 + 2 x[t] - x[t]^3\}, \{\{0.05\}\}, x[t]\}, \{\{x\}, \{-1.4\}\}, \{t, 0\}][t]]]
```

```
Out[=]= StandardDeviation[
ItoProcess[\{\{-0.05 + 2 x[t] - x[t]^3\}, \{\{0.05\}\}, x[t]\}, \{\{x\}, \{-1.4\}\}, \{t, 0\}][t]]
```

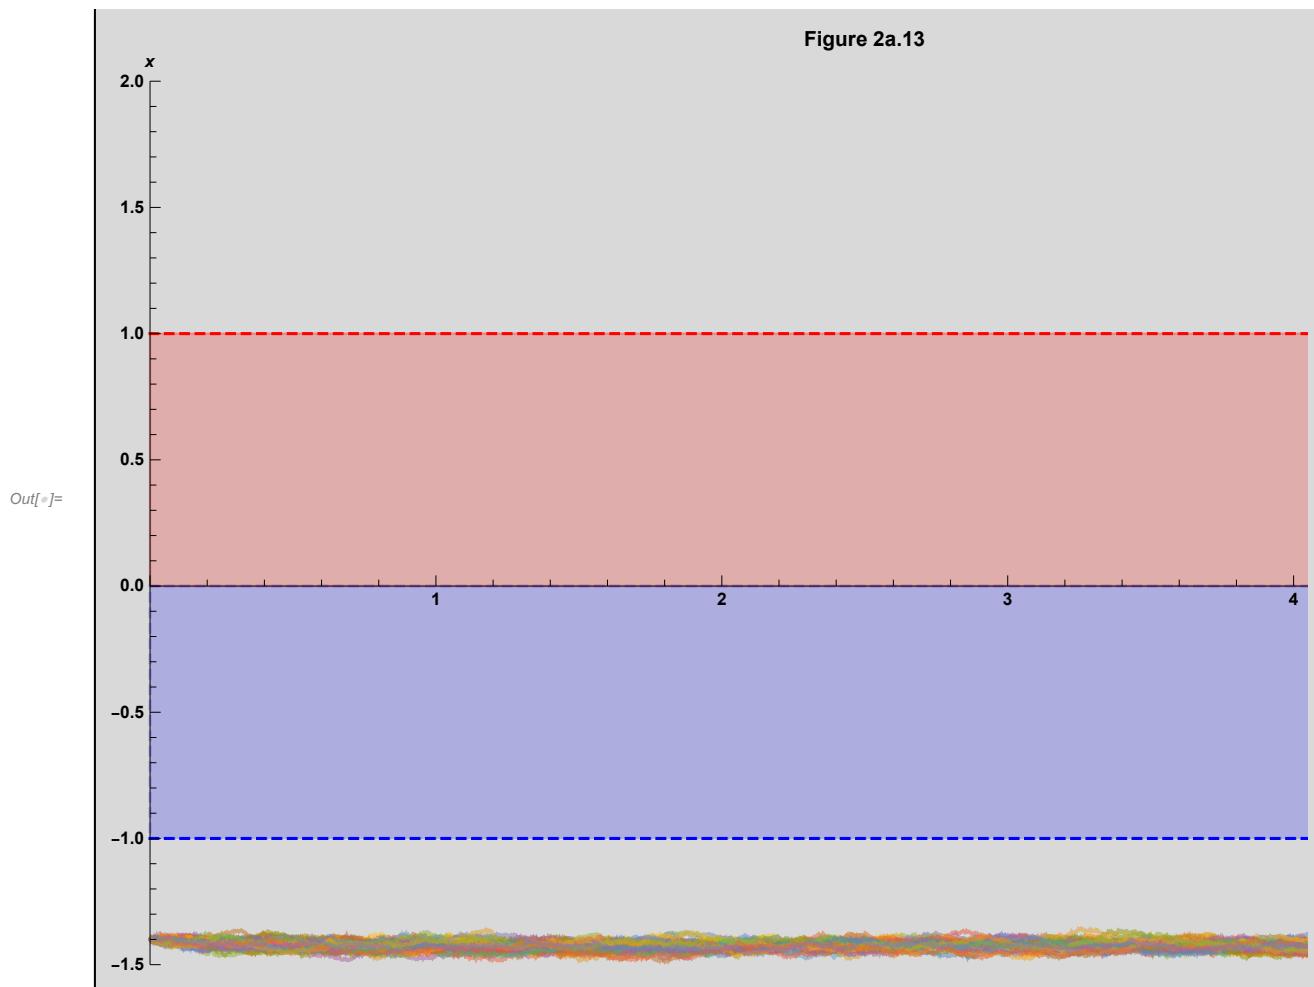
Figure 2a.13

Figure 2a.13 shows the case where initial condition x_0 equals to long term mean.

Ornstein-Uhlenbeck model (with 95% confidence interval applied)

```
In[1]:= 
P = ItoProcess[dx[t] == γ (μ - x[t]) dt + σ dw[t],
  x[t], {x, x0}, t, w ~ WienerProcess[0, 1]]
k = 0; (* value of x0 *)
l = 1.5; (* value of μ *)
m = 4; (* value of γ *)
n = 0.5; (* value of σ *)
b1 = 1; b2 = -1; (* value of boundaries*)

meanf[t_] = Mean[P[t]] /. {x0 → k, μ → l, γ → m, σ → n} (* mean function *)
sdf[t_] = StandardDeviation[P[t]] /. {x0 → k, μ → l, γ → m, σ → n}
(* standard deviation function *)
Limit[Mean[P[t]], t → ∞]
Limit[StandardDeviation[P[t]], t → ∞]

b1 = Plot[b1, {t, 0, 5}, PlotStyle → {Dashed, Red},
  PlotRange → {{0, 5}, {-1.5, 3}}, Filling → Axis];
b2 = Plot[b2, {t, 0, 5}, PlotStyle → {Dashed, Blue},
  PlotRange → {{0, 5}, {-1.5, 3}}, Filling → Axis];

p1 = ListLinePlot[RandomFunction[P /. {x0 → k, μ → l, γ → m, σ → n}, {0, 5, 0.001}, 20],
  BaseStyle → Directive[Opacity[0.5]]];
mean = Plot[meanf[t], {t, 0, 5}, PlotRange → All,
  PlotStyle → Directive[Red, Thick, Dashed], PlotLegends → {"mean"}];
uplmt = Plot[meanf[t] + 2 * sdf[t], {t, 0, 5}, PlotRange → All,
  PlotStyle → {Black, Thick, Dashed}, PlotLegends → {"upper limit"}];
lowlmt = Plot[meanf[t] - 2 * sdf[t], {t, 0, 5}, PlotRange → All,
  PlotStyle → {Blue, Thick, Dashed}, PlotLegends → {"lower limit"}];

Show[{b1, b2, p1, mean, uplmt, lowlmt},
  AxesLabel → {RawBoxes[RowBox[{"time", ", ", "t"}]], HoldForm[x]},
  PlotLabel → "Figure 2a.14", LabelStyle → {GrayLevel[0], Bold}, ImageSize → 800]

NSolve[meanf[t] == 1, t]
NSolve[meanf[t] + 2 * sdf[t] == 1, t]
NSolve[meanf[t] - 2 * sdf[t] == 1, t]
```

```
Out[1]= ItoProcess[{{γ μ - γ x[t]}, {{σ}}, x[t]}, {{x}, {x0}}, {t, 0}]
```

```
Out[2]= 1.5 e-4 t (-1 + e4 t)
```


```
Out[3]= 0.176777 √(e-8 t (-1 + e8 t))
```

```
Out[4]= μ if (x0 | μ) ∈ ℝ && γ > 0
```

Out[*f*₀]=

$$\frac{\sqrt{\frac{\sigma^2}{\gamma}}}{\sqrt{2}} \quad \text{if } \sigma^2 \in \mathbb{R} \& \gamma > 0 \& \& \sigma \neq 0$$

Figure 2a.14

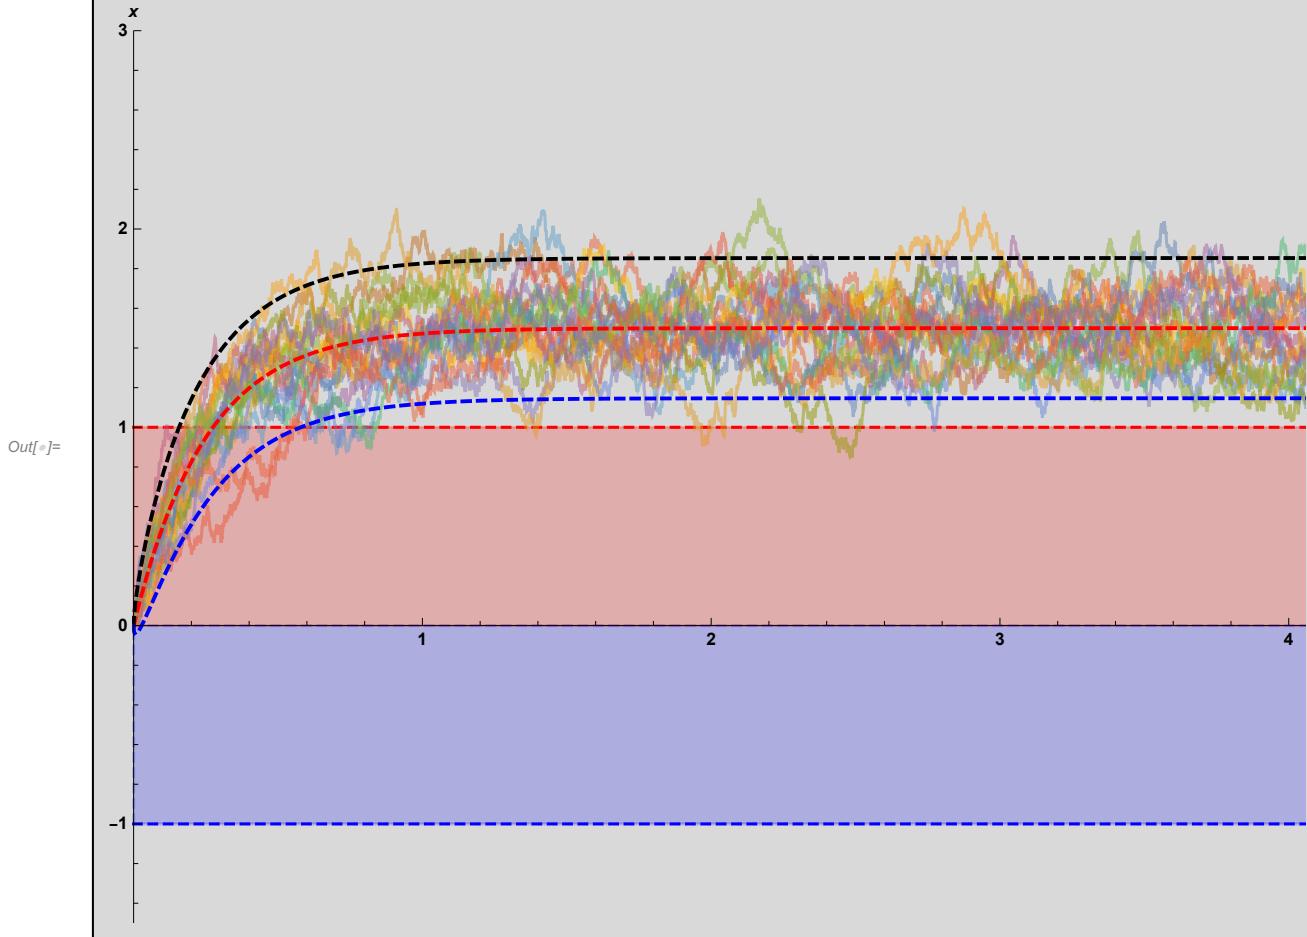

... **NSolve**: Inverse functions are being used by NSolve, so some solutions may not be found; use Reduce for complete solution information.

Out[*f*₀]=

$$\{ \{ t \rightarrow 0.274653 \} \}$$

... **NSolve**: Inverse functions are being used by NSolve, so some solutions may not be found; use Reduce for complete solution information.

Out[*f*₀]=

$$\{ \{ t \rightarrow 0.157405 \}, \{ t \rightarrow 0.157405 - 1.5708 i \}, \\ \{ t \rightarrow 0.157405 + 1.5708 i \}, \{ t \rightarrow 0.157405 + 3.14159 i \} \}$$

... **NSolve**: Inverse functions are being used by NSolve, so some solutions may not be found; use Reduce for complete solution information.

```
Out[6]= { {t → 0.578705}, {t → 0.578705 - 1.5708 i}, {t → 0.578705 + 1.5708 i}, {t → 0.578705 + 3.14159 i} }
```

From this plot of O-U model we observe that the passage time of the paths is between 0.15 to 0.6 period and with an expectation of $x = 1.5$ at 0.27 period.

c. Application of the methods

Combining Choices and Response Times in the Field: A Drift-Diffusion Model of Mobile Advertisements

Chiong, Khai and Shum, Matthew and Webb, Ryan and Chen, Richard, Combining Choices and Response Times in the Field: A Drift-Diffusion Model of Mobile Advertisements (January 14, 2019). Available at SSRN: <https://ssrn.com/abstract=3289386> or <http://dx.doi.org/10.2139/ssrn.3289386>
<https://economics.princeton.edu/wp-content/uploads/2019/08/Combining-Choices-and-Response.pdf>

In this article, Chiong et al. analyse the users' choices and their response times to video advertisements on mobile devices. The authors adapt a two-stage drift-diffusion model (DDM) to assess the optimal design and format of advertisements by investigating the behaviour of users in ad exposure stage and decision stage. In the first stage users were "forced" to watch the entire 30 seconds video ad and were then asked to make a decision in the second stage. The choices available were to either click-through to download the advertised app (positive threshold) or to click-back to return to the original app (negative threshold). From the result of the first stage, the authors found that there are two types of user (by which are then referred to as "positive users" and "negative users"), based on their estimated diffusion process drift towards or away the positive threshold. In this paper, the negative users are found to have a lower click-through rate and a shorter response time than the positive users. Behaviour of users towards non-skippable and skippable ads were also studied. Interestingly, the authors found out that the revenue for allowing viewers to skip the ad after 3 seconds are similar to that forcing them to watch the full 30 seconds-ad. In fact, as negative users are more appealed by short ads, publishers can optimise and increase their revenue by customizing their ads according to users' demographics. The authors conclude by highlighting three extensions of the study, including the

extension of DDM for multinomial choices, in which the first of N accumulation processes that hits a threshold is chosen.

Question 2 Plotting non-linear functions for a non-linear map

- a. Return map of $x(t+1)$ vs. $x(t)$
-

Logistic map

- b. Time series for Logistic map with different parameters
-

Chaotic parameter

Non-chaotic parameter

- c. Bifurcation and Lyapunov plots
-

Bifurcation diagrams

Lyapunov exponent diagram

Question 3 Parameters in non-linear dynamical systems

- a. Question 1b extension
-

Dynamic plot for parameters

Tipping point of the system when parameter changes

b. Question 2 extension

Estimating Lyapunov Exponent from Time Series

Estimating the Fractal dimension of Logistic Map using the Kaplan-Yorke conjecture