

Contents

[Power Query M formula language](#)

[Power Query M functions](#)

[Power Query M functions overview](#)

[Understanding Power Query M functions](#)

[Accessing data functions](#)

[Accessing data functions overview](#)

[AccessControlEntry.ConditionTolIdentities](#)

[AccessControlKind.Allow](#)

[AccessControlKind.Deny](#)

[Access.Database](#)

[ActiveDirectory.Domains](#)

[AdobeAnalytics.Cubes](#)

[AdoDotNet.DataSource](#)

[AdoDotNet.Query](#)

[AnalysisServices.Database](#)

[AnalysisServices.Databases](#)

[AzureStorage.BlobContents](#)

[AzureStorage.Blobs](#)

[AzureStorage.DataLake](#)

[AzureStorage.DataLakeContents](#)

[AzureStorage.Tables](#)

[Csv.Document](#)

[CsvStyle.QuoteAfterDelimiter](#)

[CsvStyle.QuoteAlways](#)

[Cube.AddAndExpandDimensionColumn](#)

[Cube.AddMeasureColumn](#)

[Cube.ApplyParameter](#)

[Cube.AttributeMemberId](#)

[Cube.AttributeMemberProperty](#)

Cube.CollapseAndRemoveColumns

Cube.Dimensions

Cube.DisplayFolders

Cube.MeasureProperties

Cube.MeasureProperty

Cube.Measures

Cube.Parameters

Cube.Properties

Cube.PropertyKey

Cube.ReplaceDimensions

Cube.Transform

DB2.Database

Essbase.Cubes

Excel.CurrentWorkbook

Excel.Workbook

Exchange.Contents

Facebook.Graph

File.Contents

Folder.Contents

Folder.Files

GoogleAnalytics.Accounts

Hdfs.Contents

Hdfs.Files

HdInsight.Containers

HdInsight.Contents

HdInsight.Files

Html.Table

Identity.From

Identity.IsMemberOf

IdentityProvider.Default

Informix.Database

Json.Document

Json.FromValue
MySQL.Database
OData.Feed
ODataOmitValues.Nulls
Odbc.DataSource
Odbc.InferOptions
Odbc.Query
OleDb.DataSource
OleDb.Query
Oracle.Database
Pdf.Tables
PostgreSQL.Database
RData.FromBinary
Salesforce.Data
Salesforce.Reports
SapBusinessWarehouse.Cubes
SapBusinessWarehouseExecutionMode.DataStream
SapBusinessWarehouseExecutionMode.BasXml
SapBusinessWarehouseExecutionMode.BasXmlGzip
SapHana.Database
SapHanaDistribution.All
SapHanaDistribution.Connection
SapHanaDistribution.Off
SapHanaDistribution.Statement
SapHanaRangeOperator.Equals
SapHanaRangeOperator.GreaterThan
SapHanaRangeOperator.GreaterThanOrEquals
SapHanaRangeOperator.LessThan
SapHanaRangeOperator.LessThanOrEquals
SapHanaRangeOperator.NotEquals
SharePoint.Contents
SharePoint.Files

[SharePoint.Tables](#)

[Soda.Feed](#)

[Sql.Database](#)

[Sql.Databases](#)

[Sybase.Database](#)

[Teradata.Database](#)

[WebAction.Request](#)

[Web.BrowserContents](#)

[Web.Contents](#)

[Web.Page](#)

[WebMethod.Delete](#)

[WebMethod.Get](#)

[WebMethod.Head](#)

[WebMethod.Patch](#)

[WebMethod.Post](#)

[WebMethod.Put](#)

[Xml.Document](#)

[Xml.Tables](#)

[Binary functions](#)

[Binary functions overview](#)

[Binary.Buffer](#)

[Binary.Combine](#)

[Binary.Compress](#)

[Binary.Decompress](#)

[Binary.From](#)

[Binary.FromList](#)

[Binary.FromText](#)

[Binary.InferContentType](#)

[Binary.Length](#)

[Binary.ToList](#)

[Binary.ToText](#)

[BinaryEncoding.Base64](#)

BinaryEncoding.Hex
BinaryFormat.7BitEncodedSignedInteger
BinaryFormat.7BitEncodedUnsignedInteger
BinaryFormat.Binary
BinaryFormat.Byte
BinaryFormat.ByteOrder
BinaryFormat.Choice
BinaryFormat.Decimal
BinaryFormat.Double
BinaryFormat.Group
BinaryFormat.Length
BinaryFormat.List
BinaryFormat.Null
BinaryFormat.Record
BinaryFormat.SignedInteger16
BinaryFormat.SignedInteger32
BinaryFormat.SignedInteger64
BinaryFormat.Single
BinaryFormat.Text
BinaryFormat.Transform
BinaryFormat.UnsignedInteger16
BinaryFormat.UnsignedInteger32
BinaryFormat.UnsignedInteger64
BinaryOccurrence.Optional
BinaryOccurrence.Repeating
BinaryOccurrence.Required
ByteOrder.BigEndian
ByteOrder.LittleEndian
Compression.Deflate
Compression.GZip
Occurrence.Optional
Occurrence.Repeating

[Occurrence.Required](#)

[#binary](#)

[Combiner functions](#)

[Combiner functions overview](#)

[Combiner.CombineTextByDelimiter](#)

[Combiner.CombineTextByEachDelimiter](#)

[Combiner.CombineTextByLengths](#)

[Combiner.CombineTextByPositions](#)

[Combiner.CombineTextByRanges](#)

[Comparer functions](#)

[Comparer functions overview](#)

[Comparer.Equals](#)

[Comparer.FromCulture](#)

[Comparer.Ordinal](#)

[Comparer.OrdinalIgnoreCase](#)

[Culture.Current](#)

[Date functions](#)

[Date functions overview](#)

[Date.AddDays](#)

[Date.AddMonths](#)

[Date.AddQuarters](#)

[Date.AddWeeks](#)

[Date.AddYears](#)

[Date.Day](#)

[Date.DayOfWeek](#)

[Date.DayOfWeekName](#)

[Date.DayOfYear](#)

[Date.DaysInMonth](#)

[Date.EndOfDay](#)

[Date.EndOfMonth](#)

[Date.EndOfQuarter](#)

[Date.EndOfWeek](#)

Date.EndOfYear
Date.From
Date.FromText
Date.IsInCurrentDay
Date.IsInCurrentMonth
Date.IsInCurrentQuarter
Date.IsInCurrentWeek
Date.IsInCurrentYear
Date.IsInNextDay
Date.IsInNextMonth
Date.IsInNextNDays
Date.IsInNextNMonths
Date.IsInNextNQuarters
Date.IsInNextNWeeks
Date.IsInNextNYears
Date.IsInNextQuarter
Date.IsInNextWeek
Date.IsInNextYear
Date.IsInPreviousDay
Date.IsInPreviousMonth
Date.IsInPreviousNDays
Date.IsInPreviousNMonths
Date.IsInPreviousNQuarters
Date.IsInPreviousNWeeks
Date.IsInPreviousNYears
Date.IsInPreviousQuarter
Date.IsInPreviousWeek
Date.IsInPreviousYear
Date.IsInYearToDate
Date.IsLeapYear
Date.Month
Date.MonthName

[Date.QuarterOfYear](#)

[Date.StartOfDay](#)

[Date.StartOfMonth](#)

[Date.StartOfQuarter](#)

[Date.StartOfWeek](#)

[Date.StartOfYear](#)

[Date.ToRecord](#)

[Date.ToText](#)

[Date.WeekOfMonth](#)

[Date.WeekOfYear](#)

[Date.Year](#)

[Day.Friday](#)

[Day.Monday](#)

[Day.Saturday](#)

[Day.Sunday](#)

[Day.Thursday](#)

[Day.Tuesday](#)

[Day.Wednesday](#)

[#date](#)

[DateTime functions](#)

[DateTime functions overview](#)

[DateTime.AddZone](#)

[DateTime.Date](#)

[DateTime.FixedLocalNow](#)

[DateTime.From](#)

[DateTime.FromFileTime](#)

[DateTime.FromText](#)

[DateTime.IsInCurrentHour](#)

[DateTime.IsInCurrentMinute](#)

[DateTime.IsInCurrentSecond](#)

[DateTime.IsInNextHour](#)

[DateTime.IsInNextMinute](#)

[DateTime.IsInNextNHours](#)
[DateTime.IsInNextNMinutes](#)
[DateTime.IsInNextNSeconds](#)
[DateTime.IsInNextSecond](#)
[DateTime.IsInPreviousHour](#)
[DateTime.IsInPreviousMinute](#)
[DateTime.IsInPreviousNHours](#)
[DateTime.IsInPreviousNMinutes](#)
[DateTime.IsInPreviousNSeconds](#)
[DateTime.IsInPreviousSecond](#)
[DateTime.LocalNow](#)
[DateTime.Time](#)
[DateTime.ToRecord](#)
[DateTime.ToText](#)
[#datetime](#)

[DateTimeZone functions](#)

[DateTimeZone functions overview](#)
[DateTimeZone.FixedLocalNow](#)
[DateTimeZone.FixedUtcNow](#)
[DateTimeZone.From](#)
[DateTimeZone.FromFileTime](#)
[DateTimeZone.FromText](#)
[DateTimeZone.LocalNow](#)
[DateTimeZone.RemoveZone](#)
[DateTimeZone.SwitchZone](#)
[DateTimeZone.ToLocal](#)
[DateTimeZone.ToRecord](#)
[DateTimeZone.ToText](#)
[DateTimeZone.ToUtc](#)
[DateTimeZone.UtcNow](#)
[DateTimeZone.ZoneHours](#)
[DateTimeZone.ZoneMinutes](#)

[#datetimezone](#)

[Duration functions](#)

[Duration functions overview](#)

[Duration.Days](#)

[Duration.From](#)

[Duration.FromText](#)

[Duration.Hours](#)

[Duration.Minutes](#)

[Duration.Seconds](#)

[Duration.ToRecord](#)

[Duration.TotalDays](#)

[Duration.TotalHours](#)

[Duration.TotalMinutes](#)

[Duration.TotalSeconds](#)

[Duration.ToText](#)

[#duration](#)

[Error handling](#)

[Error handling overview](#)

[Diagnostics.ActivityId](#)

[Diagnostics.Trace](#)

[Error.Record](#)

[TraceLevel.Critical](#)

[TraceLevel.Error](#)

[TraceLevel.Information](#)

[TraceLevel.Verbose](#)

[TraceLevel.Warning](#)

[Expression functions](#)

[Expression functions overview](#)

[Expression.Constant](#)

[Expression.Evaluate](#)

[Expression.Identifier](#)

[Function values](#)

[Function values overview](#)

[Function.From](#)

[Function.Invoke](#)

[Function.InvokeAfter](#)

[Function.IsDataSource](#)

[Function.ScalarVector](#)

[Lines functions](#)

[Lines functions overview](#)

[Lines.FromBinary](#)

[Lines.FromText](#)

[Lines.ToBinary](#)

[Lines.ToText](#)

[List functions](#)

[List functions overview](#)

[List.Accumulate](#)

[List.AllTrue](#)

[List.Alternate](#)

[List.AnyTrue](#)

[List.Average](#)

[List.Buffer](#)

[List.Combine](#)

[List.Contains](#)

[List.ContainsAll](#)

[List.ContainsAny](#)

[List.Count](#)

[List.Covariance](#)

[List.Dates](#)

[List.DateTimes](#)

[List.DateTimeZones](#)

[List.Difference](#)

[List.Distinct](#)

[List.Durations](#)

List.FindText
List.First
List.FirstN
List.Generate
List.InsertRange
List.Intersect
List.IsDistinct
List.IsEmpty
List.Last
List.LastN
List.MatchesAll
List.MatchesAny
List.Max
List.MaxN
List.Median
List.Min
List.MinN
List.Mode
List.Modes
List.NonNullCount
List.Numbers
List.PositionOf
List.PositionOfAny
List.Positions
List.Product
List.Random
List.Range
List.RemoveFirstN
List.RemoveItems
List.RemoveLastN
List.RemoveMatchingItems
List.RemoveNulls

[List.RemoveRange](#)

[List.Repeat](#)

[List.ReplaceMatchingItems](#)

[List.ReplaceRange](#)

[List.ReplaceValue](#)

[List.Reverse](#)

[List.Select](#)

[List.Single](#)

[List.SingleOrDefault](#)

[List.Skip](#)

[List.Sort](#)

[List.Split](#)

[List.StandardDeviation](#)

[List.Sum](#)

[List.Times](#)

[List.Transform](#)

[List.TransformMany](#)

[List.Union](#)

[List.Zip](#)

[Logical functions](#)

[Logical functions overview](#)

[Logical.From](#)

[Logical.FromText](#)

[Logical.ToText](#)

[Number functions](#)

[Number functions overview](#)

[Byte.From](#)

[Currency.From](#)

[Decimal.From](#)

[Double.From](#)

[Int8.From](#)

[Int16.From](#)

Int32.From
Int64.From
Number.Abs
Number.Acos
Number.Asin
Number.Atan
Number.Atan2
Number.BitwiseAnd
Number.BitwiseNot
Number.BitwiseOr
Number.BitwiseShiftLeft
Number.BitwiseShiftRight
Number.BitwiseXor
Number.Combinations
Number.Cos
Number.Cosh
Number.E
Number.Epsilon
Number.Exp
Number.Factorial
Number.From
Number.FromText
Number.IntegerDivide
Number.IsEven
Number.IsNaN
Number.IsOdd
Number.Ln
Number.Log
Number.Log10
Number.Mod
Number.NaN
Number.NegativeInfinity

[Number.Permutations](#)

[Number.PI](#)

[Number.PositiveInfinity](#)

[Number.Power](#)

[Number.Random](#)

[Number.RandomBetween](#)

[Number.Round](#)

[Number.RoundAwayFromZero](#)

[Number.RoundDown](#)

[Number.RoundTowardZero](#)

[Number.RoundUp](#)

[Number.Sign](#)

[Number.Sin](#)

[Number.Sinh](#)

[Number.Sqrt](#)

[Number.Tan](#)

[Number.Tanh](#)

[Number.ToText](#)

[Percentage.From](#)

[RoundingMode.AwayFromZero](#)

[RoundingMode.Down](#)

[RoundingMode.ToEven](#)

[RoundingMode.TowardZero](#)

[RoundingMode.Up](#)

[Single.From](#)

[Record functions](#)

[Record functions overview](#)

[MissingField.Error](#)

[MissingField.Ignore](#)

[MissingField.UseNull](#)

[Record.AddField](#)

[Record.Combine](#)

- Record.Field
- Record.FieldCount
- Record.FieldNames
- Record.FieldOrDefault
- Record.FieldValues
- Record.FromList
- Record.FromTable
- Record.HasFields
- Record.RemoveFields
- Record.RenameFields
- Record.ReorderFields
- Record.SelectFields
- Record.ToList
- Record.ToTable
- Record.TransformFields

Replacer functions

- Replacer functions overview
- Replacer.ReplaceText
- Replacer.ReplaceValue

Splitter functions

- Splitter functions overview
- QuoteStyle.Csv
- QuoteStyle.None
- Splitter.SplitByNothing
- Splitter.SplitTextByAnyDelimiter
- Splitter.SplitTextByCharacterTransition
- Splitter.SplitTextByDelimiter
- Splitter.SplitTextByEachDelimiter
- Splitter.SplitTextByLengths
- Splitter.SplitTextByPositions
- Splitter.SplitTextByRanges
- Splitter.SplitTextByRepeatedLengths

[Splitter.SplitTextByWhitespace](#)

Table functions

[Table functions overview](#)

[ExtraValues.Error](#)

[ExtraValues.Ignore](#)

[ExtraValues.List](#)

[GroupKind.Global](#)

[GroupKind.Local](#)

[ItemExpression.From](#)

[ItemExpression.Item](#)

[JoinAlgorithm.Dynamic](#)

[JoinAlgorithm.LeftHash](#)

[JoinAlgorithm.LeftIndex](#)

[JoinAlgorithm.PairwiseHash](#)

[JoinAlgorithm.RightHash](#)

[JoinAlgorithm.RightIndex](#)

[JoinAlgorithm.SortMerge](#)

[JoinKind.FullOuter](#)

[JoinKind.Inner](#)

[JoinKind.LeftAnti](#)

[JoinKind.LeftOuter](#)

[JoinKind.RightAnti](#)

[JoinKind.RightOuter](#)

[JoinSide.Left](#)

[JoinSide.Right](#)

[Occurrence.All](#)

[Occurrence.First](#)

[Occurrence.Last](#)

[Order.Ascending](#)

[Order.Descending](#)

[RowExpression.Column](#)

[RowExpression.From](#)

RowExpression.Row
Table.AddColumn
Table.AddIndexColumn
Table.AddJoinColumn
Table.AddKey
Table.AggregateTableColumn
Table.AlternateRows
Table.Buffer
Table.Column
Table.ColumnCount
Table.ColumnNames
Table.ColumnsOfType
Table.Combine
Table.CombineColumns
Table.Contains
Table.ContainsAll
Table.ContainsAny
Table.DemoteHeaders
Table.Distinct
Table.DuplicateColumn
Table.ExpandListColumn
Table.ExpandRecordColumn
Table.ExpandTableColumn
Table.FillDown
Table.FillUp
Table.FilterWithDataTable
Table.FindText
Table.First
Table.FirstN
Table.FirstValue
Table.FromColumns
Table.FromList

Table.FromPartitions
Table.FromRecords
Table.FromRows
Table.FromValue
Table.FuzzyJoin
Table.FuzzyNestedJoin
Table.Group
Table.HasColumns
Table.InsertRows
Table.IsDistinct
Table.IsEmpty
Table.Join
Table.Keys
Table.Last
Table.LastN
Table.MatchesAllRows
Table.MatchesAnyRows
Table.Max
Table.MaxN
Table.Min
Table.MinN
Table.NestedJoin
Table.Partition
Table.PartitionValues
Table.Pivot
Table.PositionOf
Table.PositionOfAny
Table.PrefixColumns
Table.Profile
Table.PromoteHeaders
Table.Range
Table.RemoveColumns

Table.RemoveFirstN
Table.RemoveLastN
Table.RemoveMatchingRows
Table.RemoveRows
Table.RemoveRowsWithErrors
Table.RenameColumns
Table.ReorderColumns
Table.Repeat
Table.ReplaceErrorValues
Table.ReplaceKeys
Table.ReplaceMatchingRows
Table.ReplaceRelationshipIdentity
Table.ReplaceRows
Table.ReplaceValue
Table.Reverse
Table.ReverseRows
Table.RowCount
Table.Schema
Table.SelectColumns
Table.SelectRows
Table.SelectRowsWithErrors
Table.SingleRow
Table.Skip
Table.Sort
Table.Split
Table.SplitColumn
Table.ToColumns
Table.ToList
Table.ToRecords
Table.ToRows
Table.TransformColumnNames
Table.TransformColumns

[Table.TransformColumnTypes](#)

[Table.TransformRows](#)

[Table.Transpose](#)

[Table.Unpivot](#)

[Table.UnpivotOtherColumns](#)

[Table.View](#)

[Table.ViewFunction](#)

[Tables.GetRelationships](#)

[#table](#)

[Text functions](#)

[Text functions overview](#)

[Character.FromNumber](#)

[Character.ToNumber](#)

[Guid.From](#)

[Json.FromValue](#)

[RelativePosition.FromEnd](#)

[RelativePosition.FromStart](#)

[Text.AfterDelimiter](#)

[Text.At](#)

[Text.BeforeDelimiter](#)

[Text.BetweenDelimiters](#)

[Text.Clean](#)

[Text.Combine](#)

[Text.Contains](#)

[Text.End](#)

[Text.EndsWith](#)

[Text.Format](#)

[Text.From](#)

[Text.FromBinary](#)

[Text.InferNumberType](#)

[Text.Insert](#)

[Text.Length](#)

Text.Lower
Text.Middle
Text.NewGuid
Text.PadEnd
Text.PadStart
Text.PositionOf
Text.PositionOfAny
Text.Proper
Text.Range
Text.Remove
Text.RemoveRange
Text.Repeat
Text.Replace
Text.ReplaceRange
Text.Reverse
Text.Select
Text.Split
Text.SplitAny
Text.Start
Text.StartsWith
Text.ToBinary
Text.ToList
Text.Trim
Text.TrimEnd
Text.TrimStart
Text.Upper
TextEncoding.Ascii
TextEncoding.BigEndianUnicode
TextEncoding.Unicode
TextEncoding.Utf8
TextEncoding.Utf16
TextEncoding.Windows

Time functions

[Time functions overview](#)

[Time.EndOfHour](#)

[Time.From](#)

[Time.FromText](#)

[Time.Hour](#)

[Time.Minute](#)

[Time.Second](#)

[Time.StartOfHour](#)

[Time.ToRecord](#)

[Time.ToText](#)

[#time](#)

Type functions

[Type functions overview](#)

[Type.AddTableKey](#)

[Type.ClosedRecord](#)

[Type.Facets](#)

[Type.ForFunction](#)

[Type.ForRecord](#)

[Type.FunctionParameters](#)

[Type.FunctionRequiredParameters](#)

[Type.FunctionReturn](#)

[Type.Is](#)

[Type.IsNullable](#)

[Type.IsOpenRecord](#)

[Type.ListItem](#)

[Type.NonNullable](#)

[Type.OpenRecord](#)

[Type.RecordFields](#)

[Type.ReplaceFacets](#)

[Type.ReplaceTableKeys](#)

[Type.TableColumn](#)

[Type.TableKeys](#)

[Type.TableRow](#)

[Type.TableSchema](#)

[Type.Union](#)

[Uri functions](#)

[Uri functions overview](#)

[Uri.BuildQueryString](#)

[Uri.Combine](#)

[Uri.EscapeDataString](#)

[Uri.Parts](#)

[Value functions](#)

[Value functions overview](#)

[DirectQueryCapabilities.From](#)

[Embedded.Value](#)

[Precision.Decimal](#)

[Precision.Double](#)

[SqlExpression.SchemaFrom](#)

[SqlExpression.ToExpression](#)

[Value.Add](#)

[Value.As](#)

[Value.Compare](#)

[Value.Divide](#)

[Value.Equals](#)

[Value.Firewall](#)

[Value.FromText](#)

[Value.Is](#)

[Value.Metadata](#)

[Value.Multiply](#)

[Value.NativeQuery](#)

[Value.NullableEquals](#)

[Value.RemoveMetadata](#)

[Value.ReplaceMetadata](#)

[Value.ReplaceType](#)

[Value.Subtract](#)

[Value.Type](#)

[Variable.Value](#)

[Quick tour of the Power Query M formula language](#)

[Power Query M language specification](#)

[Power Query M type system](#)

[Expressions, values, and let expression](#)

[Comments](#)

[Evaluation model](#)

[Operators](#)

[Type conversion](#)

[Metadata](#)

[Errors](#)

Power Query M function reference

11/25/2019 • 2 minutes to read

The Power Query M function reference includes articles for each of the over 700 functions. The reference articles you see here on docs.microsoft.com are auto-generated from in-product help. To learn more about functions and how they work in an expression, see [Understanding Power Query M functions](#).

Functions by category

- [Accessing data functions](#)
- [Binary functions](#)
- [Combiner functions](#)
- [Comparer functions](#)
- [Date functions](#)
- [DateTime functions](#)
- [DateTimeZone functions](#)
- [Duration functions](#)
- [Error handling](#)
- [Expression functions](#)
- [Function values](#)
- [List functions](#)
- [Lines functions](#)
- [Logical functions](#)
- [Number functions](#)
- [Record functions](#)
- [Replacer functions](#)
- [Splitter functions](#)
- [Table functions](#)
- [Text functions](#)
- [Time functions](#)
- [Type functions](#)
- [Uri functions](#)
- [Value functions](#)

Understanding Power Query M functions

11/25/2019 • 2 minutes to read

In the Power Query M formula language, a **function** is a mapping from a set of input values to a single output value. A function is written by first naming the function parameters, and then providing an expression to compute the result of the function. The body of the function follows the goes-to (\Rightarrow) symbol. Optionally, type information can be included on parameters and the function return value. A function is defined and invoked in the body of a **let** statement. Parameters and/or return value can be implicit or explicit. Implicit parameters and/or return value are of type **any**. Type **any** is similar to an object type in other languages. All types in M derive from type **any**.

A **function** is a value just like a number or a text value, and can be included in-line just like any other expression. The following example shows a function which is the value of an Add variable which is then invoked, or executed, from several other variables. When a function is invoked, a set of values are specified which are logically substituted for the required set of input values within the function body expression.

Example – Explicit parameters and return value

```
let
    AddOne = (x as number) as number => x + 1,
    //additional expression steps
    CalcAddOne = AddOne(5)
in
    CalcAddOne
```

Example – Implicit parameters and return value

```
let
    Add = (x, y) => x + y,
    AddResults =
        [
            OnePlusOne = Add(1, 1),    // equals 2
            OnePlusTwo = Add(1, 2)    // equals 3
        ]
in
    AddResults
```

Find the first element of a list greater than 5, or null otherwise

```
let
    FirstGreaterThan5 = (list) =>
        let
            GreaterThan5 = List.Select(list, (n) => n > 5),
            First = List.First(GreaterThan5)
        in
            First,
    Results =
        [
            Found = FirstGreaterThan5({3,7,9}), // equals 7
            NotFound = FirstGreaterThan5({1,3,4}) // equals null
        ]
in
    Results
```

Functions can be used recursively. In order to recursively reference the function, prefix the identifier with @.

```
let
  fact = (num) => if num = 0 then 1 else num * @fact (num-1)
in
  fact(5) // equals 120
```

Each keyword

The **each** keyword is used to easily create simple functions. "each ..." is syntactic sugar for a function signature that takes the `_` parameter "`(_) => ...`"

Each is useful when combined with the lookup operator, which is applied by default to `_`

For example, `each [CustomerID]` is the same as `each _[CustomerID]`, which is the same as `(_) => _[CustomerID]`

Example – Using each in table row filter

```
Table.SelectRows(
  Table.FromRecords({
    [CustomerID = 1, Name = "Bob", Phone = "123-4567"],
    [CustomerID = 2, Name = "Jim", Phone = "987-6543"] ,
    [CustomerID = 3, Name = "Paul", Phone = "543-7890"] ,
    [CustomerID = 4, Name = "Ringo", Phone = "232-1550"]
  }),
  each [CustomerID] = 2
)[Name]

// equals "Jim"
```

Accessing data functions

11/25/2019 • 8 minutes to read

Accessing data

Functions in this section access data and return table values. Most of these functions return a table value that is called a **navigation table**. A **navigation table** is a two column table. The first column contains the name of an item and the corresponding second column contains the value of that item. This shape is primarily used by the Power Query user interface to provide navigation experience over the potentially large hierarchical data returned.

FUNCTION	DESCRIPTION
AccessControlEntry.ConditionTolIdentities	Returns a list of identities that the condition will accept.
AccessControlKind.Allow	Access is allowed.
AccessControlKind.Deny	Access is denied.
Access.Database	Returns a structural representation of an Microsoft Access database.
ActiveDirectory.Domains	Returns a list of Active Directory domains in the same forest as the specified domain or of the current machine's domain if none is specified.
AdobeAnalytics.Cubes	Returns the report suites in Adobe Analytics.
AdoDotNet.DataSource	Returns the schema collection for an ADO.NET data source.
AdoDotNet.Query	Returns the schema collection for an ADO.NET data source.
AnalysisServices.Database	Returns a table of multidimensional cubes or tabular models from the Analysis Services database.
AnalysisServices.Databases	Returns the Analysis Services databases on a particular host.
AzureStorage.BlobContents	Returns the content of the specified blob from an Azure storage vault.
AzureStorage.Blobs	Returns a navigational table containing all containers found in the Azure Storage account. Each row has the container name and a link to the container blobs.
AzureStorage.DataLake	Returns a navigational table containing the documents found in the specified container and its subfolders from Azure Data Lake Storage.
AzureStorage.DataLakeContents	Returns the content of the specified file from an Azure Data Lake Storage filesystem.

FUNCTION	DESCRIPTION
AzureStorage.Tables	Returns a navigational table containing a row for each table found at the account URL from an Azure storage vault. Each row contains a link to the azure table.
Csv.Document	Returns the contents of a CSV document as a table using the specified encoding.
CsvStyle QuoteAfterDelimiter	Quotes in a field are only significant immediately following the delimiter.
CsvStyle QuoteAlways	Quotes in a field are always significant regardless of where they appear.
Cube.AddAndExpandDimensionColumn	Merges the specified dimension table, dimensionSelector, into the cube's, cube, filter context and changes the dimensional granularity by expanding the specified set, attributeNames, of dimension attributes.
Cube.AddMeasureColumn	Adds a column with the name column to the cube that contains the results of the measure measureSelector applied in the row context of each row.
Cube.ApplyParameter	Returns a cube after applying parameter with arguments to cube.
Cube.AttributeMemberId	Returns the unique member identifier from a member property value.
Cube.AttributeMemberProperty	Returns the property <code>propertyName</code> of dimension attribute <code>attribute</code> .
Cube.CollapseAndRemoveColumns	Changes the dimensional granularity of the filter context for the cube by collapsing the attributes mapped to the specified columns columnNames.
Cube.Dimensions	Returns a table containing the set of available dimensions within the cube.
Cube.DisplayFolders	Returns a nested tree of tables representing the display folder hierarchy of the objects (e.g. dimensions and measures) available for use in the cube.
Cube.MeasureProperties	Returns a table containing the set of available properties for measures that are expanded in the cube.
Cube.MeasureProperty	Returns the property of a measure.
Cube.Measures	Returns a table containing the set of available measures within the cube.
Cube.Parameters	Returns a table containing the set of parameters that can be applied to cube.

FUNCTION	DESCRIPTION
Cube.Properties	Returns a table containing the set of available properties for dimensions that are expanded in the cube.
Cube.PropertyKey	Returns the key of property <code>property</code> .
Cube.ReplaceDimensions	
Cube.Transform	Applies the list cube functions, transforms, on the cube.
DB2.Database	Returns a table of SQL tables and views available in a Db2 database.
Essbase.Cubes	Returns the cubes in an Essbase instance grouped by Essbase server.
Excel.CurrentWorkbook	Returns the tables in the current Excel Workbook.
Excel.Workbook	Returns a table representing sheets in the given excel workbook.
Exchange.Contents	Returns a table of contents from a Microsoft Exchange account.
Facebook.Graph	Returns a record containing content from the Facebook graph.
File.Contents	Returns the binary contents of the file located at a path.
Folder.Contents	Returns a table containing the properties and contents of the files and folders found at path.
Folder.Files	Returns a table containing a row for each file found at a folder path, and subfolders. Each row contains properties of the folder or file and a link to its content.
GoogleAnalytics.Accounts	Returns the Google Analytics accounts for the current credential.
Hdfs.Contents	Returns a table containing a row for each folder and file found at the folder url, {0}, from a Hadoop file system. Each row contains properties of the folder or file and a link to its content.
Hdfs.Files	Returns a table containing a row for each file found at the folder url, {0}, and subfolders from a Hadoop file system. Each row contains properties of the file and a link to its content.
HdInsight.Containers	Returns a navigational table containing all containers found in the HDInsight account. Each row has the container name and table containing its files.
HdInsight.Contents	Returns a navigational table containing all containers found in the HDInsight account. Each row has the container name and table containing its files.

FUNCTION	DESCRIPTION
HdInsight.Files	Returns a table containing a row for each folder and file found at the container URL, and subfolders from an HDInsight account. Each row contains properties of the file/folder and a link to its content.
Html.Table	Returns a table containing the results of running the specified CSS selectors against the provided html
Identity.From	Creates an identity.
Identity.IsMemberOf	Determines whether an identity is a member of an identity collection.
IdentityProvider.Default	The default identity provider for the current host.
Informix.Database	Returns a table of SQL tables and views available in an Informix database on server <code>server</code> in the database instance named <code>database</code> .
Json.Document	Returns the contents of a JSON document. The contents may be directly passed to the function as text, or it may be the binary value returned by a function like File.Contents.
Json.FromValue	Produces a JSON representation of a given value value with a text encoding specified by encoding.
MySQL.Database	Returns a table with data relating to the tables in the specified MySQL Database.
OData.Feed	Returns a table of OData feeds offered by an OData serviceUri.
ODataOmitValues.Nulls	Allows the OData service to omit null values.
Odbc.DataSource	Returns a table of SQL tables and views from the ODBC data source specified by the connection string <code>connectionString</code> .
Odbc.InferOptions	Returns the result of trying to infer SQL capabilities for an ODBC driver.
Odbc.Query	Connects to a generic provider with the given connection string and returns the result of evaluating the query.
OleDb.DataSource	Returns a table of SQL tables and views from the OLE DB data source specified by the connection string.
OleDb.Query	Returns the result of running a native query on an OLE DB data source.
Oracle.Database	Returns a table with data relating to the tables in the specified Oracle Database.
Pdf.Tables	Returns any tables found in pdf.

FUNCTION	DESCRIPTION
PostgreSQL.Database	Returns a table with data relating to the tables in the specified PostgreSQL Database.
RData.FromBinary	Returns a record of data frames from the RData file.
Salesforce.Data	Connects to the Salesforce Objects API and returns the set of available objects (i.e. Accounts).
Salesforce.Reports	Connects to the Salesforce Reports API and returns the set of available reports.
SapBusinessWarehouse.Cubes	Returns the InfoCubes and queries in an SAP Business Warehouse system grouped by InfoArea.
SapBusinessWarehouseExecutionMode.DataStream	'DataStream flattening mode' option for MDX execution in SAP Business Warehouse.
SapBusinessWarehouseExecutionMode.BasXml	'bXML flattening mode' option for MDX execution in SAP Business Warehouse.
SapBusinessWarehouseExecutionMode.BasXmlGzip	'Gzip compressed bXML flattening mode' option for MDX execution in SAP Business Warehouse. Recommended for low latency or high volume queries.
SapHana.Database	Returns the packages in an SAP HANA database.
SapHanaDistribution.All	Returns the packages in an SAP HANA database.
SapHanaDistribution.Connection	'Connection' distribution option for SAP HANA.
SapHanaDistribution.Off	'Off' distribution option for SAP HANA.
SapHanaDistribution.Statement	'Statement' distribution option for SAP HANA.
SapHanaRangeOperator.Equals	'Equals' range operator for SAP HANA input parameters.
SapHanaRangeOperator.GreaterThan	'Greater than' range operator for SAP HANA input parameters.
SapHanaRangeOperator.GreaterThanOrEquals	'Greater than or equals' range operator for SAP HANA input parameters.
SapHanaRangeOperator.LessThan	'Less than' range operator for SAP HANA input parameters.
SapHanaRangeOperator.LessThanOrEquals	'Less than or equals' range operator for SAP HANA input parameters.
SapHanaRangeOperator.NotEquals	'Not equals' range operator for SAP HANA input parameters.
SharePoint.Contents	Returns a table containing a row for each folder and document found at the SharePoint site url. Each row contains properties of the folder or file and a link to its content.

FUNCTION	DESCRIPTION
SharePoint.Files	Returns a table containing a row for each document found at the SharePoint site url, and subfolders. Each row contains properties of the folder or file and a link to its content.
SharePoint.Tables	Returns a table containing the result of a SharePoint List as an OData feed.
Soda.Feed	Returns the resulting table of a CSV file that can be accessed using the SODA 2.0 API. The URL must point to a valid SODA-compliant source that ends in a .csv extension.
Sql.Database	Returns a table containing SQL tables located on a SQL Server instance database.
Sql.Databases	Returns a table with references to databases located on a SQL Server instance. Returns a navigation table.
Sybase.Database	Returns a table with data relating to the tables in the specified Sybase Database.
Teradata.Database	Returns a table with data relating to the tables in the specified Teradata Database.
WebAction.Request	Creates an action that, when executed, will return the results of performing a method request against url using HTTP as a binary value.
Web.BrowserContents	Returns the HTML for the specified url, as viewed by a web browser.
Web.Contents	Returns the contents downloaded from a web url as a binary value.
Web.Page	Returns the contents of an HTML webpage as a table.
WebMethod.Delete	Specifies the DELETE method for HTTP.
WebMethod.Get	Specifies the GET method for HTTP.
WebMethod.Head	Specifies the HEAD method for HTTP.
WebMethod.Patch	Specifies the PATCH method for HTTP.
WebMethod.Post	Specifies the POST method for HTTP.
WebMethod.Put	Specifies the PUT method for HTTP.
Xml.Document	Returns the contents of an XML document as a hierarchical table (list of records).
Xml.Tables	Returns the contents of an XML document as a nested collection of flattened tables.

AccessControlEntry.ConditionToIdentities

11/25/2019 • 2 minutes to read

Syntax

```
AccessControlEntry.ConditionToIdentities(identityProvider as function, condition as function) as list
```

About

Using the specified `identityProvider`, converts the `condition` into the list of identities for which `condition` would return `true` in all authorization contexts with `identityProvider` as the identity provider. An error is raised if it is not possible to convert `condition` into a list of identities, for example if `condition` consults attributes other than user or group identities to make a decision.

Note that the list of identities represents the identities as they appear in `condition` and no normalization (such as group expansion) is performed on them.

AccessControlKind.Allow

11/25/2019 • 2 minutes to read

About

Access is allowed.

AccessControlKind.Deny

11/25/2019 • 2 minutes to read

About

Access is denied.

Access.Database

11/25/2019 • 2 minutes to read

Syntax

```
Access.Database(database as binary, optional options as nullable record) as table
```

About

Returns a structural representation of an Access database, `database`. An optional record parameter, `options`, may be specified to control the following options:

- `CreateNavigationProperties`: A logical (true/false) that sets whether to generate navigation properties on the returned values (default is false).
- `NavigationPropertyNameGenerator`: A function that is used for the creation of names for navigation properties.

The record parameter is specified as [option1 = value1, option2 = value2...], for example.

ActiveDirectory.Domains

11/25/2019 • 2 minutes to read

Syntax

```
ActiveDirectory.Domains(optional forestRootDomainName as nullable text) as table
```

About

Returns a list of Active Directory domains in the same forest as the specified domain or of the current machine's domain if none is specified.

AdobeAnalytics.Cubes

11/25/2019 • 2 minutes to read

Syntax

```
AdobeAnalytics.Cubes(optional options as nullable record) as table
```

About

Returns a table of multidimensional packages from Adobe Analytics. An optional record parameter, `options`, may be specified to control the following options:

- `HierarchicalNavigation` : A logical (true/false) that sets whether to view the tables grouped by their schema names (default is false).
- `MaxRetryCount` : The number of retries to perform when polling for the result of the query. The default value is 120.
- `RetryInterval` : The duration of time between retry attempts. The default value is 1 second.

AdoDotNet.DataSource

11/25/2019 • 2 minutes to read

Syntax

```
AdoDotNet.DataSource(providerName as text, connectionString as any, optional options as nullable record) as table
```

About

Returns the schema collection for the ADO.NET data source with provider name `providerName` and connection string `connectionString`. `connectionString` can be text or a record of property value pairs. Property values can either be text or number. An optional record parameter, `options`, may be provided to specify additional properties. The record can contain the following fields:

- `CommandTimeout`: A duration which controls how long the server-side query is allowed to run before it is canceled. The default value is ten minutes.
- `SqlCompatibleWindowsAuth`: A logical (true/false) that determines whether to produce SQL Server-compatible connection string options for Windows authentication. The default value is true.
- `TypeMap`

AdoDotNet.Query

11/25/2019 • 2 minutes to read

Syntax

```
AdoDotNet.Query(providerName as text, connectionString as any, query as text, optional options as nullable record) as table
```

About

Returns the result of running `query` with the connection string `connectionString` using the ADO.NET provider `providerName`. `connectionString` can be text or a record of property value pairs. Property values can either be text or number. An optional record parameter, `options`, may be provided to specify additional properties. The record can contain the following fields:

- `CommandTimeout` : A duration which controls how long the server-side query is allowed to run before it is canceled. The default value is ten minutes.
- `SqlCompatibleWindowsAuth` : A logical (true/false) that determines whether to produce SQL Server-compatible connection string options for Windows authentication. The default value is true.

AnalysisServices.Database

11/25/2019 • 2 minutes to read

Syntax

```
AnalysisServices.Database(server as text, database as text, optional options as nullable record)  
as table
```

About

Returns a table of multidimensional cubes or tabular models from the Analysis Services database `database` on server `server`. An optional record parameter, `options`, may be specified to control the following options:

- `Query` : A native MDX query used to retrieve data.
- `TypedMeasureColumns` : A logical value indicating if the types specified in the multidimensional or tabular model will be used for the types of the added measure columns. When set to false, the type "number" will be used for all measure columns. The default value for this option is false.
- `Culture` : A culture name specifying the culture for the data. This corresponds to the 'Locale Identifier' connection string property.
- `CommandTimeout` : A duration which controls how long the server-side query is allowed to run before it is canceled. The default value is driver-dependent.
- `ConnectionTimeout` : A duration which controls how long to wait before abandoning an attempt to make a connection to the server. The default value is driver-dependent.
- `SubQueries` : A number (0, 1 or 2) that sets the value of the "SubQueries" property in the connection string. This controls the behavior of calculated members on subselects or subcubes. (The default value is 2).
- `Implementation`

AnalysisServices.Databases

11/25/2019 • 2 minutes to read

Syntax

```
AnalysisServices.Databases(server as text, optional options as nullable record) as table
```

About

Returns databases on an Analysis Services instance, `server`. An optional record parameter, `options`, may be provided to specify additional properties. The record can contain the following fields:

- `TypedMeasureColumns` : A logical value indicating if the types specified in the multidimensional or tabular model will be used for the types of the added measure columns. When set to false, the type "number" will be used for all measure columns. The default value for this option is false.
- `Culture` : A culture name specifying the culture for the data. This corresponds to the 'Locale Identifier' connection string property.
- `CommandTimeout` : A duration which controls how long the server-side query is allowed to run before it is canceled. The default value is driver-dependent.
- `ConnectionTimeout` : A duration which controls how long to wait before abandoning an attempt to make a connection to the server. The default value is driver-dependent.
- `SubQueries` : A number (0, 1 or 2) that sets the value of the "SubQueries" property in the connection string. This controls the behavior of calculated members on subselects or subcubes. (The default value is 2).
- `Implementation`

AzureStorage.BlobContents

11/25/2019 • 2 minutes to read

Syntax

```
AzureStorage.BlobContents(url as text, optional options as nullable record) as binary
```

About

Returns the content of the blob at the URL, `url`, from an Azure storage vault. `options` may be specified to control the following options:

- `BlockSize` : The number of bytes to read before waiting on the data consumer. The default value is 4 MB.
- `RequestSize` : The number of bytes to try to read in a single HTTP request to the server. The default value is 4 MB.
- `ConcurrentRequests` : The ConcurrentRequests option supports faster download of data by specifying the number of requests to be made in parallel, at the cost of memory utilization. The memory required is (ConcurrentRequest * RequestSize). The default value is 16.

AzureStorage.Blobs

11/25/2019 • 2 minutes to read

Syntax

```
AzureStorage.Blobs(account as text, optional options as nullable record) as table
```

About

Returns a navigational table containing a row for each container found at the account URL, `account`, from an Azure storage vault. Each row contains a link to the container blobs. `options` may be specified to control the following options:

- `BlockSize` : The number of bytes to read before waiting on the data consumer. The default value is 4 MB.
- `RequestSize` : The number of bytes to try to read in a single HTTP request to the server. The default value is 4 MB.
- `ConcurrentRequests` : The ConcurrentRequests option supports faster download of data by specifying the number of requests to be made in parallel, at the cost of memory utilization. The memory required is (ConcurrentRequest * RequestSize). The default value is 16.

AzureStorage.DataLake

11/25/2019 • 2 minutes to read

Syntax

```
AzureStorage.DataLake(endpoint as text, optional options as nullable record) as table
```

About

Returns a navigational table containing the documents found in the specified container and its subfolders at the account URL, `endpoint`, from an Azure Data Lake Storage filesystem. `options` may be specified to control the following options:

- `BlockSize` : The number of bytes to read before waiting on the data consumer. The default value is 4 MB.
- `RequestSize` : The number of bytes to try to read in a single HTTP request to the server. The default value is 4 MB.
- `ConcurrentRequests` : The `ConcurrentRequests` option supports faster download of data by specifying the number of requests to be made in parallel, at the cost of memory utilization. The memory required is (`ConcurrentRequest * RequestSize`). The default value is 16.
- `HierarchicalNavigation` : A logical (true/false) that controls whether the files are returned in a tree-like directory view or in a flat list. The default value is false.

AzureStorage.DataLakeContents

11/25/2019 • 2 minutes to read

Syntax

```
AzureStorage.DataLakeContents(url as text, optional options as nullable record) as binary
```

About

Returns the content of the file at the URL, `url`, from an Azure Data Lake Storage filesystem. `options` may be specified to control the following options:

- `BlockSize` : The number of bytes to read before waiting on the data consumer. The default value is 4 MB.
- `RequestSize` : The number of bytes to try to read in a single HTTP request to the server. The default value is 4 MB.
- `ConcurrentRequests` : The ConcurrentRequests option supports faster download of data by specifying the number of requests to be made in parallel, at the cost of memory utilization. The memory required is (ConcurrentRequest * RequestSize). The default value is 16.

AzureStorage.Tables

11/25/2019 • 2 minutes to read

Syntax

```
AzureStorage.Tables(account as text) as table
```

About

Returns a navigational table containing a row for each table found at the account URL, `account`, from an Azure storage vault. Each row contains a link to the azure table.

Csv.Document

11/25/2019 • 2 minutes to read

Syntax

```
Csv.Document(source as any, optional columns as any, optional delimiter as any, optional extraValues as nullable number, optional encoding as nullable number) as table
```

About

Returns the contents of the CSV document as a table.

- `columns` can be null, the number of columns, a list of column names, a table type, or an options record. (See below for more details on the options record.)
- `delimiter` can be a single character, or a list of characters. Default: `","`.
- Please refer to `ExtraValues.Type` for the supported values of `extraValues`.
- `encoding` specifies the text encoding type.

If a record is specified for `columns` (and `delimiter`, `extraValues`, and `encoding` are null), the following record fields may be provided:

- `Delimiter`: The column delimiter. Default: `","`.
- `Columns`: Can be null, the number of columns, a list of column names, or a table type. If the number of columns is lower than the number found in the input, the additional columns will be ignored. If the number of columns is higher than the number found in the input, the additional columns will be null. When not specified, the number of columns will be determined by what is found in the input.
- `Encoding`: The text encoding of the file. Default: 65001 (UTF-8).
- `CsvStyle`: Specifies how quotes are handled. `CsvStyle QuoteAfterDelimiter` (default): Quotes in a field are only significant immediately following the delimiter. `CsvStyle QuoteAlways`: Quotes in a field are always significant, regardless of where they appear.
- `QuoteStyle`: Specifies how quoted line breaks are handled. `QuoteStyle.None` (default): All line breaks are treated as the end of the current row, even when they occur inside a quoted value. `QuoteStyle.Csv`: Quoted line breaks are treated as part of the data, not as the end of the current row.

Example 1

Process CSV text with column headers.

```
Table.PromoteHeaders(Csv.Document("OrderID,Item 1,Fishing rod 2,1 lb. worms"))
```

ORDERID	ITEM
1	Fishing rod
2	1 lb. worms

CsvStyle.QuoteAfterDelimiter

11/25/2019 • 2 minutes to read

Syntax

```
CsvStyle.QuoteAfterDelimiter
```

About

Quotes in a field are only significant immediately following the delimiter.

CsvStyle QuoteAlways

11/25/2019 • 2 minutes to read

Syntax

```
CsvStyle QuoteAlways
```

About

Quotes in a field are always significant regardless of where they appear.

Cube.AddAndExpandDimensionColumn

11/25/2019 • 2 minutes to read

Syntax

```
Cube.AddAndExpandDimensionColumn(**cube** as table, **dimensionSelector** as any,  
**attributeNames** as list, optional **newColumnNames** as any) as table
```

About

Merges the specified dimension table, `dimensionSelector`, into the cube's, `cube`, filter context and changes the dimensional granularity by expanding the specified set, `attributeNames`, of dimension attributes. The dimension attributes are added to the tabular view with columns named `newColumnNames`, or `attributeNames` if not specified.

Cube.AddMeasureColumn

11/25/2019 • 2 minutes to read

Syntax

```
Cube.AddMeasureColumn(**cube** as table, **column** as text, **measureSelector** as any) as table
```

About

Adds a column with the name `column` to the `cube` that contains the results of the measure `measureSelector` applied in the row context of each row. Measure application is affected by changes to dimension granularity and slicing. Measure values will be adjusted after certain cube operations are performed.

Cube.ApplyParameter

11/25/2019 • 2 minutes to read

Syntax

```
Cube.ApplyParameter(cube as table, parameter as any, optional arguments as nullable list) as table
```

About

Returns a cube after applying `parameter` with `arguments` to `cube`.

Cube.AttributeMemberId

11/25/2019 • 2 minutes to read

Syntax

```
Cube.AttributeMemberId(attribute as any) as any
```

About

Returns the unique member identifier from a member property value. `attribute`. Returns null for any other values.

Cube.AttributeMemberProperty

11/25/2019 • 2 minutes to read

Syntax

```
Cube.AttributeMemberProperty(attribute as any, propertyName as text) as any
```

About

Returns the property `propertyName` of dimension attribute `attribute`.

Cube.CollapseAndRemoveColumns

11/25/2019 • 2 minutes to read

Syntax

```
Cube.CollapseAndRemoveColumns(**cube** as table, **columnNames** as list) as table
```

About

Changes the dimensional granularity of the filter context for the `cube` by collapsing the attributes mapped to the specified columns `columnNames`. The columns are also removed from the tabular view of the cube.

Cube.Dimensions

11/25/2019 • 2 minutes to read

Syntax

```
Cube.Dimensions(**cube** as table) as table
```

About

Returns a table containing the set of available dimensions within the `cube`. Each dimension is a table containing a set of dimension attributes and each dimension attribute is represented as a column in the dimension table. Dimensions can be expanded in the cube using `Cube.AddAndExpandDimensionColumn`.

Cube.DisplayFolders

11/25/2019 • 2 minutes to read

Syntax

```
Cube.DisplayFolders(**cube** as table) as table
```

About

Returns a nested tree of tables representing the display folder hierarchy of the objects (e.g. dimensions and measures) available for use in the `cube`.

Cube.MeasureProperties

11/25/2019 • 2 minutes to read

Syntax

```
Cube.MeasureProperties(cube as table) as table
```

About

Returns a table containing the set of available properties for measures that are expanded in the cube.

Cube.MeasureProperty

11/25/2019 • 2 minutes to read

Syntax

```
Cube.MeasureProperty(measure as any, propertyName as text) as any
```

About

Returns the property `propertyName` of measure `measure`.

Cube.Measures

11/25/2019 • 2 minutes to read

Syntax

```
Cube.Measures(**cube** as any) as table
```

About

Returns a table containing the set of available measures within the `cube`. Each measure is represented as a function. Measures can be applied to the cube using `Cube.AddMeasureColumn`.

Cube.Parameters

11/25/2019 • 2 minutes to read

Syntax

```
Cube.Parameters(cube as table) as table
```

About

Returns a table containing the set of parameters that can be applied to `cube`. Each parameter is a function that can be invoked to get `cube` with the parameter and its arguments applied.

Cube.Properties

11/25/2019 • 2 minutes to read

Syntax

```
Cube.Properties(cube as table) as table
```

About

Returns a table containing the set of available properties for dimensions that are expanded in the cube.

Cube.PropertyKey

11/25/2019 • 2 minutes to read

Syntax

```
Cube.PropertyKey(property as any) as any
```

About

Returns the key of property `property`.

Cube.ReplaceDimensions

11/25/2019 • 2 minutes to read

Syntax

```
Cube.ReplaceDimensions(cube as table, dimensions as table) as table
```

About

Cube.ReplaceDimensions

Cube.Transform

11/25/2019 • 2 minutes to read

Syntax

```
Cube.Transform(cube as table, transforms as list) as table
```

About

Applies the list cube functions, `transforms`, on the `cube`.

DB2.Database

11/25/2019 • 2 minutes to read

Syntax

```
DB2.Database(server as text, database as text, optional options as nullable record) as table
```

About

Returns a table of SQL tables and views available in a Db2 database on server `server` in the database instance named `database`. The port may be optionally specified with the server, separated by a colon. An optional record parameter, `options`, may be specified to control the following options:

- `CreateNavigationProperties` : A logical (true/false) that sets whether to generate navigation properties on the returned values (default is true).
- `NavigationPropertyNameGenerator` : A function that is used for the creation of names for navigation properties.
- `Query` : A native SQL query used to retrieve data. If the query produces multiple result sets, only the first will be returned.
- `CommandTimeout` : A duration which controls how long the server-side query is allowed to run before it is canceled. The default value is ten minutes.
- `ConnectionTimeout` : A duration which controls how long to wait before abandoning an attempt to make a connection to the server. The default value is driver-dependent.
- `HierarchicalNavigation` : A logical (true/false) that sets whether to view the tables grouped by their schema names (default is false).
- `Implementation` : Specifies the internal database provider implementation to use. Valid values are: "IBM" and "Microsoft".
- `BinaryCodePage` : A number for the CCSID (Coded Character Set Identifier) to decode Db2 FOR BIT binary data into character strings. Applies to Implementation = "Microsoft". Set 0 to disable conversion (default). Set 1 to convert based on database encoding. Set other CCSID number to convert to application encoding.
- `PackageCollection` : Specifies a string value for package collection (default is "NULLID") to enable use of shared packages required to process SQL statements. Applies to Implementation = "Microsoft".
- `UseDb2ConnectGateway` : Specifies whether the connection is being made through a Db2 Connect gateway. Applies to Implementation = "Microsoft".

The record parameter is specified as [option1 = value1, option2 = value2...] or [Query = "select ..."] for example.

Essbase.Cubes

11/25/2019 • 2 minutes to read

Syntax

```
Essbase.Cubes(url as text, optional options as nullable record) as table
```

About

Returns a table of cubes grouped by Essbase server from an Essbase instance at APS server `url`. An optional record parameter, `options`, may be specified to control the following options:

- `CommandTimeout` : A duration which controls how long the server-side query is allowed to run before it is canceled. The default value is ten minutes.

Excel.CurrentWorkbook

11/25/2019 • 2 minutes to read

Syntax

```
Excel.CurrentWorkbook() as table
```

About

Returns the tables in the current Excel workbook

Excel.Workbook

11/25/2019 • 2 minutes to read

Syntax

```
Excel.Workbook(workbook as binary, optional useHeaders as nullable logical, optional delayTypes as nullable logical) as table
```

About

Returns a record of Sheets from the Excel workbook.

Exchange.Contents

11/25/2019 • 2 minutes to read

Syntax

```
Exchange.Contents (optional mailboxAddress as nullable text) as table
```

About

Returns a table of contents from the Microsoft Exchange account `mailboxAddress`. If `mailboxAddress` is not specified, the default account for the credential will be used.

Facebook.Graph

11/25/2019 • 2 minutes to read

Syntax

```
Facebook.Graph(url as text) as any
```

About

Returns a record containing a set of tables found in the Facebook graph at the specified URL, `url`.

File.Contents

11/25/2019 • 2 minutes to read

Syntax

```
File.Contents(path as text, optional options as nullable record) as binary
```

About

Returns the contents of the file, `path`, as binary.

Folder.Contents

11/25/2019 • 2 minutes to read

Syntax

```
Folder.Contents(path as text, optional options as nullable record) as table
```

About

Returns a table containing a row for each folder and file found at the folder path, `path`. Each row contains properties of the folder or file and a link to its content.

Folder.Files

11/25/2019 • 2 minutes to read

Syntax

```
Folder.Files(path as text, optional options as nullable record) as table
```

About

Returns a table containing a row for each file found at the folder path, `path`, and subfolders. Each row contains properties of the file and a link to its content.

GoogleAnalytics.Accounts

11/25/2019 • 2 minutes to read

Syntax

```
GoogleAnalytics.Accounts() as table
```

About

Returns Google Analytics accounts that are accessible from the current credential.

Hdfs.Contents

11/25/2019 • 2 minutes to read

Syntax

```
Hdfs.Contents(ur1 as text) as table
```

About

Returns a table containing a row for each folder and file found at the folder URL, `ur1`, from a Hadoop file system. Each row contains properties of the folder or file and a link to its content.

Hdfs.Files

11/25/2019 • 2 minutes to read

Syntax

```
Hdfs.Files(url as text) as table
```

About

Returns a table containing a row for each file found at the folder URL, `url`, and subfolders from a Hadoop file system. Each row contains properties of the file and a link to its content.

HdInsight.Containers

11/25/2019 • 2 minutes to read

Syntax

```
HdInsight.Containers(account as text) as table
```

About

Returns a navigational table containing a row for each container found at the account URL, `account`, from an Azure storage vault. Each row contains a link to the container blobs.

HdInsight.Contents

11/25/2019 • 2 minutes to read

Syntax

```
HdInsight.Contents(account as text) as table
```

About

Returns a navigational table containing a row for each container found at the account URL, `account`, from an Azure storage vault. Each row contains a link to the container blobs.

HdInsight.Files

11/25/2019 • 2 minutes to read

Syntax

```
HdInsight.Files(account as text, containerName as text) as table
```

About

Returns a table containing a row for each blob file found at the container URL, `account`, from an Azure storage vault. Each row contains properties of the file and a link to its content.

Html.Table

11/25/2019 • 2 minutes to read

Syntax

```
Html.Table(html as any, columnNameSelectorPairs as list, optional options as nullable record) as table
```

About

Returns a table containing the results of running the specified CSS selectors against the provided `html`. An optional record parameter, `options`, may be provided to specify additional properties. The record can contain the following fields:

- `RowSelector`

Example 1

Returns a table from a sample html text value.

```
Html.Table("<div class='\"name\"'>Jo</div><span>Manager</span>", [{"Name", ".name"}, {"Title", "span"}], [RowSelector=".name"])
```

NAME	TITLE
Jo	Manager

Example 2

Extracts all the hrefs from a sample html text value.

```
Html.Table("<a href='\"\"/test.html\"\">Test</a>", [{"Link", "a", each [Attributes][href]}])
```

LINK
/test.html

Identity.From

11/25/2019 • 2 minutes to read

Syntax

```
Identity.From(identityProvider as function, value as any) as record
```

About

Creates an identity.

Identity.IsMemberOf

11/25/2019 • 2 minutes to read

Syntax

```
Identity.IsMemberOf(identity as record, collection as record) as logical
```

About

Determines whether an identity is a member of an identity collection.

IdentityProvider.Default

11/25/2019 • 2 minutes to read

Syntax

```
IdentityProvider.Default() as any
```

About

The default identity provider for the current host.

Informix.Database

11/25/2019 • 2 minutes to read

Syntax

```
Informix.Database(server as text, database as text, optional options as nullable record) as table
```

About

Returns a table of SQL tables and views available in an Informix database on server `server` in the database instance named `database`. The port may be optionally specified with the server, separated by a colon. An optional record parameter, `options`, may be specified to control the following options:

- `CreateNavigationProperties` : A logical (true/false) that sets whether to generate navigation properties on the returned values (default is true).
- `NavigationPropertyNameGenerator` : A function that is used for the creation of names for navigation properties.
- `Query` : A native SQL query used to retrieve data. If the query produces multiple result sets, only the first will be returned.
- `CommandTimeout` : A duration which controls how long the server-side query is allowed to run before it is canceled. The default value is ten minutes.
- `ConnectionTimeout` : A duration which controls how long to wait before abandoning an attempt to make a connection to the server. The default value is driver-dependent.
- `HierarchicalNavigation` : A logical (true/false) that sets whether to view the tables grouped by their schema names (default is false).

The record parameter is specified as [option1 = value1, option2 = value2...] or [Query = "select ..."] for example.

Json.Document

11/25/2019 • 2 minutes to read

Syntax

```
Json.Document(jsonText as any, optional encoding as nullable number) as any
```

About

Returns the content of the JSON document.

Json.FromValue

11/25/2019 • 2 minutes to read

Syntax

```
Json.FromValue(value as any, optional encoding as nullable number) as binary
```

About

Produces a JSON representation of a given value `value` with a text encoding specified by `encoding`. If `encoding` is omitted, UTF8 is used. Values are represented as follows:

- Null, text and logical values are represented as the corresponding JSON types
- Numbers are represented as numbers in JSON, except that `#infinity`, `-#infinity` and `#nan` are converted to null
- Lists are represented as JSON arrays
- Records are represented as JSON objects
- Tables are represented as an array of objects
- Dates, times, datetimes, datetimestzones and durations are represented as ISO-8601 text
- Binary values are represented as base-64 encoded text
- Types and functions produce an error

Example 1

Convert a complex value to JSON.

```
Text.FromBinary(Json.FromValue([A={1, true, "3"}, B=#date(2012, 3, 25)]))
```

```
"{"A": [1, true, "3"], "B": "2012-03-25"}"
```

MySQL.Database

11/25/2019 • 2 minutes to read

Syntax

```
MySQL.Database(server as text, database as text, optional options as nullable record) as table
```

About

Returns a table of SQL tables, views, and stored scalar functions available in a MySQL database on server `server` in the database instance named `database`. The port may be optionally specified with the server, separated by a colon. An optional record parameter, `options`, may be specified to control the following options:

- `Encoding` : A `TextEncoding` value that specifies the character set used to encode all queries sent to the server (default is null).
- `CreateNavigationProperties` : A logical (true/false) that sets whether to generate navigation properties on the returned values (default is true).
- `NavigationPropertyNameGenerator` : A function that is used for the creation of names for navigation properties.
- `Query` : A native SQL query used to retrieve data. If the query produces multiple result sets, only the first will be returned.
- `CommandTimeout` : A duration which controls how long the server-side query is allowed to run before it is canceled. The default value is ten minutes.
- `ConnectionTimeout` : A duration which controls how long to wait before abandoning an attempt to make a connection to the server. The default value is driver-dependent.
- `TreatTinyAsBoolean` : A logical (true/false) that determines whether to force tinyint columns on the server as logical values. The default value is true.
- `OldGuids` : A logical (true/false) that sets whether char(36) columns (if false) or binary(16) columns (if true) will be treated as GUIDs. The default value is false.
- `ReturnSingleDatabase` : A logical (true/false) that sets whether to return all tables of all databases (if false) or to return tables and views of the specified database (if true). The default value is false.
- `HierarchicalNavigation` : A logical (true/false) that sets whether to view the tables grouped by their schema names (default is false).

The record parameter is specified as [option1 = value1, option2 = value2...] or [Query = "select ..."] for example.

OData.Feed

11/25/2019 • 2 minutes to read

Syntax

```
OData.Feed(serviceUri as text, optional headers as nullable record, optional options as any) as any
```

About

Returns a table of OData feeds offered by an OData service from a uri `serviceUri`, headers `headers`. A boolean value specifying whether to use concurrent connections or an optional record parameter, `options`, may be specified to control the following options:

- `Query` : Programmatically add query parameters to the URL without having to worry about escaping.
- `Headers` : Specifying this value as a record will supply additional headers to an HTTP request.
- `ExcludedFromCacheKey` : Specifying this value as a list will exclude these HTTP header keys from being part of the calculation for caching data.
- `ApiKeyName` : If the target site has a notion of an API key, this parameter can be used to specify the name (not the value) of the key parameter that must be used in the URL. The actual key value is provided in the credential.
- `Timeout` : Specifying this value as a duration will change the timeout for an HTTP request. The default value is 600 seconds.
- `EnableBatch` : A logical (true/false) that sets whether to allow generation of an OData \$batch request if the `MaxUriLength` is exceeded (default is false).
- `MaxUriLength` : A number that indicates the max length of an allowed uri sent to an OData service. If exceeded and `EnableBatch` is true then the request will be made to an OData \$batch endpoint, otherwise it will fail (default is 2048).
- `Concurrent` : A logical (true/false) when set to true, requests to the service will be made concurrently. When set to false, requests will be made sequentially. When not specified, the value will be determined by the service's `AsynchronousRequestsSupported` annotation. If the service does not specify whether `AsynchronousRequestsSupported` is supported, requests will be made sequentially.
- `ODataVersion` : A number (3 or 4) that specifies the OData protocol version to use for this OData service. When not specified, all supported versions will be requested. The service version will be determined by the `OData-Version` header returned by the service.
- `FunctionOverloads` : A logical (true/false) when set to true, function import overloads will be listed in the navigator as separate entries, when set to false, function import overloads will be listed as one union function in the navigator. Default value for V3: false. Default value for V4: true.
- `MoreColumns` : A logical (true/false) when set to true, adds a "More Columns" column to each entity feed containing open types and polymorphic types. This will contain the fields not declared in the base type. When false, this field is not present. Defaults to false.
- `IncludeAnnotations` : A comma separated list of namespace qualified term names or patterns to include with "" as a wildcard. By default, none of the annotations are included.
- `IncludeMetadataAnnotations` : A comma separated list of namespace qualified term names or patterns to include on metadata document requests, with "" as a wildcard. By default, includes the same annotations as `IncludeAnnotations`.
- `OmitValues` : Allows the OData service to avoid writing out certain values in responses. If acknowledged, we

will infer those values from the omitted fields. Options include:

- `ODataOmitValues.Nulls` : Allows the OData service to omit null values.
- `Implementation` : Specifies the implementation of the OData connector to use. Valid values are "2.0" or null.

ODataOmitValues.Nulls

11/25/2019 • 2 minutes to read

About

Allows the OData service to omit null values.

Odbc.DataSource

11/25/2019 • 2 minutes to read

Syntax

```
Odbc.DataSource(connectionString as any, optional options as nullable record) as table
```

About

Returns a table of SQL tables and views from the ODBC data source specified by the connection string `connectionString`. `connectionString` can be text or a record of property value pairs. Property values can either be text or number. An optional record parameter, `options`, may be provided to specify additional properties. The record can contain the following fields:

- `CreateNavigationProperties` : A logical (true/false) that sets whether to generate navigation properties on the returned values (default is true).
- `HierarchicalNavigation` : A logical (true/false) that sets whether to view the tables grouped by their schema names (default is false).
- `ConnectionTimeout` : A duration which controls how long to wait before abandoning an attempt to make a connection to the server. The default value is 15 seconds.
- `CommandTimeout` : A duration which controls how long the server-side query is allowed to run before it is canceled. The default value is ten minutes.
- `SqlCompatibleWindowsAuth` : A logical (true/false) that determines whether to produce SQL Server-compatible connection string options for Windows authentication. The default value is true.

Odbc.InferOptions

11/25/2019 • 2 minutes to read

Syntax

```
Odbc.InferOptions(connectionString as any) as record
```

About

Returns the result of trying to infer SQL capabilities with the connection string `connectionString` using ODBC. `connectionString` can be text or a record of property value pairs. Property values can either be text or number.

Odbc.Query

11/25/2019 • 2 minutes to read

Syntax

```
Odbc.Query(connectionString as any, query as text, optional options as nullable record) as table
```

About

Returns the result of running `query` with the connection string `connectionString` using ODBC. `connectionString` can be text or a record of property value pairs. Property values can either be text or number. An optional record parameter, `options`, may be provided to specify additional properties. The record can contain the following fields:

- `ConnectionTimeout` : A duration which controls how long to wait before abandoning an attempt to make a connection to the server. The default value is 15 seconds.
- `CommandTimeout` : A duration which controls how long the server-side query is allowed to run before it is canceled. The default value is ten minutes.
- `SqlCompatibleWindowsAuth` : A logical (true/false) that determines whether to produce SQL Server-compatible connection string options for Windows authentication. The default value is true.

OleDb.DataSource

11/25/2019 • 2 minutes to read

Syntax

```
OleDb.DataSource(connectionString as any, optional options as nullable record) as table
```

About

Returns a table of SQL tables and views from the OLE DB data source specified by the connection string

`connectionString`. `connectionString` can be text or a record of property value pairs. Property values can either be text or number. An optional record parameter, `options`, may be provided to specify additional properties. The record can contain the following fields:

- `CreateNavigationProperties` : A logical (true/false) that sets whether to generate navigation properties on the returned values (default is true).
- `NavigationPropertyNameGenerator` : A function that is used for the creation of names for navigation properties.
- `Query` : A native SQL query used to retrieve data. If the query produces multiple result sets, only the first will be returned.
- `HierarchicalNavigation` : A logical (true/false) that sets whether to view the tables grouped by their schema names (default is true).
- `ConnectionTimeout` : A duration which controls how long to wait before abandoning an attempt to make a connection to the server. The default value is driver-dependent.
- `CommandTimeout` : A duration which controls how long the server-side query is allowed to run before it is canceled. The default value is ten minutes.
- `SqlCompatibleWindowsAuth` : A logical (true/false) that determines whether to produce SQL Server-compatible connection string options for Windows authentication. The default value is true.

The record parameter is specified as [option1 = value1, option2 = value2...] or [Query = "select ..."] for example.

OleDb.Query

11/25/2019 • 2 minutes to read

Syntax

```
OleDb.Query(connectionString as any, query as text, optional options as nullable record) as table
```

About

Returns the result of running `query` with the connection string `connectionString` using OLE DB.

`connectionString` can be text or a record of property value pairs. Property values can either be text or number. An optional record parameter, `options`, may be provided to specify additional properties. The record can contain the following fields:

- `ConnectionTimeout` : A duration which controls how long to wait before abandoning an attempt to make a connection to the server. The default value is driver-dependent.
- `CommandTimeout` : A duration which controls how long the server-side query is allowed to run before it is canceled. The default value is ten minutes.
- `SqlCompatibleWindowsAuth` : A logical (true/false) that determines whether to produce SQL Server-compatible connection string options for Windows authentication. The default value is true.

Oracle.Database

11/25/2019 • 2 minutes to read

Syntax

```
Oracle.Database(server as text, optional options as nullable record) as table
```

About

Returns a table of SQL tables and views from the Oracle database on server `server`. The port may be optionally specified with the server, separated by a colon. An optional record parameter, `options`, may be specified to control the following options:

- `CreateNavigationProperties` : A logical (true/false) that sets whether to generate navigation properties on the returned values (default is true).
- `NavigationPropertyNameGenerator` : A function that is used for the creation of names for navigation properties.
- `Query` : A native SQL query used to retrieve data. If the query produces multiple result sets, only the first will be returned.
- `CommandTimeout` : A duration which controls how long the server-side query is allowed to run before it is canceled. The default value is ten minutes.
- `ConnectionTimeout` : A duration which controls how long to wait before abandoning an attempt to make a connection to the server. The default value is driver-dependent.
- `HierarchicalNavigation` : A logical (true/false) that sets whether to view the tables grouped by their schema names (default is false).

The record parameter is specified as [option1 = value1, option2 = value2...] or [Query = "select ..."] for example.

Pdf.Tables

11/25/2019 • 2 minutes to read

Syntax

```
Pdf.Tables(pdf as binary, optional options as nullable record) as table
```

About

Returns any tables found in `pdf`. An optional record parameter, `options`, may be provided to specify additional properties. The record can contain the following fields:

- `StartPage` : Specifies the first page in the range of pages to examine. Default: 1.
- `EndPage` : Specifies the last page in the range of pages to examine. Default: the last page of the document.
- `MultiPageTables` : Controls whether similar tables on consecutive pages will be automatically combined into a single table. Default: true.
- `EnforceBorderLines` : Controls whether border lines are always enforced as cell boundaries (when true), or simply used as one hint among many for determining cell boundaries (when false). Default: false.

Example 1

Returns the tables contained in sample.pdf.

```
Pdf.Tables(File.Contents("c:\sample.pdf"))
```

```
#table({"Name", "Kind", "Data"}, ...)
```

PostgreSQL.Database

11/25/2019 • 2 minutes to read

Syntax

```
PostgreSQL.Database(server as text, database as text, optional options as nullable record) as table
```

About

Returns a table of SQL tables and views available in a PostgreSQL database on server `server` in the database instance named `database`. The port may be optionally specified with the server, separated by a colon. An optional record parameter, `options`, may be specified to control the following options:

- `CreateNavigationProperties` : A logical (true/false) that sets whether to generate navigation properties on the returned values (default is true).
- `NavigationPropertyNameGenerator` : A function that is used for the creation of names for navigation properties.
- `Query` : A native SQL query used to retrieve data. If the query produces multiple result sets, only the first will be returned.
- `CommandTimeout` : A duration which controls how long the server-side query is allowed to run before it is canceled. The default value is ten minutes.
- `ConnectionTimeout` : A duration which controls how long to wait before abandoning an attempt to make a connection to the server. The default value is driver-dependent.
- `HierarchicalNavigation` : A logical (true/false) that sets whether to view the tables grouped by their schema names (default is false).

The record parameter is specified as [option1 = value1, option2 = value2...] or [Query = "select ..."] for example.

RData.FromBinary

11/25/2019 • 2 minutes to read

Syntax

```
RData.FromBinary(stream as binary) as any
```

About

Returns a record of data frames from the RData file.

Salesforce.Data

11/25/2019 • 2 minutes to read

Syntax

```
Salesforce.Data(optional loginUrl as any, optional options as nullable record) as table
```

About

Returns the objects on the Salesforce account provided in the credentials. The account will be connected through the provided environment `loginUrl`. If no environment is provided then the account will connect to production (<https://login.salesforce.com>). An optional record parameter, `options`, may be provided to specify additional properties. The record can contain the following fields:

- `CreateNavigationProperties` : A logical (true/false) that sets whether to generate navigation properties on the returned values (default is false).
- `ApiVersion` : The Salesforce API version to use for this query. When not specified, API version 29.0 is used.

Salesforce.Reports

11/25/2019 • 2 minutes to read

Syntax

```
Salesforce.Reports(optional loginUrl as nullable text, optional options as nullable record) as table
```

About

Returns the reports on the Salesforce account provided in the credentials. The account will be connected through the provided environment `loginUrl`. If no environment is provided then the account will connect to production (<https://login.salesforce.com>). An optional record parameter, `options`, may be provided to specify additional properties. The record can contain the following fields: `ApiVersion`: The Salesforce API version to use for this query. When not specified, API version 29.0 is used.

SapBusinessWarehouse.Cubes

11/25/2019 • 2 minutes to read

Syntax

```
SapBusinessWarehouse.Cubes(server as text, systemNumberOrSystemId as text, clientId as text,  
optional optionsOrLogonGroup as any, optional options as nullable record) as table
```

About

Returns a table of InfoCubes and queries grouped by InfoArea from an SAP Business Warehouse instance at server `server` with system number `systemNumberOrSystemId` and Client ID `clientId`. An optional record parameter, `optionsOrLogonGroup`, may be specified to control options.

sapbusinesswarehouseexecutionmode.datastream

11/25/2019 • 2 minutes to read

About

'DataStream flattening mode' option for MDX execution in SAP Business Warehouse.

SapBusinessWarehouseExecutionMode.BasXml

11/25/2019 • 2 minutes to read

About

'bXML flattening mode' option for MDX execution in SAP Business Warehouse.

SapBusinessWarehouseExecutionMode.BasXmlGzip

11/25/2019 • 2 minutes to read

About

'Gzip compressed bXML flattening mode' option for MDX execution in SAP Business Warehouse. Recommended for low latency or high volume queries.

SapHana.Database

11/25/2019 • 2 minutes to read

Syntax

```
SapHana.Database(**server** as text, optional **options** as nullable record) as table
```

About

Returns a table of multidimensional packages from the SAP HANA database `server`. An optional record parameter, `options`, may be specified to control the following options:

- `Query` : A native SQL query used to retrieve data. If the query produces multiple result sets, only the first will be returned.
- `Distribution` : A SapHanaDistribution that sets the value of the "Distribution" property in the connection string. Statement routing is the method of evaluating the correct server node of a distributed system before statement execution. The default value is SapHanaDistribution.All.

SapHanaDistribution.All

11/25/2019 • 2 minutes to read

About

'All' distribution option for SAP HANA.

SapHanaDistribution.Connection

11/25/2019 • 2 minutes to read

About

'Connection' distribution option for SAP HANA.

SapHanaDistribution.Off

11/25/2019 • 2 minutes to read

About

'Off' distribution option for SAP HANA.

SapHanaDistribution.Statement

11/25/2019 • 2 minutes to read

About

'Statement' distribution option for SAP HANA.

SapHanaRangeOperator.Equals

11/25/2019 • 2 minutes to read

About

'Equals' range operator for SAP HANA input parameters.

SapHanaRangeOperator.GreaterThan

11/25/2019 • 2 minutes to read

About

'Greater than' range operator for SAP HANA input parameters.

SapHanaRangeOperator.GreaterThanOrEquals

11/25/2019 • 2 minutes to read

About

'Greater than or equals' range operator for SAP HANA input parameters.

SapHanaRangeOperator.LessThan

11/25/2019 • 2 minutes to read

About

'Less than' range operator for SAP HANA input parameters.

SapHanaRangeOperator.LessThanOrEquals

11/25/2019 • 2 minutes to read

About

'Less than or equals' range operator for SAP HANA input parameters.

SapHanaRangeOperator.NotEquals

11/25/2019 • 2 minutes to read

About

'Not equals' range operator for SAP HANA input parameters.

SharePoint.Contents

11/25/2019 • 2 minutes to read

Syntax

```
SharePoint.Contents(url as text, optional options as nullable record) as table
```

About

Returns a table containing a row for each folder and document found at the specified SharePoint site, `url`. Each row contains properties of the folder or file and a link to its content. `options` may be specified to control the following options:

- `ApiVersion`: A number (14 or 15) or the text "Auto" that specifies the SharePoint API version to use for this site. When not specified, API version 14 is used. When Auto is specified, the server version will be automatically discovered if possible, otherwise version defaults to 14. Non-English SharePoint sites require at least version 15.

SharePoint.Files

11/25/2019 • 2 minutes to read

Syntax

```
SharePoint.Files(url as text, optional options as nullable record) as table
```

About

Returns a table containing a row for each document found at the specified SharePoint site, `url`, and subfolders. Each row contains properties of the folder or file and a link to its content. `options` may be specified to control the following options:

- `ApiVersion`: A number (14 or 15) or the text "Auto" that specifies the SharePoint API version to use for this site. When not specified, API version 14 is used. When Auto is specified, the server version will be automatically discovered if possible, otherwise version defaults to 14. Non-English SharePoint sites require at least version 15.

SharePoint.Tables

11/25/2019 • 2 minutes to read

Syntax

```
SharePoint.Tables(url as text, optional options as nullable record) as table
```

About

Returns a table containing a row for each List item found at the specified SharePoint list, `url`. Each row contains properties of the List. `options` may be specified to control the following options:

- `ApiVersion`: A number (14 or 15) or the text "Auto" that specifies the SharePoint API version to use for this site. When not specified, API version 14 is used. When Auto is specified, the server version will be automatically discovered if possible, otherwise version defaults to 14. Non-English SharePoint sites require at least version 15.

Soda.Feed

11/25/2019 • 2 minutes to read

Syntax

```
Soda.Feed(url as text) as table
```

About

Returns a table from the contents at the specified URL `url` formatted according to the SODA 2.0 API. The URL must point to a valid SODA-compliant source that ends in a .csv extension.

Sql.Database

11/25/2019 • 2 minutes to read

Syntax

```
Sql.Database(server as text, database as text, optional options as nullable record) as table
```

About

Returns a table of SQL tables, views, and stored functions from the SQL Server database `database` on server `server`. The port may be optionally specified with the server, separated by a colon or a comma. An optional record parameter, `options`, may be specified to control the following options:

- `Query` : A native SQL query used to retrieve data. If the query produces multiple result sets, only the first will be returned.
- `CreateNavigationProperties` : A logical (true/false) that sets whether to generate navigation properties on the returned values (default is true).
- `NavigationPropertyNameGenerator` : A function that is used for the creation of names for navigation properties.
- `MaxDegreeOfParallelism` : A number that sets the value of the "maxdop" query clause in the generated SQL query.
- `CommandTimeout` : A duration which controls how long the server-side query is allowed to run before it is canceled. The default value is ten minutes.
- `ConnectionTimeout` : A duration which controls how long to wait before abandoning an attempt to make a connection to the server. The default value is driver-dependent.
- `HierarchicalNavigation` : A logical (true/false) that sets whether to view the tables grouped by their schema names (default is false).
- `MultiSubnetFailover` : A logical (true/false) that sets the value of the "MultiSubnetFailover" property in the connection string (default is false).
- `UnsafeTypeConversions`
- `ContextInfo` : A binary value that is used to set the CONTEXT_INFO before running each command.

The record parameter is specified as [option1 = value1, option2 = value2...] or [Query = "select ..."] for example.

Sql.Databases

11/25/2019 • 2 minutes to read

Syntax

```
Sql.Databases(server as text, optional options as nullable record) as table
```

About

Returns a table of databases on the specified SQL server, `server`. An optional record parameter, `options`, may be specified to control the following options:

- `CreateNavigationProperties` : A logical (true/false) that sets whether to generate navigation properties on the returned values (default is true).
- `NavigationPropertyNameGenerator` : A function that is used for the creation of names for navigation properties.
- `MaxDegreeOfParallelism` : A number that sets the value of the "maxdop" query clause in the generated SQL query.
- `CommandTimeout` : A duration which controls how long the server-side query is allowed to run before it is canceled. The default value is ten minutes.
- `ConnectionTimeout` : A duration which controls how long to wait before abandoning an attempt to make a connection to the server. The default value is driver-dependent.
- `HierarchicalNavigation` : A logical (true/false) that sets whether to view the tables grouped by their schema names (default is false).
- `MultiSubnetFailover` : A logical (true/false) that sets the value of the "MultiSubnetFailover" property in the connection string (default is false).
- `UnsafeTypeConversions`
- `ContextInfo` : A binary value that is used to set the CONTEXT_INFO before running each command.

The record parameter is specified as [option1 = value1, option2 = value2...] for example.

Does not support setting a SQL query to run on the server. `Sql.Database` should be used instead to run a SQL query.

Sybase.Database

11/25/2019 • 2 minutes to read

Syntax

```
Sybase.Database(server as text, database as text, optional options as nullable record) as table
```

About

Returns a table of SQL tables and views available in a Sybase database on server `server` in the database instance named `database`. The port may be optionally specified with the server, separated by a colon. An optional record parameter, `options`, may be specified to control the following options:

- `CreateNavigationProperties` : A logical (true/false) that sets whether to generate navigation properties on the returned values (default is true).
- `NavigationPropertyNameGenerator` : A function that is used for the creation of names for navigation properties.
- `Query` : A native SQL query used to retrieve data. If the query produces multiple result sets, only the first will be returned.
- `CommandTimeout` : A duration which controls how long the server-side query is allowed to run before it is canceled. The default value is ten minutes.
- `ConnectionTimeout` : A duration which controls how long to wait before abandoning an attempt to make a connection to the server. The default value is driver-dependent.
- `HierarchicalNavigation` : A logical (true/false) that sets whether to view the tables grouped by their schema names (default is false).

The record parameter is specified as [option1 = value1, option2 = value2...] or [Query = "select ..."] for example.

Teradata.Database

11/25/2019 • 2 minutes to read

Syntax

```
Teradata.Database(server as text, optional options as nullable record) as table
```

About

Returns a table of SQL tables and views from the Teradata database on server `server`. The port may be optionally specified with the server, separated by a colon. An optional record parameter, `options`, may be specified to control the following options:

- `CreateNavigationProperties` : A logical (true/false) that sets whether to generate navigation properties on the returned values (default is true).
- `NavigationPropertyNameGenerator` : A function that is used for the creation of names for navigation properties.
- `Query` : A native SQL query used to retrieve data. If the query produces multiple result sets, only the first will be returned.
- `CommandTimeout` : A duration which controls how long the server-side query is allowed to run before it is canceled. The default value is ten minutes.
- `ConnectionTimeout` : A duration which controls how long to wait before abandoning an attempt to make a connection to the server. The default value is driver-dependent.
- `HierarchicalNavigation` : A logical (true/false) that sets whether to view the tables grouped by their schema names (default is false).

The record parameter is specified as [option1 = value1, option2 = value2...] or [Query = "select ..."] for example.

WebAction.Request

11/25/2019 • 2 minutes to read

Syntax

```
WebAction.Request(method as text, url as text, optional options as nullable record) as action
```

About

Creates an action that, when executed, will return the results of performing a `method` request against `url` using HTTP as a binary value. An optional record parameter, `options`, may be provided to specify additional properties. The record can contain the following fields:

- `Query`: Programmatically add query parameters to the URL without having to worry about escaping.
- `ApiKeyName`: If the target site has a notion of an API key, this parameter can be used to specify the name (not the value) of the key parameter that must be used in the URL. The actual key value is provided in the credential.
- `Content`: Specifying this value changes the web request from a GET to a POST, using the value of the `Content` field as the content of the POST.
- `Headers`: Specifying this value as a record will supply additional headers to an HTTP request.
- `Timeout`: Specifying this value as a duration will change the timeout for an HTTP request. The default value is 100 seconds.
- `IsRetry`: Specifying this logical value as true will ignore any existing response in the cache when fetching data.
- `ManualStatusHandling`: Specifying this value as a list will prevent any builtin handling for HTTP requests whose response has one of these status codes.
- `RelativePath`: Specifying this value as text appends it to the base URL before making the request.

Web.BrowserContents

11/25/2019 • 2 minutes to read

Syntax

```
Web.BrowserContents(url as text, optional options as nullable record) as text
```

About

Returns the HTML for the specified `url`, as viewed by a web browser. An optional record parameter, `options`, may be provided to specify additional properties. The record can contain the following fields:

- `WaitFor`: Specifies a condition to wait for before downloading the HTML, in addition to waiting for the page to load (which is always done). Can be a record containing Timeout and/or Selector fields. If only a Timeout is specified, the function will wait the amount of time specified before downloading the HTML. If both a Selector and Timeout are specified, and the Timeout elapses before the Selector exists on the page, an error will be thrown. If a Selector is specified with no Timeout, a default Timeout of 30 seconds is applied.

Example 1

Returns the HTML for <https://microsoft.com>.

```
Web.BrowserContents("https://microsoft.com")
```

```
"<!DOCTYPE html><html xmlns=..."
```

Example 2

Returns the HTML for <https://microsoft.com> after waiting for a CSS selector to exist.

```
Web.BrowserContents("https://microsoft.com", [WaitFor = [Selector = "div.ready"]])
```

```
"<!DOCTYPE html><html xmlns=..."
```

Example 3

Returns the HTML for <https://microsoft.com> after waiting ten seconds.

```
Web.BrowserContents("https://microsoft.com", [WaitFor = [Timeout = #duration(0,0,0,10)]])
```

```
"<!DOCTYPE html><html xmlns=..."
```

Example 4

Returns the HTML for <https://microsoft.com> after waiting up to ten seconds for a CSS selector to exist.

```
Web.BrowserContents("https://microsoft.com", [WaitFor = [Selector = "div.ready", Timeout =  
#duration(0,0,0,10)]])
```

```
"<!DOCTYPE html><html xmlns=..."
```

Web.Contents

11/25/2019 • 2 minutes to read

Syntax

```
Web.Contents(url as text, optional options as nullable record) as binary
```

About

Returns the contents downloaded from `url` as binary. An optional record parameter, `options`, may be provided to specify additional properties. The record can contain the following fields:

- `Query`: Programmatically add query parameters to the URL without having to worry about escaping.
- `ApiKeyName`: If the target site has a notion of an API key, this parameter can be used to specify the name (not the value) of the key parameter that must be used in the URL. The actual key value is provided in the credential.
- `Content`: Specifying this value changes the web request from a GET to a POST, using the value of the `Content` field as the content of the POST.
- `Headers`: Specifying this value as a record will supply additional headers to an HTTP request.
- `Timeout`: Specifying this value as a duration will change the timeout for an HTTP request. The default value is 100 seconds.
- `ExcludedFromCacheKey`: Specifying this value as a list will exclude these HTTP header keys from being part of the calculation for caching data.
- `IsRetry`: Specifying this logical value as true will ignore any existing response in the cache when fetching data.
- `ManualStatusHandling`: Specifying this value as a list will prevent any builtin handling for HTTP requests whose response has one of these status codes.
- `RelativePath`: Specifying this value as text appends it to the base URL before making the request.

Web.Page

11/25/2019 • 2 minutes to read

Syntax

```
Web.Page(html as any) as table
```

About

Returns the contents of the HTML document broken into its constituent structures, as well as a representation of the full document and its text after removing tags.

WebMethod.Delete

11/25/2019 • 2 minutes to read

About

Specifies the DELETE method for HTTP.

WebMethod.Get

11/25/2019 • 2 minutes to read

About

Specifies the GET method for HTTP.

WebMethod.Head

11/25/2019 • 2 minutes to read

About

Specifies the HEAD method for HTTP.

WebMethod.Patch

11/25/2019 • 2 minutes to read

About

Specifies the PATCH method for HTTP.

WebMethod.Post

11/25/2019 • 2 minutes to read

About

Specifies the POST method for HTTP.

WebMethod.Put

11/25/2019 • 2 minutes to read

About

Specifies the PUT method for HTTP.

Xml.Document

11/25/2019 • 2 minutes to read

About

Returns the contents of the XML document as a hierarchical table.

Syntax

```
Xml.Document(contents as any, optional encoding as nullable number) as table
```

Xml.Tables

11/25/2019 • 2 minutes to read

Syntax

```
Xml.Tables(contents as any, optional options as nullable record, optional encoding as nullable number) as table
```

About

Returns the contents of the XML document as a nested collection of flattened tables.

Binary functions

11/25/2019 • 3 minutes to read

Binary Formats

Reading numbers

FUNCTION	DESCRIPTION
BinaryFormat.7BitEncodedSignedInteger	A binary format that reads a 64-bit signed integer that was encoded using a 7-bit variable-length encoding.
BinaryFormat.7BitEncodedUnsignedInteger	A binary format that reads a 64-bit unsigned integer that was encoded using a 7-bit variable-length encoding.
BinaryFormat.Binary	Returns a binary format that reads a binary value.
BinaryFormat.Byte	A binary format that reads an 8-bit unsigned integer.
BinaryFormat.Choice	Returns a binary format that chooses the next binary format based on a value that has already been read.
BinaryFormat.Decimal	A binary format that reads a .NET 16-byte decimal value.
BinaryFormat.Double	A binary format that reads an 8-byte IEEE double-precision floating point value.
BinaryFormat.Group	Returns a binary format that reads a group of items. Each item value is preceded by a unique key value. The result is a list of item values.
BinaryFormat.Length	Returns a binary format that limits the amount of data that can be read. Both BinaryFormat.List and BinaryFormat.Binary can be used to read until end of the data. BinaryFormat.Length can be used to limit the number of bytes that are read.
BinaryFormat.List	Returns a binary format that reads a sequence of items and returns a list.
BinaryFormat.Null	A binary format that reads zero bytes and returns null.
BinaryFormat.Record	Returns a binary format that reads a record. Each field in the record can have a different binary format.
BinaryFormat.SignedInteger16	A binary format that reads a 16-bit signed integer.
BinaryFormat.SignedInteger32	A binary format that reads a 32-bit signed integer.
BinaryFormat.SignedInteger64	A binary format that reads a 64-bit signed integer.

FUNCTION	DESCRIPTION
BinaryFormat.Single	A binary format that reads a 4-byte IEEE single-precision floating point value.
BinaryFormat.Text	Returns a binary format that reads a text value. The optional encoding value specifies the encoding of the text.
BinaryFormat.Transform	Returns a binary format that will transform the values read by another binary format.
BinaryFormat.UnsignedInteger16	A binary format that reads a 16-bit unsigned integer.
BinaryFormat.UnsignedInteger32	A binary format that reads a 32-bit unsigned integer.
BinaryFormat.UnsignedInteger64	A binary format that reads a 64-bit unsigned integer.
CONTROLLING BYTE ORDER	DESCRIPTION
BinaryFormat.ByteOrder	Returns a binary format with the byte order specified by a function.
Table.PartitionValues	Returns information about how a table is partitioned.

Binary

FUNCTION	DESCRIPTION
Binary.Buffer	Buffers the binary value in memory. The result of this call is a stable binary value, which means it will have a deterministic length and order of bytes.
Binary.Combine	Combines a list of binaries into a single binary.
Binary.Compress	Compresses a binary value using the given compression type.
Binary.Decompress	Decompresses a binary value using the given compression type.
Binary.From	Returns a binary value from the given value.
Binary.FromList	Converts a list of numbers into a binary value
Binary.FromText	Decodes data from a text form into binary.
Binary.InferContentType	Returns a record with field Content.Type that contains the inferred MIME-type.
Binary.Length	Returns the length of binary values.
Binary.ToList	Converts a binary value into a list of numbers
Binary.ToText	Encodes binary data into a text form.

FUNCTION	DESCRIPTION
BinaryEncoding.Base64	Constant to use as the encoding type when base-64 encoding is required.
BinaryEncoding.Hex	Constant to use as the encoding type when hexadecimal encoding is required.
BinaryOccurrence.Optional	The item is expected to appear zero or one time in the input.
BinaryOccurrence.Repeating	The item is expected to appear zero or more times in the input.
BinaryOccurrence.Required	The item is expected to appear once in the input.
ByteOrder.BigEndian	A possible value for the <code>byteOrder</code> parameter in <code>BinaryFormat.ByteOrder</code> . The most significant byte appears first in Big Endian byte order.
ByteOrder.LittleEndian	A possible value for the <code>byteOrder</code> parameter in <code>BinaryFormat.ByteOrder</code> . The least significant byte appears first in Little Endian byte order.
Compression.Deflate	The compressed data is in the 'Deflate' format.
Compression.GZip	The compressed data is in the 'GZip' format.
Occurrence.Optional	The item is expected to appear zero or one time in the input.
Occurrence.Repeating	The item is expected to appear zero or more times in the input.
Occurrence.Required	The item is expected to appear once in the input.
#binary	Creates a binary value from numbers or text.

Binary.Buffer

11/25/2019 • 2 minutes to read

Syntax

```
Binary.Buffer(binary as nullable binary) as nullable binary
```

About

Buffers the binary value in memory. The result of this call is a stable binary value, which means it will have a deterministic length and order of bytes.

Example 1

Create a stable version of the binary value.

```
Binary.Buffer(Binary.FromList({0..10}))
```

```
#binary({0, 1, 2, 3, 4, 5, 6, 7, 8, 9, 10})
```

Binary.Combine

11/25/2019 • 2 minutes to read

Syntax

```
Binary.Combine(binaries as list) as binary
```

About

Combines a list of binaries into a single binary.

Binary.Compress

11/25/2019 • 2 minutes to read

Syntax

```
Binary.Compress(binary as nullable binary, compressionType as number) as nullable binary
```

About

Compresses a binary value using the given compression type. The result of this call is a compressed copy of the input. Compression types include:

- `Compression.GZip`
- `Compression.Deflate`

Example 1

Compress the binary value.

```
Binary.Compress(Binary.FromList(List.Repeat({10}, 1000)), Compression.Deflate)
```

```
#binary({227, 226, 26, 5, 163, 96, 20, 12, 119, 0, 0})
```

Binary.Decompress

11/25/2019 • 2 minutes to read

Syntax

```
Binary.Decompress(binary as nullable binary, compressionType as number) as nullable binary
```

About

Decompresses a binary value using the given compression type. The result of this call is a decompressed copy of the input. Compression types include:

- `Compression.GZip`
- `Compression.Deflate`

Example 1

Decompress the binary value.

```
Binary.Decompress(#binary({115, 103, 200, 7, 194, 20, 134, 36, 134, 74, 134, 84, 6, 0}), Compression.Deflate)
```

```
#binary({71, 0, 111, 0, 111, 0, 100, 0, 98, 0, 121, 0, 101, 0})
```

Binary.From

11/25/2019 • 2 minutes to read

Syntax

```
Binary.From(value as any, optional encoding as nullable number) as nullable binary
```

About

Returns a `binary` value from the given `value`. If the given `value` is `null`, `Binary.From` returns `null`. If the given `value` is `binary`, `value` is returned. Values of the following types can be converted to a `binary` value:

- `text`: A `binary` value from the text representation. See `Binary.FromText` for details.

If `value` is of any other type, an error is returned.

Example 1

Get the `binary` value of `"1011"`.

```
Binary.From("1011")
```

```
Binary.FromText("1011", BinaryEncoding.Base64)
```

Binary.FromList

11/25/2019 • 2 minutes to read

Syntax

```
Binary.FromList(list as list) as binary
```

About

Converts a list of numbers into a binary value.

Binary.FromText

11/25/2019 • 2 minutes to read

Syntax

```
Binary.FromText(text as nullable text, optional encoding as nullable number) as nullable binary
```

About

Returns the result of converting text value `text` to a binary (list of `number`). `encoding` may be specified to indicate the encoding used in the text value. The following `BinaryEncoding` values may be used for `encoding`.

- `BinaryEncoding.Base64`: Base 64 encoding
- `BinaryEncoding.Hex`: Hex encoding

Example 1

Decode `"1011"` into binary.

```
Binary.FromText("1011")
```

```
Binary.FromText("1011", BinaryEncoding.Base64)
```

Example 2

Decode `"1011"` into binary with Hex encoding.

```
Binary.FromText("1011", BinaryEncoding.Hex)
```

```
Binary.FromText("EBE=", BinaryEncoding.Base64)
```

Binary.InferContentType

11/25/2019 • 2 minutes to read

Syntax

```
Binary.InferContentType(source as binary) as record
```

About

Returns a record with field `Content.Type` that contains the inferred MIME-type. If the inferred content type is `text/*`, and an encoding code page is detected, then additionally returns field `Content.Encoding` that contains the encoding of the stream. If the inferred content type is `text/csv`, and the format is delimited, additionally returns field `Csv.PotentialDelimiter` containing a table for analysis of potential delimiters. If the inferred content type is `text/csv`, and the format is fixed-width, additionally returns field `Csv.PotentialPositions` containing a list for analysis of potential fixed width column positions.

Binary.Length

11/25/2019 • 2 minutes to read

Syntax

```
Binary.Length(binary as nullable binary) as nullable number
```

About

Returns the number of characters.

Binary.ToList

11/25/2019 • 2 minutes to read

Syntax

```
Binary.ToList(binary as binary) as list
```

About

Converts a binary value into a list of numbers.

Binary.ToText

11/25/2019 • 2 minutes to read

Syntax

```
Binary.ToText(binary as nullable binary, optional encoding as nullable number) as nullable text
```

About

Returns the result of converting a binary list of numbers `binary` into a text value. Optionally, `encoding` may be specified to indicate the encoding to be used in the text value produced. The following `BinaryEncoding` values may be used for `encoding`.

- `BinaryEncoding.Base64`: Base 64 encoding
- `BinaryEncoding.Hex`: Hex encoding

BinaryEncoding.Base64

11/25/2019 • 2 minutes to read

About

Constant to use as the encoding type when base-64 encoding is required.

BinaryEncoding.Hex

11/25/2019 • 2 minutes to read

About

Constant to use as the encoding type when hexadecimal encoding is required.

BinaryFormat.7BitEncodedSignedInteger

11/25/2019 • 2 minutes to read

Syntax

```
BinaryFormat.7BitEncodedSignedInteger(binary as binary) as any
```

About

A binary format that reads a 64-bit signed integer that was encoded using a 7-bit variable-length encoding.

BinaryFormat.7BitEncodedUnsignedInteger

11/25/2019 • 2 minutes to read

Syntax

```
BinaryFormat.7BitEncodedUnsignedInteger(binary as binary) as any
```

About

A binary format that reads a 64-bit unsigned integer that was encoded using a 7-bit variable-length encoding.

BinaryFormat.Binary

11/25/2019 • 2 minutes to read

Syntax

```
BinaryFormat.Binary(optional length as any) as function
```

About

Returns a binary format that reads a binary value. If `length` is specified, the binary value will contain that many bytes. If `length` is not specified, the binary value will contain the remaining bytes. The `length` can be specified either as a number, or as a binary format of the length that precedes the binary data.

BinaryFormat.Byte

11/25/2019 • 2 minutes to read

Syntax

```
BinaryFormat.Byte(binary as binary) as any
```

About

A binary format that reads an 8-bit unsigned integer.

BinaryFormat.ByteOrder

11/25/2019 • 2 minutes to read

Syntax

```
BinaryFormat.ByteOrder(binaryFormat as function, byteOrder as number) as function
```

About

Returns a binary format with the byte order specified by `binaryFormat`. The default byte order is `ByteOrder.BigEndian`.

BinaryFormat.Choice

11/25/2019 • 2 minutes to read

Syntax

```
BinaryFormat.Choice(binaryFormat as function, chooseFunction as function, optional type as nullable type, optional combineFunction as nullable function) as function
```

About

Returns a binary format that chooses the next binary format based on a value that has already been read. The binary format value produced by this function works in stages:

- The binary format specified by the `binaryFormat` parameter is used to read a value.
- The value is passed to the choice function specified by the `chooseFunction` parameter.
- The choice function inspects the value and returns a second binary format.
- The second binary format is used to read a second value.
- If the combine function is specified, then the first and second values are passed to the combine function, and the resulting value is returned.
- If the combine function is not specified, the second value is returned.
- The second value is returned.

The optional `type` parameter indicates the type of binary format that will be returned by the choice function. Either `type any`, `type list`, or `type binary` may be specified. If the `type` parameter is not specified, then `type any` is used. If `type list` or `type binary` is used, then the system may be able to return a streaming `binary` or `list` value instead of a buffered one, which may reduce the amount of memory necessary to read the format.

Example 1

Read a list of bytes where the number of elements is determined by the first byte.

```
let binaryData = #binary({2, 3, 4, 5}), listFormat = BinaryFormat.Choice( BinaryFormat.Byte, (length) => BinaryFormat.List(BinaryFormat.Byte, length)) in listFormat(binaryData)
```

3

4

Example 2

Read a list of bytes where the number of elements is determined by the first byte, and preserve the first byte read.

```
let binaryData = #binary({2, 3, 4, 5}), listFormat = BinaryFormat.Choice( BinaryFormat.Byte, (length) => BinaryFormat.Record([ length = length, list = BinaryFormat.List(BinaryFormat.Byte, length) ])) in listFormat(binaryData)
```

LENGTH	2
LIST	[List]

Example 3

Read a list of bytes where the number of elements is determined by the first byte using a streaming list.

```
let binaryData = #binary({2, 3, 4, 5}), listFormat = BinaryFormat.Choice( BinaryFormat.Byte, (length) => BinaryFormat.List(BinaryFormat.Byte, length), type list) in listFormat(binaryData)
```

3
4

BinaryFormat.Decimal

11/25/2019 • 2 minutes to read

Syntax

```
BinaryFormat.Decimal(binary as binary) as any
```

About

A binary format that reads a .NET 16-byte decimal value.

BinaryFormat.Double

11/25/2019 • 2 minutes to read

Syntax

```
BinaryFormat.Double(binary as binary) as any
```

About

A binary format that reads an 8-byte IEEE double-precision floating point value.

BinaryFormat.Group

11/25/2019 • 2 minutes to read

Syntax

```
BinaryFormat.Group(binaryFormat as function, group as list, optional extra as nullable function, optional lastKey as any) as function
```

About

The parameters are as follows:

- The `binaryFormat` parameter specifies the binary format of the key value.
- The `group` parameter provides information about the group of known items.
- The optional `extra` parameter can be used to specify a function that will return a binary format value for the value following any key that was unexpected. If the `extra` parameter is not specified, then an error will be raised if there are unexpected key values.

The `group` parameter specifies a list of item definitions. Each item definition is a list, containing 3-5 values, as follows:

- Key value. The value of the key that corresponds to the item. This must be unique within the set of items.
- Item format. The binary format corresponding to the value of the item. This allows each item to have a different format.
- Item occurrence. The `BinaryOccurrence.Type` value for how many times the item is expected to appear in the group. Required items that are not present cause an error. Required or optional duplicate items are handled like unexpected key values.
- Default item value (optional). If the default item value appears in the item definition list and is not null, then it will be used instead of the default. The default for repeating or optional items is null, and the default for repeating values is an empty list { }.
- Item value transform (optional). If the item value transform function is present in the item definition list and is not null, then it will be called to transform the item value before it is returned. The transform function is only called if the item appears in the input (it will never be called with the default value).

Example 1

The following assumes a key value that is a single byte, with 4 expected items in the group, all of which have a byte of data following the key. The items appear in the input as follows:

- Key 1 is required, and does appear with value 11.
- Key 2 repeats, and appears twice with value 22, and results in a value of { 22, 22 }.
- Key 3 is optional, and does not appear, and results in a value of null.
- Key 4 repeats, but does not appear, and results in a value of { }.
- Key 5 is not part of the group, but appears once with value 55. The extra function is called with the key value 5, and returns the format corresponding to that value (`BinaryFormat.Byte`). The value 55 is read and discarded.

```
let b = #binary( { 1, 11, 2, 22, 2, 22, 5, 55, 1, 11 } ), f = BinaryFormat.Group( BinaryFormat.Byte, { { 1, BinaryFormat.Byte, BinaryOccurrence.Required }, { 2, BinaryFormat.Byte, BinaryOccurrence.Repeating }, { 3, BinaryFormat.Byte, BinaryOccurrence.Optional }, { 4, BinaryFormat.Byte, BinaryOccurrence.Repeating } }, (extra) => BinaryFormat.Byte) in f(b)
```

11

[List]

[List]

Example 2

The following example illustrates the item value transform and default item value. The repeating item with key 1 sums the list of values read using List.Sum. The optional item with key 2 has a default value of 123 instead of null.

```
let b = #binary( { 1, 101, 1, 102 } ), f = BinaryFormat.Group( BinaryFormat.Byte, { { 1, BinaryFormat.Byte, BinaryOccurrence.Repeating, 0, (list) => List.Sum(list) }, { 2, BinaryFormat.Byte, BinaryOccurrence.Optional, 123 } }) in f(b)
```

203

123

BinaryFormat.Length

11/25/2019 • 2 minutes to read

Syntax

```
BinaryFormat.Length(binaryFormat as function, length as any) as function
```

About

Returns a binary format that limits the amount of data that can be read. Both `BinaryFormat.List` and `BinaryFormat.Binary` can be used to read until end of the data. `BinaryFormat.Length` can be used to limit the number of bytes that are read. The `binaryFormat` parameter specifies the binary format to limit. The `length` parameter specifies the number of bytes to read. The `length` parameter may either be a number value, or a binary format value that specifies the format of the length value that appears that precedes the value being read.

Example 1

Limit the number of bytes read to 2 when reading a list of bytes.

```
let binaryData = #binary({1, 2, 3}), listFormat = BinaryFormat.Length( BinaryFormat.List(BinaryFormat.Byte),  
2) in listFormat(binaryData)
```

1

2

Example 2

Limit the number of byte read when reading a list of bytes to the byte value preceding the list.

```
let binaryData = #binary({1, 2, 3}), listFormat = BinaryFormat.Length( BinaryFormat.List(BinaryFormat.Byte),  
BinaryFormat.Byte) in listFormat(binaryData)
```

2

BinaryFormat.List

11/25/2019 • 2 minutes to read

Syntax

```
BinaryFormat.List(binaryFormat as function, optional countOrCondition as any) as function
```

About

Returns a binary format that reads a sequence of items and returns a `list`. The `binaryFormat` parameter specifies the binary format of each item. There are three ways to determine the number of items read:

- If the `countOrCondition` is not specified, then the binary format will read until there are no more items.
- If the `countOrCondition` is a number, then the binary format will read that many items.
- If the `countOrCondition` is a function, then that function will be invoked for each item read. The function returns true to continue, and false to stop reading items. The final item is included in the list.
- If the `countOrCondition` is a binary format, then the count of items is expected to precedes the list, and the specified format is used to read the count.

Example 1

Read bytes until the end of the data.

```
let binaryData = #binary({1, 2, 3}), listFormat = BinaryFormat.List(BinaryFormat.Byte) in  
listFormat(binaryData)
```

1

2

3

Example 2

Read two bytes.

```
let binaryData = #binary({1, 2, 3}), listFormat = BinaryFormat.List(BinaryFormat.Byte, 2) in  
listFormat(binaryData)
```

1

2

Example 3

Read bytes until the byte value is greater than or equal to two.

```
let binaryData = #binary({1, 2, 3}), listFormat = BinaryFormat.List(BinaryFormat.Byte, (x) => x < 2) in  
listFormat(binaryData)
```

1

2

BinaryFormat.Null

11/25/2019 • 2 minutes to read

Syntax

```
BinaryFormat.Null(binary as binary) as any
```

About

A binary format that reads zero bytes and returns null.

BinaryFormat.Record

11/25/2019 • 2 minutes to read

Syntax

```
BinaryFormat.Record(record as record) as function
```

About

Returns a binary format that reads a record. The `record` parameter specifies the format of the record. Each field in the record can have a different binary format. If a field contains a value that is not a binary format value, then no data is read for that field, and the field value is echoed to the result.

Example 1

Read a record containing one 16-bit integer and one 32-bit integer.

```
let binaryData = #binary({ 0x00, 0x01, 0x00, 0x00, 0x00, 0x02}), recordFormat = BinaryFormat.Record([ A =  
BinaryFormat.UnsignedInteger16, B = BinaryFormat.UnsignedInteger32 ]) in recordFormat(binaryData)
```

A	1
B	2

BinaryFormat.SignedInteger16

11/25/2019 • 2 minutes to read

Syntax

```
BinaryFormat.SignedInteger16(binary as binary) as any
```

About

A binary format that reads a 16-bit signed integer.

BinaryFormat.SignedInteger32

11/25/2019 • 2 minutes to read

Syntax

```
BinaryFormat.SignedInteger32(binary as binary) as any
```

About

A binary format that reads a 32-bit signed integer.

BinaryFormat.SignedInteger64

11/25/2019 • 2 minutes to read

Syntax

```
BinaryFormat.SignedInteger64(binary as binary) as any
```

About

A binary format that reads a 64-bit signed integer.

BinaryFormat.Single

11/25/2019 • 2 minutes to read

Syntax

```
BinaryFormat.Single(binary as binary) as any
```

About

A binary format that reads a 4-byte IEEE single-precision floating point value.

BinaryFormat.Text

11/25/2019 • 2 minutes to read

Syntax

```
BinaryFormat.Text(length as any, optional encoding as nullable number) as function
```

About

Returns a binary format that reads a text value. The `length` specifies the number of bytes to decode, or the binary format of the length that precedes the text. The optional `encoding` value specifies the encoding of the text. If the `encoding` is not specified, then the encoding is determined from the Unicode byte order marks. If no byte order marks are present, then `TextEncoding.Utf8` is used.

Example 1

Decode two bytes as ASCII text.

```
let binaryData = #binary({65, 66, 67}), textFormat = BinaryFormat.Text(2, TextEncoding.Ascii) in  
textFormat(binaryData)
```

```
"AB"
```

Example 2

Decode ASCII text where the length of the text in bytes appears before the text as a byte.

```
let binaryData = #binary({2, 65, 66}), textFormat = BinaryFormat.Text(BinaryFormat.Byte, TextEncoding.Ascii)  
in textFormat(binaryData)
```

```
"AB"
```

BinaryFormat.Transform

11/25/2019 • 2 minutes to read

Syntax

```
BinaryFormat.Transform(binaryFormat as function, function as function) as function
```

About

Returns a binary format that will transform the values read by another binary format. The `binaryFormat` parameter specifies the binary format that will be used to read the value. The `function` is invoked with the value read, and returns the transformed value.

Example 1

Read a byte and add one to it.

```
let binaryData = #binary({1}), transformFormat = BinaryFormat.Transform( BinaryFormat.Byte, (x) => x + 1) in  
transformFormat(binaryData)
```

BinaryFormat.UnsignedInteger16

11/25/2019 • 2 minutes to read

Syntax

```
BinaryFormat.UnsignedInteger16(binary as binary) as any
```

About

A binary format that reads a 16-bit unsigned integer.

BinaryFormat.UnsignedInteger32

11/25/2019 • 2 minutes to read

Syntax

```
BinaryFormat.UnsignedInteger32(binary as binary) as any
```

About

A binary format that reads a 32-bit unsigned integer.

BinaryFormat.UnsignedInteger64

11/25/2019 • 2 minutes to read

Syntax

```
BinaryFormat.UnsignedInteger64(binary as binary) as any
```

About

A binary format that reads a 64-bit unsigned integer.

BinaryOccurrence.Optional

11/25/2019 • 2 minutes to read

About

The item is expected to appear zero or one time in the input.

BinaryOccurrence.Repeating

11/25/2019 • 2 minutes to read

About

The item is expected to appear zero or more times in the input.

BinaryOccurrence.Required

11/25/2019 • 2 minutes to read

About

The item is expected to appear once in the input.

ByteOrder.BigEndian

11/25/2019 • 2 minutes to read

About

A possible value for the `byteOrder` parameter in `BinaryFormat.ByteOrder`. The most significant byte appears first in Big Endian byte order.

ByteOrder.LittleEndian

11/25/2019 • 2 minutes to read

About

A possible value for the `byteOrder` parameter in `BinaryFormat.ByteOrder`. The least significant byte appears first in Little Endian byte order.

Compression.Deflate

11/25/2019 • 2 minutes to read

About

The compressed data is in the 'Deflate' format.

Compression.GZip

11/25/2019 • 2 minutes to read

About

The compressed data is in the 'GZip' format.

Occurrence.Optional

11/25/2019 • 2 minutes to read

About

The item is expected to appear zero or one time in the input.

Occurrence.Repeating

11/25/2019 • 2 minutes to read

About

The item is expected to appear zero or more times in the input.

Occurrence.Required

11/25/2019 • 2 minutes to read

About

The item is expected to appear once in the input.

#binary

11/25/2019 • 2 minutes to read

Syntax

```
#binary(value as any) as any
```

About

Creates a binary value from a list of numbers or a base 64 encoded text value.

Example 1

Create a binary value from a list of numbers.

```
#binary({0x30, 0x31, 0x32})
```

```
Text.ToBinary("012")
```

Example 2

Create a binary value from a base 64 encoded text value.

```
#binary("1011")
```

```
Binary.FromText("1011", BinaryEncoding.Base64)
```

Combiner functions

11/25/2019 • 2 minutes to read

Combiner functions are used by other library functions that merge values, such as `Table.ToList` and `Table.CombineColumns`. The function is applied to each row in the table to produce a single value for each row.

Combiner

FUNCTION	DESCRIPTION
Combiner.CombineTextByDelimiter	Returns a function that combines a list of text into a single text using the specified delimiter.
Combiner.CombineTextByEachDelimiter	Returns a function that combines a list of text into a single text using each specified delimiter in sequence.
Combiner.CombineTextByLengths	Returns a function that combines a list of text into a single text using the specified lengths.
Combiner.CombineTextByPositions	Returns a function that combines a list of text into a single text using the specified positions.
Combiner.CombineTextByRanges	Returns a function that combines a list of text into a single text using the specified positions and lengths.

Combiner.CombineTextByDelimiter

11/25/2019 • 2 minutes to read

Syntax

```
Combiner.CombineTextByDelimiter(delimiter as text, optional quoteStyle as nullable number) as  
function
```

About

Returns a function that combines a list of text into a single text using the specified delimiter.

Combiner.CombineTextByEachDelimiter

11/25/2019 • 2 minutes to read

Syntax

```
Combiner.CombineTextByEachDelimiter(delimiters as list, optional quoteStyle as nullable number) as function
```

About

Returns a function that combines a list of text into a single text using each specified delimiter in sequence.

Combiner.CombineTextByLengths

11/25/2019 • 2 minutes to read

Syntax

```
Combiner.CombineTextByLengths(lengths as list, optional template as nullable text) as function
```

About

Returns a function that combines a list of text into a single text using the specified lengths.

Combiner.CombineTextByPositions

11/25/2019 • 2 minutes to read

Syntax

```
Combiner.CombineTextByPositions(positions as list, optional template as nullable text) as function
```

About

Returns a function that combines a list of text into a single text using the specified positions.

Combiner.CombineTextByRanges

11/25/2019 • 2 minutes to read

Syntax

```
Combiner.CombineTextByRanges(ranges as list, optional template as nullable text) as function
```

About

Returns a function that combines a list of text into a single text using the specified positions and lengths.

Comparer functions

11/25/2019 • 2 minutes to read

Comparer

FUNCTION	DESCRIPTION
Comparer.Equals	Returns a logical value based on the equality check over the two given values.
Comparer.FromCulture	Returns a comparer function given the culture and a logical value for case sensitivity for the comparison. The default value for ignoreCase is false. The value for culture are well known text representations of locales used in the .NET framework.
Comparer.Ordinal	Returns a comparer function which uses Ordinal rules to compare values.
Comparer.OrdinalIgnoreCase	Returns a case-insensitive comparer function which uses Ordinal rules to compare the provided values x and y.
Culture.Current	Returns the current culture of the system.

Comparer.Equals

11/25/2019 • 2 minutes to read

Syntax

```
Comparer.Equals(comparer as function, x as any, y as any) as logical
```

About

Returns a `logical` value based on the equality check over the two given values, `x` and `y`, using the provided `comparer`.

`comparer` is a `Comparer` which is used to control the comparison. Comparers can be used to provide case insensitive or culture and locale aware comparisons.

The following built in comparers are available in the formula language:

- `Comparer.Ordinal`: Used to perform an exact ordinal comparison
- `Comparer.OrdinalIgnoreCase`: Used to perform an exact ordinal case-insensitive comparison
- `Comparer.FromCulture`: Used to perform a culture aware comparison

Example 1

Compare "1" and "A" using "en-US" locale to determine if the values are equal.

```
Comparer.Equals(Comparer.FromCulture("en-us"), "1", "A")
```

```
false
```

Comparer.FromCulture

11/25/2019 • 2 minutes to read

Syntax

```
Comparer.FromCulture(culture as text, optional ignoreCase as nullable logical) as function
```

About

Returns a comparer function given the `culture` and a logical value `ignoreCase` for case sensitivity for the comparison. The default value for `ignoreCase` is false. The value for culture are well known text representations of locales used in the .NET framework.

Example 1

Compare "a" and "A" using "en-US" locale to determine if the values are equal.

```
Comparer.FromCulture("en-us")("a", "A")
```

-1

Example 2

Compare "a" and "A" using "en-US" locale ignoring the case to determine if the values are equal.

```
Comparer.FromCulture("en-us", true)("a", "A")
```

0

Comparer.Ordinal

11/25/2019 • 2 minutes to read

Syntax

```
Comparer.Ordinal(x as any, y as any) as number
```

About

Returns a comparer function which uses Ordinal rules to compare the provided values `x` and `y`.

Example 1

Using Ordinal rules, compare if "encyclopædia" and "encyclopaedia" are equivalent. Note these are equivalent using `Comparer.FromCulture("en-us")`.

```
Comparer.Equals(Comparer.Ordinal, "encyclopædia", "encyclopaedia")
```

```
false
```

Comparer.OrdinalIgnoreCase

11/25/2019 • 2 minutes to read

Syntax

```
Comparer.OrdinalIgnoreCase(x as any, y as any) as number
```

About

Returns a case-insensitive comparer function which uses Ordinal rules to compare the provided values `x` and `y`.

Example

Using case-insensitive Ordinal rules, compare "Abc" with "abc". Note "Abc" is less than "abc" using

```
Comparer.Ordinal .
```

```
Comparer.OrdinalIgnoreCase("Abc", "abc")
```

```
0
```

Culture.Current

11/25/2019 • 2 minutes to read

About

Returns the name of the current culture for the application.

Date functions

11/25/2019 • 5 minutes to read

Date

FUNCTION	DESCRIPTION
Date.AddDays	Returns a Date/DateTime/DateTimeZone value with the day portion incremented by the number of days provided. It also handles incrementing the month and year portions of the value as appropriate.
Date.AddMonths	Returns a DateTime value with the month portion incremented by n months.
Date.AddQuarters	Returns a Date/DateTime/DateTimeZone value incremented by the number of quarters provided. Each quarter is defined as a duration of three months. It also handles incrementing the year portion of the value as appropriate.
Date.AddWeeks	Returns a Date/DateTime/DateTimeZone value incremented by the number of weeks provided. Each week is defined as a duration of seven days. It also handles incrementing the month and year portions of the value as appropriate.
Date.AddYears	Returns a DateTime value with the year portion incremented by n years.
Date.Day	Returns the day for a DateTime value.
Date.DayOfWeek	Returns a number (from 0 to 6) indicating the day of the week of the provided value.
Date.DayOfWeekName	Returns the day of the week name.
Date.DayOfYear	Returns a number that represents the day of the year from a DateTime value.
Date.DaysInMonth	Returns the number of days in the month from a DateTime value.
Date.EndOfDay	Returns a DateTime value for the end of the day.
Date.EndOfMonth	Returns a DateTime value for the end of the month.
Date.EndOfQuarter	Returns a Date/DateTime/DateTimeZone value representing the end of the quarter. The date and time portions are reset to their terminating values for the quarter. The timezone information is persisted.
Date.EndOfWeek	Returns a DateTime value for the end of the week.

FUNCTION	DESCRIPTION
Date.EndOfYear	Returns a DateTime value for the end of the year.
Date.From	Returns a date value from a value.
Date.FromText	Returns a Date value from a set of date formats and culture value.
Date.IsInCurrentDay	Indicates whether the given datetime value <code>dateTime</code> occurs during the current day, as determined by the current date and time on the system.
Date.IsInCurrentMonth	Returns a logical value indicating whether the given Date/DateTime/DateTimeZone occurred during the current month, as determined by the current date and time on the system.
Date.IsInCurrentQuarter	Returns a logical value indicating whether the given Date/DateTime/DateTimeZone occurred during the current quarter, as determined by the current date and time on the system.
Date.IsInCurrentWeek	Returns a logical value indicating whether the given Date/DateTime/DateTimeZone occurred during the current week, as determined by the current date and time on the system.
Date.IsInCurrentYear	Returns a logical value indicating whether the given Date/DateTime/DateTimeZone occurred during the current year, as determined by the current date and time on the system.
Date.IsInNextDay	Indicates whether the given datetime value <code>dateTime</code> occurs during the next day, as determined by the current date and time on the system.
Date.IsInNextMonth	Returns a logical value indicating whether the given Date/DateTime/DateTimeZone occurred during the next month, as determined by the current date and time on the system.
Date.IsInNextNDays	Indicates whether the given datetime value <code>dateTime</code> occurs during the next number of days, as determined by the current date and time on the system.
Date.IsInNextNMonths	Indicates whether the given datetime value <code>dateTime</code> occurs during the next number of months, as determined by the current date and time on the system.
Date.IsInNextNQuarters	Indicates whether the given datetime value <code>dateTime</code> occurs during the next number of quarters, as determined by the current date and time on the system.
Date.IsInNextNWeeks	Indicates whether the given datetime value <code>dateTime</code> occurs during the next number of weeks, as determined by the current date and time on the system.

FUNCTION	DESCRIPTION
Date.IsInNextNYears	Indicates whether the given datetime value dateTime occurs during the next number of years, as determined by the current date and time on the system.
Date.IsInNextQuarter	Returns a logical value indicating whether the given Date/DateTime/DateTimeZone occurred during the next quarter, as determined by the current date and time on the system.
Date.IsInNextWeek	Returns a logical value indicating whether the given Date/DateTime/DateTimeZone occurred during the next week, as determined by the current date and time on the system.
Date.IsInNextYear	Returns a logical value indicating whether the given Date/DateTime/DateTimeZone occurred during the next year, as determined by the current date and time on the system.
Date.IsInPreviousDay	Indicates whether the given datetime value dateTime occurs during the previous day, as determined by the current date and time on the system.
Date.IsInPreviousMonth	Returns a logical value indicating whether the given Date/DateTime/DateTimeZone occurred during the previous month, as determined by the current date and time on the system.
Date.IsInPreviousNDays	Indicates whether the given datetime value dateTime occurs during the previous number of days, as determined by the current date and time on the system.
Date.IsInPreviousNMonths	Indicates whether the given datetime value dateTime occurs during the previous number of months, as determined by the current date and time on the system.
Date.IsInPreviousNQuarters	Indicates whether the given datetime value dateTime occurs during the previous number of quarters, as determined by the current date and time on the system.
Date.IsInPreviousNWeeks	Indicates whether the given datetime value dateTime occurs during the previous number of weeks, as determined by the current date and time on the system.
Date.IsInPreviousNYears	Indicates whether the given datetime value dateTime occurs during the previous number of years, as determined by the current date and time on the system.
Date.IsInPreviousQuarter	Returns a logical value indicating whether the given Date/DateTime/DateTimeZone occurred during the previous quarter, as determined by the current date and time on the system.
Date.IsInPreviousWeek	Returns a logical value indicating whether the given Date/DateTime/DateTimeZone occurred during the previous week, as determined by the current date and time on the system.

FUNCTION	DESCRIPTION
Date.IsInPreviousYear	Returns a logical value indicating whether the given Date/DateTime/DateTimeZone occurred during the previous year, as determined by the current date and time on the system.
Date.IsInYearToDate	Returns a logical value indicating whether the given Date/DateTime/DateTimeZone occurred in the period starting January 1st of the current year and ending on the current day, as determined by the current date and time on the system.
Date.IsLeapYear	Returns a logical value indicating whether the year portion of a DateTime value is a leap year.
Date.Month	Returns the month from a DateTime value.
Date.MonthName	Returns the name of the month component.
Date.QuarterOfYear	Returns a number between 1 and 4 for the quarter of the year from a DateTime value.
Date.StartOfDay	Returns a DateTime value for the start of the day.
Date.StartOfMonth	Returns a DateTime value representing the start of the month.
Date.StartOfQuarter	Returns a DateTime value representing the start of the quarter.
Date.StartOfWeek	Returns a DateTime value representing the start of the week.
Date.StartOfYear	Returns a DateTime value representing the start of the year.
Date.ToRecord	Returns a record containing parts of a Date value.
Date.ToText	Returns a text value from a Date value.
Date.WeekOfMonth	Returns a number for the count of week in the current month.
Date.WeekOfYear	Returns a number for the count of week in the current year.
Date.Year	Returns the year from a DateTime value.
#date	Creates a date value from year, month, and day.
PARAMETER VALUES	DESCRIPTION
Day.Sunday	Represents Sunday.
Day.Monday	Represents Monday.
Day.Tuesday	Represents Tuesday.

PARAMETER VALUES	DESCRIPTION
Day.Wednesday	Represents Wednesday.
Day.Thursday	Represents Thursday.
Day.Friday	Represents Friday.
Day.Saturday	Represents Saturday.

Date.AddDays

11/25/2019 • 2 minutes to read

Syntax

```
Date.AddDays(dateTime as any, numberOfDays as number) as any
```

About

Returns the `date`, `datetime`, or `datetimezone` result from adding `numberOfDays` days to the `dateTime` value `dateTime`.

- `dateTime`: The `date`, `datetime`, or `datetimezone` value to which days are being added.
- `numberOfDays`: The number of days to add.

Example 1

Add 5 days to the `date`, `datetime`, or `datetimezone` value representing the date 5/14/2011.

```
Date.AddDays(#date(2011, 5, 14), 5)
```

```
#date(2011, 5, 19)
```

Date.AddMonths

11/25/2019 • 2 minutes to read

Syntax

```
Date.AddMonths(dateTime as any, numberOfMonths as number) as any
```

About

Returns the `date`, `datetime`, or `datetimezone` result from adding `numberOfMonths` months to the `dateTime` value `dateTime`.

- `dateTime`: The `date`, `datetime`, or `datetimezone` value to which months are being added.
- `numberOfMonths`: The number of months to add.

Example 1

Add 5 months to the `date`, `datetime`, or `datetimezone` value representing the date 5/14/2011.

```
Date.AddMonths(#date(2011, 5, 14), 5)
```

```
#date(2011, 10, 14)
```

Example 2

Add 18 months to the `date`, `datetime`, or `datetimezone` value representing the date and time of 5/14/2011 08:15:22 AM.

```
Date.AddMonths(#datetime(2011, 5, 14, 8, 15, 22), 18)
```

```
#datetime(2012, 11, 14, 8, 15, 22)
```

Date.AddQuarters

11/25/2019 • 2 minutes to read

Syntax

```
Date.AddQuarters(dateTime as any, numberOfQuarters as number) as any
```

About

Returns the `date`, `datetime`, or `datetimezone` result from adding `numberOfQuarters` quarters to the `dateTime` value `dateTime`.

- `dateTime`: The `date`, `datetime`, or `datetimezone` value to which quarters are being added.
- `numberOfQuarters`: The number of quarters to add.

Example 1

Add 1 quarter to the `date`, `datetime`, or `datetimezone` value representing the date 5/14/2011.

```
Date.AddQuarters(#date(2011, 5, 14), 1)
```

```
#date(2011, 8, 14)
```

Date.AddWeeks

11/25/2019 • 2 minutes to read

Syntax

```
Date.AddWeeks(dateTime as any, numberOfWeeks as number) as any
```

About

Returns the `date`, `datetime`, or `datetimezone` result from adding `numberOfWeeks` weeks to the `dateTime` value `dateTime`.

- `dateTime`: The `date`, `datetime`, or `datetimezone` value to which weeks are being added.
- `numberOfWeeks`: The number of weeks to add.

Example 1

Add 2 weeks to the `date`, `datetime`, or `datetimezone` value representing the date 5/14/2011.

```
Date.AddWeeks(#date(2011, 5, 14), 2)
```

```
#date(2011, 5, 28)
```

Date.AddYears

11/25/2019 • 2 minutes to read

Syntax

```
Date.AddYears(dateTime as any, numberOfYears as number) as any
```

About

Returns the `date`, `datetime`, or `datetimezone` result of adding `numberOfYears` to a `datetime` value `dateTime`.

- `dateTime`: The `date`, `datetime`, or `datetimezone` value to which years are added.
- `numberOfYears`: The number of years to add.

Example 1

Add 4 years to the `date`, `datetime`, or `datetimezone` value representing the date 5/14/2011.

```
Date.AddYears(#date(2011, 5, 14), 4)
```

```
#date(2015, 5, 14)
```

Example 2

Add 10 years to the `date`, `datetime`, or `datetimezone` value representing the date and time of 5/14/2011 08:15:22 AM.

```
Date.AddYears(#datetime(2011, 5, 14, 8, 15, 22), 10)
```

```
#datetime(2021, 5, 14, 8, 15, 22)
```

Date.Day

11/25/2019 • 2 minutes to read

Syntax

```
Date.Day(dateTime as any) as nullable number
```

About

Returns the day component of a `date`, `datetime`, or `datetimezone` value.

- `dateTime`: A `date`, `datetime`, or `datetimezone` value from which the day component is extracted.

Example 1

Get the day component of a `date`, `datetime`, or `datetimezone` value representing the date and time of 5/14/2011 05:00:00 PM.

```
Date.Day(#datetime(2011, 5, 14, 17, 0, 0))
```


Date.DayOfWeek

11/25/2019 • 2 minutes to read

Syntax

```
Date.DayOfWeek(dateTime as any, optional firstDayOfWeek as nullable number) as nullable number
```

About

Returns a number (from 0 to 6) indicating the day of the week of the provided `dateTime`.

- `dateTime`: A `date`, `datetime`, or `datetimezone` value.
- `firstDayOfWeek`: A `Day` value indicating which day should be considered the first day of the week. Allowed values are `Day.Sunday`, `Day.Monday`, `Day.Tuesday`, `Day.Wednesday`, `Day.Thursday`, `Day.Friday`, or `Day.Saturday`. If unspecified, a culture-dependent default is used.

Example 1

Get the day of the week represented by Monday, February 21st, 2011, treating Sunday as the first day of the week.

```
Date.DayOfWeek(#date(2011, 02, 21), Day.Sunday)`
```

1

Example 2

Get the day of the week represented by Monday, February 21st, 2011, treating Monday as the first day of the week.

```
Date.DayOfWeek(#date(2011, 02, 21), Day.Monday)
```

0

Date.DayOfWeekName

11/25/2019 • 2 minutes to read

Syntax

```
Date.DayOfWeekName(date as any, optional culture as nullable text)
```

About

Returns the day of the week name for the provided `date` and, optionally, a culture `culture`.

Example 1

Get the day of the week name.

```
Date.DayOfWeekName(#date(2011, 12, 31), "en-US")
```

```
"Saturday"
```

Date.DayOfYear

11/25/2019 • 2 minutes to read

Syntax

```
Date.DayOfYear(dateTime as any) as nullable number
```

About

Returns a number representing the day of the year in the provided `date`, `datetime`, or `datetimezone` value, `dateTime`.

Example 1

The number of the day March 1st, 2011 (`#date(2011, 03, 01)`).

```
Date.DayOfYear(#date(2011, 03, 01))
```

Date.DaysInMonth

11/25/2019 • 2 minutes to read

Syntax

```
Date.DaysInMonth(dateTime as any) as nullable number
```

About

Returns the number of days in the month in the `date`, `datetime`, or `datetimezone` value `dateTime`.

- `dateTime`: A `date`, `datetime`, or `datetimezone` value for which the number of days in the month is returned.

Example 1

Number of days in the month December as represented by `#date(2011, 12, 01)`.

```
Date.DaysInMonth(#date(2011, 12, 01))
```

Date.EndOfDay

11/25/2019 • 2 minutes to read

```
Date.EndOfDay(dateTime as any) as any
```

About

Returns a `date`, `datetime`, or `datetimezone` value representing the end of the day in `dateTime`. Time zone information is preserved.

- `dateTime`: A `date`, `datetime`, or `datetimezone` value from from which the end of the day is calculated.

Example 1

Get the end of the day for 5/14/2011 05:00:00 PM.

```
Date.EndOfDay(#datetime(2011, 5, 14, 17, 0, 0))
```

```
#datetime(2011, 5, 14, 23, 59, 59.9999999)
```

Example 2

Get the end of the day for 5/17/2011 05:00:00 PM -7:00.

```
Date.EndOfDay(#datetimezone(2011, 5, 17, 5, 0, 0, -7, 0))
```

```
#datetimezone(2011, 5, 17, 23, 59, 59.9999999, -7, 0)
```

Date.EndOfMonth

11/25/2019 • 2 minutes to read

Syntax

```
Date.EndOfMonth(dateTime as any) as any
```

About

Returns the last day of the month in `dateTime`.

- `dateTime`: A `date`, `datetime`, or `datetimezone` value from which the end of the month is calculated

Example 1

Get the end of the month for 5/14/2011.

```
Date.EndOfMonth(#date(2011, 5, 14))
```

```
#date(2011, 5, 31)
```

Example 2

Get the end of the month for 5/17/2011 05:00:00 PM -7:00.

```
Date.EndOfMonth(#datetimezone(2011, 5, 17, 5, 0, 0, -7, 0))
```

```
#datetimezone(2011, 5, 31, 23, 59, 59.9999999, -7, 0)
```

Date.EndOfQuarter

11/25/2019 • 2 minutes to read

Syntax

```
Date.EndOfQuarter(dateTime as any) as any
```

About

Returns a `date`, `datetime`, or `datetimezone` value representing the end of the quarter in `dateTime`. Time zone information is preserved.

- `dateTime`: A `date`, `datetime`, or `datetimezone` value from which the end of the quarter is calculated.

Example 1

Find the end of the quarter for October 10th, 2011, 8:00AM (`#datetime(2011, 10, 10, 8, 0, 0)`).

```
Date.EndOfQuarter(#datetime(2011, 10, 10, 8, 0, 0))
```

```
#datetime(2011, 12, 31, 23, 59, 59.9999999)
```

Date.EndOfWeek

11/25/2019 • 2 minutes to read

Syntax

```
Date.EndOfWeek(dateTime as any, optional firstDayOfWeek as nullable number) as any
```

About

Returns the last day of the week in the provided `date`, `datetime`, or `datetimezone` `dateTime`. This function takes an optional `Day`, `firstDayOfWeek`, to set the first day of the week for this relative calculation. The default value is `Day.Sunday`.

- `dateTime`: A `date`, `datetime`, or `datetimezone` value from which the last day of the week is calculated
- `firstDayOfWeek`: *[Optional]* A `Day.Type` value representing the first day of the week. Possible values are `Day.Sunday`, `Day.Monday`, `Day.Tuesday`, `Day.Wednesday`, `Day.Thursday`, `Day.Friday` and `Day.Saturday`. The default value is `Day.Sunday`.

Example 1

Get the end of the week for 5/14/2011.

```
Date.EndOfWeek(#date(2011, 5, 14))
```

```
#date(2011, 5, 14)
```

Example 2

Get the end of the week for 5/17/2011 05:00:00 PM -7:00, with Sunday as the first day of the week.

```
Date.EndOfWeek(#datetimezone(2011, 5, 17, 5, 0, 0, -7, 0), Day.Sunday)
```

```
#datetimezone(2011, 5, 21, 23, 59, 59.9999999, -7, 0)
```


Date.EndOfYear

11/25/2019 • 2 minutes to read

Syntax

```
Date.EndOfYear(dateTime as any) as any
```

About

Returns a value representing the end of the year in `dateTime`, including fractional seconds. Time zone information is preserved.

- `dateTime`: A `date`, `datetime`, or `datetimezone` value from which the end of the year is calculated.

Example 1

Get the end of the year for 5/14/2011 05:00:00 PM.

```
Date.EndOfYear(#datetime(2011, 5, 14, 17, 0, 0))
```

```
#datetime(2011, 12, 31, 23, 59, 59.9999999)
```

Example 2

Get the end of hour for 5/17/2011 05:00:00 PM -7:00.

```
Date.EndOfYear(#datetimezone(2011, 5, 17, 5, 0, 0, -7, 0))
```

```
#datetimezone(2011, 12, 31, 23, 59, 59.9999999, -7, 0)
```

Date.From

11/25/2019 • 2 minutes to read

Syntax

```
Date.From(value as any, optional culture as nullable text) as nullable date
```

About

Returns a `date` value from the given `value`. If the given `value` is `null`, `Date.From` returns `null`. If the given `value` is `date`, `value` is returned. Values of the following types can be converted to a `date` value:

- `text`: A `date` value from textual representation. See `Date.FromText` for details.
- `datetime`: The date component of the `value`.
- `datetimezone`: The date component of the local datetime equivalent of `value`.
- `number`: The date component of the datetime equivalent the OLE Automation Date expressed by `value`.

If `value` is of any other type, an error is returned.

Example 1

Convert `43910` to a `date` value.

```
Date.From(43910)
```

```
#date(2020, 3, 20)
```

Example 2

Convert `#datetime(1899, 12, 30, 06, 45, 12)` to a `date` value.

```
Date.From(#datetime(1899, 12, 30, 06, 45, 12))
```

```
#date(1899, 12, 30)
```

Date.FromText

11/25/2019 • 2 minutes to read

Syntax

```
Date.FromText(text as nullable text, optional culture as nullable text) as nullable date
```

About

Creates a `date` value from a textual representation, `text`, following ISO 8601 format standard.

- `Date.FromText("2010-02-19")` // Date, yyyy-MM-dd

Example 1

Convert `"December 31, 2010"` into a date value.

```
Date.FromText("2010-12-31")
```

```
#date(2010, 12, 31)
```

Example 2

Convert `"December 31, 2010"` into a date value, with a different format

```
Date.FromText("2010, 12, 31")
```

```
#date(2010, 12, 31)
```

Example 3

Convert `"December, 2010"` into a date value.

```
Date.FromText("2010, 12")
```

```
#date(2010, 12, 1)
```

Example 4

Convert `"2010"` into a date value.

```
Date.FromText("2010")
```

```
#date(2010, 1, 1)
```

Date.IsInCurrentDay

11/25/2019 • 2 minutes to read

Syntax

```
Date.IsInCurrentDay(dateTime as any) as nullable logical
```

About

Indicates whether the given datetime value `dateTime` occurs during the current day, as determined by the current date and time on the system.

- `dateTime`: A `date`, `datetime`, or `datetimezone` value to be evaluated.

Example

Determine if the current system time is in the current day.

```
Date.IsInCurrentDay(DateTime.FixedLocalNow())
```

```
true
```

Date.IsInCurrentMonth

11/25/2019 • 2 minutes to read

Syntax

```
Date.IsInCurrentMonth(dateTime as any) as nullable logical
```

About

Indicates whether the given datetime value `dateTime` occurs during the current month, as determined by the current date and time on the system.

- `dateTime`: A `date`, `datetime`, or `datetimezone` value to be evaluated.

Example 1

Determine if the current system time is in the current month.

```
Date.IsInCurrentMonth(DateTime.FixedLocalNow())
```

```
true
```

Date.IsInCurrentQuarter

11/25/2019 • 2 minutes to read

Syntax

```
Date.IsInCurrentQuarter(dateTime as any) as nullable logical
```

About

Indicates whether the given datetime value `dateTime` occurs during the current quarter, as determined by the current date and time on the system.

- `dateTime`: A `date`, `datetime`, or `datetimezone` value to be evaluated.

Example 1

Determine if the current system time is in the current quarter.

```
Date.IsInCurrentQuarter(DateTime.FixedLocalNow())
```

```
true
```

Date.IsInCurrentWeek

11/25/2019 • 2 minutes to read

Syntax

```
Date.IsInCurrentWeek(dateTime as any) as nullable logical
```

About

Indicates whether the given datetime value `dateTime` occurs during the current week, as determined by the current date and time on the system.

- `dateTime`: A `date`, `datetime`, or `datetimezone` value to be evaluated.

Example 1

Determine if the current system time is in the current week.

```
Date.IsInCurrentWeek(DateTime.FixedLocalNow())
```

```
true
```

Date.IsInCurrentYear

11/25/2019 • 2 minutes to read

Syntax

```
Date.IsInCurrentYear(dateTime as any) as nullable logical
```

About

Indicates whether the given datetime value `dateTime` occurs during the current year, as determined by the current date and time on the system.

- `dateTime`: A `date`, `datetime`, or `datetimezone` value to be evaluated.

Example 1

Determine if the current system time is in the current year.

```
Date.IsInCurrentYear(DateTime.FixedLocalNow())
```

```
true
```


Date.IsInNextDay

11/25/2019 • 2 minutes to read

Syntax

```
Date.IsInNextDay(dateTime as any) as nullable logical
```

About

Indicates whether the given datetime value `dateTime` occurs during the next day, as determined by the current date and time on the system. Note that this function will return false when passed a value that occurs within the current day.

- `dateTime`: A `date`, `datetime`, or `datetimezone` value to be evaluated.

Example 1

Determine if the day after the current system time is in the next day.

```
Date.IsInNextDay(Date.AddDays(DateTime.FixedLocalNow(), 1))
```

```
true
```

Date.IsInNextMonth

11/25/2019 • 2 minutes to read

Syntax

```
Date.IsInNextMonth(dateTime as any) as nullable logical
```

About

Indicates whether the given datetime value `dateTime` occurs during the next month, as determined by the current date and time on the system. Note that this function will return false when passed a value that occurs within the current month.

- `dateTime`: A `date`, `datetime`, or `datetimezone` value to be evaluated.

Example 1

Determine if the month after the current system time is in the next month.

```
Date.IsInNextMonth(Date.AddMonths(DateTime.FixedLocalNow(), 1))
```

```
true
```

Date.IsInNextNDays

11/25/2019 • 2 minutes to read

Syntax

```
Date.IsInNextNDays(dateTime as any, days as number) as nullable logical
```

About

Indicates whether the given datetime value `dateTime` occurs during the next number of days, as determined by the current date and time on the system. Note that this function will return false when passed a value that occurs within the current day.

- `dateTime`: A `date`, `datetime`, or `datetimezone` value to be evaluated.
- `days`: The number of days.

Example 1

Determine if the day after the current system time is in the next two days.

```
Date.IsInNextNDays(Date.AddDays(DateTime.FixedLocalNow(), 1), 2)
```

```
true
```

Date.IsInNextNMonths

11/25/2019 • 2 minutes to read

```
Date.IsInNextNMonths(dateTime as any, months as number) as nullable logical
```

About

Indicates whether the given datetime value `dateTime` occurs during the next number of months, as determined by the current date and time on the system. Note that this function will return false when passed a value that occurs within the current month.

- `dateTime`: A `date`, `datetime`, or `datetimezone` value to be evaluated.
- `months`: The number of months.

Example 1

Determine if the month after the current system time is in the next two months.

```
Date.IsInNextNMonths(Date.AddMonths(DateTime.FixedLocalNow(), 1), 2)
```

```
true
```

Date.IsInNextNQuarters

11/25/2019 • 2 minutes to read

Syntax

```
Date.IsInNextNQuarters(dateTime as any, quarters as number) as nullable logical
```

About

Indicates whether the given datetime value `dateTime` occurs during the next number of quarters, as determined by the current date and time on the system. Note that this function will return false when passed a value that occurs within the current quarter.

- `dateTime`: A `date`, `datetime`, or `datetimezone` value to be evaluated.
- `quarters`: The number of quarters.

Example 1

Determine if the quarter after the current system time is in the next two quarters.

```
Date.IsInNextNQuarters(Date.AddQuarters(DateTime.FixedLocalNow(), 1), 2)
```

```
true
```

Date.IsInNextNWeeks

11/25/2019 • 2 minutes to read

Syntax

```
Date.IsInNextNWeeks(dateTime as any, weeks as number) as nullable logical
```

About

Indicates whether the given datetime value `dateTime` occurs during the next number of weeks, as determined by the current date and time on the system. Note that this function will return false when passed a value that occurs within the current week.

- `dateTime`: A `date`, `datetime`, or `datetimezone` value to be evaluated.
- `weeks`: The number of weeks.

Example 1

Determine if the week after the current system time is in the next two weeks.

```
Date.IsInNextNWeeks(Date.AddDays(DateTime.FixedLocalNow(), 7), 2)
```

```
true
```

Date.IsInNextNYears

11/25/2019 • 2 minutes to read

Syntax

```
Date.IsInNextNYears(dateTime as any, years as number) as nullable logical
```

About

Indicates whether the given datetime value `dateTime` occurs during the next number of years, as determined by the current date and time on the system. Note that this function will return false when passed a value that occurs within the current year.

- `dateTime`: A `date`, `datetime`, or `datetimezone` value to be evaluated.
- `years`: The number of years.

Example 1

Determine if the year after the current system time is in the next two years.

```
Date.IsInNextNYears(Date.AddYears(DateTime.FixedLocalNow(), 1), 2)
```

```
true
```

Date.IsInNextQuarter

11/25/2019 • 2 minutes to read

Syntax

```
Date.IsInNextQuarter(dateTime as any) as nullable logical
```

About

Indicates whether the given datetime value `dateTime` occurs during the next quarter, as determined by the current date and time on the system. Note that this function will return false when passed a value that occurs within the current quarter.

- `dateTime`: A `date`, `datetime`, or `datetimezone` value to be evaluated.

####Example 1 Determine if the quarter after the current system time is in the next quarter.

```
Date.IsInNextQuarter(Date.AddQuarters(DateTime.FixedLocalNow(), 1))
```

```
true
```


Date.IsInNextWeek

11/25/2019 • 2 minutes to read

Syntax

```
Date.IsInNextWeek(dateTime as any) as nullable logical
```

About

Indicates whether the given datetime value `dateTime` occurs during the next week, as determined by the current date and time on the system. Note that this function will return false when passed a value that occurs within the current week.

- `dateTime`: A `date`, `datetime`, or `datetimezone` value to be evaluated.

Example 1

Determine if the week after the current system time is in the next week.

```
Date.IsInNextWeek(Date.AddDays(DateTime.FixedLocalNow(), 7))
```

```
true
```

Date.IsInNextYear

11/25/2019 • 2 minutes to read

Syntax

```
Date.IsInNextYear(dateTime as any) as nullable logical
```

About

Indicates whether the given datetime value `dateTime` occurs during the next year, as determined by the current date and time on the system. Note that this function will return false when passed a value that occurs within the current year.

- `dateTime`: A `date`, `datetime`, or `datetimezone` value to be evaluated.

Example 1

Determine if the year after the current system time is in the next year.

```
Date.IsInNextYear(Date.AddYears(DateTime.FixedLocalNow(), 1))
```

```
true
```

Date.IsInPreviousDay

11/25/2019 • 2 minutes to read

Syntax

```
Date.IsInPreviousDay(dateTime as any) as nullable logical
```

About

Indicates whether the given datetime value `dateTime` occurs during the previous day, as determined by the current date and time on the system. Note that this function will return false when passed a value that occurs within the current day.

- `dateTime`: A `date`, `datetime`, or `datetimezone` value to be evaluated.

Example 1

Determine if the day before the current system time is in the previous day.

```
Date.IsInPreviousDay(Date.AddDays(DateTime.FixedLocalNow(), -1))
```

```
true
```

Date.IsInPreviousMonth

11/25/2019 • 2 minutes to read

Syntax

```
Date.IsInPreviousMonth(dateTime as any) as nullable logical
```

About

Indicates whether the given datetime value `dateTime` occurs during the previous month, as determined by the current date and time on the system. Note that this function will return false when passed a value that occurs within the current month.

- `dateTime`: A `date`, `datetime`, or `datetimezone` value to be evaluated.

Example 1

Determine if the month before the current system time is in the previous month.

```
Date.IsInPreviousMonth(Date.AddMonths(DateTime.FixedLocalNow(), -1))
```

```
true
```

Date.IsInPreviousNDays

11/25/2019 • 2 minutes to read

Syntax

```
Date.IsInPreviousNDays(dateTime as any, days as number) as nullable logical
```

About

Indicates whether the given datetime value `dateTime` occurs during the previous number of days, as determined by the current date and time on the system. Note that this function will return false when passed a value that occurs within the current day.

- `dateTime`: A `date`, `datetime`, or `datetimezone` value to be evaluated.
- `days`: The number of days.

Example 1

Determine if the day before the current system time is in the previous two days.

```
Date.IsInPreviousNDays(Date.AddDays(DateTime.FixedLocalNow(), -1), 2)
```

```
true
```

Date.IsInPreviousNMonths

11/25/2019 • 2 minutes to read

Syntax

```
Date.IsInPreviousNMonths(dateTime as any, months as number) as nullable logical
```

About

Indicates whether the given datetime value `dateTime` occurs during the previous number of months, as determined by the current date and time on the system. Note that this function will return false when passed a value that occurs within the current month.

- `dateTime`: A `date`, `datetime`, or `datetimezone` value to be evaluated.
- `months`: The number of months.

Example 1

Determine if the month before the current system time is in the previous two months.

```
Date.IsInPreviousNMonths(Date.AddMonths(DateTime.FixedLocalNow(), -1), 2)
```

```
true
```

Date.IsInPreviousNQuarters

11/25/2019 • 2 minutes to read

Syntax

```
Date.IsInPreviousNQuarters(dateTime as any, quarters as number) as nullable logical
```

About

Indicates whether the given datetime value `dateTime` occurs during the previous number of quarters, as determined by the current date and time on the system. Note that this function will return false when passed a value that occurs within the current quarter.

- `dateTime`: A `date`, `datetime`, or `datetimezone` value to be evaluated.
- `quarters`: The number of quarters.

Example 1

Determine if the quarter before the current system time is in the previous two quarters.

```
Date.IsInPreviousNQuarters(Date.AddQuarters(DateTime.FixedLocalNow(), -1), 2)
```

```
true
```

Date.IsInPreviousNWeeks

11/25/2019 • 2 minutes to read

Syntax

```
Date.IsInPreviousNWeeks(dateTime as any, weeks as number) as nullable logical
```

About

Indicates whether the given datetime value `dateTime` occurs during the previous number of weeks, as determined by the current date and time on the system. Note that this function will return false when passed a value that occurs within the current week.

- `dateTime`: A `date`, `datetime`, or `datetimezone` value to be evaluated.
- `weeks`: The number of weeks.

Example 1

Determine if the week before the current system time is in the previous two weeks.

```
Date.IsInPreviousNWeeks(Date.AddDays(DateTime.FixedLocalNow(), -7), 2)
```

```
true
```


Date.IsInPreviousNYears

11/25/2019 • 2 minutes to read

Syntax

```
Date.IsInPreviousNYears(dateTime as any, years as number) as nullable logical
```

About

Indicates whether the given datetime value `dateTime` occurs during the previous number of years, as determined by the current date and time on the system. Note that this function will return false when passed a value that occurs within the current year.

- `dateTime`: A `date`, `datetime`, or `datetimezone` value to be evaluated.
- `years`: The number of years.

Example 1

Determine if the year before the current system time is in the previous two years.

```
Date.IsInPreviousNYears(Date.AddYears(DateTime.FixedLocalNow(), -1), 2)
```

```
true
```

Date.IsInPreviousQuarter

11/25/2019 • 2 minutes to read

Syntax

```
Date.IsInPreviousQuarter(dateTime as any) as nullable logical
```

About

Indicates whether the given datetime value `dateTime` occurs during the previous quarter, as determined by the current date and time on the system. Note that this function will return false when passed a value that occurs within the current quarter.

- `dateTime`: A `date`, `datetime`, or `datetimezone` value to be evaluated.

Example 1

Determine if the quarter before the current system time is in the previous quarter.

```
Date.IsInPreviousQuarter(Date.AddQuarters(DateTime.FixedLocalNow(), -1))
```

```
true
```

Date.IsInPreviousWeek

11/25/2019 • 2 minutes to read

Syntax

```
Date.IsInPreviousWeek(dateTime as any) as nullable logical
```

About

Indicates whether the given datetime value `dateTime` occurs during the previous week, as determined by the current date and time on the system. Note that this function will return false when passed a value that occurs within the current week.

- `dateTime`: A `date`, `datetime`, or `datetimezone` value to be evaluated.

Example 1

Determine if the week before the current system time is in the previous week.

```
Date.IsInPreviousWeek(Date.AddDays(DateTime.FixedLocalNow(), -7))
```

```
true
```

Date.IsInPreviousYear

11/25/2019 • 2 minutes to read

Syntax

```
Date.IsInPreviousYear(dateTime as any) as nullable logical
```

About

Indicates whether the given datetime value `dateTime` occurs during the previous year, as determined by the current date and time on the system. Note that this function will return false when passed a value that occurs within the current year.

- `dateTime`: A `date`, `datetime`, or `datetimezone` value to be evaluated.

Example 1

Determine if the year before the current system time is in the previous year.

```
Date.IsInPreviousYear(Date.AddYears(DateTime.FixedLocalNow(), -1))
```

```
true
```

Date.IsInYearToDate

11/25/2019 • 2 minutes to read

Syntax

```
Date.IsInYearToDate(dateTime as any) as nullable logical
```

About

Indicates whether the given datetime value `dateTime` occurs during the current year and is on or before the current day, as determined by the current date and time on the system.

- `dateTime`: A `date`, `datetime`, or `datetimezone` value to be evaluated.

Example 1

Determine if the current system time is in the year to date.

```
Date.IsInYearToDate(DateTime.FixedLocalNow())
```

```
true
```

Date.IsLeapYear

11/25/2019 • 2 minutes to read

Syntax

```
Date.IsLeapYear(dateTime as any) as nullable logical
```

About

Indicates whether the given datetime value `dateTime` falls in is a leap year.

- `dateTime`: A `date`, `datetime`, or `datetimezone` value to be evaluated.

Example 1

Determine if the year 2012, as represented by `#date(2012, 01, 01)` is a leap year.

```
Date.IsLeapYear(#date(2012, 01, 01))
```

```
true
```

Date.Month

11/25/2019 • 2 minutes to read

Syntax

```
Date.Month(dateTime as any) as nullable number
```

About

Returns the month component of the provided `datetime` value, `dateTime`.

Example 1

Find the month in `#datetime(2011, 12, 31, 9, 15, 36)`.

```
Date.Month(#datetime(2011, 12, 31, 9, 15, 36))
```

Date.MonthName

11/25/2019 • 2 minutes to read

Syntax

```
Date.MonthName(date as any, optional culture as nullable text) as nullable text
```

About

Returns the name of the month component for the provided `date` and, optionally, a culture `culture`.

Example

Get the month name.

```
Date.MonthName(#datetime(2011, 12, 31, 5, 0, 0), "en-US")
```

```
"December"
```


Date.QuarterOfYear

11/25/2019 • 2 minutes to read

Syntax

```
Date.QuarterOfYear(dateTime as any) as nullable number
```

About

Returns a number from 1 to 4 indicating which quarter of the year the date `dateTime` falls in. `dateTime` can be a `date`, `datetime`, or `datetimezone` value.

Example 1

Find which quarter of the year the date `#date(2011, 12, 31)` falls in.

```
Date.QuarterOfYear(#date(2011, 12, 31))
```

Date.StartOfDay

11/25/2019 • 2 minutes to read

Syntax

```
Date.StartOfDay(dateTime as any) as any
```

About

Returns the first value of the day `dateTime`. `dateTime` must be a `date`, `datetime`, or `datetimezone` value.

Example 1

Find the start of the day for October 10th, 2011, 8:00AM (`#datetime(2011, 10, 10, 8, 0, 0)`).

```
Date.StartOfDay(#datetime(2011, 10, 10, 8, 0, 0))
```

```
#datetime(2011, 10, 10, 0, 0, 0)
```

Date.StartOfMonth

11/25/2019 • 2 minutes to read

Syntax

```
Date.StartOfMonth(dateTime as any) as any
```

About

Returns the first value of the month given a `date` or `datetime` type.

Example 1

Find the start of the month for October 10th, 2011, 8:10:32AM (`#datetime(2011, 10, 10, 8, 10, 32)`).

```
Date.StartOfMonth(#datetime(2011, 10, 10, 8, 10, 32))
```

```
#datetime(2011, 10, 1, 0, 0, 0)
```

Date.StartOfQuarter

11/25/2019 • 2 minutes to read

Syntax

```
Date.StartOfQuarter(dateTime as any) as any
```

About

Returns the first value of the quarter < `dateTime` . `dateTime` must be a `date` , `datetime` , or `datetimezone` value.

Example 1

Find the start of the quarter for October 10th, 2011, 8:00AM (`#datetime(2011, 10, 10, 8, 0, 0)`).

```
Date.StartOfQuarter(#datetime(2011, 10, 10, 8, 0, 0))
```

```
#datetime(2011, 10, 1, 0, 0, 0)
```

Date.StartOfWeek

11/25/2019 • 2 minutes to read

Syntax

```
Date.StartOfWeek(dateTime as any, optional firstDayOfWeek as nullable number) as any
```

About

Returns the first value of the week given a `date`, `datetime`, or `datetimezone` value.

Example 1

Find the start of the week for October 10th, 2011, 8:10:32AM (`#datetime(2011, 10, 10, 8, 10, 32)`).

```
Date.StartOfWeek(#datetime(2011, 10, 10, 8, 10, 32))
```

```
#datetime(2011, 10, 9, 0, 0, 0)
```

Date.StartOfYear

11/25/2019 • 2 minutes to read

Syntax

```
Date.StartOfYear(dateTime as any) as any
```

About

Returns the first value of the year given a `date`, `datetime`, or `datetimezone` value.

Example 1

Find the start of the year for October 10th, 2011, 8:10:32AM (`#datetime(2011, 10, 10, 8, 10, 32)`).

```
Date.StartOfYear(#datetime(2011, 10, 10, 8, 10, 32))
```

```
#datetime(2011, 1, 1, 0, 0, 0)
```

Date.ToRecord

11/25/2019 • 2 minutes to read

Syntax

```
Date.ToRecord(date as date) as record
```

About

Returns a record containing the parts of the given date value, `date`.

- `date`: A `date` value for from which the record of its parts is to be calculated.

Example 1

Convert the `#date(2011, 12, 31)` value into a record containing parts from the date value.

```
Date.ToRecord(#date(2011, 12, 31))
```

YEAR	2011
MONTH	12
DAY	31

Date.ToText

11/25/2019 • 2 minutes to read

Syntax

```
Date.ToText(date as nullable date, optional format as nullable text, optional culture as nullable text) as nullable text
```

About

Returns a textual representation of `date`, the Date value, `date`. This function takes in an optional format parameter `format`. For a complete list of supported formats, please refer to the Library specification document.

Example 1

Get a textual representation of `#date(2010, 12, 31)`.

```
Date.ToText(#date(2010, 12, 31))
```

```
"12/31/2010"
```

Example 2

Get a textual representation of `#date(2010, 12, 31)` with format option.

```
Date.ToText(#date(2010, 12, 31), "yyyy/MM/dd")
```

```
"2010/12/31"
```


Date.WeekOfMonth

11/25/2019 • 2 minutes to read

Syntax

```
Date.WeekOfMonth(dateTime as any, optional firstDayOfWeek as nullable number) as nullable number
```

About

Returns a number from 1 to 5 indicating which week of the year month the date `dateTime` falls in.

- `dateTime`: A `datetime` value for which the week-of-the-month is determined.

Example 1

Determine which week of March the 15th falls on in 2011 (`#date(2011, 03, 15)`).

```
Date.WeekOfMonth(#date(2011, 03, 15))
```

Date.WeekOfYear

11/25/2019 • 2 minutes to read

Syntax

```
Date.WeekOfYear(dateTime as any, optional firstDayOfWeek as nullable number) as nullable number
```

About

Returns a number from 1 to 54 indicating which week of the year the date, `dateTime`, falls in.

- `dateTime`: A `datetime` value for which the week-of-the-year is determined.
- `firstDayOfWeek`: An optional `Day.Type` value that indicates which day is considered the start of a new week (for example, `Day.Sunday`). If unspecified, a culture-dependent default is used.

Example 1

Determine which week of the year March 27th, 2011 falls in (`#date(2011, 03, 27)`).

```
Date.WeekOfYear(#date(2011, 03, 27))
```

14

Example 2

Determine which week of the year March 27th, 2011 falls in (`#date(2011, 03, 27)`), using Monday as the start of a new week.

```
Date.WeekOfYear(#date(2011, 03, 27), Day.Monday)
```

13

Date.Year

11/25/2019 • 2 minutes to read

```
Date.Year(dateTime as any) as nullable number
```

About

Returns the year component of the provided `datetime` value, `dateTime`.

Example 1

Find the year in `#datetime(2011, 12, 31, 9, 15, 36)`.

```
Date.Year(#datetime(2011, 12, 31, 9, 15, 36))
```

```
2011
```

Day.Friday

11/25/2019 • 2 minutes to read

About

Returns 6, the number representing Friday.

Day.Monday

11/25/2019 • 2 minutes to read

About

Returns 2, the number representing Monday.

Day.Saturday

11/25/2019 • 2 minutes to read

About

Returns 7, the number representing Saturday.

Day.Sunday

11/25/2019 • 2 minutes to read

About

Returns 1, the number representing Sunday.

Day.Thursday

11/25/2019 • 2 minutes to read

About

Returns 5, the number representing Thursday.

Day.Tuesday

11/25/2019 • 2 minutes to read

About

Returns 3, the number representing Tuesday.

Day.Wednesday

11/25/2019 • 2 minutes to read

About

Returns 4, the number representing Wednesday.

#date

11/25/2019 • 2 minutes to read

Syntax

```
#date(year as number, month as number, day as number) as date
```

About

Creates a date value from year `year`, month `month`, and day `day`. Raises an error if these are not true:

- $1 \leq \text{year} \leq 9999$
- $1 \leq \text{month} \leq 12$
- $1 \leq \text{day} \leq 31$

DateTime functions

11/25/2019 • 2 minutes to read

DateTime

FUNCTION	DESCRIPTION
DateTime.AddZone	Adds the timezonehours as an offset to the input datetime value and returns a new datetimezone value.
DateTime.Date	Returns a date part from a DateTime value
DateTime.FixedLocalNow	Returns a DateTime value set to the current date and time on the system.
DateTime.From	Returns a datetime value from a value.
DateTime.FromFileTime	Returns a DateTime value from the supplied number.
DateTime.FromText	Returns a DateTime value from a set of date formats and culture value.
DateTime.IsInCurrentHour	Indicates whether the given datetime value occurs during the current hour, as determined by the current date and time on the system.
DateTime.IsInCurrentMinute	Indicates whether the given datetime value occurs during the current minute, as determined by the current date and time on the system.
DateTime.IsInCurrentSecond	Indicates whether the given datetime value occurs during the current second, as determined by the current date and time on the system.
DateTime.IsInNextHour	Indicates whether the given datetime value occurs during the next hour, as determined by the current date and time on the system.
DateTime.IsInNextMinute	Indicates whether the given datetime value occurs during the next minute, as determined by the current date and time on the system.
DateTime.IsInNextNHours	Indicates whether the given datetime value occurs during the next number of hours, as determined by the current date and time on the system.
DateTime.IsInNextNMinutes	Indicates whether the given datetime value occurs during the next number of minutes, as determined by the current date and time on the system.

FUNCTION	DESCRIPTION
DateTime.IsInNextNSeconds	Indicates whether the given datetime value occurs during the next number of seconds, as determined by the current date and time on the system.
DateTime.IsInNextSecond	Indicates whether the given datetime value occurs during the next second, as determined by the current date and time on the system.
DateTime.IsInPreviousHour	Indicates whether the given datetime value occurs during the previous hour, as determined by the current date and time on the system.
DateTime.IsInPreviousMinute	Indicates whether the given datetime value occurs during the previous minute, as determined by the current date and time on the system.
DateTime.IsInPreviousNHours	Indicates whether the given datetime value occurs during the previous number of hours, as determined by the current date and time on the system.
DateTime.IsInPreviousNMinutes	Indicates whether the given datetime value occurs during the previous number of minutes, as determined by the current date and time on the system.
DateTime.IsInPreviousNSeconds	Indicates whether the given datetime value occurs during the previous number of seconds, as determined by the current date and time on the system.
DateTime.IsInPreviousSecond	Indicates whether the given datetime value occurs during the previous second, as determined by the current date and time on the system.
DateTime.LocalNow	Returns a datetime value set to the current date and time on the system.
DateTime.Time	Returns a time part from a DateTime value.
DateTime.ToRecord	Returns a record containing parts of a DateTime value.
DateTime.ToText	Returns a text value from a DateTime value.
#datetime	Creates a datetime value from year, month, day, hour, minute, and second.

DateTime.AddZone

11/25/2019 • 2 minutes to read

Syntax

```
DateTime.AddZone(dateTime as nullable datetime, timezoneHours as number, optional timezoneMinutes as nullable number) as nullable datetimetype
```

About

Sets timezone information to on the datetime value `dateTime`. The timezone information will include `timezoneHours` and optionally `timezoneMinutes`.

Example 1

Set timezone information for `#datetime(2010, 12, 31, 11, 56, 02)` to 7 hours, 30 minutes.

```
DateTime.AddZone(#datetime(2010, 12, 31, 11, 56, 02), 7, 30)
```

```
#datetimezone(2010, 12, 31, 11, 56, 2, 7, 30)
```

DateTime.Date

11/25/2019 • 2 minutes to read

Syntax

```
DateTime.Date(dateTime as any) as nullable date
```

About

Returns the date component of `dateTime`, the given `date`, `datetime`, or `datetimezone` value.

Example 1

Find date value of `#datetime(2010, 12, 31, 11, 56, 02)`.

```
DateTime.Date(#datetime(2010, 12, 31, 11, 56, 02))
```

```
#date(2010, 12, 31)
```

DateTime.FixedLocalNow

11/25/2019 • 2 minutes to read

Syntax

```
DateTime.FixedLocalNow() as datetime
```

About

Returns a `datetime` value set to the current date and time on the system. This value is fixed and will not change with successive calls, unlike `DateTime.LocalNow`, which may return different values over the course of execution of an expression.

DateTime.From

11/25/2019 • 2 minutes to read

Syntax

```
DateTime.From(value as any, optional culture as nullable text) as nullable datetime
```

About

Returns a `datetime` value from the given `value`. If the given `value` is `null`, `DateTime.From` returns `null`. If the given `value` is `datetime`, `value` is returned. Values of the following types can be converted to a `datetime` value:

- `text`: A `datetime` value from textual representation. See `DateTime.FromText` for details.
- `date`: A `datetime` with `value` as the date component and `12:00:00 AM` as the time component.
- `datetimezone`: The local `datetime` equivalent of `value`.
- `time`: A `datetime` with the date equivalent of the OLE Automation Date of `0` as the date component and `value` as the time component.
- `number`: A `datetime` equivalent the OLE Automation Date expressed by `value`.

If `value` is of any other type, an error is returned.

Example 1

Convert `#time(06, 45, 12)` to a `datetime` value.

```
DateTime.From(#time(06, 45, 12))
```

```
#datetime(1899, 12, 30, 06, 45, 12)
```

Example 2

Convert `#date(1975, 4, 4)` to a `datetime` value.

```
DateTime.From(#date(1975, 4, 4))
```

```
#datetime(1975, 4, 4, 0, 0, 0)
```

DateTime.FromFileTime

11/25/2019 • 2 minutes to read

Syntax

```
DateTime.FromFileTime(fileTime as nullable number) as nullable datetime
```

About

Creates a `datetime` value from the `fileTime` value and converts it to the local time zone. The filetime is a Windows file time value that represents the number of 100-nanosecond intervals that have elapsed since 12:00 midnight, January 1, 1601 A.D. (C.E.) Coordinated Universal Time (UTC).

Example 1

Convert `129876402529842245` into a datetime value.

```
DateTime.FromFileTime(129876402529842245)
```

```
#datetime(2012, 7, 24, 14, 50, 52.9842245)
```

DateTime.FromText

11/25/2019 • 2 minutes to read

Syntax

```
DateTime.FromText(text as nullable text, optional culture as nullable text) as nullable datetime
```

About

Creates a `datetime` value from a textual representation, `text`, following ISO 8601 format standard.

- `DateTime.FromText("2010-12-31T01:30:00")` // yyyy-MM-ddThh:mm:ss

Example 1

Convert `"2010-12-31T01:30:25"` into a datetime value.

```
DateTime.FromText("2010-12-31T01:30:25")
```

```
#datetime(2010, 12, 31, 1, 30, 25)
```

Example 2

Convert `"2010-12-31T01:30"` into a datetime value.

```
DateTime.FromText("2010-12-31T01:30")
```

```
#datetime(2010, 12, 31, 1, 30, 0)
```

Example 3

Convert `"20101231T013025"` into a datetime value.

```
DateTime.FromText("20101231T013025")
```

```
#datetime(2010, 12, 31, 1, 30, 25)
```

Example 4

Convert `"20101231T01:30:25"` into a datetime value.

```
DateTime.FromText("20101231T01:30:25")
```

```
#datetime(2010, 12, 31, 1, 30, 25)
```

Example 5

Convert "20101231T01:30:25.121212" into a datetime value.

```
DateTime.FromText("20101231T01:30:25.121212")
```

```
#datetime(2010, 12, 31, 1, 30, 25.121212)
```

DateTime.IsInCurrentHour

11/25/2019 • 2 minutes to read

Syntax

```
DateTime.IsInCurrentHour(dateTime as any) as nullable logical
```

About

Indicates whether the given datetime value `dateTime` occurs during the current hour, as determined by the current date and time on the system.

- `dateTime`: A `datetime`, or `datetimezone` value to be evaluated.

Example 1

Determine if the current system time is in the current hour.

```
DateTime.IsInCurrentHour(DateTime.FixedLocalNow())
```

```
true
```

DateTime.IsInCurrentMinute

11/25/2019 • 2 minutes to read

Syntax

```
DateTime.IsInCurrentMinute(dateTime as any) as nullable logical
```

About

Indicates whether the given datetime value `dateTime` occurs during the current minute, as determined by the current date and time on the system.

- `dateTime`: A `datetime`, or `datetimezone` value to be evaluated.

Example 1

Determine if the current system time is in the current minute.

```
DateTime.IsInCurrentMinute(DateTime.FixedLocalNow())
```

```
true
```

DateTime.IsInCurrentSecond

11/25/2019 • 2 minutes to read

Syntax

```
DateTime.IsInCurrentSecond(dateTime as any) as nullable logical
```

About

Indicates whether the given datetime value `dateTime` occurs during the current second, as determined by the current date and time on the system.

- `dateTime`: A `datetime`, or `datetimezone` value to be evaluated.

Example 1

Determine if the current system time is in the current second.

```
DateTime.IsInCurrentSecond(DateTime.FixedLocalNow())
```

```
true
```

DateTime.IsInNextHour

11/25/2019 • 2 minutes to read

Syntax

```
DateTime.IsInNextHour(dateTime as any) as nullable logical
```

About

Indicates whether the given datetime value `dateTime` occurs during the next hour, as determined by the current date and time on the system. Note that this function will return false when passed a value that occurs within the current hour.

- `dateTime`: A `datetime`, or `datetimezone` value to be evaluated.

Example 1

Determine if the hour after the current system time is in the next hour.

```
DateTime.IsInNextHour(DateTime.FixedLocalNow() + #duration(0,1,0,0))
```

```
true
```


DateTime.IsInNextMinute

11/25/2019 • 2 minutes to read

Syntax

```
DateTime.IsInNextMinute(dateTime as any) as nullable logical
```

About

Indicates whether the given datetime value `dateTime` occurs during the next minute, as determined by the current date and time on the system. Note that this function will return false when passed a value that occurs within the current minute.

- `dateTime`: A `datetime`, or `datetimezone` value to be evaluated.

Example 1

Determine if the minute after the current system time is in the next minute.

```
DateTime.IsInNextMinute(DateTime.FixedLocalNow() + #duration(0,0,1,0))
```

```
true
```

DateTime.IsInNextNHours

11/25/2019 • 2 minutes to read

Syntax

```
DateTime.IsInNextNHours(dateTime as any, hours as number) as nullable logical
```

About

Indicates whether the given datetime value `dateTime` occurs during the next number of hours, as determined by the current date and time on the system. Note that this function will return false when passed a value that occurs within the current hour.

- `dateTime`: A `datetime`, or `datetimezone` value to be evaluated.
- `hours`: The number of hours.

Example 1

Determine if the hour after the current system time is in the next two hours.

```
DateTime.IsInNextNHours(DateTime.FixedLocalNow() + #duration(0,2,0,0), 2)
```

```
true
```

DateTime.IsInNextNMinutes

11/25/2019 • 2 minutes to read

Syntax

```
DateTime.IsInNextNMinutes(dateTime as any, minutes as number) as nullable logical
```

About

Indicates whether the given datetime value `dateTime` occurs during the next number of minutes, as determined by the current date and time on the system. Note that this function will return false when passed a value that occurs within the current minute.

- `dateTime`: A `datetime`, or `datetimezone` value to be evaluated.
- `minutes`: The number of minutes.

Example 1

Determine if the minute after the current system time is in the next two minutes.

```
DateTime.IsInNextNMinutes(DateTime.FixedLocalNow() + #duration(0,0,2,0), 2)
```

```
true
```

DateTime.IsInNextNSeconds

11/25/2019 • 2 minutes to read

Syntax

```
DateTime.IsInNextNSeconds(dateTime as any, seconds as number) as nullable logical
```

About

Indicates whether the given datetime value `dateTime` occurs during the next number of seconds, as determined by the current date and time on the system. Note that this function will return false when passed a value that occurs within the current second.

- `dateTime`: A `datetime`, or `datetimezone` value to be evaluated.
- `seconds`: The number of seconds.

Example 1

Determine if the second after the current system time is in the next two seconds.

```
DateTime.IsInNextNSeconds(DateTime.FixedLocalNow() + #duration(0,0,0,2), 2)
```

```
true
```

DateTime.IsInNextSecond

11/25/2019 • 2 minutes to read

Syntax

```
DateTime.IsInNextSecond(dateTime as any) as nullable logical
```

About

Indicates whether the given datetime value `dateTime` occurs during the next second, as determined by the current date and time on the system. Note that this function will return false when passed a value that occurs within the current second.

- `dateTime`: A `datetime`, or `datetimezone` value to be evaluated.

Example 1

Determine if the second after the current system time is in the next second.

```
DateTime.IsInNextSecond(DateTime.FixedLocalNow() + #duration(0,0,0,1))
```

```
true
```

DateTime.IsInPreviousHour

11/25/2019 • 2 minutes to read

Syntax

```
DateTime.IsInPreviousHour(dateTime as any) as nullable logical
```

About

Indicates whether the given datetime value `dateTime` occurs during the previous hour, as determined by the current date and time on the system. Note that this function will return false when passed a value that occurs within the current hour.

- `dateTime`: A `datetime`, or `datetimezone` value to be evaluated.

Example 1

Determine if the hour before the current system time is in the previous hour.

```
DateTime.IsInPreviousHour(DateTime.FixedLocalNow() - #duration(0,1,0,0))
```

```
true
```

DateTime.IsInPreviousMinute

11/25/2019 • 2 minutes to read

Syntax

```
DateTime.IsInPreviousMinute(dateTime as any) as nullable logical
```

About

Indicates whether the given datetime value `dateTime` occurs during the previous minute, as determined by the current date and time on the system. Note that this function will return false when passed a value that occurs within the current minute.

- `dateTime`: A `datetime`, or `datetimezone` value to be evaluated.

Example 1

Determine if the minute before the current system time is in the previous minute.

```
DateTime.IsInPreviousMinute(DateTime.FixedLocalNow() - #duration(0,0,1,0))
```

```
true
```

DateTime.IsInPreviousNHours

11/25/2019 • 2 minutes to read

Syntax

```
DateTime.IsInPreviousNHours(dateTime as any, hours as number) as nullable logical
```

About

Indicates whether the given datetime value `dateTime` occurs during the previous number of hours, as determined by the current date and time on the system. Note that this function will return false when passed a value that occurs within the current hour.

- `dateTime`: A `datetime`, or `datetimezone` value to be evaluated.
- `hours`: The number of hours.

Example 1

Determine if the hour before the current system time is in the previous two hours.

```
DateTime.IsInPreviousNHours(DateTime.FixedLocalNow() - #duration(0,2,0,0), 2)
```

```
true
```


DateTime.IsInPreviousNMinutes

11/25/2019 • 2 minutes to read

Syntax

```
DateTime.IsInPreviousNMinutes(dateTime as any, minutes as number) as nullable logical
```

About

Indicates whether the given datetime value `dateTime` occurs during the previous number of minutes, as determined by the current date and time on the system. Note that this function will return false when passed a value that occurs within the current minute.

- `dateTime`: A `datetime`, or `datetimezone` value to be evaluated.
- `minutes`: The number of minutes.

Example 1

Determine if the minute before the current system time is in the previous two minutes.

```
DateTime.IsInPreviousNMinutes(DateTime.FixedLocalNow() - #duration(0,0,2,0), 2)
```

```
true
```

DateTime.IsInPreviousNSeconds

11/25/2019 • 2 minutes to read

Syntax

```
DateTime.IsInPreviousNSeconds(dateTime as any, seconds as number) as nullable logical
```

About

Indicates whether the given datetime value `dateTime` occurs during the previous number of seconds, as determined by the current date and time on the system. Note that this function will return false when passed a value that occurs within the current second.

- `dateTime`: A `datetime`, or `datetimezone` value to be evaluated.
- `seconds`: The number of seconds.

Example 1

Determine if the second before the current system time is in the previous two seconds.

```
DateTime.IsInPreviousNSeconds(DateTime.FixedLocalNow() - #duration(0,0,0,2), 2)
```

```
true
```

DateTime.IsInPreviousSecond

11/25/2019 • 2 minutes to read

Syntax

```
DateTime.IsInPreviousSecond(dateTime as any) as nullable logical
```

About

Indicates whether the given datetime value `dateTime` occurs during the previous second, as determined by the current date and time on the system. Note that this function will return false when passed a value that occurs within the current second.

- `dateTime`: A `datetime`, or `datetimezone` value to be evaluated.

Example 1

Determine if the second before the current system time is in the previous second.

```
DateTime.IsInPreviousSecond(DateTime.FixedLocalNow() - #duration(0,0,0,1))
```

```
true
```

DateTime.LocalNow

11/25/2019 • 2 minutes to read

Syntax

```
DateTime.LocalNow() as datetime
```

About

Returns a `datetime` value set to the current date and time on the system.

DateTime.Time

11/25/2019 • 2 minutes to read

Syntax

```
DateTime.Time(dateTime as any) as nullable time
```

About

Returns the time part of the given datetime value, `dateTime`.

Example 1

Find the time value of `#datetime(2010, 12, 31, 11, 56, 02)`.

```
DateTime.Time(#datetime(2010, 12, 31, 11, 56, 02))
```

```
#time(11, 56, 2)
```

DateTime.ToRecord

11/25/2019 • 2 minutes to read

Syntax

```
DateTime.ToRecord(dateTime as datetime) as record
```

About

Returns a record containing the parts of the given datetime value, `dateTime`.

- `dateTime`: A `datetime` value for from which the record of its parts is to be calculated.

Example 1

Convert the `#datetime(2011, 12, 31, 11, 56, 2)` value into a record containing Date and Time values.

```
DateTime.ToRecord(#datetime(2011, 12, 31, 11, 56, 2))
```

YEAR	2011
MONTH	12
DAY	31
HOUR	11
MINUTE	56
SECOND	2

DateTime.ToText

11/25/2019 • 2 minutes to read

Syntax

```
DateTime.ToText(dateTime as nullable datetime, optional format as nullable text, optional culture as nullable text) as nullable text
```

About

Returns a textual representation of `dateTime`, the datetime value, `dateTime`. This function takes in an optional format parameter `format`. For a complete list of supported formats, please refer to the Library specification document.

Example 1

Get a textual representation of `#datetime(2011, 12, 31, 11, 56, 2)`.

```
DateTime.ToText(#datetime(2010, 12, 31, 11, 56, 2))
```

```
"12/31/2010 11:56:02 AM"
```

Example 2

Get a textual representation of `#datetime(2011, 12, 31, 11, 56, 2)` with format option.

```
DateTime.ToText(#datetime(2010, 12, 31, 11, 56, 2), "yyyy/MM/ddThh:mm:ss")
```

```
"2010/12/31T11:56:02"
```

#datetime

11/25/2019 • 2 minutes to read

Syntax

```
#datetime(year as number, month as number, day as number, hour as number, minute as number, second as number) as any
```

About

Creates a datetime value from whole numbers year `year`, month `month`, day `day`, hour `hour`, minute `minute`, and (fractional) second `second`. Raises an error if these are not true:

- $1 \leq \text{year} \leq 9999$
- $1 \leq \text{month} \leq 12$
- $1 \leq \text{day} \leq 31$
- $0 \leq \text{hour} \leq 23$
- $0 \leq \text{minute} \leq 59$
- $0 \leq \text{second} \leq 59$

DateTimeZone functions

11/25/2019 • 2 minutes to read

DateTimeZone

FUNCTION	DESCRIPTION
DateTimeZone.FixedLocalNow	Returns a DateTimeZone value set to the current date, time, and timezone offset on the system.
DateTimeZone.FixedUtcNow	Returns the current date and time in UTC (the GMT timezone).
DateTimeZone.From	Returns a datetimezone value from a value.
DateTimeZone.FromFileTime	Returns a DateTimeZone from a number value.
DateTimeZone.FromText	Returns a DateTimeZone value from a set of date formats and culture value.
DateTimeZone.LocalNow	Returns a DateTime value set to the current system date and time.
DateTimeZone.RemoveZone	Returns a datetime value with the zone information removed from the input datetimezone value.
DateTimeZone.SwitchZone	Changes the timezone information for the input DateTimeZone.
DateTimeZone.ToLocal	Returns a DateTime value from the local time zone.
DateTimeZone.ToRecord	Returns a record containing parts of a DateTime value.
DateTimeZone.ToText	Returns a text value from a DateTime value.
DateTimeZone.ToUtc	Returns a DateTime value to the Utc time zone.
DateTimeZone.UtcNow	Returns a DateTime value set to the current system date and time in the Utc timezone.
DateTimeZone.ZoneHours	Returns a time zone hour value from a DateTime value.
DateTimeZone.ZoneMinutes	Returns a time zone minute value from a DateTime value.
#datetimezone	Creates a datetimezone value from year, month, day, hour, minute, second, offset-hours, and offset-minutes.

DateTimeZone.FixedLocalNow

11/25/2019 • 2 minutes to read

Syntax

```
DateTimeZone.FixedLocalNow() as datetimezone
```

About

Returns a `datetime` value set to the current date and time on the system. The returned value contains timezone information representing the local timezone. This value is fixed and will not change with successive calls, unlike `DateTimeZone.LocalNow`, which may return different values over the course of execution of an expression.

DateTimeZone.FixedUtcNow

11/25/2019 • 2 minutes to read

Syntax

```
DateTimeZone.FixedUtcNow() as datetimezone
```

About

Returns the current date and time in UTC (the GMT timezone). This value is fixed and will not change with successive calls.

DateTimeZone.From

11/25/2019 • 2 minutes to read

Syntax

```
DateTimeZone.From(value as any, optional culture as nullable text) as nullable datetimezone
```

About

Returns a `datetimezone` value from the given `value`. If the given `value` is `null`, `DateTimeZone.From` returns `null`. If the given `value` is `datetimezone`, `value` is returned. Values of the following types can be converted to a `datetimezone` value:

- `text`: A `datetimezone` value from textual representation. See `DateTimeZone.FromText` for details.
- `date`: A `datetimezone` with `value` as the date component, `12:00:00 AM` as the time component and the offset corresponding the local time zone.
- `datetime`: A `datetimezone` with `value` as the datetime and the offset corresponding the local time zone.
- `time`: A `datetimezone` with the date equivalent of the OLE Automation Date of `0` as the date component, `value` as the time component and the offset corresponding the local time zone.
- `number`: A `datetimezone` with the datetime equivalent the OLE Automation Date expressed by `value` and the offset corresponding the local time zone.

If `value` is of any other type, an error is returned.

Example 1

Convert `"2020-10-30T01:30:00-08:00"` to a `datetimezone` value.

```
DateTimeZone.From("2020-10-30T01:30:00-08:00")
```

```
#datetimezone(2020, 10, 30, 01, 30, 00, -8, 00)
```

DateTimeZone.FromFileTime

11/25/2019 • 2 minutes to read

Syntax

```
DateTimeZone.FromFileTime(fileTime as nullable number) as nullable datetimetypezone
```

About

Creates a `datetimetypezone` value from the `fileTime` value and converts it to the local time zone. The filetime is a Windows file time value that represents the number of 100-nanosecond intervals that have elapsed since 12:00 midnight, January 1, 1601 A.D. (C.E.) Coordinated Universal Time (UTC).

Example 1

Convert `129876402529842245` into a `datetimetypezone` value.

```
DateTimeZone.FromFileTime(129876402529842245)
```

```
#datetimetypezone(2012, 7, 24, 14, 50, 52.9842245, -7, 0)
```

DateTimeZone.FromText

11/25/2019 • 2 minutes to read

Syntax

```
DateTimeZone.FromText(text as nullable text, optional culture as nullable text) as nullable datetimezone
```

About

Creates a `datetimezone` value from a textual representation, `text`, following ISO 8601 format standard.

- `DateTimeZone.FromText("2010-12-31T01:30:00-08:00")` // yyyy-MM-ddThh:mm:ssZ

Example 1

Convert `"2010-12-31T01:30:00-08:00"` into a `datetimezone` value.

```
DateTimeZone.FromText("2010-12-31T01:30:00-08:00")
```

```
#datetimezone(2010, 12, 31, 1, 30, 0, -8, 0)
```

Example 2

Convert `"2010-12-31T01:30:00.121212-08:00"` into a `datetimezone` value.

```
DateTimeZone.FromText("2010-12-31T01:30:00.121212-08:00")
```

```
#datetimezone(2010, 12, 31, 1, 30, 0.121212, -8, 0)
```

Example 3

Convert `"2010-12-31T01:30:00Z"` into a `datetimezone` value.

```
DateTimeZone.FromText("2010-12-31T01:30:00Z")
```

```
#datetimezone(2010, 12, 31, 1, 30, 0, 0, 0)
```

Example 4

Convert `"20101231T013000+0800"` into a `datetimezone` value.

```
DateTimeZone.FromText("20101231T013000+0800")
```

```
#datetimezone(2010, 12, 31, 1, 30, 0, 8, 0)
```

DateTimeZone.LocalNow

11/25/2019 • 2 minutes to read

Syntax

```
DateTimeZone.LocalNow() as datetimezone
```

About

Returns a `datetimezone` value set to the current date and time on the system. The returned value contains timezone information representing the local timezone.

DateTimeZone.RemoveZone

11/25/2019 • 2 minutes to read

Syntax

```
DateTimeZone.RemoveZone(dateTimeZone as nullable datetimezone) as nullable datetime
```

About

Returns a #datetime value from `dateTimeZone` with timezone information removed.

Example 1

Remove timezone information from the value #datetimezone(2011, 12, 31, 9, 15, 36, -7, 0).

```
DateTimeZone.RemoveZone( #datetimezone(2011, 12, 31, 9, 15, 36,-7, 0))
```

```
#datetime(2011, 12, 31, 9, 15, 36)
```


DateTimeZone.SwitchZone

11/25/2019 • 2 minutes to read

Syntax

```
DateTimeZone.SwitchZone(dateTimeZone as nullable datetimezone, timezoneHours as number, optional timezoneMinutes as nullable number) as nullable datetimezone
```

About

Changes timezone information to on the datetimezone value `dateTimeZone` to the new timezone information provided by `timezoneHours` and optionally `timezoneMinutes`. If `dateTimeZone` does not have a timezone component, an exception is thrown.

Example 1

Change timezone information for `#datetimezone(2010, 12, 31, 11, 56, 02, 7, 30)` to 8 hours.

```
DateTimeZone.SwitchZone(#datetimezone(2010, 12, 31, 11, 56, 02, 7, 30), 8)
```

```
#datetimezone(2010, 12, 31, 12, 26, 2, 8, 0)
```

Example 2

Change timezone information for `#datetimezone(2010, 12, 31, 11, 56, 02, 7, 30)` to -30 minutes.

```
DateTimeZone.SwitchZone(#datetimezone(2010, 12, 31, 11, 56, 02, 7, 30), 0, -30)
```

```
#datetimezone(2010, 12, 31, 3, 56, 2, 0, -30)
```

DateTimeZone.ToLocal

11/25/2019 • 2 minutes to read

Syntax

```
DateTimeZone.ToLocal(dateTimeZone as nullable datetimezone) as nullable datetimezone
```

About

Changes timezone information of the datetimezone value `dateTimeZone` to the local timezone information. If `dateTimeZone` does not have a timezone component, the local timezone information is added.

Example 1

Change timezone information for `#datetimezone(2010, 12, 31, 11, 56, 02, 7, 30)` to local timezone (assuming PST).

```
DateTimeZone.ToLocal(#datetimezone(2010, 12, 31, 11, 56, 02, 7, 30))
```

```
#datetimezone(2010, 12, 31, 12, 26, 2, -8, 0)
```

DateTimeZone.ToRecord

11/25/2019 • 2 minutes to read

Syntax

```
DateTimeZone.ToRecord(dateTimeZone as datetimezone) as record
```

About

Returns a record containing the parts of the given datetimezone value, `dateTimeZone`.

- `dateTimeZone`: A `datetimezone` value for from which the record of its parts is to be calculated.

Example 1

Convert the `#datetimezone(2011, 12, 31, 11, 56, 2, 8, 0)` value into a record containing Date, Time, and Zone values.

```
DateTimeZone.ToRecord(#datetimezone(2011, 12, 31, 11, 56, 2, 8, 0))
```

YEAR	2011
MONTH	12
DAY	31
HOUR	11
MINUTE	56
SECOND	2
ZONEHOURS	8
ZONEMINUTES	0

DateTimeZone.ToText

11/25/2019 • 2 minutes to read

Syntax

```
DateTimeZone.ToText(dateTimeZone as nullable datetimezone, optional format as nullable text,  
optional culture as nullable text) as nullable text
```

About

Returns a textual representation of `dateTimeZone`, the datetimezone value, `dateTimeZone`. This function takes in an optional format parameter `format`. For a complete list of supported formats, please refer to the Library specification document.

Example 1

Get a textual representation of `#datetimezone(2011, 12, 31, 11, 56, 2, 8, 0)`.

```
DateTimeZone.ToText(#datetimezone(2010, 12, 31, 11, 56, 2, 8, 0))
```

```
"12/31/2010 11:56:02 AM +08:00"
```

Example 2

Get a textual representation of `#datetimezone(2010, 12, 31, 11, 56, 2, 10, 12)` with format option.

```
DateTimeZone.ToText(#datetimezone(2010, 12, 31, 11, 56, 2, 10, 12), "yyyy/MM/ddThh:mm:sszzz")
```

```
"2010/12/31T11:56:02+10:12"
```

DateTimeZone.ToUtc

11/25/2019 • 2 minutes to read

Syntax

```
DateTimeZone.ToUtc(dateTimeZone as nullable datetimezone) as nullable datetimezone
```

About

Changes timezone information of the datetime value `dateTimeZone` to the UTC or Universal Time timezone information. If `dateTimeZone` does not have a timezone component, the UTC timezone information is added.

Example 1

Change timezone information for `#datetimezone(2010, 12, 31, 11, 56, 02, 7, 30)` to UTC timezone.

```
DateTimeZone.ToUtc(#datetimezone(2010, 12, 31, 11, 56, 02, 7, 30))
```

```
#datetimezone(2010, 12, 31, 4, 26, 2, 0, 0)
```

DateTimeZone.UtcNow

11/25/2019 • 2 minutes to read

Syntax

```
DateTimeZone.UtcNow() as datetimezone
```

About

Returns the current date and time in UTC (the GMT timezone).

Example 1

Get the current date & time in UTC.

```
DateTimeZone.UtcNow()
```

```
#datetimezone(2011, 8, 16, 23, 34, 37.745, 0, 0)
```

DateTimeZone.ZoneHours

11/25/2019 • 2 minutes to read

Syntax

```
DateTimeZone.ZoneHours(dateTimeZone as nullable datetimezone) as nullable number
```

About

Changes the timezone of the value.

DateTimeZone.ZoneMinutes

11/25/2019 • 2 minutes to read

Syntax

```
DateTimeZone.ZoneMinutes(dateTimeZone as nullable datetimezone) as nullable number
```

About

Changes the timezone of the value.

#datetimezone

11/25/2019 • 2 minutes to read

Syntax

```
#datetimezone(year as number, month as number, day as number, hour as number, minute as number, second as number, offsetHours as number, offsetMinutes as number) as any
```

About

Creates a datetimezone value from whole numbers year `year`, month `month`, day `day`, hour `hour`, minute `minute`, (fractional) second `second`, (fractional) offset-hours `offsetHours`, and offset-minutes `offsetMinutes`.

Raises an error if these are not true:

- $1 \leq \text{year} \leq 9999$
- $1 \leq \text{month} \leq 12$
- $1 \leq \text{day} \leq 31$
- $0 \leq \text{hour} \leq 23$
- $0 \leq \text{minute} \leq 59$
- $0 \leq \text{second} \leq 59$
- $-14 \leq \text{offset-hours} + \text{offset-minutes} / 60 \leq 14$

Duration functions

11/25/2019 • 2 minutes to read

Duration

FUNCTION	DESCRIPTION
Duration.Days	Returns the day component of a Duration value.
Duration.From	Returns a duration value from a value.
Duration.FromText	Returns a Duration value from a text value.
Duration.Hours	Returns an hour component of a Duration value.
Duration.Minutes	Returns a minute component of a Duration value.
Duration.Seconds	Returns a second component of a Duration value.
Duration.ToRecord	Returns a record with parts of a Duration value.
Duration.TotalDays	Returns the total magnitude of days from a Duration value.
Duration.TotalHours	Returns the total magnitude of hours from a Duration value.
Duration.TotalMinutes	Returns the total magnitude of minutes from a Duration value.
Duration.TotalSeconds	Returns the total magnitude of seconds from a duration value.
Duration.ToText	Returns a text value from a Duration value.
#duration	Creates a duration value from days, hour, minute, and second.

Duration.Days

11/25/2019 • 2 minutes to read

Syntax

```
Duration.Days(duration as nullable duration) as nullable number
```

About

Returns the day component of the provided `duration` value, `duration`.

Example 1

Find the day in `#duration(5, 4, 3, 2)`.

```
Duration.Days(#duration(5, 4, 3, 2))
```

Duration.From

11/25/2019 • 2 minutes to read

Syntax

```
Duration.From(value as any) as nullable duration
```

About

Returns a `duration` value from the given `value`. If the given `value` is `null`, `Duration.From` returns `null`. If the given `value` is `duration`, `value` is returned. Values of the following types can be converted to a `duration` value:

- `text`: A `duration` value from textual elapsed time forms (d.h:m:s). See `Duration.FromText` for details.
- `number`: A `duration` equivalent to the number of whole and fractional days expressed by `value`.

If `value` is of any other type, an error is returned.

Example 1

Convert `2.525` into a `duration` value.

```
Duration.From(2.525)
```

```
#duration(2, 12, 36, 0)
```

Duration.FromText

11/25/2019 • 2 minutes to read

Syntax

```
Duration.FromText(text as nullable text) as nullable duration
```

About

Returns a duration value from the specified text, `text`. The following formats can be parsed by this function:

- (-)hh:mm(:ss(.ff))
- (-)ddd(hh:mm(:ss(.ff)))

(All ranges are inclusive)

ddd: Number of days.

hh: Number of hours, between 0 and 23.

mm: Number of minutes, between 0 and 59.

ss: Number of seconds, between 0 and 59.

ff: Fraction of seconds, between 0 and 9999999.

Example 1

Convert `"2.05:55:20"` into a `duration` value.

```
Duration.FromText("2.05:55:20")
```

```
#duration(2, 5, 55, 20)
```

Duration.Hours

11/25/2019 • 2 minutes to read

Syntax

```
Duration.Hours(duration as nullable duration) as nullable number
```

About

Returns the hour component of the provided `duration` value, `duration`.

Example 1

Find the hours in `#duration(5, 4, 3, 2)`.

```
Duration.Hours(#duration(5, 4, 3, 2))
```

Duration.Minutes

11/25/2019 • 2 minutes to read

Syntax

```
Duration.Minutes(duration as nullable duration) as nullable number
```

About

Returns the minutes component of the provided `duration` value, `duration`.

Example 1

Find the minutes in `#duration(5, 4, 3, 2)`.

```
Duration.Minutes(#duration(5, 4, 3, 2))
```

Duration.Seconds

11/25/2019 • 2 minutes to read

Syntax

```
Duration.Seconds(duration as nullable duration) as nullable number
```

About

Returns the seconds component of the provided `duration` value, `duration`.

Example 1

Find the seconds in `#duration(5, 4, 3, 2)`.

```
Duration.Seconds(#duration(5, 4, 3, 2))
```


Duration.ToRecord

11/25/2019 • 2 minutes to read

Syntax

```
Duration.ToRecord(duration as duration) as record
```

About

Returns a record containing the parts the duration value, `duration`.

- `duration`: A `duration` from which the record is created.

Example 1

Convert `#duration(2, 5, 55, 20)` into a record of its parts including days, hours, minutes and seconds if applicable.

```
Duration.ToRecord(#duration(2, 5, 55, 20))
```

DAYS	2
HOURS	5
MINUTES	55
SECONDS	20

Duration.TotalDays

11/25/2019 • 2 minutes to read

Syntax

```
Duration.TotalDays(duration as nullable duration) as nullable number
```

About

Returns the total days spanned by the provided `duration` value, `duration`.

Example 1

Find the total days spanned in `#duration(5, 4, 3, 2)`.

```
Duration.TotalDays(#duration(5, 4, 3, 2))
```

```
5.1687731481481478
```

Duration.TotalHours

11/25/2019 • 2 minutes to read

Syntax

```
Duration.TotalHours(duration as nullable duration) as nullable number
```

About

Returns the total hours spanned by the provided `duration` value, `duration`.

Example 1

Find the total hours spanned in `#duration(5, 4, 3, 2)`.

```
Duration.TotalHours(#duration(5, 4, 3, 2))
```

```
124.05055555555555
```

Duration.TotalMinutes

11/25/2019 • 2 minutes to read

Syntax

```
Duration.TotalMinutes(duration as nullable duration) as nullable number
```

About

Returns the total minutes spanned by the provided `duration` value, `duration`.

Example 1

Find the total minutes spanned in `#duration(5, 4, 3, 2)`.

```
Duration.TotalMinutes(#duration(5, 4, 3, 2))
```

```
7443.0333333333338
```

Duration.TotalSeconds

11/25/2019 • 2 minutes to read

Syntax

```
Duration.TotalSeconds(duration as nullable duration) as nullable number
```

About

Returns the total seconds spanned by the provided `duration` value, `duration`.

Example 1

Find the total seconds spanned in `#duration(5, 4, 3, 2)`.

```
Duration.TotalSeconds(#duration(5, 4, 3, 2))
```

```
446582
```

Duration.ToText

11/25/2019 • 2 minutes to read

Syntax

```
Duration.ToText(duration as nullable duration, optional format as nullable text) as nullable text
```

About

Returns a textual representation in the form "day.hour:mins:sec" of the given duration value, `duration`. A text value that specifies the format can be provided as an optional second parameter, `format`.

- `duration`: A `duration` from which the textual representation is calculated.
- `format`: *[Optional]* A `text` value that specifies the format.

Example 1

Convert `#duration(2, 5, 55, 20)` into a text value.

```
Duration.ToText(#duration(2, 5, 55, 20))
```

```
"2.05:55:20"
```

#duration

11/25/2019 • 2 minutes to read

Syntax

```
#duration(days as number, hours as number, minutes as number, seconds as number) as duration
```

About

Creates a duration value from numbers days `days`, hours `hours`, minutes `minutes`, and seconds `seconds`.

Error handling

11/25/2019 • 2 minutes to read

Error

FUNCTION	DESCRIPTION
Diagnostics.ActivityId	Returns an opaque identifier for the currently-running evaluation.
Diagnostics.Trace	Writes a trace message, if tracing is enabled, and returns value.
Error.Record	Returns a record containing fields "Reason", "Message", and "Detail" set to the provided values. The record can be used to raise or throw an error.
TraceLevel.Critical	Returns 1, the value for Critical trace level.
TraceLevel.Error	Returns 2, the value for Error trace level.
TraceLevel.Information	Returns 4, the value for Information trace level.
TraceLevel.Verbose	Returns 5, the value for Verbose trace level.
TraceLevel.Warning	Returns 3, the value for Warning trace level.

Diagnostics.ActivityId

11/25/2019 • 2 minutes to read

Syntax

```
Diagnostics.ActivityId() as nullable text
```

About

Returns an opaque identifier for the currently-running evaluation.

Diagnostics.Trace

11/25/2019 • 2 minutes to read

Syntax

```
Diagnostics.Trace(traceLevel as number, message as anynonnull, value as any, optional delayed as nullable logical) as any
```

About

Writes a trace `message`, if tracing is enabled, and returns `value`. An optional parameter `delayed` specifies whether to delay the evaluation of `value` until the message is traced. `traceLevel` can take one of the following values:

- `TraceLevel.Critical`
- `TraceLevel.Error`
- `TraceLevel.Warning`
- `TraceLevel.Information`
- `TraceLevel.Verbose`

Example 1

Trace the message before invoking `Text.From` function and return the result.

```
Diagnostics.Trace(TraceLevel.Information, "TextValueFromNumber", () => Text.From(123), true)
```

```
"123"
```

Error.Record

11/25/2019 • 2 minutes to read

Syntax

```
Error.Record(reason as text, optional message as nullable text, optional detail as any) as record
```

About

Returns an error record from the provided text values for reason, message and detail.

TraceLevel.Critical

11/25/2019 • 2 minutes to read

About

Returns 1, the value for Critical trace level.

TraceLevel.Error

11/25/2019 • 2 minutes to read

About

Returns 2, the value for Error trace level.

TraceLevel.Information

11/25/2019 • 2 minutes to read

About

Returns 4, the value for Information trace level.

TraceLevel.Verbose

11/25/2019 • 2 minutes to read

About

Returns 5, the value for Verbose trace level.

TraceLevel.Warning

11/25/2019 • 2 minutes to read

About

Returns 3, the value for Warning trace level.

Expression functions

11/25/2019 • 2 minutes to read

Expression

FUNCTION	DESCRIPTION
Expression.Constant	Returns the M source code representation of a constant value.
Expression.Evaluate	Returns the result of evaluating an M expression.
Expression.Identifier	Returns the M source code representation of an identifier.

Expression.Constant

11/25/2019 • 2 minutes to read

Syntax

```
Expression.Constant(value as any) as text
```

About

Returns the M source code representation of a constant value.

Example 1

Get the M source code representation of a number value.

```
Expression.Constant(123)
```

```
"123"
```

Example 2

Get the M source code representation of a date value.

```
Expression.Constant(#date(2035, 01, 02))
```

```
"#date(2035, 1, 2)"
```

Example 3

Get the M source code representation of a text value.

```
Expression.Constant("abc")
```

```
"""abc"""
```

Expression.Evaluate

11/25/2019 • 2 minutes to read

Syntax

```
Expression.Evaluate(document as text, optional environment as nullable record) as any
```

About

Returns the result of evaluating an M expression `document`, with the available identifiers that can be referenced defined by `environment`.

Example 1

Evaluate a simple sum.

```
Expression.Evaluate("1 + 1")
```

2

Example 2

Evaluate a more complex sum.

```
Expression.Evaluate("List.Sum({1, 2, 3})", [List.Sum = List.Sum])
```

6

Example 3

Evaluate the concatenation of a text value with an identifier.

```
Expression.Evaluate(Expression.Constant("abc") & " & " & Expression.Identifier("x"), [x="def"])
```

```
"""abcdef"""
```

Expression.Identifier

11/25/2019 • 2 minutes to read

Syntax

```
Expression.Identifier(name as text) as text
```

About

Returns the M source code representation of an identifier `name`.

Example 1

Get the M source code representation of an identifier.

```
Expression.Identifier("MyIdentifier")
```

```
"MyIdentifier"
```

Example 2

Get the M source code representation of an identifier that contains a space.

```
Expression.Identifier("My Identifier")
```

```
"#" "My Identifier" ""
```

Function values

11/25/2019 • 2 minutes to read

Function

FUNCTION	DESCRIPTION
Function.From	Takes a unary function <code>function</code> and creates a new function with the type <code>functionType</code> that constructs a list out of its arguments and passes it to <code>function</code> .
Function.Invoke	Invokes the given function using the specified and returns the result.
Function.InvokeAfter	Returns the result of invoking function after duration delay has passed.
Function.IsDataSource	Returns whether or not function is considered a data source.
Function.ScalarVector	Returns a scalar function of type <code>scalarFunctionType</code> that invokes <code>vectorFunction</code> with a single row of arguments and returns its single output.

Function.From

11/25/2019 • 2 minutes to read

Syntax

```
Function.From(functionType as type, function as function) as function
```

About

Takes a unary function `function` and creates a new function with the type `functionType` that constructs a list out of its arguments and passes it to `function`.

Example 1

Converts List.Sum into a two-argument function whose arguments are added together.

```
Function.From(type function (a as number, b as number) as number, List.Sum)(2, 1)
```

3

Example 2

Converts a function taking a list into a two-argument function.

```
Function.From(type function (a as text, b as text) as text, (list) => list{0} & list{1})("2", "1")
```

"21"

Function.Invoke

11/25/2019 • 2 minutes to read

Syntax

```
Function.Invoke(function as function, args as list) as any
```

About

Invokes the given function using the specified list of arguments and returns the result.

Example 1

Invokes Record.FieldNames with one argument [A=1,B=2]

```
Function.Invoke(Record.FieldNames, {[A=1,B=2]})
```

A

B

Function.InvokeAfter

11/25/2019 • 2 minutes to read

Syntax

```
Function.InvokeAfter(function as function, delay as duration) as any
```

About

Returns the result of invoking `function` after duration `delay` has passed.

Function.IsDataSource

11/25/2019 • 2 minutes to read

Syntax

```
Function.IsDataSource(function as function) as logical
```

About

Returns whether or not `function` is considered a data source.

Function.ScalarVector

11/25/2019 • 2 minutes to read

Syntax

```
Function.ScalarVector(scalarFunctionType as type, vectorFunction as function) as function
```

About

Returns a scalar function of type `scalarFunctionType` that invokes `vectorFunction` with a single row of arguments and returns its single output. Additionally, when the scalar function is repeatedly applied for each row of a table of inputs, such as in `Table.AddColumn`, instead `vectorFunction` will be applied once for all inputs.

`vectorFunction` will be passed a table whose columns match in name and position the parameters of `scalarFunctionType`. Each row of this table contains the arguments for one call to the scalar function, with the columns corresponding to the parameters of `scalarFunctionType`.

`vectorFunction` must return a list of the same length as the input table, whose item at each position must be the same result as evaluating the scalar function on the input row of the same position.

The input table is expected to be streamed in, so `vectorFunction` is expected to stream its output as input comes in, only working with one chunk of input at a time. In particular, `vectorFunction` must not enumerate its input table more than once.

Lines functions

11/25/2019 • 2 minutes to read

Lines

FUNCTION	DESCRIPTION
Lines.FromBinary	Converts a binary value to a list of text values split at lines breaks.
Lines.FromText	Converts a text value to a list of text values split at lines breaks.
Lines.ToBinary	Converts a list of text into a binary value using the specified encoding and lineSeparator. The specified lineSeparator is appended to each line. If not specified then the carriage return and line feed characters are used.
Lines.ToText	Converts a list of text into a single text. The specified lineSeparator is appended to each line. If not specified then the carriage return and line feed characters are used.

Lines.FromBinary

11/25/2019 • 2 minutes to read

Syntax

```
Lines.FromBinary(binary as binary, optional quoteStyle as nullable number, optional  
includeLineSeparators as nullable logical, optional encoding as nullable number) as list
```

About

Converts a binary value to a list of text values split at lines breaks. If a quote style is specified, then line breaks may appear within quotes. If `includeLineSeparators` is true, then the line break characters are included in the text.

Lines.FromText

11/25/2019 • 2 minutes to read

Syntax

```
Lines.FromText(text as text, optional quoteStyle as nullable number, optional  
includeLineSeparators as nullable logical) as list
```

About

Converts a text value to a list of text values split at lines breaks. If includeLineSeparators is true, then the line break characters are included in the text.

- `QuoteStyle.None`: (default) No quoting behavior is needed.
- `QuoteStyle.Csv`: Quoting is as per Csv. A double quote character is used to demarcate such regions, and a pair of double quote characters is used to indicate a single double quote character within such a region.

Lines.ToBinary

11/25/2019 • 2 minutes to read

Syntax

```
Lines.ToBinary(lines as list, optional lineSeparator as nullable text, optional encoding as nullable number, optional includeByteOrderMark as nullable logical) as binary
```

About

Converts a list of text into a binary value using the specified encoding and lineSeparator. The specified lineSeparator is appended to each line. If not specified then the carriage return and line feed characters are used.

Lines.ToText

11/25/2019 • 2 minutes to read

Syntax

```
Lines.ToText(lines as list, optional lineSeparator as nullable text) as text
```

About

Converts a list of text into a single text. The specified lineSeparator is appended to each line. If not specified then the carriage return and line feed characters are used.

List functions

11/25/2019 • 8 minutes to read

The Power Query Formula Language (informally known as "M") is a powerful **mashup query language** optimized for building queries that mashup data. It is a functional, case sensitive language similar to F#, which can be used with [Power Query](#) in Excel and [Power BI Desktop](#) . To learn more, see the [Power Query Formula Language \(informally known as "M"\)](#).

Information

FUNCTION	DESCRIPTION
List.Count	Returns the number of items in a list.
List.NonNullCount	Returns the number of items in a list excluding null values
List.IsEmpty	Returns whether a list is empty.

Selection

FUNCTION	DESCRIPTION
List.Alternate	Returns a list with the items alternated from the original list based on a count, optional repeatInterval, and an optional offset.
List.Buffer	Buffers the list in memory. The result of this call is a stable list, which means it will have a deterministic count, and order of items.
List.Distinct	Filters a list down by removing duplicates. An optional equation criteria value can be specified to control equality comparison. The first value from each equality group is chosen.
List.FindText	Searches a list of values, including record fields, for a text value.
List.First	Returns the first value of the list or the specified default if empty. Returns the first item in the list, or the optional default value, if the list is empty. If the list is empty and a default value is not specified, the function returns.
List.FirstN	Returns the first set of items in the list by specifying how many items to return or a qualifying condition provided by countOrCondition .
List.InsertRange	Inserts items from values at the given index in the input list.
List.IsDistinct	Returns whether a list is distinct.

FUNCTION	DESCRIPTION
List.Last	Returns the last set of items in the list by specifying how many items to return or a qualifying condition provided by countOrCondition .
List.LastN	Returns the last set of items in a list by specifying how many items to return or a qualifying condition.
List.MatchesAll	Returns true if all items in a list meet a condition.
List.MatchesAny	Returns true if any item in a list meets a condition.
List.Positions	Returns a list of positions for an input list.
List.Range	Returns a count items starting at an offset.
List.Select	Selects the items that match a condition.
List.Single	Returns the single item of the list or throws an Expression.Error if the list has more than one item.
List.SingleOrDefault	Returns a single item from a list.
List.Skip	Skips the first item of the list. Given an empty list, it returns an empty list. This function takes an optional parameter countOrCondition to support skipping multiple values.

Transformation functions

FUNCTION	DESCRIPTION
List.Accumulate	Accumulates a result from the list. Starting from the initial value seed this function applies the accumulator function and returns the final result.
List.Combine	Merges a list of lists into single list.
List.RemoveRange	Returns a list that removes count items starting at offset. The default count is 1.
List.RemoveFirstN	Returns a list with the specified number of elements removed from the list starting at the first element. The number of elements removed depends on the optional countOrCondition parameter.
List.RemoveItems	Removes items from list1 that are present in list2, and returns a new list.
List.RemoveLastN	Returns a list with the specified number of elements removed from the list starting at the last element. The number of elements removed depends on the optional countOrCondition parameter.

FUNCTION	DESCRIPTION
List.Repeat	Returns a list that repeats the contents of an input list count times.
List.ReplaceRange	Returns a list that replaces count values in a list with a replaceWith list starting at an index.
List.RemoveMatchingItems	Removes all occurrences of the given values in the list.
List.RemoveNulls	Removes null values from a list.
List.ReplaceMatchingItems	Replaces occurrences of existing values in the list with new values using the provided equationCriteria. Old and new values are provided by the replacements parameters. An optional equation criteria value can be specified to control equality comparisons. For details of replacement operations and equation criteria, see Parameter Values.
List.ReplaceValue	Searches a list of values for the value and replaces each occurrence with the replacement value.
List.Reverse	Returns a list that reverses the items in a list.
List.Split	Splits the specified list into a list of lists using the specified page size.
List.Transform	Performs the function on each item in the list and returns the new list.
List.TransformMany	Returns a list whose elements are projected from the input list.

Membership functions

Since all values can be tested for equality, these functions can operate over heterogeneous lists.

FUNCTION	DESCRIPTION
List.AllTrue	Returns true if all expressions in a list are true
List.AnyTrue	Returns true if any expression in a list is true
List.Contains	Returns true if a value is found in a list.
List.ContainsAll	Returns true if all items in values are found in a list.
List.ContainsAny	Returns true if any item in values is found in a list.
List.PositionOf	Finds the first occurrence of a value in a list and returns its position.
List.PositionOfAny	Finds the first occurrence of any value in values and returns its position.

Set operations

FUNCTION	DESCRIPTION
List.Difference	Returns the items in list 1 that do not appear in list 2. Duplicate values are supported.
List.Intersect	Returns a list from a list of lists and intersects common items in individual lists. Duplicate values are supported.
List.Union	Returns a list from a list of lists and unions the items in the individual lists. The returned list contains all items in any input lists. Duplicate values are matched as part of the Union.
List.Zip	Returns a list of lists combining items at the same position.

Ordering

Ordering functions perform comparisons. All values that are compared must be comparable with each other. This means they must all come from the same datatype (or include null, which always compares smallest). Otherwise, an `Expression.Error` is thrown.

Comparable data types

- Number
- Duration
- DateTime
- Text
- Logical
- Null

FUNCTION	DESCRIPTION
List.Max	Returns the maximum item in a list, or the optional default value if the list is empty.
List.MaxN	Returns the maximum values in the list. After the rows are sorted, optional parameters may be specified to further filter the result
List.Median	Returns the median item from a list.
List.Min	Returns the minimum item in a list, or the optional default value if the list is empty.
List.MinN	Returns the minimum values in a list.
List.Sort	Returns a sorted list using comparison criterion.

Averages

These functions operate over homogeneous lists of Numbers, DateTimes, and Durations.

FUNCTION	DESCRIPTION
List.Average	Returns an average value from a list in the datatype of the values in the list.
List.Mode	Returns an item that appears most commonly in a list.
List.Modes	Returns all items that appear with the same maximum frequency.
List.StandardDeviation	Returns the standard deviation from a list of values. List.StandardDeviation performs a sample based estimate. The result is a number for numbers, and a duration for DateTimes and Durations.

Addition

These functions work over homogeneous lists of Numbers or Durations.

FUNCTION	DESCRIPTION
List.Sum	Returns the sum from a list.

Numerics

These functions only work over numbers.

FUNCTION	DESCRIPTION
List.Covariance	Returns the covariance from two lists as a number.
List.Product	Returns the product from a list of numbers.

Generators

These functions generate list of values.

FUNCTION	DESCRIPTION
List.Dates	Returns a list of date values from size count, starting at start and adds an increment to every value.
List.DateTimes	Returns a list of datetime values from size count, starting at start and adds an increment to every value.
List.DateTimeZones	Returns a list of of datetimezone values from size count, starting at start and adds an increment to every value.
List.Durations	Returns a list of durations values from size count, starting at start and adds an increment to every value.
List.Generate	Generates a list from a value function, a condition function, a next function, and an optional transformation function on the values.
List.Numbers	Returns a list of numbers from size count starting at initial, and adds an increment. The increment defaults to 1.

FUNCTION	DESCRIPTION
List.Random	Returns a list of count random numbers, with an optional seed parameter.
List.Times	Returns a list of time values of size count, starting at start.

Parameter values

Occurrence specification

- Occurrence.First = 0;
- Occurrence.Last = 1;
- Occurrence.All = 2;

Sort order

- Order.Ascending = 0;
- Order.Descending = 1;

Equation criteria

Equation criteria for list values can be specified as either a

- A function value that is either
 - A key selector that determines the value in the list to apply the equality criteria, or
 - A comparer function that is used to specify the kind of comparison to apply. Built in comparer functions can be specified, see section for Comparer functions.
- A list value which has
 - Exactly two items
 - The first element is the key selector as specified above
 - The second element is a comparer as specified above.

For more information and examples, see [List.Distinct](#).

Comparison criteria

Comparison criterion can be provided as either of the following values:

- A number value to specify a sort order. For more information, see sort order in Parameter values.
- To compute a key to be used for sorting, a function of 1 argument can be used.
- To both select a key and control order, comparison criterion can be a list containing the key and order.
- To completely control the comparison, a function of 2 arguments can be used that returns -1, 0, or 1 given the relationship between the left and right inputs. Value.Compare is a method that can be used to delegate this logic.

For more information and examples, see [List.Sort](#).

Replacement operations

Replacement operations are specified by a list value, each item of this list must be

- A list value of exactly two items

- First item is the old value in the list, to be replaced
- Second item is the new which should replace all occurrences of the old value in the list

List.Accumulate

11/25/2019 • 2 minutes to read

Syntax

```
List.Accumulate(list as list, seed as any, accumulator as function) as any
```

About

Accumulates a summary value from the items in the list `list`, using `accumulator`. An optional seed parameter, `seed`, may be set.

Example 1

Accumulates the summary value from the items in the list {1, 2, 3, 4, 5} using `((state, current) => state + current)`.

```
List.Accumulate({1, 2, 3, 4, 5}, 0, (state, current) => state + current)
```

List.AllTrue

11/25/2019 • 2 minutes to read

Syntax

```
List.AllTrue(list as list) as logical
```

About

Returns true if all expressions in the list `list` are true.

Example 1

Determine if all the expressions in the list {true, true, 2 > 0} are true.

```
List.AllTrue({true, true, 2 > 0})
```

```
true
```

Example 2

Determine if all the expressions in the list {true, true, 2 < 0} are true.

```
List.AllTrue({true, false, 2 < 0})
```

```
false
```


List.Alternate

11/25/2019 • 2 minutes to read

Syntax

```
List.Alternate(list as list, count as number, optional repeatInterval as nullable number, optional offset as nullable number) as list
```

About

Returns a list comprised of all the odd numbered offset elements in a list. Alternates between taking and skipping values from the list `list` depending on the parameters.

- `count`: Specifies number of values that are skipped each time.
- `repeatInterval`: An optional repeat interval to indicate how many values are added in between the skipped values.
- `offset`: An option offset parameter to begin skipping the values at the initial offset.

Example 1

Create a list from {1..10} that skips the first number.

```
List.Alternate({1..10}, 1)
```

2

3

4

5

6

7

8

9

10

Example 2

Create a list from {1..10} that skips the every other number.

```
List.Alternate({1..10}, 1, 1)
```

2

4

6

8

10

Example 3

Create a list from {1..10} that starts at 1 and skips every other number.

```
List.Alternate({1..10}, 1, 1, 1)
```

1

3

5

7

9

Example 4

Create a list from {1..10} that starts at 1, skips one value, keeps two values and so on.

```
List.Alternate({1..10}, 1, 2, 1)
```

1

3

4

6

7

9

10

List.AnyTrue

11/25/2019 • 2 minutes to read

Syntax

```
List.AnyTrue(list as list) as logical
```

About

Returns true if any expression in the list `list` is true.

Example 1

Determine if any of the expressions in the list {true, false, 2 > 0} are true.

```
List.AnyTrue({true, false, 2>0})
```

```
true
```

Example 2

Determine if any of the expressions in the list {2 = 0, false, 2 < 0} are true.

```
List.AnyTrue({2 = 0, false, 2 < 0})
```

```
false
```

List.Average

11/25/2019 • 2 minutes to read

Syntax

```
List.Average(list as list, optional precision as nullable number) as any
```

About

Returns the average value for the items in the list, `list`. The result is given in the same datatype as the values in the list. Only works with number, date, time, datetime, datetimezone and duration values. If the list is empty null is returned.

Example 1

Find the average of the list of numbers, `{3, 4, 6}`.

```
List.Average({3, 4, 6})
```

```
4.333333333333333
```

Example 2

Find the average of the date values January 1, 2011, January 2, 2011 and January 3, 2011.

```
List.Average({#date(2011, 1, 1), #date(2011, 1, 2), #date(2011, 1, 3)})
```

```
#date(2011, 1, 2)
```

List.Buffer

11/25/2019 • 2 minutes to read

Syntax

```
List.Buffer(list as list) as list
```

About

Buffers the list `list` in memory. The result of this call is a stable list.

Example 1

Create a stable copy of the list {1..10}.

```
List.Buffer({1..10})
```

1

2

3

4

5

6

7

8

9

10

List.Combine

11/25/2019 • 2 minutes to read

Syntax

```
List.Combine(lists as list) as list
```

About

Takes a list of lists, `lists`, and merges them into a single new list.

Example 1

Combine the two simple lists {1, 2} and {3, 4}.

```
List.Combine({{1, 2}, {3, 4}})
```

1

2

3

4

Example 2

Combine the two lists, {1, 2} and {3, {4, 5}}, one of which contains a nested list.

```
List.Combine({{1, 2}, {3, {4, 5}}})
```

1

2

3

[List]

List.Contains

11/25/2019 • 2 minutes to read

Syntax

```
List.Contains(list as list, value as any, optional equationCriteria as any) as logical
```

About

Indicates whether the list `list` contains the value `value`. Returns true if value is found in the list, false otherwise. An optional equation criteria value, `equationCriteria`, can be specified to control equality testing.

Example 1

Find if the list {1, 2, 3, 4, 5} contains 3.

```
List.Contains({1, 2, 3, 4, 5}, 3)
```

```
true
```

Example 2

Find if the list {1, 2, 3, 4, 5} contains 6.

```
List.Contains({1, 2, 3, 4, 5}, 6)
```

```
false
```

List.ContainsAll

11/25/2019 • 2 minutes to read

Syntax

```
List.ContainsAll(list as list, values as list, optional equationCriteria as any) as logical
```

About

Indicates whether the list `list` includes all the values in another list, `values`. Returns true if value is found in the list, false otherwise. An optional equation criteria value, `equationCriteria`, can be specified to control equality testing.

Example 1

Find out if the list {1, 2, 3, 4, 5} contains 3 and 4.

```
List.ContainsAll({1, 2, 3, 4, 5}, {3, 4})
```

```
true
```

Example 2

Find out if the list {1, 2, 3, 4, 5} contains 5 and 6.

```
List.ContainsAll({1, 2, 3, 4, 5}, {5, 6})
```

```
false
```


List.ContainsAny

11/25/2019 • 2 minutes to read

Syntax

```
List.ContainsAny(list as list, values as list, optional equationCriteria as any) as logical
```

About

Indicates whether the list `list` includes any of the values in another list, `values`. Returns true if value is found in the list, false otherwise. An optional equation criteria value, `equationCriteria`, can be specified to control equality testing.

Example 1

Find out if the list {1, 2, 3, 4, 5} contains 3 or 9.

```
List.ContainsAny({1, 2, 3, 4, 5}, {3, 9})
```

true

Example 2

Find out if the list {1, 2, 3, 4, 5} contains 6 or 7.

```
List.ContainsAny({1, 2, 3, 4, 5}, {6, 7})
```

false

List.Count

11/25/2019 • 2 minutes to read

Syntax

```
List.Count(list as list) as number
```

About

Returns the number of items in the list `list`.

Example 1

Find the number of values in the list {1, 2, 3}.

```
List.Count({1, 2, 3})
```

3

List.Covariance

11/25/2019 • 2 minutes to read

Syntax

```
List.Covariance(numberList1 as list, numberList2 as list) as nullable number
```

About

Returns the covariance between two lists, `numberList1` and `numberList2`. `numberList1` and `numberList2` must contain the same number of `number` values.

Example 1

Calculate the covariance between two lists.

```
List.Covariance({1, 2, 3},{1, 2, 3})
```

```
0.6666666666666667
```

List.Dates

11/25/2019 • 2 minutes to read

Syntax

```
List.Dates(start as date, count as number, step as duration) as list
```

About

Returns a list of `date` values of size `count`, starting at `start`. The given increment, `step`, is a `duration` value that is added to every value.

Example 1

Create a list of 5 values starting from New Year's Eve (`#date(2011, 12, 31)`) incrementing by 1 day (`#duration(1, 0, 0, 0)`).

```
List.Dates(#date(2011, 12, 31), 5, #duration(1, 0, 0, 0))
```

12/31/2011 12:00:00 AM

1/1/2012 12:00:00 AM

1/2/2012 12:00:00 AM

1/3/2012 12:00:00 AM

1/4/2012 12:00:00 AM

List.DateTime

11/25/2019 • 2 minutes to read

Syntax

```
List.DateTime(start as datetime, count as number, step as duration) as list
```

About

Returns a list of `datetime` values of size `count`, starting at `start`. The given increment, `step`, is a `duration` value that is added to every value.

Example

Create a list of 10 values starting from 5 minutes before New Year's Day (`#datetime(2011, 12, 31, 23, 55, 0)`) incrementing by 1 minute (`#duration(0, 0, 1, 0)`).

```
List.DateTime(#datetime(2011, 12, 31, 23, 55, 0), 10, #duration(0, 0, 1, 0))
```

12/31/2011 11:55:00 PM

12/31/2011 11:56:00 PM

12/31/2011 11:57:00 PM

12/31/2011 11:58:00 PM

12/31/2011 11:59:00 PM

1/1/2012 12:00:00 AM

1/1/2012 12:01:00 AM

1/1/2012 12:02:00 AM

1/1/2012 12:03:00 AM

1/1/2012 12:04:00 AM

List.DateTimeZones

11/25/2019 • 2 minutes to read

Syntax

```
List.DateTimeZones(start as datetimezone, count as number, step as duration) as list
```

About

Returns a list of `datetimezone` values of size `count`, starting at `start`. The given increment, `step`, is a `duration` value that is added to every value.

Example 1

Create a list of 10 values starting from 5 minutes before New Year's Day (`#datetimezone(2011, 12, 31, 23, 55, 0, -8, 0)`) incrementing by 1 minute (`#duration(0, 0, 1, 0)`).

```
List.DateTimeZones(#datetimezone(2011, 12, 31, 23, 55, 0, -8, 0), 10, #duration(0, 0, 1, 0))
```

12/31/2011 11:55:00 PM -08:00

12/31/2011 11:56:00 PM -08:00

12/31/2011 11:57:00 PM -08:00

12/31/2011 11:58:00 PM -08:00

12/31/2011 11:59:00 PM -08:00

1/1/2012 12:00:00 AM -08:00

1/1/2012 12:01:00 AM -08:00

1/1/2012 12:02:00 AM -08:00

1/1/2012 12:03:00 AM -08:00

1/1/2012 12:04:00 AM -08:00

List.Difference

11/25/2019 • 2 minutes to read

```
List.Difference(list1 as list, list2 as list, optional equationCriteria as any) as list
```

About

Returns the items in list `list1` that do not appear in list `list2`. Duplicate values are supported. An optional equation criteria value, `equationCriteria`, can be specified to control equality testing.

Example 1

Find the items in list {1, 2, 3, 4, 5} that do not appear in {4, 5, 3}.

```
List.Difference({1, 2, 3, 4, 5}, {4, 5, 3})
```

1

2

Example 2

Find the items in the list {1, 2} that do not appear in {1, 2, 3}.

```
List.Difference({1, 2}, {1, 2, 3})
```

List.Distinct

11/25/2019 • 2 minutes to read

Syntax

```
List.Distinct(list as list, optional equationCriteria as any) as list
```

About

Returns a list that contains all the values in list `list` with duplicates removed. If the list is empty, the result is an empty list.

Example 1

Remove the duplicates from the list {1, 1, 2, 3, 3, 3}.

```
List.Distinct({1, 1, 2, 3, 3, 3})
```

1

2

3

List.Durations

11/25/2019 • 2 minutes to read

Syntax

```
List.Durations(start as duration, count as number, step as duration) as list
```

About

Returns a list of `count` `duration` values, starting at `start` and incremented by the given `duration` `step`.

Example

Create a list of 5 values starting 1 hour and incrementing by an hour.

```
List.Durations(#duration(0, 1, 0, 0), 5, #duration(0, 1, 0, 0))
```

01:00:00

02:00:00

03:00:00

04:00:00

05:00:00

List.FindText

11/25/2019 • 2 minutes to read

Syntax

```
List.FindText(list as list, text as text) as list
```

About

Returns a list of the values from the list `list` which contained the value `text`.

Example 1

Find the text values in the list {"a", "b", "ab"} that match "a".

```
List.FindText({"a", "b", "ab"}, "a")
```

a

ab

List.First

11/25/2019 • 2 minutes to read

Syntax

```
List.First(list as list, optional defaultValue as any) as any
```

About

Returns the first item in the list `list`, or the optional default value, `defaultValue`, if the list is empty. If the list is empty and a default value is not specified, the function returns `null`.

Example 1

Find the first value in the list {1, 2, 3}.

```
List.First({1, 2, 3})
```

1

Example 2

Find the first value in the list {}. If the list is empty, return -1.

```
List.First({}, -1)
```

-1

List.FirstN

11/25/2019 • 2 minutes to read

Syntax

```
List.FirstN(list as list, countOrCondition as any) as any
```

About

- If a number is specified, up to that many items are returned.
- If a condition is specified, all items are returned that initially meet the condition. Once an item fails the condition, no further items are considered.

Example 1

Find the initial values in the list {3, 4, 5, -1, 7, 8, 2} that are greater than 0.

```
List.FirstN({3, 4, 5, -1, 7, 8, 2}, each _ > 0)
```

3

4

5

List.Generate

11/25/2019 • 2 minutes to read

Syntax

```
List.Generate(initial as function, condition as function, next as function, optional selector as nullable function) as list
```

About

Generates a list of values given four functions that generate the initial value `initial`, test against a condition `condition`, and if successful select the result and generate the next value `next`. An optional parameter, `selector`, may also be specified.

Example 1

Create a list that starts at 10, remains greater than 0 and decrements by 1.

```
List.Generate(()=>10, each _ > 0, each _ - 1)
```

10

9

8

7

6

5

4

3

2

1

Example 2

Generate a list of records containing x and y, where x is a value and y is a list. x should remain less than 10 and represent the number of items in the list y. After the list is generated, return only the x values.

```
List.Generate(()=> [ x = 1 , y = {}] , each [x] < 10 , each [x = List.Count([y]), y = [y] & {x}] , each [x])
```

1
0
1
2
3
4
5
6
7
8
9

List.InsertRange

11/25/2019 • 2 minutes to read

Syntax

```
List.InsertRange(list as list, index as number, values as list) as list
```

About

Returns a new list produced by inserting the values in `values` into `list` at `index`. The first position in the list is at index 0.

- `list`: The target list where values are to be inserted.
- `index`: The index of the target list (`list`) where the values are to be inserted. The first position in the list is at index 0.
- `values`: The list of values which are to be inserted into `list`.

Example 1

Insert the list ({3, 4}) into the target list ({1, 2, 5}) at index 2.

```
List.InsertRange({1, 2, 5}, 2, {3, 4})
```

1

2

3

4

5

Example 2

Insert a list with a nested list ({1, {1.1, 1.2}}) into a target list ({2, 3, 4}) at index 0.

```
List.InsertRange({2, 3, 4}, 0, {1, {1.1, 1.2}})
```

1

[List]

2

3

List.Intersect

11/25/2019 • 2 minutes to read

Syntax

```
List.Intersect(lists as list, optional equationCriteria as any) as list
```

About

Returns the intersection of the list values found in the input list `lists`. An optional parameter, `equationCriteria`, can be specified.

Example 1

Find the intersection of the lists {1..5}, {2..6}, {3..7}.

```
List.Intersect({{1..5}, {2..6}, {3..7}})
```

3

4

5

List.IsDistinct

11/25/2019 • 2 minutes to read

Syntax

```
List.IsDistinct(list as list, optional equationCriteria as any) as logical
```

About

Returns a logical value whether there are duplicates in the list `list`; `true` if the list is distinct, `false` if there are duplicate values.

Example 1

Find if the list {1, 2, 3} is distinct (i.e. no duplicates).

```
List.IsDistinct({1, 2, 3})
```

```
true
```

Example 2

Find if the list {1, 2, 3, 3} is distinct (i.e. no duplicates).

```
List.IsDistinct({1, 2, 3, 3})
```

```
false
```

List.IsEmpty

11/25/2019 • 2 minutes to read

Syntax

```
List.IsEmpty(list as list) as logical
```

About

Returns `true` if the list, `list`, contains no values (length 0). If the list contains values (length > 0), returns `false`.

Example 1

Find if the list {} is empty.

```
List.IsEmpty({})
```

`true`

Example 2

Find if the list {1, 2} is empty.

```
List.IsEmpty({1, 2})
```

`false`

List.Last

11/25/2019 • 2 minutes to read

Syntax

```
List.Last(list as list, optional defaultValue as any) as any
```

About

Returns the last item in the list `list`, or the optional default value, `defaultValue`, if the list is empty. If the list is empty and a default value is not specified, the function returns `null`.

Example 1

Find the last value in the list {1, 2, 3}.

```
List.Last({1, 2, 3})
```

3

Example 2

Find the last value in the list {} or -1 if it empty.

```
List.Last({}, -1)
```

-1

List.LastN

11/25/2019 • 2 minutes to read

Syntax

```
List.LastN(list as list, optional countOrCondition as any) as any
```

About

Returns the last item of the list `list`. If the list is empty, an exception is thrown. This function takes an optional parameter, `countOrCondition`, to support gathering multiple items or filtering items. `countOrCondition` can be specified in three ways:

- If a number is specified, up to that many items are returned.
- If a condition is specified, all items are returned that initially meet the condition, starting at the end of the list. Once an item fails the condition, no further items are considered.
- If this parameter is null the last item in the list is returned.

Example 1

Find the last value in the list {3, 4, 5, -1, 7, 8, 2}.

```
List.LastN({3, 4, 5, -1, 7, 8, 2},1)
```

2

Example 2

Find the last values in the list {3, 4, 5, -1, 7, 8, 2} that are greater than 0.

```
List.LastN({3, 4, 5, -1, 7, 8, 2}, each _ > 0)
```

7

8

2

List.MatchesAll

11/25/2019 • 2 minutes to read

Syntax

```
List.MatchesAll(list as list, condition as function) as logical
```

About

Returns `true` if the condition function, `condition`, is satisfied by all values in the list `list`, otherwise returns `false`.

Example 1

Determine if all the values in the list {11, 12, 13} are greater than 10.

```
List.MatchesAll({11, 12, 13}, each _ > 10)
```

```
true
```

Example 2

Determine if all the values in the list {1, 2, 3} are greater than 10.

```
List.MatchesAll({1, 2, 3}, each _ > 10)
```

```
false
```

List.MatchesAny

11/25/2019 • 2 minutes to read

Syntax

```
List.MatchesAny(list as list, condition as function) as logical
```

About

Returns `true` if the condition function, `condition`, is satisfied by any of values in the list `list`, otherwise returns `false`.

Example 1

Find if any of the values in the list {9, 10, 11} are greater than 10.

```
List.MatchesAny({9, 10, 11}, each _ > 10)
```

```
true
```

Example 2

Find if any of the values in the list {1, 2, 3} are greater than 10.

```
List.MatchesAny({1, 2, 3}, each _ > 10)
```

```
false
```

List.Max

11/25/2019 • 2 minutes to read

Syntax

```
List.Max(list as list, optional default as any, optional comparisonCriteria as any, optional includeNulls as nullable logical) as any
```

About

Returns the maximum item in the list `list`, or the optional default value `default` if the list is empty. An optional `comparisonCriteria` value, `comparisonCriteria`, may be specified to determine how to compare the items in the list. If this parameter is null, the default comparer is used.

Example 1

Find the max in the list {1, 4, 7, 3, -2, 5}.

```
List.Max({1, 4, 7, 3, -2, 5},1)
```

7

Example 2

Find the max in the list {} or return -1 if it is empty.

```
List.Max({}, -1)
```

-1

List.MaxN

11/25/2019 • 2 minutes to read

Syntax

```
List.MaxN(list as list, countOrCondition as any, optional comparisonCriteria as any, optional includeNulls as nullable logical) as list
```

About

Returns the maximum value(s) in the list, `list`. After the rows are sorted, optional parameters may be specified to further filter the result. The optional parameter, `countOrCondition`, specifies the number of values to return or a filtering condition. The optional parameter, `comparisonCriteria`, specifies how to compare values in the list.

- `list`: The list of values.
- `countOrCondition`: If a number is specified, a list of up to `countOrCondition` items in ascending order is returned. If a condition is specified, a list of items that initially meet the condition is returned. Once an item fails the condition, no further items are considered.
- `comparisonCriteria`: *[Optional]* An optional `comparisonCriteria` value, may be specified to determine how to compare the items in the list. If this parameter is null, the default comparer is used.

List.Median

11/25/2019 • 2 minutes to read

Syntax

```
List.Median(list as list, optional comparisonCriteria as any) as any
```

About

Returns the median item of the list `list`. This function returns `null` if the list contains no non-`null` values. If there is an even number of items, the function chooses the smaller of the two median items unless the list is comprised entirely of datetimes, durations, numbers or times, in which case it returns the average of the two items.

Example 1

Find the median of the list `{5, 3, 1, 7, 9}`.

```
powerquery-mList.Median({5, 3, 1, 7, 9})
```

5

List.Min

11/25/2019 • 2 minutes to read

Syntax

```
List.Min(list as list, optional default as any, optional comparisonCriteria as any, optional includeNulls as nullable logical) as any
```

About

Returns the minimum item in the list `list`, or the optional default value `default` if the list is empty. An optional `comparisonCriteria` value, `comparisonCriteria`, may be specified to determine how to compare the items in the list. If this parameter is null, the default comparer is used.

Example 1

Find the min in the list {1, 4, 7, 3, -2, 5}.

```
List.Min({1, 4, 7, 3, -2, 5})
```

-2

Example 2

Find the min in the list {} or return -1 if it is empty.

```
List.Min({}, -1)
```

-1

List.MinN

11/25/2019 • 2 minutes to read

Syntax

```
List.MinN(list as list, countOrCondition as any, optional comparisonCriteria as any, optional includeNulls as nullable logical) as list
```

About

Returns the minimum value(s) in the list, `list`. The parameter, `countOrCondition`, specifies the number of values to return or a filtering condition. The optional parameter, `comparisonCriteria`, specifies how to compare values in the list.

- `list`: The list of values.
- `countOrCondition`: If a number is specified, a list of up to `countOrCondition` items in ascending order is returned. If a condition is specified, a list of items that initially meet the condition is returned. Once an item fails the condition, no further items are considered. If this parameter is null the single smallest value in the list is returned.
- `comparisonCriteria`: *[Optional]* An optional `comparisonCriteria` value, may be specified to determine how to compare the items in the list. If this parameter is null, the default comparer is used.

Example 1

Find the 5 smallest values in the list `{3, 4, 5, -1, 7, 8, 2}`.

```
List.MinN({3, 4, 5, -1, 7, 8, 2}, 5)
```

-1

2

3

4

5

List.Mode

11/25/2019 • 2 minutes to read

Syntax

```
List.Mode(list as list, optional equationCriteria as any) as any
```

About

Returns the item that appears most frequently in the list, `list`. If the list is empty an exception is thrown. If multiple items appear with the same maximum frequency, the last one is chosen. An optional `comparisonCriteria` value, `equationCriteria`, can be specified to control equality testing.

Example 1

Find the item that appears most frequently in the list `{"A", 1, 2, 3, 3, 4, 5}`.

```
List.Mode({"A", 1, 2, 3, 3, 4, 5})
```

3

Example 2

Find the item that appears most frequently in the list `{"A", 1, 2, 3, 3, 4, 5, 5}`.

```
List.Mode({"A", 1, 2, 3, 3, 4, 5, 5})
```

5

List.Modes

11/25/2019 • 2 minutes to read

Syntax

```
List.Modes(list as list, optional equationCriteria as any) as list
```

About

Returns the item that appears most frequently in the list, `list`. If the list is empty an exception is thrown. If multiple items appear with the same maximum frequency, the last one is chosen. An optional `comparisonCriteria` value, `equationCriteria`, can be specified to control equality testing.

Example 1

Find the items that appears most frequently in the list `{"A", 1, 2, 3, 3, 4, 5, 5}`.

```
List.Modes({"A", 1, 2, 3, 3, 4, 5, 5})
```

3

5

List.NonNullCount

11/25/2019 • 2 minutes to read

Syntax

```
List.NonNullCount(list as list) as number
```

About

Returns the number of non-null items in the list `list`.

List.Numbers

11/25/2019 • 2 minutes to read

Syntax

```
List.Numbers(start as number, count as number, optional increment as nullable number) as list
```

About

Returns a list of numbers given an initial value, count, and optional increment value. The default increment value is 1.

- **start** : The initial value in the list.
- **count** : The number of values to create.
- **increment** : *[Optional]* The value to increment by. If omitted values are incremented by 1.

Example 1

Generate a list of 10 consecutive numbers starting at 1.

```
List.Numbers(1, 10)
```

1

2

3

4

5

6

7

8

9

10

Example 2

Generate a list of 10 numbers starting at 1, with an increment of 2 for each subsequent number.

List.Numbers(1, 10, 2)

1
3
5
7
9
11
13
15
17
19

List.PositionOf

11/25/2019 • 2 minutes to read

Syntax

```
List.PositionOf(list as list, value as any, optional occurrence as nullable number, optional  
equationCriteria as any) as any
```

About

Returns the offset at which the value `value` appears in the list `list`. Returns -1 if the value doesn't appear. An optional occurrence parameter `occurrence` can be specified.

- `occurrence`: The maximum number of occurrences to report.

Example 1

Find the position in the list {1, 2, 3} at which the value 3 appears.

```
List.PositionOf({1, 2, 3}, 3)
```

List.PositionOfAny

11/25/2019 • 2 minutes to read

Syntax

```
List.PositionOfAny(list as list, values as list, optional occurrence as nullable number, optional  
equationCriteria as any) as any
```

About

Returns the offset in list `list` of the first occurrence of a value in a list `values`. Returns -1 if no occurrence is found. An optional occurrence parameter `occurrence` can be specified.

- `occurrence`: The maximum number of occurrences that can be returned.

Example 1

Find the first position in the list {1, 2, 3} at which the value 2 or 3 appears.

```
List.PositionOfAny({1, 2, 3}, {2, 3})
```

List.Positions

11/25/2019 • 2 minutes to read

Syntax

```
List.Positions(list as list) as list
```

About

Returns a list of offsets for the input list `list`. When using `List.Transform` to change a list, the list of positions can be used to give the transform access to the position.

Example 1

Find the offsets of values in the list {1, 2, 3, 4, null, 5}.

```
List.Positions({1, 2, 3, 4, null, 5})
```

0
1
2
3
4
5

List.Product

11/25/2019 • 2 minutes to read

Syntax

```
List.Product(numbersList as list, optional precision as nullable number) as nullable number
```

About

Returns the product of the non-null numbers in the list, `numbersList`. Returns null if there are no non-null values in the list.

Example 1

Find the product of the numbers in the list `{1, 2, 3, 3, 4, 5, 5}`.

```
List.Product({1, 2, 3, 3, 4, 5, 5})
```

```
1800
```

List.Random

11/25/2019 • 2 minutes to read

Syntax

```
List.Random(count as number, optional seed as nullable number) as list
```

About

Returns a list of random numbers between 0 and 1, given the number of values to generate and an optional seed value.

- **count** : The number of random values to generate.
- **seed** : *[Optional]* A numeric value used to seed the random number generator. If omitted a unique list of random numbers is generated each time you call the function. If you specify the seed value with a number every call to the function generates the same list of random numbers.

Example 1

Create a list of 3 random numbers.

```
List.Random(3)
```

0.992332

0.132334

0.023592

Example 2

Create a list of 3 random numbers, specifying seed value.

```
List.Random(3, 2)
```

0.883002

0.245344

0.723212

List.Range

11/25/2019 • 2 minutes to read

Syntax

```
List.Range(list as list, offset as number, optional count as nullable number) as list
```

About

Returns a subset of the list beginning at the offset `list`. An optional parameter, `offset`, sets the maximum number of items in the subset.

Example 1

Find the subset starting at offset 6 of the list of numbers 1 through 10.

```
List.Range({1..10}, 6)
```

7

8

9

10

Example 2

Find the subset of length 2 from offset 6, from the list of numbers 1 through 10.

```
List.Range({1..10}, 6, 2)
```

7

8

List.RemoveFirstN

11/25/2019 • 2 minutes to read

Syntax

```
List.RemoveFirstN(list as list, optional countOrCondition as any) as list
```

About

Returns a list that removes the first element of list `list`. If `list` is an empty list an empty list is returned. This function takes an optional parameter, `countOrCondition`, to support removing multiple values as listed below.

- If a number is specified, up to that many items are removed.
- If a condition is specified, the returned list begins with the first element in `list` that meets the criteria. Once an item fails the condition, no further items are considered.
- If this parameter is null, the default behavior is observed.

Example 1

Create a list from {1, 2, 3, 4, 5} without the first 3 numbers.

```
List.RemoveFirstN({1, 2, 3, 4, 5}, 3)
```

4

5

Example 2

Create a list from {5, 4, 2, 6, 1} that starts with a number less than 3.

```
List.RemoveFirstN({5, 4, 2, 6, 1}, each _ > 3)
```

2

6

1

List.RemoveItems

11/25/2019 • 2 minutes to read

Syntax

```
List.RemoveItems(list1 as list, list2 as list) as list
```

About

Removes all occurrences of the given values in the `list2` from `list1`. If the values in `list2` don't exist in `list1`, the original list is returned.

Example 1

Remove the items in the list {2, 4, 6} from the list {1, 2, 3, 4, 2, 5, 5}.

```
List.RemoveItems({1, 2, 3, 4, 2, 5, 5}, {2, 4, 6})
```

1

3

5

5

List.RemoveLastN

11/25/2019 • 2 minutes to read

Syntax

```
List.RemoveLastN(list as list, optional countOrCondition as any) as list
```

About

Returns a list that removes the last `countOrCondition` elements from the end of list `list`. If `list` has less than `countOrCondition` elements, an empty list is returned.

- If a number is specified, up to that many items are removed.
- If a condition is specified, the returned list ends with the first element from the bottom in `list` that meets the criteria. Once an item fails the condition, no further items are considered.
- If this parameter is null, only one item is removed.

Example 1

Create a list from {1, 2, 3, 4, 5} without the last 3 numbers.

```
List.RemoveLastN({1, 2, 3, 4, 5}, 3)
```

1

2

Example 2

Create a list from {5, 4, 2, 6, 4} that ends with a number less than 3.

```
List.RemoveLastN({5, 4, 2, 6, 4}, each _ < 3)
```

5

4

2

List.RemoveMatchingItems

11/25/2019 • 2 minutes to read

Syntax

```
List.RemoveMatchingItems(list1 as list, list2 as list, optional equationCriteria as any) as list
```

About

Removes all occurrences of the given values in `list2` from the list `list1`. If the values in `list2` don't exist in `list1`, the original list is returned. An optional equation criteria value, `equationCriteria`, can be specified to control equality testing.

Example 1

Create a list from {1, 2, 3, 4, 5, 5} without {1, 5}.

```
List.RemoveMatchingItems({1, 2, 3, 4, 5, 5}, {1, 5})
```

2

3

4

List.RemoveNulls

11/25/2019 • 2 minutes to read

Syntax

```
List.RemoveNulls(list as list) as list
```

About

Removes all occurrences of "null" values in the `list`. If there are no 'null' values in the list, the original list is returned.

Example 1

Remove the "null" values from the list {1, 2, 3, null, 4, 5, null, 6}.

```
List.RemoveNulls({1, 2, 3, null, 4, 5, null, 6})
```

1

2

3

4

5

6

List.RemoveRange

11/25/2019 • 2 minutes to read

Syntax

```
List.RemoveRange(list as list, index as number, optional count as nullable number) as list
```

About

Removes `count` values in the `list` starting at the specified position, `index`.

Example 1

Remove 3 values in the list {1, 2, 3, 4, -6, -2, -1, 5} starting at index 4.

```
List.RemoveRange({1, 2, 3, 4, -6, -2, -1, 5}, 4, 3)
```

1

2

3

4

5

List.Repeat

11/25/2019 • 2 minutes to read

Syntax

```
List.Repeat(list as list, count as number) as list
```

About

Returns a list that is `count` repetitions of the original list, `list`.

Example 1

Create a list that has {1, 2} repeated 3 times.

```
List.Repeat({1, 2}, 3)
```

1

2

1

2

1

2

List.ReplaceMatchingItems

11/25/2019 • 2 minutes to read

Syntax

```
List.ReplaceMatchingItems(list as list, replacements as list, optional equationCriteria as any) as list
```

About

Performs the given replacements to the list `list`. A replacement operation `replacements` consists of a list of two values, the old value and new value, provided in a list. An optional equation criteria value, `equationCriteria`, can be specified to control equality testing.

Example 1

Create a list from {1, 2, 3, 4, 5} replacing the value 5 with -5, and the value 1 with -1.

```
List.ReplaceMatchingItems({1, 2, 3, 4, 5}, {{5, -5}, {1, -1}})
```

-1

2

3

4

-5

List.ReplaceRange

11/25/2019 • 2 minutes to read

Syntax

```
List.ReplaceRange(list as list, index as number, count as number, replaceWith as list) as list
```

About

Replaces `count` values in the `list` with the list `replaceWith`, starting at specified position, `index`.

Example 1

Replace {7, 8, 9} in the list {1, 2, 7, 8, 9, 5} with {3, 4}.

```
List.ReplaceRange({1, 2, 7, 8, 9, 5}, 2, 3, {3, 4})
```

1

2

3

4

5

List.ReplaceValue

11/25/2019 • 2 minutes to read

Syntax

```
List.ReplaceValue(list as list, oldValue as any, newValue as any, replacer as function) as list
```

About

Searches a list of values, `list`, for the value `oldValue` and replaces each occurrence with the replacement value `newValue`.

Example 1

Replace all the "a" values in the list {"a", "B", "a", "a"} with "A".

```
v List.ReplaceValue({"a", "B", "a", "a"}, "a", "A", Replacer.ReplaceText)
```

```
<table> <tr><td>A</td></tr> <tr><td>B</td></tr> <tr><td>A</td></tr> <tr><td>A</td></tr> </table>
```

List.Reverse

11/25/2019 • 2 minutes to read

Syntax

```
List.Reverse(list as list) as list
```

About

Returns a list with the values in the list `list` in reversed order.

Example 1

Create a list from {1..10} in reverse order.

```
List.Reverse({1..10})
```

10

9

8

7

6

5

4

3

2

1

List.Select

11/25/2019 • 2 minutes to read

Syntax

```
List.Select(list as list, selection as function) as list
```

About

Returns a list of values from the list `list`, that match the selection condition `selection`.

Example 1

Find the values in the list {1, -3, 4, 9, -2} that are greater than 0.

```
List.Select({1, -3, 4, 9, -2}, each _ > 0)
```

1

4

9

List.Single

11/25/2019 • 2 minutes to read

Syntax

```
List.Single(list as list) as any
```

About

If there is only one item in the list `list`, returns that item. If there is more than one item or the list is empty, the function throws an exception.

Example 1

Find the single value in the list {1}.

```
List.Single({1})
```

1

Example 2

Find the single value in the list {1, 2, 3}.

```
List.Single({1, 2, 3})
```

[Expression.Error] There were too many elements in the enumeration to complete the operation.

List.SingleOrDefault

11/25/2019 • 2 minutes to read

Syntax

```
List.SingleOrDefault(list as list, optional default as any) as any
```

About

If there is only one item in the list `list`, returns that item. If the list is empty, the function returns null unless an optional `default` is specified. If there is more than one item in the list, the function returns an error.

Example 1

Find the single value in the list {1}.

```
List.SingleOrDefault({1})
```

1

Example 2

Find the single value in the list {}.

```
List.SingleOrDefault({})
```

null

Example 3

Find the single value in the list {}. If is empty, return -1.

```
List.SingleOrDefault({}, -1)
```

-1

List.Skip

11/25/2019 • 2 minutes to read

Syntax

```
List.Skip(list as list, optional countOrCondition as any) as list
```

About

Returns a list that skips the first element of list `list`. If `list` is an empty list an empty list is returned. This function takes an optional parameter, `countOrCondition`, to support skipping multiple values as listed below.

- If a number is specified, up to that many items are skipped.
- If a condition is specified, the returned list begins with the first element in `list` that meets the criteria. Once an item fails the condition, no further items are considered.
- If this parameter is null, the default behavior is observed.

Example 1

Create a list from {1, 2, 3, 4, 5} without the first 3 numbers.

```
List.Skip({1, 2, 3, 4, 5}, 3)
```

4

5

Example 2

Create a list from {5, 4, 2, 6, 1} that starts with a number less than 3.

```
List.Skip({5, 4, 2, 6, 1}, each _ > 3)
```

2

6

1

List.Sort

11/25/2019 • 2 minutes to read

Syntax

```
List.Sort(list as list, optional comparisonCriteria as any) as list
```

About

Sorts a list of data, `list`, according to the optional criteria specified. An optional parameter, `comparisonCriteria`, can be specified as the comparison criterion. This can take the following values:

- To control the order, the comparison criterion can be an Order enum value. (`Order.Descending`, `Order.Ascending`).
- To compute a key to be used for sorting, a function of 1 argument can be used.
- To both select a key and control order, comparison criterion can be a list containing the key and order (`{each 1 / _, Order.Descending}`).
- To completely control the comparison, a function of 2 arguments can be used that returns -1, 0, or 1 given the relationship between the left and right inputs. `Value.Compare` is a method that can be used to delegate this logic.

Example 1

Sort the list {2, 3, 1}.

```
List.Sort({2, 3, 1})
```

1

2

3

Example 2

Sort the list {2, 3, 1} in descending order.

```
List.Sort({2, 3, 1}, Order.Descending)
```

3

2

1

Example 3

Sort the list {2, 3, 1} in descending order using the Value.Compare method.

```
List.Sort({2, 3, 1}, (x, y) => Value.Compare(1/x, 1/y))
```

3

2

1

List.Split

11/25/2019 • 2 minutes to read

Syntax

```
List.Split(list as list, pageSize as number) as list
```

About

Splits `list` into a list of lists where the first element of the output list is a list containing the first `pageSize` elements from the source list, the next element of the output list is a list containing the next `pageSize` elements from the source list, etc.

List.StandardDeviation

11/25/2019 • 2 minutes to read

Syntax

```
List.StandardDeviation(numbersList as list) as nullable number
```

About

Returns a sample based estimate of the standard deviation of the values in the list, `numbersList`. If `numbersList` is a list of numbers, a number is returned. An exception is thrown on an empty list or a list of items that is not type `number`.

Example 1

Find the standard deviation of the numbers 1 through 5.

```
List.StandardDeviation({1..5})
```

```
1.5811388300841898
```

List.Sum

11/25/2019 • 2 minutes to read

Syntax

```
List.Sum(list as list, optional precision as nullable number) as any
```

About

Returns the sum of the non-null values in the list, `list`. Returns null if there are no non-null values in the list.

Example 1

Find the sum of the numbers in the list `{1, 2, 3}`.

```
List.Sum({1, 2, 3})
```

List.Times

11/25/2019 • 2 minutes to read

Syntax

```
List.Times(start as time, count as number, step as duration) as list
```

About

Returns a list of `time` values of size `count`, starting at `start`. The given increment, `step`, is a `duration` value that is added to every value.

Example 1

Create a list of 4 values starting from noon (`#time(12, 0, 0)`) incrementing by one hour (`#duration(0, 1, 0, 0)`).

```
List.Times(#time(12, 0, 0), 4, #duration(0, 1, 0, 0))
```

12:00:00

13:00:00

14:00:00

15:00:00

List.Transform

11/25/2019 • 2 minutes to read

Syntax

```
List.Transform(list as list, transform as function) as list
```

About

Returns a new list of values by applying the transform function `transform` to the list, `list`.

Example 1

Add 1 to each value in the list {1, 2}.

```
List.Transform({1, 2}, each _ + 1)
```

2

3

List.TransformMany

11/25/2019 • 2 minutes to read

Syntax

```
List.TransformMany(list as list, collectionTransform as function, resultTransform as function) as list
```

About

Returns a list whose elements are projected from the input list. The `collectionTransform` function is applied to each element, and the `resultTransform` function is invoked to construct the resulting list. The `collectionSelector` has the signature `(x as Any) => ...` where `x` is an element in list. The `resultTransform` projects the shape of the result and has the signature `(x as Any, y as Any) => ...` where `x` is the element in list and `y` is the element obtained by applying the `collectionTransform` to that element.

List.Union

11/25/2019 • 2 minutes to read

Syntax

```
List.Union(lists as list, optional equationCriteria as any) as list
```

About

Takes a list of lists `lists`, unions the items in the individual lists and returns them in the output list. As a result, the returned list contains all items in any input lists. This operation maintains traditional bag semantics, so duplicate values are matched as part of the Union. An optional equation criteria value, `equationCriteria`, can be specified to control equality testing.

Example 1

Create a union of the list {1..5}, {2..6}, {3..7}.

```
List.Union({ {1..5}, {2..6}, {3..7} })
```

1

2

3

4

5

6

7

List.Zip

11/25/2019 • 2 minutes to read

Syntax

```
List.Zip(lists as list) as list
```

About

Takes a list of lists, `lists`, and returns a list of lists combining items at the same position.

Example 1

Zips the two simple lists {1, 2} and {3, 4}.

```
List.Zip({{1, 2}, {3, 4}})
```

```
[List]
```

```
[List]
```

Example 2

Zips the two simple lists of different lengths {1, 2} and {3}.

```
List.Zip({{1, 2}, {3}})
```

```
[List]
```

```
[List]
```


Logical functions

11/25/2019 • 2 minutes to read

Logical

FUNCTION	DESCRIPTION
Logical.From	Returns a logical value from a value.
Logical.FromText	Returns a logical value of true or false from a text value.
Logical.ToText	Returns a text value from a logical value.

Logical.From

11/25/2019 • 2 minutes to read

Syntax

```
Logical.From(value as any) as nullable logical
```

About

Returns a `logical` value from the given `value`. If the given `value` is `null`, `Logical.From` returns `null`. If the given `value` is `logical`, `value` is returned.

Values of the following types can be converted to a `logical` value:

- `text`: A `logical` value from the text value, either `"true"` or `"false"`. See `Logical.FromText` for details.
- `number`: `false` if `value` equals `0`, `true` otherwise.

If `value` is of any other type, an error is returned.

Example 1

Convert `2` to a `logical` value.

```
Logical.From(2)
```

```
true
```

Logical.FromText

11/25/2019 • 2 minutes to read

Syntax

```
Logical.FromText(text as nullable text) as nullable logical
```

About

Creates a logical value from the text value `text`, either "true" or "false". If `text` contains a different string, an exception is thrown. The text value `text` is case insensitive.

Example 1

Create a logical value from the text string "true".

```
Logical.FromText("true")
```

```
true
```

Example 2

Create a logical value from the text string "a".

```
Logical.FromText("a")
```

```
[Expression.Error] Could not convert to a logical.
```

Logical.ToText

11/25/2019 • 2 minutes to read

Syntax

```
Logical.ToText(logicalValue as nullable logical) as nullable text
```

About

Creates a text value from the logical value `logicalValue`, either `true` or `false`. If `logicalValue` is not a logical value, an exception is thrown.

Example 1

Create a text value from the logical `true`.

```
Logical.ToText(true)
```

```
"true"
```

Number functions

11/25/2019 • 3 minutes to read

Number

Constants

FUNCTION	DESCRIPTION
Number.E	Returns 2.7182818284590451, the value of e up to 16 decimal digits.
Number.Epsilon	Returns the smallest possible number.
Number.NaN	Represents 0/0.
Number.NegativeInfinity	Represents -1/0.
Number.PI	Returns 3.1415926535897931, the value for Pi up to 16 decimal digits.
Number.PositiveInfinity	Represents 1/0.

Information

FUNCTION	DESCRIPTION
Number.IsEven	Returns true if a value is an even number.
Number.IsNaN	Returns true if a value is Number.NaN.
Number.IsOdd	Returns true if a value is an odd number.

Conversion and formatting

FUNCTION	DESCRIPTION
Byte.From	Returns a 8-bit integer number value from the given value.
Currency.From	Returns a currency value from the given value.
Decimal.From	Returns a decimal number value from the given value.
Double.From	Returns a Double number value from the given value.
Int8.From	Returns a signed 8-bit integer number value from the given value.
Int16.From	Returns a 16-bit integer number value from the given value.

FUNCTION	DESCRIPTION
Int32.From	Returns a 32-bit integer number value from the given value.
Int64.From	Returns a 64-bit integer number value from the given value.
Number.From	Returns a number value from a value.
Number.FromText	Returns a number value from a text value.
Number.ToText	Returns a text value from a number value.
Percentage.From	Returns a percentage value from the given value.
Single.From	Returns a Single number value from the given value.

Rounding

FUNCTION	DESCRIPTION
Number.Round	Returns a nullable number (n) if value is an integer.
Number.RoundAwayFromZero	Returns Number.RoundUp(value) when value ≥ 0 and Number.RoundDown(value) when value < 0 .
Number.RoundDown	Returns the largest integer less than or equal to a number value.
Number.RoundTowardZero	Returns Number.RoundDown(x) when $x \geq 0$ and Number.RoundUp(x) when $x < 0$.
Number.RoundUp	Returns the larger integer greater than or equal to a number value.

Operations

FUNCTION	DESCRIPTION
Number.Abs	Returns the absolute value of a number.
Number.Combinations	Returns the number of combinations of a given number of items for the optional combination size.
Number.Exp	Returns a number representing e raised to a power.
Number.Factorial	Returns the factorial of a number.
Number.IntegerDivide	Divides two numbers and returns the whole part of the resulting number.
Number.Ln	Returns the natural logarithm of a number.
Number.Log	Returns the logarithm of a number to the base.

FUNCTION	DESCRIPTION
Number.Log10	Returns the base-10 logarithm of a number.
Number.Mod	Divides two numbers and returns the remainder of the resulting number.
Number.Permutations	Returns the number of total permutatons of a given number of items for the optional permutation size.
Number.Power	Returns a number raised by a power.
Number.Sign	Returns 1 for positive numbers, -1 for negative numbers or 0 for zero.
Number.Sqrt	Returns the square root of a number.

Random

FUNCTION	DESCRIPTION
Number.Random	Returns a random fractional number between 0 and 1.
Number.RandomBetween	Returns a random number between the two given number values.

Trigonometry

FUNCTION	DESCRIPTION
Number.Acos	Returns the arccosine of a number.
Number.Asin	Returns the arcsine of a number.
Number.Atan	Returns the arctangent of a number.
Number.Atan2	Returns the arctangent of the division of two numbers.
Number.Cos	Returns the cosine of a number.
Number.Cosh	Returns the hyperbolic cosine of a number.
Number.Sin	Returns the sine of a number.
Number.Sinh	Returns the hyperbolic sine of a number.
Number.Tan	Returns the tangent of a number.
Number.Tanh	Returns the hyperbolic tangent of a number.

Bytes

FUNCTION	DESCRIPTION
Number.BitwiseAnd	Returns the result of a bitwise AND operation on the provided operands.
Number.BitwiseNot	Returns the result of a bitwise NOT operation on the provided operands.
Number.BitwiseOr	Returns the result of a bitwise OR operation on the provided operands.
Number.BitwiseShiftLeft	Returns the result of a bitwise shift left operation on the operands.
Number.BitwiseShiftRight	Returns the result of a bitwise shift right operation on the operands.
Number.BitwiseXor	Returns the result of a bitwise XOR operation on the provided operands.

PARAMETER VALUES	DESCRIPTION
RoundingMode.AwayFromZero	RoundingMode.AwayFromZero
RoundingMode.Down	RoundingMode.Down
RoundingMode.ToEven	RoundingMode.ToEven
RoundingMode.TowardZero	RoundingMode.TowardZero
RoundingMode.Up	RoundingMode.Up

Syntax

```
Byte.From(value as any, optional culture as nullable text, optional roundingMode as nullable number) as nullable number
```

About

Returns a 8-bit integer `number` > value from the given `value`. If the given `value` > is `null`, `Byte.From` returns `null`. If the given `value` is `number` within the range of 8-bit integer without a fractional part, `value` is returned. If it has fractional part, then the number is rounded with the rounding mode specified. The default rounding mode is `RoundingMode.ToEven`. If the given `value` is of any other type, see `Number.FromText` for converting it to `number` value, then the previous statement about converting `number` value to 8-bit integer `number` value applies. See `Number.Round` for the available rounding modes.

Example 1

Get the 8-bit integer `number` value of `"4"`.

```
Byte.From("4")
```

4

Example 2

Get the 8-bit integer `number` value of `"4.5"` using `RoundingMode.AwayFromZero`.

```
Byte.From("4.5", null, RoundingMode.AwayFromZero)
```

5

=

Currency.From

11/25/2019 • 2 minutes to read

Syntax

```
Currency.From(value as any, optional culture as nullable text, optional roundingMode as nullable number) as nullable number
```

About

Returns a `currency` value from the given `value`. If the given `value` is `null`, `Currency.From` returns `null`. If the given `value` is `number` within the range of currency, fractional part of the `value` is rounded to 4 decimal digits and returned. If the given `value` is of any other type, see `Number.FromText` for converting it to `number` value, then the previous statement about converting `number` value to `currency` value applies. Valid range for currency is `-922,337,203,685,477.5808` to `922,337,203,685,477.5807`. See `Number.Round` for the available rounding modes, the default is `RoundingMode.ToEven`.

Example 1

Get the `currency` value of `"1.2345"`.

```
Currency.From("1.2345")
```

```
1.2346
```

Example 2

Get the `currency` value of `"1.2345"` using `RoundingMode.Down`.

```
Currency.From("1.2345", "en-US", RoundingMode.Down)
```

```
1.2345
```

Decimal.From

11/25/2019 • 2 minutes to read

Syntax

```
Decimal.From(value as any, optional culture as nullable text) as nullable number
```

About

Returns a Decimal `number` value from the given `value`. If the given `value` is `null`, `Decimal.From` returns `null`. If the given `value` is `number` within the range of Decimal, `value` is returned, otherwise an error is returned. If the given `value` is of any other type, see `Number.FromText` for converting it to `number` value, then the previous statement about converting `number` value to Decimal `number` value applies.

Example 1

Get the Decimal `number` value of `"4.5"`.

```
Decimal.From("4.5")
```

```
4.5
```

Double.From

11/25/2019 • 2 minutes to read

Syntax

```
Double.From(value as any, optional culture as nullable text) as nullable number
```

About

Returns a Double `number` value from the given `value`. If the given `value` is `null`, `Double.From` returns `null`. If the given `value` is `number` within the range of Double, `value` is returned, otherwise an error is returned. If the given `value` is of any other type, see `Number.FromText` for converting it to `number` value, then the previous statement about converting `number` value to Double `number` value applies.

Example 1

Get the Double `number` value of `"4"`.

```
Double.From("4.5")
```

```
4.5
```

Int8.From

11/25/2019 • 2 minutes to read

Syntax

```
Int8.From(value as any, optional culture as nullable text, optional roundingMode as nullable number) as nullable number
```

About

Returns a signed 8-bit integer `number` value from the given `value`. If the given `value` is `null`, `Int8.From` returns `null`. If the given `value` is `number` within the range of signed 8-bit integer without a fractional part, `value` is returned. If it has fractional part, then the number is rounded with the rounding mode specified. The default rounding mode is `RoundingMode.ToEven`. If the given `value` is of any other type, see `Number.FromText` for converting it to `number` value, then the previous statement about converting `number` value to signed 8-bit integer `number` value applies. See `Number.Round` for the available rounding modes.

Example 1

Get the signed 8-bit integer `number` value of `"4"`.

```
Int8.From("4")
```

4

Example 2

Get the signed 8-bit integer `number` value of `"4.5"` using `RoundingMode.AwayFromZero`.

```
Int8.From("4.5", null, RoundingMode.AwayFromZero)
```

5

Int16.From

11/25/2019 • 2 minutes to read

Syntax

```
Int16.From(value as any, optional culture as nullable text, optional roundingMode as nullable number) as nullable number
```

About

Returns a 16-bit integer `number` value from the given `value`. If the given `value` is `null`, `Int16.From` returns `null`. If the given `value` is `number` within the range of 16-bit integer without a fractional part, `value` is returned. If it has fractional part, then the number is rounded with the rounding mode specified. The default rounding mode is `RoundingMode.ToEven`. If the given `value` is of any other type, see `Number.FromText` for converting it to `number` value, then the previous statement about converting `number` value to 16-bit integer `number` value applies. See `Number.Round` for the available rounding modes.

Example 1

Get the 16-bit integer `number` value of `"4"`.

```
Int16.From("4")
```

4

Example 2

Get the 16-bit integer `number` value of `"4.5"` using `RoundingMode.AwayFromZero`.

```
Int16.From("4.5", null, RoundingMode.AwayFromZero)
```

5

Int32.From

11/25/2019 • 2 minutes to read

Syntax

```
Int32.From(value as any, optional culture as nullable text, optional roundingMode as nullable number) as nullable number
```

About

Returns a 32-bit integer `number` value from the given `value`. If the given `value` is `null`, `Int32.From` returns `null`. If the given `value` is `number` within the range of 32-bit integer without a fractional part, `value` is returned. If it has fractional part, then the number is rounded with the rounding mode specified. The default rounding mode is `RoundingMode.ToEven`. If the given `value` is of any other type, see `Number.FromText` for converting it to `number` value, then the previous statement about converting `number` value to 32-bit integer `number` value applies. See `Number.Round` for the available rounding modes.

Example 1

Get the 32-bit integer `number` value of `"4"`.

```
Int32.From("4")
```

4

Example 2

Get the 32-bit integer `number` value of `"4.5"` using `RoundingMode.AwayFromZero`.

```
Int32.From("4.5", null, RoundingMode.AwayFromZero)
```

5

Int64.From

11/25/2019 • 2 minutes to read

Syntax

```
Int64.From(value as any, optional culture as nullable text, optional roundingMode as nullable number) as nullable number
```

About

Returns a 64-bit integer `number` value from the given `value`. If the given `value` is `null`, `Int64.From` returns `null`. If the given `value` is `number` within the range of 64-bit integer without a fractional part, `value` is returned. If it has fractional part, then the number is rounded with the rounding mode specified. The default rounding mode is `RoundingMode.ToEven`. If the given `value` is of any other type, see `Number.FromText` for converting it to `number` value, then the previous statement about converting `number` value to 64-bit integer `number` value applies. See `Number.Round` for the available rounding modes.

Example 1

Get the 64-bit integer `number` value of `"4"`.

```
Int64.From("4")
```

4

Example 2

Get the 64-bit integer `number` value of `"4.5"` using `RoundingMode.AwayFromZero`.

```
Int64.From("4.5", null, RoundingMode.AwayFromZero)
```

5

Number.Abs

11/25/2019 • 2 minutes to read

Syntax

```
Number.Abs(number as nullable number) as nullable number
```

About

Returns the absolute value of `number`. If `number` is null, `Number.Abs` returns null.

- `number`: A `number` for which the absolute value is to be calculated.

Example 1

Absolute value of -3.

```
Number.Abs(-3)
```

Number.Acos

11/25/2019 • 2 minutes to read

Syntax

```
Number.Acos(number as nullable number) as nullable number
```

About

Returns the arccosine of `number`.

Number.Asin

11/25/2019 • 2 minutes to read

Syntax

```
Number.Asin(number as nullable number) as nullable number
```

About

Returns the arcsine of `number`.

Number.Atan

11/25/2019 • 2 minutes to read

Syntax

```
Number.Atan(number as nullable number) as nullable number
```

About

Returns the arctangent of `number`.

Number.Atan2

11/25/2019 • 2 minutes to read

Syntax

```
Number.Atan2(y as nullable number, x as nullable number) as nullable number
```

About

Returns the arctangent of the division of the two numbers, `y` and `x`. The division will be constructed as `y / x`.

Number.BitwiseAnd

11/25/2019 • 2 minutes to read

Syntax

```
Number.BitwiseAnd(number1 as nullable number, number2 as nullable number) as nullable number
```

About

Returns the result of performing a bitwise "And" operation between `number1` and `number2`.

Number.BitwiseNot

11/25/2019 • 2 minutes to read

Syntax

```
Number.BitwiseNot(number as any) as any
```

About

Returns the result of performing a bitwise "Not" operation on `number`.

Number.BitwiseOr

11/25/2019 • 2 minutes to read

Syntax

```
Number.BitwiseOr(number1 as nullable number, number2 as nullable number) as nullable number
```

About

Returns the result of performing a bitwise "Or" between `number1` and `number2`.

Number.BitwiseShiftLeft

11/25/2019 • 2 minutes to read

Syntax

```
Number.BitwiseShiftLeft(number1 as nullable number, number2 as nullable number) as nullable number
```

About

Returns the result of performing a bitwise shift to the left on `number1`, by the specified number of bits `number2`.

Number.BitwiseShiftRight

11/25/2019 • 2 minutes to read

Syntax

```
Number.BitwiseShiftRight(number1 as nullable number, number2 as nullable number) as nullable number
```

About

Returns the result of performing a bitwise shift to the right on `number1`, by the specified number of bits `number2`.

Number.BitwiseXor

11/25/2019 • 2 minutes to read

Syntax

```
Number.BitwiseXor(number1 as nullable number, number2 as nullable number) as nullable number
```

About

Returns the result of performing a bitwise "XOR" (Exclusive-OR) between `number1` and `number2`.

Number.Combinations

11/25/2019 • 2 minutes to read

Syntax

```
Number.Combinations(setSize as nullable number, combinationSize as nullable number) as nullable number
```

About

Returns the number of unique combinations from a list of items, `setSize` with specified combination size, `combinationSize`.

- `setSize` : The number of items in the list.
- `combinationSize` : The number of items in each combination.

Example 1

Find the number of combinations from a total of 5 items when each combination is a group of 3.

```
Number.Combinations(5, 3)
```

```
10
```

Number.Cos

11/25/2019 • 2 minutes to read

Syntax

```
Number.Cos(number as nullable number) as nullable number
```

About

Returns the cosine of `number`.

Example 1

Find the cosine of the angle 0.

```
Number.Cos(0)
```

Number.Cosh

11/25/2019 • 2 minutes to read

Syntax

```
Number.Cosh(number as nullable number) as nullable number
```

About

Returns the hyperbolic cosine of `number`.

Number.E

11/25/2019 • 2 minutes to read

About

A constant that represents 2.7182818284590451, the value for e up to 16 decimal digits.

Number.Epsilon

11/25/2019 • 2 minutes to read

About

A constant value that represents the smallest positive number a floating-point number can hold.

Number.Exp

11/25/2019 • 2 minutes to read

Syntax

```
Number.Exp(number as nullable number) as nullable number
```

About

Returns the result of raising e to the power of `number` (exponential function).

- `number`: A `number` for which the exponential function is to be calculated. If `number` is null, `Number.Exp` returns null.

Example 1

Raise e to the power of 3.

```
Number.Exp(3)
```

```
20.085536923187668
```

Number.Factorial

11/25/2019 • 2 minutes to read

Syntax

```
Number.Factorial(number as nullable number) as nullable number
```

About

Returns the factorial of the number `number`.

Example 1

Find the factorial of 10.

```
Number.Factorial(10)
```

```
3628800
```

Number.From

11/25/2019 • 2 minutes to read

Syntax

```
Number.From(value as any, optional culture as nullable text) as nullable number
```

About

Returns a `number` value from the given `value`. If the given `value` is `null`, `Number.From` returns `null`. If the given `value` is `number`, `value` is returned. Values of the following types can be converted to a `number` value:

- `text`: A `number` value from textual representation. Common text formats are handled ("15", "3,423.10", "5.0E-10"). See `Number.FromText` for details.
- `logical`: 1 for `true`, 0 for `false`.
- `datetime`: A double-precision floating-point number that contains an OLE Automation date equivalent.
- `datetimezone`: A double-precision floating-point number that contains an OLE Automation date equivalent of the local date and time of `value`.
- `date`: A double-precision floating-point number that contains an OLE Automation date equivalent.
- `time`: Expressed in fractional days.
- `duration`: Expressed in whole and fractional days.

If `value` is of any other type, an error is returned.

Example 1

Get the `number` value of `"4"`.

```
powerquery-mNumber.From("4")
```

4

Example 2

Get the `number` value of `#datetime(2020, 3, 20, 6, 0, 0)`.

```
Number.From(#datetime(2020, 3, 20, 6, 0, 0))
```

43910.25

Example 3

Get the `number` value of `"12.3%"`.

```
Number.From("12.3%")
```


Number.FromText

11/25/2019 • 2 minutes to read

Syntax

```
Number.FromText(text as nullable text, optional culture as nullable text) as nullable number
```

About

Returns a `number` value from the given text value, `text`.

- `text`: The textual representation of a number value. The representation must be in a common number format - "15", "3,423.10", "5.0E-10".

Example 1

Get the number value of `"4"`.

```
Number.FromText("4")
```

4

Example 2

Get the number value of `"5.0e-10"`.

```
Number.FromText("5.0e-10")
```

5E-10

Number.IntegerDivide

11/25/2019 • 2 minutes to read

Syntax

```
Number.IntegerDivide(number1 as nullable number, number2 as nullable number, optional precision as nullable number) as nullable number
```

About

Returns the integer portion of the result from dividing a number, `number1`, by another number, `number2`. If

`number1` or `number2` are null, `Number.IntegerDivide` returns null.

- `number1`: The dividend.
- `number2`: The divisor.

Example 1

Divide 6 by 4.

```
Number.IntegerDivide(6, 4)
```

1

Example 2

Divide 8.3 by 3.

```
Number.IntegerDivide(8.3, 3)
```

2

Number.IsEven

11/25/2019 • 2 minutes to read

Syntax

```
Number.IsEven(number as number) as logical
```

About

Indicates if the value, `number`, is even by returning `true` if it is even, `false` otherwise.

Example 1

Check if 625 is an even number.

```
Number.IsEven(625)
```

```
false
```

Example 2

Check if 82 is an even number.

```
Number.IsEven(82)
```

```
true
```

Number.IsNaN

11/25/2019 • 2 minutes to read

Syntax

```
Number.IsNaN(number as number) as logical
```

About

Indicates if the value is NaN (Not a number). Returns `true` if `number` is equivalent to `Number.IsNaN`, `false` otherwise.

Example 1

Check if 0 divided by 0 is NaN.

```
Number.IsNaN(0/0)
```

```
true
```

Example 2

Check if 1 divided by 0 is NaN.

```
Number.IsNaN(1/0)
```

```
false
```


Number.IsOdd

11/25/2019 • 2 minutes to read

Syntax

```
Number.IsOdd(number as number) as logical
```

About

Indicates if the value is odd. Returns `true` if `number` is an odd number, `false` otherwise.

Example 1

Check if 625 is an odd number.

```
Number.IsOdd(625)
```

```
true
```

Example 2

Check if 82 is an odd number.

```
Number.IsOdd(82)
```

```
false
```

Number.Ln

11/25/2019 • 2 minutes to read

Syntax

```
Number.Ln(number as nullable number) as nullable number
```

About

Returns the natural logarithm of a number, `number`. If `number` is null `Number.Ln` returns null.

####Example 1 Get the natural logarithm of 15.

```
Number.Ln(15)
```

```
2.70805020110221
```

Number.Log

11/25/2019 • 2 minutes to read

Syntax

```
Number.Log(number as nullable number, optional base as nullable number) as nullable number
```

About

Returns the logarithm of a number, `number`, to the specified `base` base. If `base` is not specified, the default value is `Number.E`. If `number` is null `Number.Log` returns null.

Example 1

Get the base 10 logarithm of 2.

```
Number.Log(2, 10)
```

```
0.3010299956639812
```

Example 2

Get the base e logarithm of 2.

```
Number.Log(2)
```

```
0.69314718055994529
```

Number.Log10

11/25/2019 • 2 minutes to read

Syntax

```
Number.Log10(number as nullable number) as nullable number
```

About

Returns the base 10 logarithm of a number, `number`. If `number` is null `Number.Log10` returns null.

Example 1

Get the base 10 logarithm of 2.

```
Number.Log10(2)
```

```
0.3010299956639812
```

Number.Mod

11/25/2019 • 2 minutes to read

Syntax

```
Number.Mod(number as nullable number, divisor as nullable number, optional precision as nullable number) as nullable number
```

About

Returns the remainder resulting from the integer division of `number` by `divisor`. If `number` or `divisor` are null, `Number.Mod` returns null.

- `number`: The dividend.
- `divisor`: The divisor.

Example 1

Find the remainder when you divide 5 by 3.

```
Number.Mod(5, 3)
```

Number.NaN

11/25/2019 • 2 minutes to read

About

A constant value that represents 0 divided by 0.

Number.NegativeInfinity

11/25/2019 • 2 minutes to read

About

A constant value that represents -1 divided by 0.

Number.Permutations

11/25/2019 • 2 minutes to read

Syntax

```
Number.Permutations(setSize as nullable number, permutationSize as nullable number) as nullable number
```

About

Returns the number of permutations that can be generated from a number of items, `setSize`, with a specified permutation size, `permutationSize`.

Example 1

Find the number of permutations from a total of 5 items in groups of 3.

```
Number.Permutations(5, 3)
```

60

Number.PI

11/25/2019 • 2 minutes to read

About

A constant that represents 3.1415926535897932, the value for pi up to 16 decimal digits.

Number.PositiveInfinity

11/25/2019 • 2 minutes to read

About

A constant value that represents 1 divided by 0.

Number.Power

11/25/2019 • 2 minutes to read

Syntax

```
Number.Power(number as nullable number, power as nullable number) as nullable number
```

About

Returns the result of raising `number` to the power of `power`. If `number` or `power` are null, `Number.Power` returns null.

- `number`: The base.
- `power`: The exponent.

Example 1

Find the value of 5 raised to the power of 3 (5 cubed).

```
Number.Power(5, 3)
```

```
125
```

Number.Random

11/25/2019 • 2 minutes to read

Syntax

```
Number.Random() as number
```

About

Returns a random number between 0 and 1.

Example 1

Get a random number.

```
Number.Random()
```

```
0.919303
```

Number.RandomBetween

11/25/2019 • 2 minutes to read

Syntax

```
Number.RandomBetween(bottom as number, top as number) as number
```

About

Returns a random number between `bottom` and `top`.

Example 1

Get a random number between 1 and 5.

```
Number.RandomBetween(1, 5)
```

```
2.546797
```

Number.Round

11/25/2019 • 2 minutes to read

Syntax

```
Number.Round(number as nullable number, optional digits as nullable number, optional roundingMode as nullable number) as nullable number
```

About

Returns the result of rounding `number` to the nearest number. If `number` is null, `Number.Round` returns null. `number` is rounded to the nearest integer, unless the optional parameter `digits` is specified. If `digits` is specified, `number` is rounded to the `digits` number of decimal digits. An optional `roundingMode` parameter specifies rounding direction when there is a tie between the possible numbers to round to (see `RoundingMode.Type` for possible values).

Example 1

Round 1.234 to the nearest integer.

```
Number.Round(1.234)
```

1

Example 2

Round 1.56 to the nearest integer.

```
Number.Round(1.56)
```

2

Example 3

Round 1.2345 to two decimal places.

```
Number.Round(1.2345, 2)
```

1.23

Example 4

Round 1.2345 to three decimal places (Rounding up).

```
Number.Round(1.2345, 3, RoundingMode.Up)
```

1.235

Example 5

Round 1.2345 to three decimal places (Rounding down).

```
Number.Round(1.2345, 3, RoundingMode.Down)
```

```
1.234
```

Number.RoundAwayFromZero

11/25/2019 • 2 minutes to read

Syntax

```
Number.RoundAwayFromZero(number as nullable number, optional digits as nullable number) as nullable number
```

About

Returns the result of rounding `number` based on the sign of the number. This function will round positive numbers up and negative numbers down. If `digits` is specified, `number` is rounded to the `digits` number of decimal digits.

Example 1

Round the number -1.2 away from zero.

```
Number.RoundAwayFromZero(-1.2)
```

```
-2
```

Example 2

Round the number 1.2 away from zero.

```
Number.RoundAwayFromZero(1.2)
```

```
2
```

Example 3

Round the number -1.234 to two decimal places away from zero.

```
Number.RoundAwayFromZero(-1.234, 2)
```

```
-1.24
```


Number.RoundDown

11/25/2019 • 2 minutes to read

Syntax

```
Number.RoundDown(number as nullable number, optional digits as nullable number) as nullable number
```

About

Returns the result of rounding `number` down to the previous highest integer. If `number` is null, `Number.RoundDown` returns null. If `digits` is specified, `number` is rounded to the `digits` number of decimal digits.

Example 1

Round down 1.234 to integer.

```
Number.RoundDown(1.234)
```

1

Example 2

Round down 1.999 to integer.

```
Number.RoundDown(1.999)
```

1

Example 3

Round down 1.999 to two decimal places.

```
Number.RoundDown(1.999, 2)
```

1.99

Number.RoundTowardZero

11/25/2019 • 2 minutes to read

Syntax

```
Number.RoundTowardZero(number as nullable number, optional digits as nullable number) as nullable number
```

About

Returns the result of rounding `number` based on the sign of the number. This function will round positive numbers down and negative numbers up. If `digits` is specified, `number` is rounded to the `digits` number of decimal digits.

Number.RoundUp

11/25/2019 • 2 minutes to read

Syntax

```
Number.RoundUp(number as nullable number, optional digits as nullable number) as nullable number
```

About

Returns the result of rounding `number` down to the previous highest integer. If `number` is null, `Number.RoundDown` returns null. If `digits` is specified, `number` is rounded to the `digits` number of decimal digits.

Example 1

Round up 1.234 to integer.

```
Number.RoundUp(1.234)
```

2

Example 2

Round up 1.999 to integer.

```
Number.RoundUp(1.999)
```

2

Example 3

Round up 1.234 to two decimal places.

```
Number.RoundUp(1.234, 2)
```

1.24

Number.Sign

11/25/2019 • 2 minutes to read

Syntax

```
Number.Sign(number as nullable number) as nullable number
```

About

Returns 1 for if `number` is a positive number, -1 if it is a negative number, and 0 if it is zero. If `number` is null, `Number.Sign` returns null.

Example 1

Determine the sign of 182.

```
Number.Sign(182)
```

```
1
```

Example 2

Determine the sign of -182.

```
Number.Sign(-182)
```

```
-1
```

Example 3

Determine the sign of 0.

```
Number.Sign(0)
```

```
0
```

Number.Sin

11/25/2019 • 2 minutes to read

Syntax

```
Number.Sin(number as nullable number) as nullable number
```

About

Returns the sine of `number`.

Example 1

Find the sine of the angle 0.

```
Number.Sin(0)
```

0

Number.Sinh

11/25/2019 • 2 minutes to read

Syntax

```
Number.Sinh(number as nullable number) as nullable number
```

About

Returns the hyperbolic sine of `number`.

Number.Sqrt

11/25/2019 • 2 minutes to read

Syntax

```
Number.Sqrt(number as nullable number) as nullable number
```

About

Returns the square root of `number`. If `number` is null, `Number.Sqrt` returns null. If it is a negative value, `Number.NaN` is returned (Not a number).

Example 1

Find the square root of 625.

```
Number.Sqrt(625)
```

```
25
```

Example 2

Find the square root of 85.

```
Number.Sqrt(85)
```

```
9.2195444572928871
```

Number.Tan

11/25/2019 • 2 minutes to read

Syntax

```
Number.Tan(number as nullable number) as nullable number
```

About

Returns the tangent of `number`.

Example 1

Find the tangent of the angle 1.

```
Number.Tan(1)
```

```
1.5574077246549023
```


Number.Tanh

11/25/2019 • 2 minutes to read

Syntax

```
Number.Tanh(number as nullable number) as nullable number
```

About

Returns the hyperbolic tangent of `number`.

Number.ToText

11/25/2019 • 2 minutes to read

Syntax

```
Number.ToText(number as nullable number, optional format as nullable text, optional culture as nullable text) as nullable text
```

About

Formats the numeric value `number` to a text value according to the format specified by `format`. The format is a single character code optionally followed by a number precision specifier. The following character codes may be used for `format`.

- "D" or "d": (Decimal) Formats the result as integer digits. The precision specifier controls the number of digits in the output.
- "E" or "e": (Exponential [scientific]) Exponential notation. The precision specifier controls the maximum number of decimal digits (default is 6).
- "F" or "f": (Fixed-point) Integral and decimal digits.
- "G" or "g": (General) Most compact form of either fixed-point or scientific.
- "N" or "n": (Number) Integral and decimal digits with group separators and a decimal separator.
- "P" or "p": (Percent) Number multiplied by 100 and displayed with a percent symbol.
- "R" or "r": (Round-trip) A text value that can round-trip an identical number. The precision specifier is ignored.
- "X" or "x": (Hexadecimal) A hexadecimal text value.

Example 1

Format a number as text without format specified.

```
Number.ToText(4)
```

```
"4"
```

Example 2

Format a number as text in Exponential format.

```
Number.ToText(4, "e")
```

```
"4.000000e+000"
```

Example 3

Format a number as text in Decimal format with limited precision.

```
Number.ToText(-0.1234, "P1")
```

"-12.3 %"

Percentage.From

11/25/2019 • 2 minutes to read

Syntax

```
Percentage.From(value as any, optional culture as nullable text) as nullable number
```

About

Returns a `percentage` value from the given `value`. If the given `value` is `null`, `Percentage.From` returns `null`. If the given `value` is `text` with a trailing percent symbol, then the converted decimal number will be returned. Otherwise, see `Number.From` for converting it to `number` value.

Example 1

Get the `percentage` value of `"12.3%"`.

```
Percentage.From("12.3%")
```

```
0.123
```

RoundingMode.AwayFromZero

11/25/2019 • 2 minutes to read

About

RoundingMode.AwayFromZero

RoundingMode.Down

11/25/2019 • 2 minutes to read

About

RoundingMode.Down

RoundingMode.ToEven

11/25/2019 • 2 minutes to read

About

RoundingMode.ToEven

RoundingMode.TowardZero

11/25/2019 • 2 minutes to read

About

RoundingMode.TowardZero

RoundingMode.Up

11/25/2019 • 2 minutes to read

About

RoundingMode.Up

Single.From

11/25/2019 • 2 minutes to read

Syntax

```
Single.From(value as any, optional culture as nullable text) as nullable number
```

About

Returns a `Single` `number` value from the given `value`. If the given `value` is `null`, `Single.From` returns `null`. If the given `value` is `number` within the range of `Single`, `value` is returned, otherwise an error is returned. If the given `value` is of any other type, see `Number.FromText` for converting it to `number` value, then the previous statement about converting `number` value to `Single` `number` value applies.

Example 1

Get the `Single` `number` value of `"1.5"`.

```
Single.From("1.5")
```

```
1.5
```

Record functions

11/25/2019 • 2 minutes to read

Record

Information

FUNCTION	DESCRIPTION
Record.FieldCount	Returns the number of fields in a record.
Record.HasFields	Returns true if the field name or field names are present in a record.

Transformations

FUNCTION	DESCRIPTION
Record.AddField	Adds a field from a field name and value.
Record.Combine	Combines the records in a list.
Record.RemoveFields	Returns a new record that reorders the given fields with respect to each other. Any fields not specified remain in their original locations.
Record.RenameFields	Returns a new record that renames the fields specified. The resultant fields will retain their original order. This function supports swapping and chaining field names. However, all target names plus remaining field names must constitute a unique set or an error will occur.
Record.ReorderFields	Returns a new record that reorders fields relative to each other. Any fields not specified remain in their original locations. Requires two or more fields.
Record.TransformFields	Transforms fields by applying transformOperations. For more information about values supported by transformOperations, see Parameter Values.

Selection

FUNCTION	DESCRIPTION
Record.Field	Returns the value of the given field. This function can be used to dynamically create field lookup syntax for a given record. In that way it is a dynamic version of the record[field] syntax.
Record.FieldNames	Returns a list of field names in order of the record's fields.
Record.FieldOrDefault	Returns the value of a field from a record, or the default value if the field does not exist.

FUNCTION	DESCRIPTION
Record.FieldValues	Returns a list of field values in order of the record's fields.
Record.SelectFields	Returns a new record that contains the fields selected from the input record. The original order of the fields is maintained.

Serialization

FUNCTION	DESCRIPTION
Record.FromList	Returns a record given a list of field values and a set of fields.
Record.FromTable	Returns a record from a table of records containing field names and values.
Record.ToList	Returns a list of values containing the field values of the input record.
Record.ToTable	Returns a table of records containing field names and values from an input record.

Parameter Values

The following type definitions are used to describe the parameter values that are referenced in Record functions above.

MissingField option	MissingField.Error = 0; MissingField.Ignore = 1; MissingField.UseNull = 2;
Transform operations	<p>Transform operations can be specified by either of the following values:</p> <p>A list value of two items, first item being the field name and the second item being the transformation function applied to that field to produce a new value.</p> <p>A list of transformations can be provided by providing a list value, and each item being the list value of 2 items as described above.</p> <p>For examples, see description of Record.TransformFields</p>
Rename operations	<p>Rename operations for a record can be specified as either of:</p> <p>A single rename operation, which is represented by a list of two field names, old and new.</p> <p>For examples, see description of Record.RenameFields.</p>

MissingField.Error

11/25/2019 • 2 minutes to read

About

An optional parameter in record and table functions indicating that missing fields should result in an error. (This is the default parameter value.)

MissingField.Ignore

11/25/2019 • 2 minutes to read

About

An optional parameter in record and table functions indicating that missing fields should be ignored.

MissingField.UseNull

11/25/2019 • 2 minutes to read

About

An optional parameter in record and table functions indicating that missing fields should be included as null values.

Record.AddField

11/25/2019 • 2 minutes to read

Syntax

```
Record.AddField(record as record, fieldName as text, value as any, optional delayed as nullable logical) as record
```

About

Adds a field to a record `record`, given the name of the field `fieldName` and the value `value`.

Example 1

Add the field Address to the record.

```
Record.AddField([CustomerID = 1, Name = "Bob", Phone = "123-4567"], "Address", "123 Main St.")
```

CUSTOMERID	1
NAME	Bob
PHONE	123-4567
ADDRESS	123 Main St.

Record.Combine

11/25/2019 • 2 minutes to read

Syntax

```
Record.Combine(records as list) as record
```

About

Combines the records in the given `records`. If the `records` contains non-record values, an error is returned.

Example 1

Create a combined record from the records.

```
Record.Combine([ [CustomerID =1, Name ="Bob"] , [Phone = "123-4567"]])
```

CUSTOMERID	1
NAME	Bob
PHONE	123-4567

Record.Field

11/25/2019 • 2 minutes to read

Syntax

```
Record.Field(record as record, field as text) as any
```

About

Returns the value of the specified `field` in the `record`. If the field is not found, an exception is thrown.

Example 1

Find the value of field "CustomerID" in the record.

```
Record.Field([CustomerID = 1, Name = "Bob", Phone = "123-4567"], "CustomerID")
```

Record.FieldCount

11/25/2019 • 2 minutes to read

Syntax

```
Record.FieldCount(record as record) as number
```

About

Returns the number of fields in the record `record`.

Example 1

Find the number of fields in the record.

```
Record.FieldCount([CustomerID = 1, Name = "Bob"])
```

Record.FieldNames

11/25/2019 • 2 minutes to read

Syntax

```
Record.FieldNames(record as record) as list
```

About

Returns the names of the fields in the record `record` as text.

Example 1

Find the names of the fields in the record.

```
Record.FieldNames([OrderID = 1, CustomerID = 1, Item = "Fishing rod", Price = 100.0])
```

OrderID
CustomerID
Item
Price

Record.FieldOrDefault

11/25/2019 • 2 minutes to read

Syntax

```
Record.FieldOrDefault(record as nullable record, field as text, optional defaultValue as any) as any
```

About

Returns the value of the specified field `field` in the record `record`. If the field is not found, the optional `defaultValue` is returned.

Example 1

Find the value of field "Phone" in the record, or return null if it doesn't exist.

```
Record.FieldOrDefault([CustomerID =1, Name="Bob"], "Phone")
```

```
null
```

Example 2

Find the value of field "Phone" in the record, or return the default if it doesn't exist.

```
Record.FieldOrDefault([CustomerID =1, Name="Bob"], "Phone", "123-4567")
```

```
"123-4567"
```

Record.FieldValues

11/25/2019 • 2 minutes to read

Syntax

```
Record.FieldValues(record as record) as list
```

About

Returns a list of the field values in record `record`.

Example 1

Find the field values in the record.

```
Record.FieldValues([CustomerID = 1, Name = "Bob", Phone = "123-4567"])
```

1
Bob
123-4567

Record.FromList

11/25/2019 • 2 minutes to read

Syntax

```
Record.FromList(list as list, fields as any) as record
```

About

Returns a record given a `list` of field values and a set of fields. The `fields` can be specified either by a list of text values, or a record type. An error is thrown if the fields are not unique.

Example 1

Build a record from a list of field values and a list of field names.

```
Record.FromList({1, "Bob", "123-4567"}, {"CustomerID", "Name", "Phone"})
```

CUSTOMERID	1
NAME	Bob
PHONE	123-4567

Example 2

Build a record from a list of field values and a record type.

```
Record.FromList({1, "Bob", "123-4567"}, type [CustomerID = number, Name = text, Phone = number])
```

CUSTOMERID	1
NAME	Bob
PHONE	123-4567

Record.FromTable

11/25/2019 • 2 minutes to read

Syntax

```
Record.FromTable(table as table) as record
```

About

Returns a record from a table of records `table` containing field names and value names

`{[Name = name, Value = value]}`. An exception is thrown if the field names are not unique.

Example 1

Create a record from the table of the form `Table.FromRecords({[Name = "CustomerID", Value = 1], [Name = "Name", Value = "Bob"], [Name = "Phone", Value = "123-4567"]})`.

```
Record.FromTable(Table.FromRecords({[Name = "CustomerID", Value = 1], [Name = "Name", Value = "Bob"], [Name = "Phone", Value = "123-4567"]}))
```

CUSTOMERID	1
NAME	Bob
PHONE	123-4567

Record.HasFields

11/25/2019 • 2 minutes to read

Syntax

```
Record.HasFields(record as record, fields as any) as logical
```

About

Indicates whether the record `record` has the fields specified in `fields`, by returning a logical value (true or false). Multiple field values can be specified using a list.

Example 1

Check if the record has the field "CustomerID".

```
Record.HasFields([CustomerID = 1, Name = "Bob", Phone = "123-4567"],"CustomerID")
```

```
true
```

Example 2

Check if the record has the field "CustomerID" and "Address".

```
Record.HasFields([CustomerID = 1, Name = "Bob", Phone = "123-4567"],{"CustomerID", "Address"})
```

```
false
```

Record.RemoveFields

11/25/2019 • 2 minutes to read

Syntax

```
Record.RemoveFields(record as record, fields as any, optional missingField as nullable number) as record
```

About

Returns a record that removes all the fields specified in list `fields` from the input `record`. If the field specified does not exist, an exception is thrown.

Example 1

Remove the field "Price" from the record.

```
Record.RemoveFields([CustomerID=1, Item = "Fishing rod", Price=18.00], "Price")
```

CUSTOMERID	1
ITEM	Fishing rod

Example 2

Remove the fields "Price" and "Item" from the record.

```
Record.RemoveFields([CustomerID=1, Item = "Fishing rod", Price=18.00], {"Price", "Item"})
```

CUSTOMERID	1
-------------------	---

Record.RenameFields

11/25/2019 • 2 minutes to read

Syntax

```
Record.RenameFields(record as record, renames as list, optional missingField as nullable number)  
as record
```

About

Returns a record after renaming fields in the input `record` to the new field names specified in list `renames`. For multiple renames, a nested list can be used (`{{ old1, new1}, {old2, new2} }`).

Example 1

Rename the field "UnitPrice" to "Price" from the record.

```
Record.RenameFields([OrderID = 1, CustomerID = 1, Item = "Fishing rod", UnitPrice = 100.0],  
{ "UnitPrice", "Price" })
```

ORDERID	1
CUSTOMERID	1
ITEM	Fishing rod
PRICE	100

Example 2

Rename the fields "UnitPrice" to "Price" and "OrderNum" to "OrderID" from the record.

```
Record.RenameFields([OrderNum = 1, CustomerID = 1, Item = "Fishing rod", UnitPrice = 100.0], {{ "UnitPrice",  
"Price"}, {"OrderNum", "OrderID"} })
```

ORDERID	1
CUSTOMERID	1
ITEM	Fishing rod
PRICE	100

Record.ReorderFields

11/25/2019 • 2 minutes to read

Syntax

```
Record.ReorderFields(record as record, fieldOrder as list, optional missingField as nullable number) as record
```

About

Returns a record after reordering the fields in `record` in the order of fields specified in list `fieldOrder`. Field values are maintained and fields not listed in `fieldOrder` are left in their original position.

Example 1

Reorder some of the fields in the record.

```
Record.ReorderFields([CustomerID= 1, OrderID = 1, Item = "Fishing rod", Price = 100.0], {"OrderID", "CustomerID"})
```

ORDERID	1
CUSTOMERID	1
ITEM	Fishing rod
PRICE	100

Record.SelectFields

11/25/2019 • 2 minutes to read

Syntax

```
Record.SelectFields(record as record, fields as any, optional missingField as nullable number) as record
```

About

Returns a record which includes only the fields specified in list `fields` from the input `record`.

Example 1

Select the fields "Item" and "Price" in the record.

```
Record.SelectFields( [OrderID = 1, CustomerID = 1, Item = "Fishing rod", Price = 100.0] , {"Item", "Price"})
```

ITEM	Fishing rod
PRICE	100

Record.ToList

11/25/2019 • 2 minutes to read

Syntax

```
Record.ToList(record as record) as list
```

About

Returns a list of values containing the field values from the input `record`.

Example 1

Extract the field values from a record.

```
Record.ToList([A = 1, B = 2, C = 3])
```

1

2

3

Record.ToTable

11/25/2019 • 2 minutes to read

Syntax

```
Record.ToTable(record as record) as table
```

About

Returns a table containing the columns `Name` and `Value` with a row for each field in `record`.

Example 1

Return the table from the record.

```
Record.ToTable([OrderID = 1, CustomerID = 1, Item = "Fishing rod", Price = 100.0])
```

NAME	VALUE
OrderID	1
CustomerID	1
Item	Fishing rod
Price	100

Record.TransformFields

11/25/2019 • 2 minutes to read

Syntax

```
Record.TransformFields(record as record, transformOperations as list, optional missingField as nullable number) as record
```

About

Returns a record after applying transformations specified in list `transformOperations` to `record`. One or more fields may be transformed at a given time.

In the case of a single field being transformed, `transformOperations` is expected to be a list with two items. The first item in `transformOperations` specifies a field name, and the second item in `transformOperations` specifies the function to be used for transformation. For example, `{"Quantity", Number.FromText}`

In the case of a multiple fields being transformed, `transformOperations` is expected to be a list of lists, where each inner list is a pair of field name and transformation operation. For example,

```
{{"Quantity",Number.FromText},{"UnitPrice", Number.FromText}}
```

Example 1

Convert "Price" field to number.

```
Record.TransformFields([OrderID = 1, CustomerID= 1, Item = "Fishing rod", Price = "100.0"], {"Price", Number.FromText})
```

ORDERID	1
CUSTOMERID	1
ITEM	Fishing rod
PRICE	100

Example 2

Convert "OrderID" and "Price" fields to numbers.

```
Record.TransformFields( [OrderID ="1", CustomerID= 1, Item = "Fishing rod", Price = "100.0"], {"OrderID", Number.FromText}, {"Price",Number.FromText})
```

ORDERID	1
CUSTOMERID	1

ITEM	Fishing rod
PRICE	100

Replacer functions

11/25/2019 • 2 minutes to read

Replacer functions are used by other functions in the library to replace a given value in a structure.

Replacer

FUNCTION	DESCRIPTION
Replacer.ReplaceText	This function be provided to List.ReplaceValue or Table.ReplaceValue to do replace of text values in list and table values respectively.
Replacer.ReplaceValue	This function be provided to List.ReplaceValue or Table.ReplaceValue to do replace values in list and table values respectively.

Replacer.ReplaceText

11/25/2019 • 2 minutes to read

Syntax

```
Replacer.ReplaceText(text as nullable text, old as text, new as text) as nullable text
```

About

Replaces the `old` text in the original `text` with the `new` text. This replacer function can be used in `List.ReplaceValue` and `Table.ReplaceValue`.

Example 1

Replace the text "hE" with "He" in the string "hEllo world".

```
Replacer.ReplaceText("hEllo world", "hE", "He")
```

```
"Hello world"
```

Replacer.ReplaceValue

11/25/2019 • 2 minutes to read

Syntax

```
Replacer.ReplaceValue(value as any, old as any, new as any) as any
```

About

Replaces the `old` value in the original `value` with the `new` value. This replacer function can be used in `List.ReplaceValue` and `Table.ReplaceValue`.

Example 1

Replace the value 11 with the value 10.

```
Replacer.ReplaceValue(11, 11, 10)
```

```
10
```

Splitter functions

11/25/2019 • 2 minutes to read

Splitter

FUNCTION	DESCRIPTION
Splitter.SplitByNothing	Returns a function that does no splitting, returning its argument as a single element list.
Splitter.SplitTextByCharacterTransition	Returns a function that splits text into a list of text according to a transition from one kind of character to another.
Splitter.SplitTextByAnyDelimiter	Returns a function that splits text by any supported delimiter.
Splitter.SplitTextByDelimiter	Returns a function that will split text according to a delimiter.
Splitter.SplitTextByEachDelimiter	Returns a function that splits text by each delimiter in turn.
Splitter.SplitTextByLengths	Returns a function that splits text according to the specified lengths.
Splitter.SplitTextByPositions	Returns a function that splits text according to the specified positions.
Splitter.SplitTextByRanges	Returns a function that splits text according to the specified ranges.
Splitter.SplitTextByRepeatedLengths	Returns a function that splits text into a list of text after the specified length repeatedly.
Splitter.SplitTextByWhitespace	Returns a function that splits text according to whitespace.
PARAMETER VALUES	DESCRIPTION
QuoteStyle.Csv	Quote characters indicate the start of a quoted string. Nested quotes are indicated by two quote characters.
QuoteStyle.None	Quote characters have no significance.

QuoteStyle.Csv

11/25/2019 • 2 minutes to read

About

Quote characters indicate the start of a quoted string. Nested quotes are indicated by two quote characters.

QuoteStyle.None

11/25/2019 • 2 minutes to read

About

Quote characters have no significance.

Splitter.SplitByNothing

11/25/2019 • 2 minutes to read

Syntax

```
Splitter.SplitByNothing() as function
```

About

Returns a function that does no splitting, returning its argument as a single element list.

Splitter.SplitTextByAnyDelimiter

11/25/2019 • 2 minutes to read

Syntax

```
Splitter.SplitTextByAnyDelimiter(delimiters as list, optional quoteStyle as nullable number,  
optional startAtEnd as nullable logical) as function
```

About

Returns a function that splits text into a list of text at any of the specified delimiters.

Splitter.SplitTextByCharacterTransition

11/25/2019 • 2 minutes to read

Syntax

```
Splitter.SplitTextByCharacterTransition(before as anynonnull, after as anynonnull) as function
```

About

Returns a function that splits text into a list of text according to a transition from one kind of character to another.

The `before` and `after` parameters can either be a list of characters, or a function that takes a character and returns true/false.

Splitter.SplitTextByDelimiter

11/25/2019 • 2 minutes to read

Syntax

```
Splitter.SplitTextByDelimiter(delimiter as text, optional quoteStyle as nullable number) as  
function
```

About

Returns a function that splits text into a list of text according to the specified delimiter.

Splitter.SplitTextByEachDelimiter

11/25/2019 • 2 minutes to read

Syntax

```
Splitter.SplitTextByEachDelimiter(delimiters as list, optional quoteStyle as nullable number,  
optional startAtEnd as nullable logical) as function
```

About

Returns a function that splits text into a list of text at each specified delimiter in sequence.

Splitter.SplitTextByLengths

11/25/2019 • 2 minutes to read

Syntax

```
Splitter.SplitTextByLengths(lengths as list, optional startAtEnd as nullable logical) as function
```

About

Returns a function that splits text into a list of text by each specified length.

Splitter.SplitTextByPositions

11/25/2019 • 2 minutes to read

Syntax

```
Splitter.SplitTextByPositions(positions as list, optional startAtEnd as nullable logical) as  
function
```

About

Returns a function that splits text into a list of text at each specified position.

Splitter.SplitTextByRanges

11/25/2019 • 2 minutes to read

Syntax

```
Splitter.SplitTextByRanges(ranges as list, optional startAtEnd as nullable logical) as function
```

About

Returns a function that splits text into a list of text according to the specified offsets and lengths.

Splitter.SplitTextByRepeatedLengths

11/25/2019 • 2 minutes to read

Syntax

```
Splitter.SplitTextByRepeatedLengths(length as number, optional startAtEnd as nullable logical) as function
```

About

Returns a function that splits text into a list of text after the specified length repeatedly.

Splitter.SplitTextByWhitespace

11/25/2019 • 2 minutes to read

Syntax

```
Splitter.SplitTextByWhitespace(optional quoteStyle as nullable number) as function
```

About

Returns a function that splits text into a list of text at whitespace.

Table functions

11/25/2019 • 14 minutes to read

Table construction

FUNCTION	DESCRIPTION
ItemExpression.From	Returns the AST for the body of a function.
ItemExpression.Item	An AST node representing the item in an item expression.
RowExpression.Column	Returns an AST that represents access to a column within a row expression.
RowExpression.From	Returns the AST for the body of a function.
RowExpression.Row	An AST node representing the row in a row expression.
Table.FromColumns	Returns a table from a list containing nested lists with the column names and values.
Table.FromList	Converts a list into a table by applying the specified splitting function to each item in the list.
Table.FromRecords	Returns a table from a list of records.
Table.FromRows	Creates a table from the list where each element of the list is a list that contains the column values for a single row.
Table.FromValue	Returns a table with a column containing the provided value or list of values.
Table.Split	Splits the specified table into a list of tables using the specified page size.
Table.FuzzyJoin	Joins the rows from the two tables that fuzzy match based on the given keys.
Table.FuzzyNestedJoin	Performs a fuzzy join between tables on supplied columns and produces the join result in a new column.
Table.View	Creates or extends a table with user-defined handlers for query and action operations.
Table.ViewFunction	Creates a function that can be intercepted by a handler defined on a view (via <code>Table.View</code>).

Conversions

FUNCTION	DESCRIPTION
Table.ToColumns	Returns a list of nested lists each representing a column of values in the input table.
Table.ToList	Returns a table into a list by applying the specified combining function to each row of values in a table.
Table.ToRecords	Returns a list of records from an input table.
Table.ToRows	Returns a nested list of row values from an input table.

Information

FUNCTION	DESCRIPTION
Table.ColumnCount	Returns the number of columns in a table.
Table.IsEmpty	Returns true if the table does not contain any rows.
Table.Profile	Returns a profile of the columns of a table.
Table.RowCount	Returns the number of rows in a table.
Table.Schema	Returns a table containing a description of the columns (i.e. the schema) of the specified table.
Tables.GetRelationships	Returns the relationships among a set of tables.

Row operations

FUNCTION	DESCRIPTION
Table.AlternateRows	Returns a table containing an alternating pattern of the rows from a table.
Table.Combine	Returns a table that is the result of merging a list of tables. The tables must all have the same row type structure.
Table.FindText	Returns a table containing only the rows that have the specified text within one of their cells or any part thereof.
Table.First	Returns the first row from a table.
Table.FirstN	Returns the first row(s) of a table, depending on the countOrCondition parameter.
Table.FirstValue	Returns the first column of the first row of the table or a specified default value.
Table.FromPartitions	Returns a table that is the result of combining a set of partitioned tables into new columns. The type of the column can optionally be specified, the default is any.

FUNCTION	DESCRIPTION
Table.InsertRows	Returns a table with the list of rows inserted into the table at an index. Each row to insert must match the row type of the table..
Table.Last	Returns the last row of a table.
Table.LastN	Returns the last row(s) from a table, depending on the countOrCondition parameter.
Table.MatchesAllRows	Returns true if all of the rows in a table meet a condition.
Table.MatchesAnyRows	Returns true if any of the rows in a table meet a condition.
Table.Partition	Partitions the table into a list of groups number of tables, based on the value of the column of each row and a hash function. The hash function is applied to the value of the column of a row to obtain a hash value for the row. The hash value modulo groups determines in which of the returned tables the row will be placed.
Table.Range	Returns the specified number of rows from a table starting at an offset.
Table.RemoveFirstN	Returns a table with the specified number of rows removed from the table starting at the first row. The number of rows removed depends on the optional countOrCondition parameter.
Table.RemoveLastN	Returns a table with the specified number of rows removed from the table starting at the last row. The number of rows removed depends on the optional countOrCondition parameter.
Table.RemoveRows	Returns a table with the specified number of rows removed from the table starting at an offset.
Table.RemoveRowsWithErrors	Returns a table with all rows removed from the table that contain an error in at least one of the cells in a row.
Table.Repeat	Returns a table containing the rows of the table repeated the count number of times.
Table.ReplaceRows	Returns a table where the rows beginning at an offset and continuing for count are replaced with the provided rows.
Table.ReverseRows	Returns a table with the rows in reverse order.
Table.SelectRows	Returns a table containing only the rows that match a condition.
Table.SelectRowsWithErrors	Returns a table with only the rows from table that contain an error in at least one of the cells in a row.
Table.SingleRow	Returns a single row from a table.

FUNCTION	DESCRIPTION
Table.Skip	Returns a table that does not contain the first row or rows of the table.

Column operations

FUNCTION	DESCRIPTION
Table.Column	Returns the values from a column in a table.
Table.ColumnNames	Returns the names of columns from a table.
Table.ColumnsOfType	Returns a list with the names of the columns that match the specified types.
Table.DemoteHeaders	Demotes the header row down into the first row of a table.
Table.DuplicateColumn	Duplicates a column with the specified name. Values and type are copied from the source column.
Table.HasColumns	Returns true if a table has the specified column or columns.
Table.Pivot	Given a table and attribute column containing pivotValues, creates new columns for each of the pivot values and assigns them values from the valueColumn. An optional aggregationFunction can be provided to handle multiple occurrence of the same key value in the attribute column.
Table.PrefixColumns	Returns a table where the columns have all been prefixed with a text value.
Table.PromoteHeaders	Promotes the first row of the table into its header or column names.
Table.RemoveColumns	Returns a table without a specific column or columns.
Table.ReorderColumns	Returns a table with specific columns in an order relative to one another.
Table.RenameColumns	Returns a table with the columns renamed as specified.
Table.SelectColumns	Returns a table that contains only specific columns.
Table.TransformColumnNames	Transforms column names by using the given function.
Table.Unpivot	Given a list of table columns, transforms those columns into attribute-value pairs.
Table.UnpivotOtherColumns	Translates all columns other than a specified set into attribute-value pairs, combined with the rest of the values in each row.

Parameters

PARAMETER VALUES	DESCRIPTION
JoinKind.Inner	A possible value for the optional <code>JoinKind</code> parameter in <code>Table.Join</code> . The table resulting from an inner join contains a row for each pair of rows from the specified tables that were determined to match based on the specified key columns.
JoinKind.LeftOuter	A possible value for the optional <code>JoinKind</code> parameter in <code>Table.Join</code> . A left outer join ensures that all rows of the first table appear in the result.
JoinKind.RightOuter	A possible value for the optional <code>JoinKind</code> parameter in <code>Table.Join</code> . A right outer join ensures that all rows of the second table appear in the result.
JoinKind.FullOuter	A possible value for the optional <code>JoinKind</code> parameter in <code>Table.Join</code> . A full outer join ensures that all rows of both tables appear in the result. Rows that did not have a match in the other table are joined with a default row containing null values for all of its columns.
JoinKind.LeftAnti	A possible value for the optional <code>JoinKind</code> parameter in <code>Table.Join</code> . A left anti join returns that all rows from the first table which do not have a match in the second table.
JoinKind.RightAnti	A possible value for the optional <code>JoinKind</code> parameter in <code>Table.Join</code> . A right anti join returns that all rows from the second table which do not have a match in the first table.
MissingField.Error	An optional parameter in record and table functions indicating that missing fields should result in an error. (This is the default parameter value.)
MissingField.Ignore	An optional parameter in record and table functions indicating that missing fields should be ignored.
MissingField.UseNull	An optional parameter in record and table functions indicating that missing fields should be included as null values.
GroupKind.Global	<code>GroupKind.Global</code>
GroupKind.Local	<code>GroupKind.Local</code>
ExtraValues.List	If the splitter function returns more columns than the table expects, they should be collected into a list.
ExtraValues.Ignore	If the splitter function returns more columns than the table expects, they should be ignored.
ExtraValues.Error	If the splitter function returns more columns than the table expects, an error should be raised.
JoinAlgorithm.Dynamic	<code>JoinAlgorithm.Dynamic</code>
JoinAlgorithm.PairwiseHash	<code>JoinAlgorithm.PairwiseHash</code>

PARAMETER VALUES	DESCRIPTION
JoinAlgorithm.SortMerge	JoinAlgorithm.SortMerge
JoinAlgorithm.LeftHash	JoinAlgorithm.LeftHash
JoinAlgorithm.RightHash	JoinAlgorithm.RightHash
JoinAlgorithm.LeftIndex	JoinAlgorithm.LeftIndex
JoinAlgorithm.RightIndex	JoinAlgorithm.RightIndex
JoinSide.Left	Specifies the left table of a join.
JoinSide.Right	Specifies the right table of a join.

Transformation

Parameters for Group options

- GroupKind.Global = 0;
- GroupKind.Local = 1;

Parameters for Join kinds

- JoinKind.Inner = 0;
- JoinKind.LeftOuter = 1;
- JoinKind.RightOuter = 2;
- JoinKind.FullOuter = 3;
- JoinKind.LeftAnti = 4;
- JoinKind.RightAnti = 5

Join Algorithm

The following JoinAlgorithm values can be specified to Table.Join

JoinAlgorithm.Dynamic	0,
JoinAlgorithm.PairwiseHash	1,
JoinAlgorithm.SortMerge	2,
JoinAlgorithm.LeftHash	3,
JoinAlgorithm.RightHash	4,

```
JoinAlgorithm.LeftIndex      5,
```

```
JoinAlgorithm.RightIndex    6,
```

PARAMETER VALUES	DESCRIPTION
JoinSide.Left	Specifies the left table of a join.
JoinSide.Right	Specifies the right table of a join.

Example data

The following tables are used by the examples in this section.

Customers table

```
Customers = Table.FromRecords({  
  
    [CustomerID = 1, Name = "Bob", Phone = "123-4567"],  
  
    [CustomerID = 2, Name = "Jim", Phone = "987-6543"],  
  
    [CustomerID = 3, Name = "Paul", Phone = "543-7890"],  
  
    [CustomerID = 4, Name = "Ringo", Phone = "232-1550"]  
  
})
```

Orders table

```
Orders = Table.FromRecords({  
  
    [OrderID = 1, CustomerID = 1, Item = "Fishing rod", Price = 100.0],  
  
    [OrderID = 2, CustomerID = 1, Item = "1 lb. worms", Price = 5.0],  
  
    [OrderID = 3, CustomerID = 2, Item = "Fishing net", Price = 25.0],  
  
    [OrderID = 4, CustomerID = 3, Item = "Fish tazer", Price = 200.0],  
  
    [OrderID = 5, CustomerID = 3, Item = "Band-aids", Price = 2.0],  
  
    [OrderID = 6, CustomerID = 1, Item = "Tackle box", Price = 20.0],  
  
    [OrderID = 7, CustomerID = 5, Item = "Bait", Price = 3.25],  
  
    [OrderID = 8, CustomerID = 5, Item = "Fishing Rod", Price = 100.0],  
  
    [OrderID = 9, CustomerID = 6, Item = "Bait", Price = 3.25]  
  
})
```

FUNCTION	DESCRIPTION
Table.AddColumn	Adds a column named newColumnName to a table.

FUNCTION	DESCRIPTION
Table.AddIndexColumn	Returns a table with a new column with a specific name that, for each row, contains an index of the row in the table.
Table.AddJoinColumn	Performs a nested join between table1 and table2 from specific columns and produces the join result as a newColumnName column for each row of table1.
Table.AddKey	Add a key to table.
Table.AggregateTableColumn	Aggregates tables nested in a specific column into multiple columns containing aggregate values for those tables.
Table.CombineColumns	Table.CombineColumns merges columns using a combiner function to produce a new column. Table.CombineColumns is the inverse of Table.SplitColumns.
Table.ExpandListColumn	Given a column of lists in a table, create a copy of a row for each value in its list.
Table.ExpandRecordColumn	Expands a column of records into columns with each of the values.
Table.ExpandTableColumn	Expands a column of records or a column of tables into multiple columns in the containing table.
Table.FillDown	Replaces null values in the specified column or columns of the table with the most recent non-null value in the column.
Table.FillUp	Returns a table from the table specified where the value of the next cell is propagated to the null values cells above in the column specified.
Table.FilterWithDataTable	
Table.Group	Groups table rows by the values of key columns for each row.
Table.Join	Joins the rows of table1 with the rows of table2 based on the equality of the values of the key columns selected by table1, key1 and table2, key2.
Table.Keys	Returns a list of key column names from a table.
Table.NestedJoin	Joins the rows of the tables based on the equality of the keys. The results are entered into a new column.
Table.ReplaceErrorValues	Replaces the error values in the specified columns with the corresponding specified value.
Table.ReplaceKeys	Returns a new table with new key information set in the keys argument.
Table.ReplaceRelationshipIdentity	

FUNCTION	DESCRIPTION
Table.ReplaceValue	Replaces oldValue with newValue in specific columns of a table, using the provided replacer function, such as text.Replace or Value.Replace.
Table.SplitColumn	Returns a new set of columns from a single column applying a splitter function to each value.
Table.TransformColumns	Transforms columns from a table using a function.
Table.TransformColumnTypes	Transforms the column types from a table using a type.
Table.TransformRows	Transforms the rows from a table using a transform function.
Table.Transpose	Returns a table with columns converted to rows and rows converted to columns from the input table.

Membership

Parameters for membership checks

Occurrence specification

```
Occurrence.First = 0
```

```
Occurrence.Last = 1
```

```
Occurrence.All = 2
```

FUNCTION	DESCRIPTION
Table.Contains	Determines whether the a record appears as a row in the table.
Table.ContainsAll	Determines whether all of the specified records appear as rows in the table.
Table.ContainsAny	Determines whether any of the specified records appear as rows in the table.
Table.Distinct	Removes duplicate rows from a table, ensuring that all remaining rows are distinct.
Table.IsDistinct	Determines whether a table contains only distinct rows.
Table.PositionOf	Determines the position or positions of a row within a table.
Table.PositionOfAny	Determines the position or positions of any of the specified rows within the table.

FUNCTION	DESCRIPTION
Table.RemoveMatchingRows	Removes all occurrences of rows from a table.
Table.ReplaceMatchingRows	Replaces specific rows from a table with the new rows.

Ordering

Example data

The following tables are used by the examples in this section.

Employees table

```
Employees = Table.FromRecords(

    {[Name="Bill",   Level=7,   Salary=100000],

     [Name="Barb",   Level=8,   Salary=150000],

     [Name="Andrew", Level=6,   Salary=85000],

     [Name="Nikki",  Level=5,   Salary=75000],

     [Name="Margo",  Level=3,   Salary=45000],

     [Name="Jeff",   Level=10,  Salary=200000]}},

type table [

    Name = text,

    Level = number,

    Salary = number

])
```

FUNCTION	DESCRIPTION
Table.Max	Returns the largest row or rows from a table using a comparisonCriteria.
Table.MaxN	Returns the largest N rows from a table. After the rows are sorted, the countOrCondition parameter must be specified to further filter the result.
Table.Min	Returns the smallest row or rows from a table using a comparisonCriteria.
Table.MinN	Returns the smallest N rows in the given table. After the rows are sorted, the countOrCondition parameter must be specified to further filter the result.
Table.Sort	Sorts the rows in a table using a comparisonCriteria or a default ordering if one is not specified.

Other

FUNCTION	DESCRIPTION
Table.Buffer	Buffers a table into memory, isolating it from external changes during evaluation.

Parameter Values

Naming output columns

This parameter is a list of text values specifying the column names of the resulting table. This parameter is generally used in the Table construction functions, such as [Table.FromRows](#) and [Table.FromList](#).

Comparison criteria

Comparison criterion can be provided as either of the following values:

- A number value to specify a sort order. See sort order in the parameter values section above.
- To compute a key to be used for sorting, a function of 1 argument can be used.
- To both select a key and control order, comparison criterion can be a list containing the key and order.
- To completely control the comparison, a function of 2 arguments can be used that returns -1, 0, or 1 given the relationship between the left and right inputs. [Value.Compare](#) is a method that can be used to delegate this logic.

For examples, see description of [Table.Sort](#).

Count or Condition criteria

This criteria is generally used in ordering or row operations. It determines the number of rows returned in the table and can take two forms, a number or a condition:

- A number indicates how many values to return inline with the appropriate function
- If a condition is specified, the rows containing values that initially meet the condition is returned. Once a value fails the condition, no further values are considered.

See [Table.FirstN](#) or [Table.MaxN](#).

Handling of extra values

This is used to indicate how the function should handle extra values in a row. This parameter is specified as a number, which maps to the options below.

```
ExtraValues.List = 0

ExtraValues.Error = 1

ExtraValues.Ignore = 2
```

For more information, see [Table.FromList](#).

Missing column handling

This is used to indicate how the function should handle missing columns. This parameter is specified as a number, which maps to the options below.

```
MissingField.Error = 0;  
  
MissingField.Ignore = 1;  
  
MissingField.UseNull = 2;
```

This is used in column or transformation operations. For Examples, see [Table.TransformColumns](#).

Sort Order

This is used to indicate how the results should be sorted. This parameter is specified as a number, which maps to the options below.

```
Order.Ascending = 0  
  
Order.Descending = 1
```

Equation criteria

Equation criteria for tables can be specified as either a

- A function value that is either
 - A key selector that determines the column in the table to apply the equality criteria, or
 - A comparer function that is used to specify the kind of comparison to apply. Built in comparer functions can be specified, see section for Comparer functions.
- A list of the columns in the table to apply the equality criteria

For examples, look at description for [Table.Distinct](#).

ExtraValues.Error

11/25/2019 • 2 minutes to read

About

If the splitter function returns more columns than the table expects, an error should be raised.

ExtraValues.Ignore

11/25/2019 • 2 minutes to read

About

If the splitter function returns more columns than the table expects, they should be ignored.

ExtraValues.List

11/25/2019 • 2 minutes to read

About

If the splitter function returns more columns than the table expects, they should be collected into a list.

GroupKind.Global

11/25/2019 • 2 minutes to read

About

Syntax

```
GroupKind.Global
```

GroupKind.Local

11/25/2019 • 2 minutes to read

About

Syntax

```
GroupKind.Local
```

About

GroupKind.Local

ItemExpression.From

11/25/2019 • 2 minutes to read

Syntax

```
ItemExpression.From(function as function) as record
```

About

Returns the AST for the body of `function`, normalized into an *item expression*:

- The function must be a 1-argument lambda.
- All references to the function parameter are replaced with `ItemExpression.Item`.
- The AST will be simplified to contain only nodes of the kinds:
 - `Constant`
 - `Invocation`
 - `Unary`
 - `Binary`
 - `If`
 - `FieldAccess`
 - `NotImplemented`

An error is raised if an item expression AST cannot be returned for the body of `function`.

Example 1

Returns the AST for the body of the function `each _ <> null`

```
ItemExpression.From(each _ <> null)
```

KIND	Binary
OPERATOR	NotEquals
LEFT	[Record]
RIGHT	[Record]

ItemExpression.Item

11/25/2019 • 2 minutes to read

About

An AST node representing the item in an item expression.

JoinAlgorithm.Dynamic

11/25/2019 • 2 minutes to read

About

JoinAlgorithm.Dynamic

JoinAlgorithm.LeftHash

11/25/2019 • 2 minutes to read

About

JoinAlgorithm.LeftHash

JoinAlgorithm.LeftIndex

11/25/2019 • 2 minutes to read

About

JoinAlgorithm.LeftIndex

JoinAlgorithm.PairwiseHash

11/25/2019 • 2 minutes to read

About

JoinAlgorithm.PairwiseHash

JoinAlgorithm.RightHash

11/25/2019 • 2 minutes to read

About

JoinAlgorithm.RightHash

JoinAlgorithm.RightIndex

11/25/2019 • 2 minutes to read

About

JoinAlgorithm.RightIndex

JoinAlgorithm.SortMerge

11/25/2019 • 2 minutes to read

About

JoinAlgorithm.SortMerge

JoinKind.FullOuter

11/25/2019 • 2 minutes to read

About

A possible value for the optional `JoinKind` parameter in `Table.Join`. A full outer join ensures that all rows of both tables appear in the result. Rows that did not have a match in the other table are joined with a default row containing null values for all of its columns.

JoinKind.Inner

11/25/2019 • 2 minutes to read

About

A possible value for the optional `JoinKind` parameter in `Table.Join`. The table resulting from an inner join contains a row for each pair of rows from the specified tables that were determined to match based on the specified key columns.

JoinKind.LeftAnti

11/25/2019 • 2 minutes to read

About

A possible value for the optional `JoinKind` parameter in `Table.Join`. A left anti join returns that all rows from the first table which do not have a match in the second table.

JoinKind.LeftOuter

11/25/2019 • 2 minutes to read

About

A possible value for the optional `JoinKind` parameter in `Table.Join`. A left outer join ensures that all rows of the first table appear in the result.

JoinKind.RightAnti

11/25/2019 • 2 minutes to read

About

A possible value for the optional `JoinKind` parameter in `Table.Join`. A right anti join returns that all rows from the second table which do not have a match in the first table.

JoinKind.RightOuter

11/25/2019 • 2 minutes to read

About

A possible value for the optional `JoinKind` parameter in `Table.Join`. A right outer join ensures that all rows of the second table appear in the result.

JoinSide.Left

11/25/2019 • 2 minutes to read

About

Specifies the left table of a join.

JoinSide.Right

11/25/2019 • 2 minutes to read

About

Specifies the right table of a join.

Occurrence.All

11/25/2019 • 2 minutes to read

About

A list of positions of all occurrences of the found values is returned.

Occurrence.First

11/25/2019 • 2 minutes to read

About

The position of the first occurrence of the found value is returned.

Occurrence.Last

11/25/2019 • 2 minutes to read

About

The position of the last occurrence of the found value is returned.

Order.Ascending

11/25/2019 • 2 minutes to read

About

Function type which sorts the list in ascending order.

Order.Descending

11/25/2019 • 2 minutes to read

About

Function type which sorts the list in descending order.

RowExpression.Column

11/25/2019 • 2 minutes to read

Syntax

```
RowExpression.Column(columnName as text) as record
```

About

Returns an AST that represents access to column `columnName` of the row within a row expression.

Example 1

Creates an AST representing access of column "CustomerName".

```
RowExpression.Column("CustomerName")
```

KIND	FieldAccess
EXPRESSION	[Record]
MEMBERNAME	CustomerName

RowExpression.From

11/25/2019 • 2 minutes to read

Syntax

```
RowExpression.From(function as function) as record
```

About

Returns the AST for the body of `function`, normalized into a *row expression*:

- The function must be a 1-argument lambda.
- All references to the function parameter are replaced with `RowExpression.Row`.
- All references to columns are replaced with `RowExpression.Column(columnName)`.
- The AST will be simplified to contain only nodes of the kinds:
 - `Constant`
 - `Invocation`
 - `Unary`
 - `Binary`
 - `If`
 - `FieldAccess`
 - `NotImplemented`

An error is raised if a row expression AST cannot be returned for the body of `function`.

Example 1

Returns the AST for the body of the function `each [CustomerID] = "ALFKI"`

```
RowExpression.From(each [CustomerName] = "ALFKI")
```

KIND	Binary
OPERATOR	Equals
LEFT	[Record]
RIGHT	[Record]

RowExpression.Row

11/25/2019 • 2 minutes to read

About

An AST node representing the row in a row expression.

Table.AddColumn

11/25/2019 • 2 minutes to read

Syntax

```
Table.AddColumn(table as table, newColumnName as text, columnGenerator as function, optional  
columnType as nullable type) as table
```

About

Adds a column named `newColumnName` to the table `table`. The values for the column are computed using the specified selection function `columnGenerator` with each row taken as an input.

Example 1

Add a column named "TotalPrice" to the table with each value being the sum of column [Price] and column [Shipping].

```
Table.AddColumn(Table.FromRecords({[OrderID = 1, CustomerID = 1, Item = "Fishing rod", Price = 100.0, Shipping  
= 10.00], [OrderID = 2, CustomerID = 1, Item = "1 lb. worms", Price = 5.0, Shipping = 15.00], [OrderID = 3,  
CustomerID = 2, Item = "Fishing net", Price = 25.0, Shipping = 10.00]}), "TotalPrice", each [Price] +  
[Shipping])
```

ORDERID	CUSTOMERID	ITEM	PRICE	SHIPPING	TOTALPRICE
1	1	Fishing rod	100	10	110
2	1	1 lb. worms	5	15	20
3	2	Fishing net	25	10	35

Table.AddIndexColumn

11/25/2019 • 2 minutes to read

Syntax

```
Table.AddIndexColumn(table as table, newColumnName as text, optional initialValue as nullable number, optional increment as nullable number) as table
```

About

Appends a column named `newColumnName` to the `table` with explicit position values. An optional value, `initialValue`, the initial index value. An optional value, `increment`, specifies how much to increment each index value.

Example 1

Add an index column named "Index" to the table.

```
Table.AddIndexColumn(Table.FromRecords({[CustomerID = 1, Name = "Bob", Phone = "123-4567"], [CustomerID = 2, Name = "Jim", Phone = "987-6543"], [CustomerID = 3, Name = "Paul", Phone = "543-7890"], [CustomerID = 4, Name = "Ringo", Phone = "232-1550"]}), "Index")
```

CUSTOMERID	NAME	PHONE	INDEX
1	Bob	123-4567	0
2	Jim	987-6543	1
3	Paul	543-7890	2
4	Ringo	232-1550	3

Example 2

Add an index column named "index", starting at value 10 and incrementing by 5, to the table.

```
Table.AddIndexColumn(Table.FromRecords({[CustomerID = 1, Name = "Bob", Phone = "123-4567"], [CustomerID = 2, Name = "Jim", Phone = "987-6543"], [CustomerID = 3, Name = "Paul", Phone = "543-7890"], [CustomerID = 4, Name = "Ringo", Phone = "232-1550"]}), "Index", 10, 5)
```

CUSTOMERID	NAME	PHONE	INDEX
1	Bob	123-4567	10
2	Jim	987-6543	15
3	Paul	543-7890	20

4	Ringo	232-1550	25
---	-------	----------	----

Table.AddJoinColumn

11/25/2019 • 2 minutes to read

Syntax

```
Table.AddJoinColumn(table1 as table, key1 as any, table2 as function, key2 as any, newColumnName as text) as table
```

About

Joins the rows of `table1` with the rows of `table2` based on the equality of the values of the key columns selected by `key1` (for `table1`) and `key2` (for `table2`). The results are entered into the column named `newColumnName`. This function behaves similarly to `Table.Join` with a `JoinKind` of `LeftOuter` except that the join results are presented in a nested rather than flattened fashion.

Example 1

Add a join column to `{{[saleID = 1, item = "Shirt"], [saleID = 2, item = "Hat"]}}` named "price/stock" from the table `{{[saleID = 1, price = 20], [saleID = 2, price = 10]}}` joined on `[saleID]`.

```
Table.AddJoinColumn(Table.FromRecords({[saleID = 1, item = "Shirt"], [saleID = 2, item = "Hat"]}), "saleID",  
() => Table.FromRecords({[saleID = 1, price = 20, stock = 1234], [saleID = 2, price = 10, stock = 5643]}),  
"saleID", "price")
```

SALEID	ITEM	PRICE
1	Shirt	[Table]
2	Hat	[Table]

Table.AddKey

11/25/2019 • 2 minutes to read

Syntax

```
Table.AddKey(table as table, columns as list, isPrimary as logical) as table
```

About

Add a key to `table`, given `columns` is the subset of `table`'s column names that defines the key, and `isPrimary` specifies whether the key is primary.

Example 1

Add a key to {[Id = 1, Name = "Hello There"], [Id = 2, Name = "Good Bye"]} that comprise of {"Id"} and make it a primary.

```
let tableType = type table [Id = Int32.Type, Name = text], table = Table.FromRecords({[Id = 1, Name = "Hello There"], [Id = 2, Name = "Good Bye"]}), resultTable = Table.AddKey(table, {"Id"}, true) in resultTable
```

ID	NAME
1	Hello There
2	Good Bye

Table.AggregateTableColumn

11/25/2019 • 2 minutes to read

Syntax

```
Table.AggregateTableColumn(table as table, column as text, aggregations as list) as table
```

About

Aggregates tables in `table [column]` into multiple columns containing aggregate values for the tables.

`aggregations` is used to specify the columns containing the tables to aggregate, the aggregation functions to apply to the tables to generate their values, and the names of the aggregate columns to create.

Example 1

Aggregate table columns in `[t]` in the table `{[t = {[a=1, b=2, c=3], [a=2,b=4,c=6]}, b = 2]}` into the sum of `[t.a]`, the min and max of `[t.b]`, and the count of values in `[t.a]`.

```
Table.AggregateTableColumn(Table.FromRecords({[t = Table.FromRecords({[a=1, b=2, c=3], [a=2,b=4,c=6]}), b = 2]}, type table [t = table [a=number, b=number, c=number], b = number]), "t", {{ "a", List.Sum, "sum of t.a"}, {"b", List.Min, "min of t.b"}, {"b", List.Max, "max of t.b"}, {"a", List.Count, "count of t.a"}}
```

SUM OF T.A	MIN OF T.B	MAX OF T.B	COUNT OF T.A	B
3	2	4	2	2

Table.AlternateRows

11/25/2019 • 2 minutes to read

Syntax

```
Table.AlternateRows(table as table, offset as number, skip as number, take as number) as table
```

About

Keeps the initial offset then alternates taking and skipping the following rows.

- **table**: The input table.
- **offset**: The number of rows to keep before starting iterations.
- **skip**: The number of rows to remove in each iteration.
- **take**: The number of rows to keep in each iteration.

Example 1

Return a table from the table that, starting at the first row, skips 1 value and then keeps 1 value.

```
Table.AlternateRows(Table.FromRecords({[CustomerID = 1, Name = "Bob", Phone = "123-4567"], [CustomerID = 2, Name = "Jim", Phone = "987-6543"], [CustomerID = 3, Name = "Paul", Phone = "543-7890"]}), 1, 1, 1)
```

CUSTOMERID	NAME	PHONE
1	Bob	123-4567
3	Paul	543-7890

Table.Buffer

11/25/2019 • 2 minutes to read

Syntax

```
Table.Buffer(table as table) as table
```

About

Buffers a table in memory, isolating it from external changes during evaluation.

Table.Column

11/25/2019 • 2 minutes to read

Syntax

```
Table.Column(table as table, column as text) as list
```

About

Returns the column of data specified by `column` from the table `table` as a list.

Example 1

Returns the values from the [Name] column in the table.

```
Table.Column(Table.FromRecords({ [CustomerID = 1, Name = "Bob", Phone = "123-4567"], [CustomerID = 2, Name = "Jim", Phone = "987-6543"], [CustomerID = 3, Name = "Paul", Phone = "543-7890"], [CustomerID = 4, Name = "Ringo", Phone = "232-1550"]}), "Name")
```

Bob
Jim
Paul
Ringo

Table.ColumnCount

11/25/2019 • 2 minutes to read

Syntax

```
Table.ColumnCount(table as table) as number
```

About

Returns the number of columns in the table `table`.

Example 1

Find the number of columns in the table.

```
Table.ColumnCount(Table.FromRecords({[CustomerID =1, Name ="Bob", Phone = "123-4567"],[CustomerID =2, Name ="Jim", Phone = "987-6543"],[CustomerID =3, Name ="Paul", Phone = "543-7890"]})))
```

Table.ColumnNames

11/25/2019 • 2 minutes to read

Syntax

```
Table.ColumnNames(table as table) as list
```

About

Returns the column names in the table `table` as a list of text.

Example 1

Find the column names of the table.

```
Table.ColumnNames(Table.FromRecords({ [CustomerID = 1, Name = "Bob", Phone = "123-4567"], [CustomerID = 2, Name = "Jim", Phone = "987-6543"] , [CustomerID = 3, Name = "Paul", Phone = "543-7890"] , [CustomerID = 4, Name = "Ringo", Phone = "232-1550"]}))
```

CustomerID
Name
Phone

Table.ColumnsOfType

11/25/2019 • 2 minutes to read

Syntax

```
Table.ColumnsOfType(table as table, listOfTypes as list) as list
```

About

Returns a list with the names of the columns from table `table` that match the types specified in `listOfTypes`.

Example 1

Return the names of columns of type `Number.Type` from the table.

```
Table.ColumnsOfType(Table.FromRecords({[a=1,b="hello"]}, type table[a=Number.Type, b=Text.Type]), {type  
number})
```

a

Table.Combine

11/25/2019 • 2 minutes to read

Syntax

```
Table.Combine(tables as list, optional columns as any) as table
```

About

Returns a table that is the result of merging a list of tables, `tables`. The resulting table will have a row type structure defined by `columns` or by a union of the input types if `columns` is not specified.

Example 1

Merge the three tables together.

```
Table.Combine({Table.FromRecords({[CustomerID = 1, Name = "Bob", Phone = "123-4567"]}),  
Table.FromRecords({[CustomerID = 2, Name = "Jim", Phone = "987-6543"] }),Table.FromRecords({[CustomerID = 3,  
Name = "Paul", Phone = "543-7890"]})})})
```

CUSTOMERID	NAME	PHONE
1	Bob	123-4567
2	Jim	987-6543
3	Paul	543-7890

Example 2

Merge three tables with different structures.

```
Table.Combine({Table.FromRecords({[Name="Bob",Phone="123-4567"]}), Table.FromRecords({[Fax="987-6543",  
Phone="838-7171"] }),Table.FromRecords({[Cell = "543-7890"]})})})
```

NAME	PHONE	FAX	CELL
Bob	123-4567		
	838-7171	987-6543	
			543-7890

Example 3

Merge two tables and project onto the given type.

Table.Combine({Table.FromRecords({[Name="Bob",Phone="123-4567"]}), Table.FromRecords({[Fax="987-6543",
Phone="838-7171"] }),Table.FromRecords({[Cell = "543-7890"]})}), {"CustomerID", "Name"})

CUSTOMERID	NAME
	Bob

Table.CombineColumns

11/25/2019 • 2 minutes to read

Syntax

```
Table.CombineColumns(table as table, sourceColumns as list, combiner as function, column as text)  
as table
```

About

Combines the specified columns into a new column using the specified combiner function.

Table.Contains

11/25/2019 • 2 minutes to read

Syntax

```
Table.Contains(table as table, row as record, optional equationCriteria as any) as logical
```

About

Indicates whether the specified record, `row`, appears as a row in the `table`. An optional parameter `equationCriteria` may be specified to control comparison between the rows of the table.

Example 1

Determine if the table contains the row.

```
Table.Contains(Table.FromRecords({[CustomerID = 1, Name = "Bob", Phone = "123-4567"], [CustomerID = 2, Name = "Jim", Phone = "987-6543"], [CustomerID = 3, Name = "Paul", Phone = "543-7890"], [CustomerID = 4, Name = "Ringo", Phone = "232-1550"]}), [Name="Bob"])
```

```
true
```

Example 2

Determine if the table contains the row.

```
Table.Contains(Table.FromRecords({[CustomerID = 1, Name = "Bob", Phone = "123-4567"], [CustomerID = 2, Name = "Jim", Phone = "987-6543"], [CustomerID = 3, Name = "Paul", Phone = "543-7890"], [CustomerID = 4, Name = "Ringo", Phone = "232-1550"]}), [Name="Ted"])
```

```
false
```

Example 3

Determine if the table contains the row comparing only the column [Name].

```
Table.Contains(Table.FromRecords({[CustomerID = 1, Name = "Bob", Phone = "123-4567"], [CustomerID = 2, Name = "Jim", Phone = "987-6543"], [CustomerID = 3, Name = "Paul", Phone = "543-7890"], [CustomerID = 4, Name = "Ringo", Phone = "232-1550"]}), [CustomerID=4, Name="Bob", "Name"])
```

```
true
```

Table.ContainsAll

11/25/2019 • 2 minutes to read

Syntax

```
Table.ContainsAll(table as table, rows as list, optional equationCriteria as any) as logical
```

About

Indicates whether all the specified records in the list of records `rows`, appear as rows in the `table`. An optional parameter `equationCriteria` may be specified to control comparison between the rows of the table.

Example 1

Determine if the table contains all the rows comparing only the column [CustomerID].

```
Table.ContainsAll( Table.FromRecords( { [CustomerID = 1, Name = "Bob", Phone = "123-4567"], [CustomerID = 2, Name = "Jim", Phone = "987-6543"] , [CustomerID = 3, Name = "Paul", Phone = "543-7890"] , [CustomerID = 4, Name = "Ringo", Phone = "232-1550"] } ), {[CustomerID=1, Name="Bill"],[CustomerID=2, Name="Fred"]}, "CustomerID")
```

```
true
```

Example 2

Determine if the table contains all the rows.

```
Table.ContainsAll( Table.FromRecords( { [CustomerID = 1, Name = "Bob", Phone = "123-4567"], [CustomerID = 2, Name = "Jim", Phone = "987-6543"] , [CustomerID = 3, Name = "Paul", Phone = "543-7890"] , [CustomerID = 4, Name = "Ringo", Phone = "232-1550"] } ), {[CustomerID=1, Name="Bill"],[CustomerID=2, Name="Fred"]})
```

```
false
```

Table.ContainsAny

11/25/2019 • 2 minutes to read

Syntax

```
Table.ContainsAny(table as table, rows as list, optional equationCriteria as any) as logical
```

About

Indicates whether any the specified records in the list of records `rows`, appear as rows in the `table`. An optional parameter `equationCriteria` may be specified to control comparison between the rows of the table.

Example 1

Determine if the table `({[a = 1, b = 2], [a = 3, b = 4]})` contains the rows `[a = 1, b = 2]` or `[a = 3, b = 5]`.

```
Table.ContainsAny(Table.FromRecords({[a = 1, b = 2], [a = 3, b = 4]}), {[a = 1, b = 2], [a = 3, b = 5]})
```

true

Example 2

Determine if the table `({[a = 1, b = 2], [a = 3, b = 4]})` contains the rows `[a = 1, b = 3]` or `[a = 3, b = 5]`.

```
Table.ContainsAny(Table.FromRecords({[a = 1, b = 2], [a = 3, b = 4]}), {[a = 1, b = 3], [a = 3, b = 5]})
```

false

Example 3

Determine if the table `(Table.FromRecords({[a = 1, b = 2], [a = 3, b = 4]}))` contains the rows `[a = 1, b = 3]` or `[a = 3, b = 5]` comparing only the column `[a]`.

```
Table.ContainsAny(Table.FromRecords({[a = 1, b = 2], [a = 3, b = 4]}), {[a = 1, b = 3], [a = 3, b = 5]}, "a")
```

true

Table.DemoteHeaders

11/25/2019 • 2 minutes to read

Syntax

```
Table.DemoteHeaders(table as table) as table
```

About

Demotes the column headers (i.e. column names) to the first row of values. The default column names are "Column1", "Column2" and so on.

Example 1

Demote the first row of values in the table.

```
Table.DemoteHeaders(Table.FromRecords({[CustomerID=1, Name="Bob", Phone="123-4567"],[CustomerID=2, Name="Jim",  
Phone="987-6543"]})))
```

COLUMN1	COLUMN2	COLUMN3
CustomerID	Name	Phone
1	Bob	123-4567
2	Jim	987-6543

Table.Distinct

11/25/2019 • 2 minutes to read

Syntax

```
Table.Distinct(table as table, optional equationCriteria as any) as table
```

About

Removes duplicate rows from the table `table`. An optional parameter, `equationCriteria`, specifies which columns of the table are tested for duplication. If `equationCriteria` is not specified, all columns are tested.

Example 1

Remove the duplicate rows from the table.

```
Table.Distinct(Table.FromRecords({[a = "A", b = "a"], [a = "B", b = "b"], [a = "A", b = "a"]}))
```

A	B
A	a
B	b

Example 2

Remove the duplicate rows from column [b] in the table

```
({[a = "A", b = "a"], [a = "B", b = "a"], [a = "A", b = "b"]}) .
```

```
Table.Distinct(Table.FromRecords({[a = "A", b = "a"], [a = "B", b = "a"], [a = "A", b = "b"]}), "b")
```

A	B
A	a
A	b

Table.DuplicateColumn

11/25/2019 • 2 minutes to read

Syntax

```
Table.DuplicateColumn(table as table, columnName as text, newColumnName as text, optional  
columnType as nullable type) as table
```

About

Duplicate the column named `columnName` to the table `table`. The values and type for the column `newColumnName` are copied from column `columnName`.

Example

Duplicate the column "a" to a column named "copied column" in the table `{{[a = 1, b = 2], [a = 3, b = 4]}}`.

```
Table.DuplicateColumn(Table.FromRecords({[a = 1, b = 2], [a = 3, b = 4]}), "a", "copied column")
```

A	B	COPIED COLUMN
1	2	1
3	4	3

Table.ExpandListColumn

11/25/2019 • 2 minutes to read

Syntax

```
Table.ExpandListColumn(table as table, column as text) as table
```

About

Given a `table`, where a `column` is a list of values, splits the list into a row for each value. Values in the other columns are duplicated in each new row created.

Example 1

Split the list column [Name] in the table.

```
Table.ExpandListColumn(Table.FromRecords({[Name= {"Bob", "Jim", "Paul"}, Discount = .15]}), "Name")
```

NAME	DISCOUNT
Bob	0.15
Jim	0.15
Paul	0.15

Table.ExpandRecordColumn

11/25/2019 • 2 minutes to read

Syntax

```
Table.ExpandRecordColumn(table as table, column as text, fieldNames as list, optional  
newColumnNames as nullable list) as table
```

About

Given the `column` of records in the input `table`, creates a table with a column for each field in the record. Optionally, `newColumnNames` may be specified to ensure unique names for the columns in the new table.

- `table`: The original table with the record column to expand.
- `column`: The column to expand.
- `fieldNames`: The list of fields to expand into columns in the table.
- `newColumnNames`: The list of column names to give the new columns. The new column names cannot duplicate any column in the new table.

Example 1

Expand column [a] in the table `{{[a = [aa = 1, bb = 2, cc = 3], b = 2]}}` into 3 columns "aa", "bb" and "cc".

```
Table.ExpandRecordColumn(Table.FromRecords({[a = [aa = 1, bb = 2, cc = 3], b = 2]}), "a", {"aa", "bb", "cc"})
```

AA	BB	CC	B
1	2	3	2

Table.ExpandTableColumn

11/25/2019 • 2 minutes to read

Syntax

```
Table.ExpandTableColumn(table as table, column as text, columnNames as list, optional  
newColumnNames as nullable list) as table
```

About

Expands tables in `table [column]` into multiple rows and columns. `columnNames` is used to select the columns to expand from the inner table. Specify `newColumnNames` to avoid conflicts between existing columns and new columns.

Example 1

Expand table columns in `[a]` in the table `{[t = {[a=1, b=2, c=3], [a=2,b=4,c=6]}, b = 2]}` into 3 columns `[t.a]`, `[t.b]` and `[t.c]`.

```
Table.ExpandTableColumn(Table.FromRecords({[t = Table.FromRecords({[a=1, b=2, c= 3],[a=2,b=4,c=6]}), b = 2]}),  
"t", {"a","b","c"}, {"t.a","t.b","t.c"})
```

T.A	T.B	T.C	B
1	2	3	2
2	4	6	2

Table.FillDown

11/25/2019 • 2 minutes to read

Syntax

```
Table.FillDown(table as table, columns as list) as table
```

About

Returns a table from the `table` specified where the value of a previous cell is propagated to the null-valued cells below in the `columns` specified.

Example 1

Return a table with the null values in column [Place] filled with the value above them from the table.

```
Table.FillDown(Table.FromRecords({[Place=1, Name="Bob"], [Place=null, Name="John"], [Place=2, Name="Brad"],  
[Place=3, Name="Mark"], [Place=null, Name="Tom"], [Place=null, Name="Adam"]}), {"Place"})
```

PLACE	NAME
1	Bob
1	John
2	Brad
3	Mark
3	Tom
3	Adam

Table.FillUp

11/25/2019 • 2 minutes to read

Syntax

```
Table.FillUp(table as table, columns as list) as table
```

About

Returns a table from the `table` specified where the value of the next cell is propagated to the null-valued cells above in the `columns` specified.

Example 1

Return a table with the null values in column [Column2] filled with the value below them from the table.

```
Table.FillUp(Table.FromRecords({[Column1 = 1, Column2 = 2], [Column1 = 3, Column2 = null], [Column1 = 5, Column2 = 3]}), {"Column2"})
```

COLUMN1	COLUMN2
1	2
3	3
5	3

Table.FilterWithDataTable

11/25/2019 • 2 minutes to read

Syntax

```
Table.FilterWithDataTable(**table** as table, **dataTableIdentifier** as text) as any
```

About

Table.FilterWithDataTable

Table.FindText

11/25/2019 • 2 minutes to read

Syntax

```
Table.FindText(table as table, text as text) as table
```

About

Returns the rows in the table `table` that contain the text `text`. If the text is not found, an empty table is returned.

Example 1

Find the rows in the table that contain "Bob".

```
Table.FindText(Table.FromRecords({[CustomerID = 1, Name = "Bob", Phone = "123-4567"], [CustomerID = 2, Name = "Jim", Phone = "987-6543"], [CustomerID = 3, Name = "Paul", Phone = "543-7890"], [CustomerID = 4, Name = "Ringo", Phone = "232-1550"]}), "Bob")
```

CUSTOMERID	NAME	PHONE
1	Bob	123-4567

Table.First

11/25/2019 • 2 minutes to read

Syntax

```
Table.First(table as table, optional default as any) as any
```

About

Returns the first row of the `table` or an optional default value, `default`, if the table is empty.

Example 1

Find the first row of the table.

```
Table.First(Table.FromRecords({[CustomerID = 1, Name = "Bob", Phone = "123-4567"], [CustomerID = 2, Name = "Jim", Phone = "987-6543"] , [CustomerID = 3, Name = "Paul", Phone = "543-7890"]})))
```

CUSTOMERID	1
NAME	Bob
PHONE	123-4567

Example 2

Find the first row of the table `{}` or return `[a = 0, b = 0]` if empty.

```
Table.First(Table.FromRecords({}), [a = 0, b = 0])
```

A	0
B	0

Table.FirstN

11/25/2019 • 2 minutes to read

Syntax

```
Table.FirstN(table as table, countOrCondition as any) as table
```

About

Returns the first row(s) of the table `table`, depending on the value of `countOrCondition`:

- If `countOrCondition` is a number, that many rows (starting at the top) will be returned.
- If `countOrCondition` is a condition, the rows that meet the condition will be returned until a row does not meet the condition.

Example 1

Find the first two rows of the table.

```
Table.FirstN(Table.FromRecords({[CustomerID = 1, Name = "Bob", Phone = "123-4567"], [CustomerID = 2, Name = "Jim", Phone = "987-6543"] , [CustomerID = 3, Name = "Paul", Phone = "543-7890"]}), 2)
```

CUSTOMERID	NAME	PHONE
1	Bob	123-4567
2	Jim	987-6543

Example 2

Find the first rows where `[a] > 0` in the table.

```
Table.FirstN(Table.FromRecords({[a = 1, b = 2], [a = 3, b = 4], [a = -5, b = -6]}), each [a] > 0)
```

A	B
1	2
3	4

Table.FirstValue

11/25/2019 • 2 minutes to read

Syntax

```
Table.FirstValue(table as table, optional default as any) as any
```

About

Returns the first column of the first row of the table `table` or a specified default value.

Table.FromColumns

11/25/2019 • 2 minutes to read

Syntax

```
Table.FromColumns(lists as list, optional columns as any) as table
```

About

Creates a table of type `columns` from a list `lists` containing nested lists with the column names and values. If some columns have more values than others, the missing values will be filled with the default value, 'null', if the columns are nullable.

Example 1

Return a table from a list of customer names in a list. Each value in the customer list item becomes a row value, and each list becomes a column.

```
Table.FromColumns({ {1, "Bob", "123-4567"} , {2, "Jim", "987-6543"}, {3, "Paul", "543-7890"} })
```

COLUMN1	COLUMN2	COLUMN3
1	2	3
Bob	Jim	Paul
123-4567	987-6543	543-7890

Example 2

Create a table from a given list of columns and a list of column names.

```
Table.FromColumns({ {1, "Bob", "123-4567"} , {2, "Jim", "987-6543"}, {3, "Paul", "543-7890"}}, {"CustomerID", "Name", "Phone"})
```

CUSTOMERID	NAME	PHONE
1	2	3
Bob	Jim	Paul
123-4567	987-6543	543-7890

Example 3

Create a table with different number of columns per row. The missing row value is null.

Table.FromColumns({ {1, 2, 3}, {4, 5}, {6, 7, 8, 9} }, {"column1", "column2", "column3"})

COLUMN1	COLUMN2	COLUMN3
1	4	6
2	5	7
3		8
		9

Table.FromList

11/25/2019 • 2 minutes to read

Syntax

```
Table.FromList(list as list, optional splitter as nullable function, optional columns as any, optional default as any, optional extraValues as nullable number) as table
```

About

Converts a list, `list` into a table by applying the optional splitting function, `splitter`, to each item in the list. By default, the list is assumed to be a list of text values that is split by commas. Optional `columns` may be the number of columns, a list of columns or a `TableType`. Optional `default` and `extraValues` may also be specified.

Example 1

Create a table from the list with the column named "Letters" using the default splitter.

```
Table.FromList({"a", "b", "c", "d"}, null, {"Letters"})
```

LETTERS
a
b
c
d

Example 2

Create a table from the list using the `Record.FieldValues` splitter with the resulting table having "CustomerID" and "Name" as column names.

```
Table.FromList([CustomerID=1,Name="Bob"],[CustomerID=2,Name="Jim"]) , Record.FieldValues, {"CustomerID", "Name"})
```

CUSTOMERID	NAME
1	Bob
2	Jim

Table.FromPartitions

11/25/2019 • 2 minutes to read

Syntax

```
Table.FromPartitions(partitionColumn as text, partitions as list, optional partitionColumnType as nullable type) as table
```

About

Returns a table that is the result of combining a set of partitioned tables, `partitions`. `partitionColumn` is the name of the column to add. The type of the column defaults to `any`, but can be specified by `partitionColumnType`.

Example 1

Find item type from the list `{number}`.

```
Table.FromPartitions( "Year", { { 1994, Table.FromPartitions( "Month", { { "Jan", Table.FromPartitions( "Day", { { 1, #table({"Foo"}, {"Bar"}) } }, { 2, #table({"Foo"}, {"Bar"}) } } ) }, { "Feb", Table.FromPartitions( "Day", { { 3, #table({"Foo"}, {"Bar"}) } }, { 4, #table({"Foo"}, {"Bar"}) } } ) } } ) }
```

FOO	DAY	MONTH	YEAR
Bar	1	Jan	1994
Bar	2	Jan	1994
Bar	3	Feb	1994
Bar	4	Feb	1994

Table.FromRecords

11/25/2019 • 2 minutes to read

Syntax

```
Table.FromRecords(records as list, optional columns as any, optional missingField as nullable number) as table
```

About

Converts `records`, a list of records, into a table.

Example 1

Create a table from records, using record field names as column names.

```
Table.FromRecords({[CustomerID = 1, Name = "Bob", Phone = "123-4567"], [CustomerID = 2, Name = "Jim", Phone = "987-6543"], [CustomerID = 3, Name = "Paul", Phone = "543-7890"]})
```

CUSTOMERID	NAME	PHONE
1	Bob	123-4567
2	Jim	987-6543
3	Paul	543-7890

Example 2

Create a table from records with typed columns and select the number columns.

```
Table.ColumnsOfType(Table.FromRecords({[CustomerID=1, Name="Bob"]}, type table[CustomerID=Number.Type, Name=Text.Type]), {type number})
```

CustomerID

Table.FromRows

11/25/2019 • 2 minutes to read

Syntax

```
Table.FromRows(rows as list, optional columns as any) as table
```

About

Creates a table from the list `rows` where each element of the list is an inner list that contains the column values for a single row. An optional list of column names, a table type, or a number of columns could be provided for `columns`.

Example 1

Return a table with column [CustomerID] with values {1, 2}, column [Name] with values {"Bob", "Jim"}, and column [Phone] with values {"123-4567", "987-6543"}.

```
Table.FromRows({ {1, "Bob", "123-4567"}, {2, "Jim", "987-6543"} }, {"CustomerID", "Name", "Phone"})
```

CUSTOMERID	NAME	PHONE
1	Bob	123-4567
2	Jim	987-6543

Example 2

Return a table with column [CustomerID] with values {1, 2}, column [Name] with values {"Bob", "Jim"}, and column [Phone] with values {"123-4567", "987-6543"}, where [CustomerID] is number type, and [Name] and [Phone] are text types.

```
Table.FromRows({{1, "Bob", "123-4567"}, {2, "Jim", "987-6543"}}, type table [CustomerID = number, Name = text, Phone = text])
```

CUSTOMERID	NAME	PHONE
1	Bob	123-4567
2	Jim	987-6543

Table.FromValue

11/25/2019 • 2 minutes to read

Syntax

```
Table.FromValue(value as any, optional options as nullable record) as table
```

About

Creates a table with a column containing the provided value or list of values, `value`. An optional record parameter, `options`, may be specified to control the following options:

- `DefaultColumnName`: The column name used when constructing a table from a list or scalar value.

Example 1

Create a table from the value 1.

```
Table.FromValue(1)
```

VALUE
1

Example 2

Create a table from the list.

```
Table.FromValue({1, "Bob", "123-4567"})
```

VALUE
1
Bob
123-4567

Example 3

Create a table from the value 1, with a custom column name.

```
Table.FromValue(1, [DefaultColumnName = "MyValue"])
```

MYVALUE

Table.FuzzyJoin

11/25/2019 • 2 minutes to read

Syntax

```
Table.FuzzyJoin(table1 as table, key1 as any, table2 as table, key2 as any, optional joinKind as nullable number, optional joinOptions as nullable record) as table
```

About

Joins the rows of `table1` with the rows of `table2` based on a fuzzy matching of the values of the key columns selected by `key1` (for `table1`) and `key2` (for `table2`).

Fuzzy matching is a comparison based on similarity of text rather than equality of text.

By default, an inner join is performed, however an optional `joinKind` may be included to specify the type of join. Options include:

- `JoinKind.Inner`
- `JoinKind.LeftOuter`
- `JoinKind.RightOuter`
- `JoinKind.FullOuter`
- `JoinKind.LeftAnti`
- `JoinKind.RightAnti`

An optional set of `joinOptions` may be included to specify how to compare the key columns. Options include:

- `ConcurrentRequests`
- `Culture`
- `IgnoreCase`
- `IgnoreSpace`
- `NumberOfMatches`
- `Threshold`
- `TransformationTable`

The following table provides more details about the advanced options.

ADVANCED OPTION	DEFAULT	ALLOWED	DESCRIPTION
ConcurrentRequests	1	Between 1 and 8	The ConcurrentRequests option supports parallelizing the join operation by specifying the number of parallel threads to use.

Culture	Culture neutral	A valid culture name	The Culture option allows matching records based on culture-specific rules. For example a Culture option of 'ja-JP' matches records based on the Japanese language.
IgnoreCase	true	true or false	The IgnoreCase option allows matching records irrespective of the case of the text. For example, 'Grapes' (sentence case) is matched with 'grapes' (lower case) if the IgnoreCase option is set to true.
IgnoreSpace	true	true or false	The IgnoreSpace option allows combining text parts in order to find matches. For example, 'Micro soft' is matched with both 'Microsoft' and 'Micro soft' if the IgnoreSpace option is set to true.
NumberOfMatches	2147483647	Between 0 and 2147483647	The NumberOfMatches option specifies the maximum number of matching rows that can be returned.
Threshold	0.80	Between 0.00 and 1.00	The similarity Threshold option provides the ability to match records above a given similarity score. A threshold of 1.00 is the same as specifying an exact match criteria. For example, 'Grapes' matches with 'Graes' (missing 'p') only if the threshold is set to less than 0.90.
TransformationTable		A valid table with at least 2 columns named 'From' and 'To'.	The TransformationTable option allows matching records based on custom value mappings. For example, 'Grapes' are matched with 'Raisins' if a transformation table is provided with the 'From' column containing 'Grapes' and the 'To' column containing 'Raisins'.

Example

Left inner fuzzy join of two tables based on [FirstName]

```
Table.FuzzyJoin( Table.FromRecords({ [CustomerID = 1, FirstName1 = "Bob", Phone = "555-1234"], [CustomerID = 2, FirstName1 = "Robert", Phone = "555-4567"] }, type table [CustomerID = nullable number, FirstName1 = nullable text, Phone = nullable text]), {"FirstName1"}, Table.FromRecords({ [CustomerStateID = 1, FirstName2 = "Bob", State = "TX"], [CustomerStateID = 2, FirstName2 = "bOB", State = "CA"] }, type table [CustomerStateID = nullable number, FirstName2 = nullable text, State = nullable text]), {"FirstName2"}, JoinKind.LeftOuter, [IgnoreCase = true, IgnoreSpace = false] )
```

CUSTOMERID	FIRSTNAME1	PHONE	CUSTOMERSTATEID	FIRSTNAME2	STATE
1	Bob	555-1234	1	Bob	TX
1	Bob	555-1234	2	bOB	CA
2	Robert	555-4567			

Table.FuzzyNestedJoin

11/25/2019 • 2 minutes to read

Syntax

```
Table.FuzzyNestedJoin(table1 as table, key1 as any, table2 as table, key2 as any, newColumnName as text, optional joinKind as nullable number, optional joinOptions as nullable record) as table
```

About

Joins the rows of `table1` with the rows of `table2` based on a fuzzy matching of the values of the key columns selected by `key1` (for `table1`) and `key2` (for `table2`). The results are returned in a new column named `newColumnName`.

Fuzzy matching is a comparison based on similarity of text rather than equality of text.

The optional `joinKind` specifies the kind of join to perform. By default, a left outer join is performed if a `joinKind` is not specified. Options include:

- `JoinKind.Inner`
- `JoinKind.LeftOuter`
- `JoinKind.RightOuter`
- `JoinKind.FullOuter`
- `JoinKind.LeftAnti`
- `JoinKind.RightAnti`

An optional set of `joinOptions` may be included to specify how to compare the key columns. Options include:

- `ConcurrentRequests`
- `Culture`
- `IgnoreCase`
- `IgnoreSpace`
- `NumberOfMatches`
- `Threshold`
- `TransformationTable`

The following table provides more details about the advanced options.

ADVANCED OPTION	DEFAULT	ALLOWED	DESCRIPTION
ConcurrentRequests	1	Between 1 and 8	The ConcurrentRequests option supports parallelizing the join operation by specifying the number of parallel threads to to use.

Culture	Culture neutral	A valid culture name	The Culture option allows matching records based on culture-specific rules. For example a Culture option of 'ja-JP' matches records based on the Japanese language.
IgnoreCase	true	true or false	The IgnoreCase option allows matching records irrespective of the case of the text. For example, 'Grapes' (sentence case) is matched with 'grapes' (lower case) if the IgnoreCase option is set to true.
IgnoreSpace	true	true or false	The IgnoreSpace option allows combining text parts in order to find matches. For example, 'Micro soft' is matched with 'Microsoft' if the IgnoreSpace option is set to true.
NumberOfMatches	2147483647	Between 0 and 2147483647	The NumberOfMatches option specifies the maximum number of matching rows that can be returned.
Threshold	0.80	Between 0.00 and 1.00	The similarity Threshold option provides the ability to match records above a given similarity score. A threshold of 1.00 is the same as specifying an exact match criteria. For example, 'Grapes' matches with 'Graes' (missing 'p') only if the threshold is set to less than 0.90.
TransformationTable		A valid table with at least 2 columns named 'From' and 'To'.	The TransformationTable option allows matching records based on custom value mappings. For example, 'Grapes' are matched with 'Raisins' if a transformation table is provided with the 'From' column containing 'Grapes' and the 'To' column containing 'Raisins'.

Example

Left inner fuzzy join of two tables based on [FirstName]

```
Table.FuzzyNestedJoin( Table.FromRecords({ [CustomerID = 1, FirstName1 = "Bob", Phone = "555-1234"],
[CustomerID = 2, FirstName1 = "Robert", Phone = "555-4567"] }, type table [CustomerID = nullable number,
FirstName1 = nullable text, Phone = nullable text]), {"FirstName1"}, Table.FromRecords({ [CustomerStateID = 1,
FirstName2 = "Bob", State = "TX"], [CustomerStateID = 2, FirstName2 = "bOB", State = "CA"] }, type table
[CustomerStateID = nullable number, FirstName2 = nullable text, State = nullable text]), {"FirstName2"},
"NestedTable", JoinKind.LeftOuter, [IgnoreCase = true, IgnoreSpace = false] )
```

CUSTOMERID	FIRSTNAME1	PHONE	NESTEDTABLE
1	Bob	555-1234	[Table]
2	Robert	555-4567	[Table]

Table.Group

11/25/2019 • 2 minutes to read

Syntax

```
Table.Group(table as table, key as any, aggregatedColumns as list, optional groupKind as nullable number, optional comparer as nullable function) as table
```

About

Groups the rows of `table` by the values in the specified column, `key`, for each row. For each group, a record is constructed containing the key columns (and their values) along with any aggregated columns specified by `aggregatedColumns`. Note if multiple keys match the comparer, different keys may be returned. This function cannot guarantee to return a fixed order of rows. Optionally, `groupKind` and `comparer` may also be specified.

Example 1

Group the table adding an aggregate column [total] which contains the sum of prices ("each List.Sum([price])").

```
Table.Group(Table.FromRecords({[CustomerID= 1, price = 20], [CustomerID= 2, price = 10], [CustomerID= 2, price = 20], [CustomerID= 1, price = 10], [CustomerID= 3, price = 20], [CustomerID= 3, price = 5]}), "CustomerID", {"total",each List.Sum([price])})
```

CUSTOMERID	TOTAL
1	30
2	30
3	25

Table.HasColumns

11/25/2019 • 2 minutes to read

Syntax

```
Table.HasColumns(table as table, columns as any) as logical
```

About

indicates whether the `table` contains the specified column(s), `columns`. Returns `true` if the table contains the column(s), `false` otherwise.

Example 1

Determine if the table has the column [Name].

```
Table.HasColumns(Table.FromRecords({[CustomerID = 1, Name = "Bob", Phone = "123-4567"], [CustomerID = 2, Name = "Jim", Phone = "987-6543"], [CustomerID = 3, Name = "Paul", Phone = "543-7890"], [CustomerID = 4, Name = "Ringo", Phone = "232-1550"]}), "Name")
```

```
true
```

Example 2

Find if the table has the column [Name] and [PhoneNumber].

```
Table.HasColumns(Table.FromRecords({[CustomerID = 1, Name = "Bob", Phone = "123-4567"], [CustomerID = 2, Name = "Jim", Phone = "987-6543"], [CustomerID = 3, Name = "Paul", Phone = "543-7890"], [CustomerID = 4, Name = "Ringo", Phone = "232-1550"]}), {"Name", "PhoneNumber"})
```

```
false
```

Table.InsertRows

11/25/2019 • 2 minutes to read

Syntax

```
Table.InsertRows(table as table, offset as number, rows as list) as table
```

About

Returns a table with the list of rows, `rows`, inserted into the `table` at the given position, `offset`. Each column in the row to insert must match the column types of the table.

Example 1

Insert the row into the table at position 1.

```
Table.InsertRows(Table.FromRecords({[CustomerID = 1, Name = "Bob", Phone = "123-4567"], [CustomerID = 2, Name = "Jim", Phone = "987-6543"]}), 1, {[CustomerID = 3, Name = "Paul", Phone = "543-7890"]})
```

CUSTOMERID	NAME	PHONE
1	Bob	123-4567
3	Paul	543-7890
2	Jim	987-6543

Example 2

Insert two rows into the table at position 1.

```
Table.InsertRows(Table.FromRecords({[CustomerID = 1, Name = "Bob", Phone = "123-4567"]}), 1, {[CustomerID = 2, Name = "Jim", Phone = "987-6543"], [CustomerID = 3, Name = "Paul", Phone = "543-7890"] })
```

CUSTOMERID	NAME	PHONE
1	Bob	123-4567
2	Jim	987-6543
3	Paul	543-7890

Table.IsDistinct

11/25/2019 • 2 minutes to read

Syntax

```
Table.IsDistinct(table as table, optional comparisonCriteria as any) as logical
```

About

Indicates whether the `table` contains only distinct rows (no duplicates). Returns `true` if the rows are distinct, `false` otherwise. An optional parameter, `comparisonCriteria`, specifies which columns of the table are tested for duplication. If `comparisonCriteria` is not specified, all columns are tested.

Example 1

Determine if the table is distinct.

```
Table.IsDistinct(Table.FromRecords({ [CustomerID = 1, Name = "Bob", Phone = "123-4567"], [CustomerID = 2, Name = "Jim", Phone = "987-6543"] , [CustomerID = 3, Name = "Paul", Phone = "543-7890"] , [CustomerID = 4, Name = "Ringo", Phone = "232-1550"]}))
```

true

Example 2

Determine if the table is distinct in column.

```
Table.IsDistinct(Table.FromRecords({ [CustomerID = 1, Name = "Bob", Phone = "123-4567"], [CustomerID = 2, Name = "Jim", Phone = "987-6543"] , [CustomerID = 3, Name = "Paul", Phone = "543-7890"] , [CustomerID = 5, Name = "Bob", Phone = "232-1550"]}), "Name")
```

false

Table.IsEmpty

11/25/2019 • 2 minutes to read

Syntax

```
Table.IsEmpty(table as table) as logical
```

About

Indicates whether the `table` contains any rows. Returns `true` if there are no rows (i.e. the table is empty), `false` otherwise.

Example 1

Determine if the table is empty.

```
Table.IsEmpty(Table.FromRecords({[CustomerID =1, Name ="Bob", Phone = "123-4567"],[CustomerID =2, Name ="Jim",  
Phone = "987-6543"],[CustomerID =3, Name ="Paul", Phone = "543-7890"]})))
```

false

Example 2

Determine if the table `({})` is empty.

```
Table.IsEmpty(Table.FromRecords({}))
```

true

Table.Join

11/25/2019 • 2 minutes to read

Syntax

```
Table.Join(table1 as table, key1 as any, table2 as table, key2 as any, optional joinKind as nullable number, optional joinAlgorithm as nullable number, optional keyEqualityComparers as nullable list) as table
```

About

Joins the rows of `table1` with the rows of `table2` based on the equality of the values of the key columns selected by `key1` (for `table1`) and `key2` (for `table2`).

By default, an inner join is performed, however an optional `joinKind` may be included to specify the type of join. Options include:

- `JoinKind.Inner`
- `JoinKind.LeftOuter`
- `JoinKind.RightOuter`
- `JoinKind.FullOuter`
- `JoinKind.LeftAnti`
- `JoinKind.RightAnti`

An optional set of `keyEqualityComparers` may be included to specify how to compare the key columns.

Example 1

Inner join the two tables on [CustomerID]

```
Table.Join
(
    Table.FromRecords([
        [CustomerID = 1, Name = "Bob", Phone = "123-4567"],
        [CustomerID = 2, Name = "Jim", Phone = "987-6543"],
        [CustomerID = 3, Name = "Paul", Phone = "543-7890"],
        [CustomerID = 4, Name = "Ringo", Phone = "232-1550"]
    ]),
    "CustomerID",
    Table.FromRecords([
        [OrderID = 1, CustomerID = 1, Item = "Fishing rod", Price = 100.0],
        [OrderID = 2, CustomerID = 1, Item = "1 lb. worms", Price = 5.0],
        [OrderID = 3, CustomerID = 2, Item = "Fishing net", Price = 25.0],
        [OrderID = 4, CustomerID = 3, Item = "Fish tazer", Price = 200.0],
        [OrderID = 5, CustomerID = 3, Item = "Band-aids", Price = 2.0],
        [OrderID = 6, CustomerID = 1, Item = "Tackle box", Price = 20.0],
        [OrderID = 7, CustomerID = 5, Item = "Bait", Price = 3.25],
        [OrderID = 8, CustomerID = 5, Item = "Fishing Rod", Price = 100.0],
        [OrderID = 9, CustomerID = 6, Item = "Bait", Price = 3.25]
    ]),
    "CustomerID")
```

CUSTOMERID	NAME	PHONE	ORDERID	ITEM	PRICE
1	Bob	123-4567	1	Fishing rod	100
1	Bob	123-4567	2	1 lb. worms	5

2	Jim	987-6543	3	Fishing net	25
3	Paul	543-7890	4	Fish tazer	200
3	Paul	543-7890	5	Band-aids	2
1	Bob	123-4567	6	Tackle box	20

Table.Keys

11/25/2019 • 2 minutes to read

Syntax

```
Table.Keys(table as table) as list
```

About

Table.Keys

Table.Last

11/25/2019 • 2 minutes to read

Syntax

```
Table.Last(table as table, optional default as any) as any
```

About

Returns the last row of the `table` or an optional default value, `default`, if the table is empty.

Example 1

Find the last row of the table.

```
Table.Last(Table.FromRecords({[CustomerID = 1, Name = "Bob", Phone = "123-4567"], [CustomerID = 2, Name = "Jim", Phone = "987-6543"], [CustomerID = 3, Name = "Paul", Phone = "543-7890"]}))
```

CUSTOMERID	3
NAME	Paul
PHONE	543-7890

Example 2

Find the last row of the table `{}` or return `[a = 0, b = 0]` if empty.

```
Table.Last(Table.FromRecords({}), [a = 0, b = 0])
```

A	0
B	0

Table.LastN

11/25/2019 • 2 minutes to read

Syntax

```
Table.LastN(table as table, countOrCondition as any) as table
```

About

Returns the last row(s) from the table, `table`, depending on the value of `countOrCondition`:

- If `countOrCondition` is a number, that many rows will be returned starting from position (end - `countOrCondition`).
- If `countOrCondition` is a condition, the rows that meet the condition will be returned in ascending position until a row does not meet the condition.

Example 1

Find the last two rows of the table.

```
Table.LastN(Table.FromRecords({[CustomerID = 1, Name = "Bob", Phone = "123-4567"], [CustomerID = 2, Name = "Jim", Phone = "987-6543"] , [CustomerID = 3, Name = "Paul", Phone = "543-7890"]}), 2)
```

CUSTOMERID	NAME	PHONE
2	Jim	987-6543
3	Paul	543-7890

Example 2

Find the last rows where `[a] > 0` in the table.

```
Table.LastN(Table.FromRecords({[a = -1, b = -2], [a = 3, b = 4], [a = 5, b = 6]}), each _ [a] > 0)
```

A	B
3	4
5	6

Table.MatchesAllRows

11/25/2019 • 2 minutes to read

Syntax

```
Table.MatchesAllRows(table as table, condition as function) as logical
```

About

Indicates whether all the rows in the `table` match the given `condition`. Returns `true` if all of the rows match, `false` otherwise.

Example 1

Determine whether all of the row values in column [a] are even in the table.

```
Table.MatchesAllRows(Table.FromRecords({[a = 2, b = 4], [a = 6, b = 8]}), each Number.Mod([a], 2) = 0 )
```

```
true
```

Example 2

Find if all of the row values are [a = 1, b = 2], in the table `(([a = 1, b = 2], [a = 3, b = 4]))`.

```
Table.MatchesAllRows(Table.FromRecords({[a = 1, b = 2], [a = -3, b = 4]}), each _ = [a = 1, b = 2])
```

```
false
```

Table.MatchesAnyRows

11/25/2019 • 2 minutes to read

Syntax

```
Table.MatchesAnyRows(table as table, condition as function) as logical
```

About

Indicates whether any the rows in the `table` match the given `condition`. Returns `true` if any of the rows match, `false` otherwise.

Example 1

Determine whether any of the row values in column [a] are even in the table `({[a = 2, b = 4], [a = 6, b = 8]})`.

```
Table.MatchesAnyRows(Table.FromRecords({[a = 1, b = 4], [a = 3, b = 8]}), each Number.Mod([a], 2) = 0 )
```

false

Example 2

Determine whether any of the row values are [a = 1, b = 2], in the table `({[a = 1, b = 2], [a = 3, b = 4]})`.

```
Table.MatchesAnyRows(Table.FromRecords({[a = 1, b = 2], [a = -3, b = 4]}), each _ = [a = 1, b = 2])
```

true

Table.Max

11/25/2019 • 2 minutes to read

Syntax

```
Table.Max(table as table, comparisonCriteria as any, optional default as any) as any
```

About

Returns the largest row in the `table`, given the `comparisonCriteria`. If the table is empty, the optional `default` value is returned.

Example 1

Find the row with the largest value in column [a] in the table `{{[a = 2, b = 4], [a = 6, b = 8]}}`.

```
Table.Max(Table.FromRecords({[a = 2, b = 4], [a = 6, b = 8]}), "a")
```

A	6
B	8

Example 2

Find the row with the largest value in column [a] in the table `{{}}`. Return -1 if empty.

```
Table.Max(#table({"a"},{}), "a", -1)
```

-1

Table.MaxN

11/25/2019 • 2 minutes to read

Syntax

```
Table.MaxN(table as table, comparisonCriteria as any, countOrCondition as any) as table
```

About

Returns the largest row(s) in the `table`, given the `comparisonCriteria`. After the rows are sorted, the `countOrCondition` parameter must be specified to further filter the result. Note the sorting algorithm cannot guarantee a fixed sorted result. The `countOrCondition` parameter can take multiple forms:

- If a number is specified, a list of up to `countOrCondition` items in ascending order is returned.
- If a condition is specified, a list of items that initially meet the condition is returned. Once an item fails the condition, no further items are considered.

Example 1

Find the row with the largest value in column [a] with the condition [a] > 0, in the table. The rows are sorted before the filter is applied.

```
Table.MaxN(Table.FromRecords({[a = 2, b = 4], [a = 0, b = 0], [a = 6, b = 2]}), "a", each [a] > 0)
```

A	B
6	2
2	4

Example 2

Find the row with the largest value in column [a] with the condition [b] > 0, in the table. The rows are sorted before the filter is applied.

```
Table.MaxN(Table.FromRecords({[a = 2, b = 4], [a = 8, b = 0], [a = 6, b = 2]}), "a", each [b] > 0)
```

Table.Min

11/25/2019 • 2 minutes to read

Syntax

```
Table.Min(table as table, comparisonCriteria as any, optional default as any) as any
```

About

Returns the smallest row in the `table`, given the `comparisonCriteria`. If the table is empty, the optional `default` value is returned.

Example 1

Find the row with the smallest value in column [a] in the table.

```
Table.Min(Table.FromRecords({[a = 2, b = 4], [a = 6, b = 8]}), "a")
```

A	2
B	4

Example 2

Find the row with the smallest value in column [a] in the table. Return -1 if empty.

```
Table.Min(#table({"a"},{}), "a", -1)
```

-1

Table.MinN

11/25/2019 • 2 minutes to read

Syntax

```
Table.MinN(table as table, comparisonCriteria as any, countOrCondition as any) as table
```

About

Returns the smallest row(s) in the `table`, given the `comparisonCriteria`. After the rows are sorted, the `countOrCondition` parameter must be specified to further filter the result. Note the sorting algorithm cannot guarantee a fixed sorted result. The `countOrCondition` parameter can take multiple forms:

- If a number is specified, a list of up to `countOrCondition` items in ascending order is returned.
- If a condition is specified, a list of items that initially meet the condition is returned. Once an item fails the condition, no further items are considered.

Example 1

Find the row with the smallest value in column [a] with the condition [a] < 3, in the table. The rows are sorted before the filter is applied.

```
Table.MinN(Table.FromRecords({[a = 2, b = 4], [a = 0, b = 0], [a = 6, b = 4]}), "a", each [a] < 3)
```

A	B
0	0
2	4

Example 2

Find the row with the smallest value in column [a] with the condition [b] < 0, in the table. The rows are sorted before the filter is applied.

```
Table.MinN(Table.FromRecords({[a = 2, b = 4], [a = 8, b = 0], [a = 6, b = 2]}), "a", each [b] < 0)
```


Table.NestedJoin

11/25/2019 • 2 minutes to read

Syntax

```
Table.NestedJoin(table1 as table, key1 as any, table2 as any, key2 as any, newColumnName as text,  
optional joinKind as nullable number, optional keyEqualityComparers as nullable list) as table
```

About

Joins the rows of `table1` with the rows of `table2` based on the equality of the values of the key columns selected by `key1` (for `table1`) and `key2` (for `table2`). The results are entered into the column named `newColumnName`.

The optional `joinKind` specifies the kind of join to perform. By default, a left outer join is performed if a `joinKind` is not specified.

An optional set of `keyEqualityComparers` may be included to specify how to compare the key columns.

Table.Partition

11/25/2019 • 2 minutes to read

Syntax

```
Table.Partition(table as table, column as text, groups as number, hash as function) as list
```

About

Partitions the `table` into a list of `groups` number of tables, based on the value of the `column` and a `hash` function. The `hash` function is applied to the value of the `column` row to obtain a hash value for the row. The hash value modulo `groups` determines in which of the returned tables the row will be placed.

- `table` : The table to partition.
- `column` : The column to hash to determine which returned table the row is in.
- `groups` : The number of tables the input table will be partitioned into.
- `hash` : The function applied to obtain a hash value.

Example

Partition the table `(([a = 2, b = 4], [a = 6, b = 8], [a = 2, b = 4], [a = 1, b = 4]))` into 2 tables on column `[a]`, using the value of the columns as the hash function.

```
Table.Partition(Table.FromRecords({[a = 2, b = 4], [a = 1, b = 4], [a = 2, b = 4], [a = 1, b = 4]}), "a", 2, each _)
```

```
{ Table.FromRecords({[a = 2, b = 4], [a = 2, b = 4]}, { "a", "b" }), Table.FromRecords({[a = 1, b = 4], [a = 1, b = 4]}, { "a", "b" }) }
```

Table.PartitionValues

11/25/2019 • 2 minutes to read

Syntax

```
Table.Partition(table as table, column as text, groups as number, hash as function) as list
```

About

Partitions the `table` into a list of `groups` number of tables, based on the value of the `column` and a `hash` function. The `hash` function is applied to the value of the `column` row to obtain a hash value for the row. The hash value modulo `groups` determines in which of the returned tables the row will be placed.

- `table` : The table to partition.
- `column` : The column to hash to determine which returned table the row is in.
- `groups` : The number of tables the input table will be partitioned into.
- `hash` : The function applied to obtain a hash value.

Example 1

Partition the table `([a = 2, b = 4], [a = 6, b = 8], [a = 2, b = 4], [a = 1, b = 4])` into 2 tables on column `[a]`, using the value of the columns as the hash function.

```
Table.Partition(Table.FromRecords([a = 2, b = 4], [a = 1, b = 4], [a = 2, b = 4], [a = 1, b = 4])), "a", 2,  
each _)
```

[Table]

[Table]

Table.Pivot

11/25/2019 • 2 minutes to read

Syntax

```
Table.Pivot(table as table, pivotValues as list, attributeColumn as text, valueColumn as text,  
optional aggregationFunction as nullable function) as table
```

About

Given a pair of columns representing attribute-value pairs, rotates the data in the attribute column into a column headings.

Example 1

Take the values "a", "b", and "c" in the attribute column of table

```
({ [ key = "x", attribute = "a", value = 1 ], [ key = "x", attribute = "c", value = 3 ], [ key = "y", attribute  
= "a", value = 2 ], [ key = "y", attribute = "b", value = 4 ] })
```

and pivot them into their own column.

```
Table.Pivot(Table.FromRecords({ [ key = "x", attribute = "a", value = 1 ], [ key = "x", attribute = "c", value  
= 3 ], [ key = "y", attribute = "a", value = 2 ], [ key = "y", attribute = "b", value = 4 ] }), { "a", "b",  
"c" }, "attribute", "value")
```

KEY	A	B	C
x	1		3
y	2	4	

Example 2

Take the values "a", "b", and "c" in the attribute column of table

```
({ [ key = "x", attribute = "a", value = 1 ], [ key = "x", attribute = "c", value = 3 ], [ key = "x", attribute  
= "c", value = 5 ], [ key = "y", attribute = "a", value = 2 ], [ key = "y", attribute = "b", value = 4 ] })
```

and pivot them into their own column. The attribute "c" for key "x" has multiple values associated with it, so use the function List.Max to resolve the conflict.

```
Table.Pivot(Table.FromRecords({ [ key = "x", attribute = "a", value = 1 ], [ key = "x", attribute = "c", value  
= 3 ], [ key = "x", attribute = "c", value = 5 ], [ key = "y", attribute = "a", value = 2 ], [ key = "y",  
attribute = "b", value = 4 ] }), { "a", "b", "c" }, "attribute", "value", List.Max)
```

KEY	A	B	C
x	1		5
y	2	4	

Table.PositionOf

11/25/2019 • 2 minutes to read

Syntax

```
Table.PositionOf(table as table, row as record, optional occurrence as any, optional equationCriteria as any) as any
```

About

Returns the row position of the first occurrence of the `row` in the `table` specified. Returns -1 if no occurrence is found.

- `table`: The input table.
- `row`: The row in the table to find the position of.
- `occurrence`: *[Optional]* Specifies which occurrences of the row to return.
- `equationCriteria`: *[Optional]* Controls the comparison between the table rows.

Example 1

Find the position of the first occurrence of [a = 2, b = 4] in the table

```
(([a = 2, b = 4], [a = 6, b = 8], [a = 2, b = 4], [a = 1, b = 4])) .
```

```
Table.PositionOf(Table.FromRecords({[a = 2, b = 4], [a = 1, b = 4], [a = 2, b = 4], [a = 1, b = 4]}), [a = 2, b = 4])
```

0

Example 2

Find the position of the second occurrence of [a = 2, b = 4] in the table

```
(([a = 2, b = 4], [a = 6, b = 8], [a = 2, b = 4], [a = 1, b = 4])) .
```

```
Table.PositionOf(Table.FromRecords({[a = 2, b = 4], [a = 1, b = 4], [a = 2, b = 4], [a = 1, b = 4]}), [a = 2, b = 4], 1)
```

2

Example 3

Find the position of all the occurrences of [a = 2, b = 4] in the table

```
(([a = 2, b = 4], [a = 6, b = 8], [a = 2, b = 4], [a = 1, b = 4])) .
```

```
Table.PositionOf(Table.FromRecords({[a = 2, b = 4], [a = 1, b = 4], [a = 2, b = 4], [a = 1, b = 4]}), [a = 2, b = 4], Occurrence.All)
```

0

Table.PositionOfAny

11/25/2019 • 2 minutes to read

Syntax

```
Table.PositionOfAny(table as table, rows as list, optional occurrence as nullable number, optional equationCriteria as any) as any
```

About

Returns the row(s) position(s) from the `table` of the first occurrence of the list of `rows`. Returns -1 if no occurrence is found.

- `table`: The input table.
- `rows`: The list of rows in the table to find the positions of.
- `occurrence`: *[Optional]* Specifies which occurrences of the row to return.
- `equationCriteria`: *[Optional]* Controls the comparison between the table rows.

Example 1

Find the position of the first occurrence of [a = 2, b = 4] or [a = 6, b = 8] in the table

```
(([a = 2, b = 4], [a = 6, b = 8], [a = 2, b = 4], [a = 1, b = 4])) .
```

```
Table.PositionOfAny(Table.FromRecords({[a = 2, b = 4], [a = 1, b = 4], [a = 2, b = 4], [a = 1, b = 4]}), {[a = 2, b = 4], [a = 6, b = 8]})
```

```
0
```

Example 2

Find the position of all the occurrences of [a = 2, b = 4] or [a = 6, b = 8] in the table

```
(([a = 2, b = 4], [a = 6, b = 8], [a = 2, b = 4], [a = 1, b = 4])) .
```

```
Table.PositionOfAny(Table.FromRecords({[a = 2, b = 4], [a = 6, b = 8], [a = 2, b = 4], [a = 1, b = 4]}), {[a = 2, b = 4], [a = 6, b = 8]}, Occurrence.All)
```

```
0
```

```
1
```

```
2
```

Table.PrefixColumns

11/25/2019 • 2 minutes to read

Syntax

```
Table.PrefixColumns(table as table, prefix as text) as table
```

About

Returns a table where all the column names from the `table` provided are prefixed with the given text, `prefix`, plus a period in the form `prefix.ColumnName`.

Example 1

Prefix the columns with "MyTable" in the table.

```
Table.PrefixColumns(Table.FromRecords({[CustomerID = 1, Name = "Bob", Phone = "123-4567"]}), "MyTable")
```

MYTABLE.CUSTOMERID	MYTABLE.NAME	MYTABLE.PHONE
1	Bob	123-4567

Table.Profile

11/25/2019 • 2 minutes to read

Syntax

```
Table.Profile(table as table, optional additionalAggregates as nullable list) as table
```

About

Returns a profile for the columns in `table`.

The following information is returned for each column (when applicable):

- minimum
- maximum
- average
- standard deviation
- count
- null count
- distinct count

Table.PromoteHeaders

11/25/2019 • 2 minutes to read

Syntax

```
Table.PromoteHeaders(table as table, optional options as nullable record) as table
```

About

Promotes the first row of values as the new column headers (i.e. column names). By default, only text or number values are promoted to headers. Valid options:

PromoteAllScalars : If set to **true**, all the scalar values in the first row are promoted to headers using the **Culture**, if specified (or current document locale). For values that cannot be converted to text, a default column name will be used.

Culture : A culture name specifying the culture for the data.

Example 1

Promote the first row of values in the table.

```
Table.PromoteHeaders(Table.FromRecords({[Column1 = "CustomerID", Column2 = "Name", Column3 = #date(1980,1,1)],  
[Column1 = 1, Column2 = "Bob", Column3 = #date(1980,1,1)]}))
```

CUSTOMERID	NAME	COLUMN3
1	Bob	1/1/1980 12:00:00 AM

Example 2

Promote all the scalars in the first row of the table to headers.

```
Table.PromoteHeaders(Table.FromRecords({[Rank = 1, Name = "Name", Date = #date(1980,1,1)], [Rank = 1, Name =  
"Bob", Date = #date(1980,1,1)]}), [PromoteAllScalars = true, Culture = "en-US"])
```

1	NAME	1/1/1980
1	Bob	1/1/1980 12:00:00 AM

Table.Range

11/25/2019 • 2 minutes to read

Syntax

```
Table.Range(table as table, offset as number, optional count as nullable number) as table
```

About

Returns the rows from the `table` starting at the specified `offset`. An optional parameter, `count`, specifies how many rows to return. By default, all the rows after the offset are returned.

Example 1

Return all the rows starting at offset 1 in the table.

```
Table.Range(Table.FromRecords({[CustomerID = 1, Name = "Bob", Phone = "123-4567"], [CustomerID = 2, Name = "Jim", Phone = "987-6543"], [CustomerID = 3, Name = "Paul", Phone = "543-7890"], [CustomerID = 4, Name = "Ringo", Phone = "232-1550"]}), 1)
```

CUSTOMERID	NAME	PHONE
2	Jim	987-6543
3	Paul	543-7890
4	Ringo	232-1550

Example 2

Return one row starting at offset 1 in the table.

```
Table.Range(Table.FromRecords({[CustomerID = 1, Name = "Bob", Phone = "123-4567"], [CustomerID = 2, Name = "Jim", Phone = "987-6543"], [CustomerID = 3, Name = "Paul", Phone = "543-7890"], [CustomerID = 4, Name = "Ringo", Phone = "232-1550"]}), 1, 1)
```

CUSTOMERID	NAME	PHONE
2	Jim	987-6543

Table.RemoveColumns

11/25/2019 • 2 minutes to read

Syntax

```
Table.RemoveColumns(table as table, columns as any, optional missingField as nullable number) as table
```

About

Removes the specified `columns` from the `table` provided. If the column doesn't exist, an exception is thrown unless the optional parameter `missingField` specifies an alternative (eg. `MissingField.UseNull` or `MissingField.Ignore`).

Example 1

Remove column [Phone] from the table.

```
Table.RemoveColumns(Table.FromRecords({[CustomerID=1, Name="Bob", Phone = "123-4567"]}), "Phone")
```

CUSTOMERID	NAME
1	Bob

Example 2

Remove column [Address] from the table. Throws an error if it doesn't exist.

```
Table.RemoveColumns(Table.FromRecords({[CustomerID=1, Name="Bob", Phone = "123-4567"]}), "Address")
```

```
[Expression.Error] The field 'Address' of the record was not found.
```

Table.RemoveFirstN

11/25/2019 • 2 minutes to read

Syntax

```
Table.RemoveFirstN(table as table, optional countOrCondition as any) as table
```

About

Returns a table that does not contain the first specified number of rows, `countOrCondition`, of the table `table`. The number of rows removed depends on the optional parameter `countOrCondition`.

- If `countOrCondition` is omitted only the first row is removed.
- If `countOrCondition` is a number, that many rows (starting at the top) will be removed.
- If `countOrCondition` is a condition, the rows that meet the condition will be removed until a row does not meet the condition.

Example 1

Remove the first row of the table.

```
Table.RemoveFirstN(Table.FromRecords({[CustomerID = 1, Name = "Bob", Phone = "123-4567"], [CustomerID = 2, Name = "Jim", Phone = "987-6543"], [CustomerID = 3, Name = "Paul", Phone = "543-7890"], [CustomerID = 4, Name = "Ringo", Phone = "232-1550"]}), 1)
```

CUSTOMERID	NAME	PHONE
2	Jim	987-6543
3	Paul	543-7890
4	Ringo	232-1550

Example 2

Remove the first two rows of the table.

```
Table.RemoveFirstN(Table.FromRecords({[CustomerID = 1, Name = "Bob", Phone = "123-4567"], [CustomerID = 2, Name = "Jim", Phone = "987-6543"], [CustomerID = 3, Name = "Paul", Phone = "543-7890"], [CustomerID = 4, Name = "Ringo", Phone = "232-1550"]}), 2)
```

CUSTOMERID	NAME	PHONE
3	Paul	543-7890
4	Ringo	232-1550

Example 3

Remove the first rows where [CustomerID] <=2 of the table.

```
Table.RemoveFirstN(Table.FromRecords({[CustomerID = 1, Name = "Bob", Phone = "123-4567"], [CustomerID = 2, Name = "Jim", Phone = "987-6543"] , [CustomerID = 3, Name = "Paul", Phone = "543-7890"] , [CustomerID = 4, Name = "Ringo", Phone = "232-1550"]}), each [CustomerID] <= 2)
```

CUSTOMERID	NAME	PHONE
3	Paul	543-7890
4	Ringo	232-1550

Table.RemoveLastN

11/25/2019 • 2 minutes to read

Syntax

```
Table.RemoveLastN(table as table, optional countOrCondition as any) as table
```

About

Returns a table that does not contain the last `countOrCondition` rows of the table `table`. The number of rows removed depends on the optional parameter `countOrCondition`.

- If `countOrCondition` is omitted only the last row is removed.
- If `countOrCondition` is a number, that many rows (starting at the bottom) will be removed.
- If `countOrCondition` is a condition, the rows that meet the condition will be removed until a row does not meet the condition.

Example 1

Remove the last row of the table.

```
Table.RemoveLastN(Table.FromRecords({[CustomerID = 1, Name = "Bob", Phone = "123-4567"],[CustomerID = 2, Name = "Jim", Phone = "987-6543"],[CustomerID = 3, Name = "Paul", Phone = "543-7890"],[CustomerID = 4, Name = "Ringo", Phone = "232-1550"]}), 1)
```

CUSTOMERID	NAME	PHONE
1	Bob	123-4567
2	Jim	987-6543
3	Paul	543-7890

Example 2

Remove the last rows where [CustomerID] > 2 of the table.

```
Table.RemoveLastN(Table.FromRecords({[CustomerID = 1, Name = "Bob", Phone = "123-4567"],[CustomerID = 2, Name = "Jim", Phone = "987-6543"],[CustomerID = 3, Name = "Paul", Phone = "543-7890"],[CustomerID = 4, Name = "Ringo", Phone = "232-1550"]}), each [CustomerID] >= 2)
```

CUSTOMERID	NAME	PHONE
1	Bob	123-4567

Table.RemoveMatchingRows

11/25/2019 • 2 minutes to read

Syntax

```
Table.RemoveMatchingRows(table as table, rows as list, optional equationCriteria as any) as table
```

About

Removes all occurrences of the specified `rows` from the `table`. An optional parameter `equationCriteria` may be specified to control the comparison between the rows of the table.

Example 1

Remove any rows where `[a = 1]` from the table `({[a = 1, b = 2], [a = 3, b = 4], [a = 1, b = 6]})`.

```
Table.RemoveMatchingRows(Table.FromRecords({[a = 1, b = 2], [a = 3, b = 4], [a = 1, b = 6]}), {[a = 1]}, "a")
```

A	B
3	4

Table.RemoveRows

11/25/2019 • 2 minutes to read

Syntax

```
Table.RemoveRows(table as table, offset as number, optional count as nullable number) as table
```

About

Removes **count** of rows from the beginning of the **table**, starting at the **offset** specified. A default count of 1 is used if the **count** parameter isn't provided.

Example 1

Remove the first row from the table.

```
Table.RemoveRows(Table.FromRecords({[CustomerID = 1, Name = "Bob", Phone = "123-4567"], [CustomerID = 2, Name = "Jim", Phone = "987-6543"], [CustomerID = 3, Name = "Paul", Phone = "543-7890"], [CustomerID = 4, Name = "Ringo", Phone = "232-1550"]}), 0)
```

CUSTOMERID	NAME	PHONE
2	Jim	987-6543
3	Paul	543-7890
4	Ringo	232-1550

Example 2

Remove the row at position 1 from the table.

```
Table.RemoveRows(Table.FromRecords({[CustomerID = 1, Name = "Bob", Phone = "123-4567"], [CustomerID = 2, Name = "Jim", Phone = "987-6543"], [CustomerID = 3, Name = "Paul", Phone = "543-7890"], [CustomerID = 4, Name = "Ringo", Phone = "232-1550"]}), 1)
```

CUSTOMERID	NAME	PHONE
1	Bob	123-4567
3	Paul	543-7890
4	Ringo	232-1550

Example 3

Remove two rows starting at position 1 from the table.

```
Table.RemoveRows(Table.FromRecords({[CustomerID = 1, Name = "Bob", Phone = "123-4567"], [CustomerID = 2, Name = "Jim", Phone = "987-6543"], [CustomerID = 3, Name = "Paul", Phone = "543-7890"], [CustomerID = 4, Name = "Ringo", Phone = "232-1550"]}), 1, 2)
```

CUSTOMERID	NAME	PHONE
1	Bob	123-4567
4	Ringo	232-1550

Table.RemoveRowsWithErrors

11/25/2019 • 2 minutes to read

Syntax

```
Table.RemoveRowsWithErrors(table as table, optional columns as nullable list) as table
```

About

Returns a table with the rows removed from the input table that contain an error in at least one of the cells. If a columns list is specified, then only the cells in the specified columns are inspected for errors.

Example 1

Remove error value from first row.

```
Table.RemoveRowsWithErrors(Table.FromRecords({[Column1=...],[Column1=2], [Column1=3]}))
```

COLUMN1
2
3

Table.RenameColumns

11/25/2019 • 2 minutes to read

Syntax

```
Table.RenameColumns(table as table, renames as list, optional missingField as nullable number) as table
```

About

Performs the given renames to the columns in table `table`. A replacement operation `renames` consists of a list of two values, the old column name and new column name, provided in a list. If the column doesn't exist, an exception is thrown unless the optional parameter `missingField` specifies an alternative (eg. `MissingField.UseNull` or `MissingField.Ignore`).

Example 1

Replace the column name "CustomerNum" with "CustomerID" in the table.

```
Table.RenameColumns(Table.FromRecords({[CustomerNum=1, Name="Bob", Phone = "123-4567"]}), {"CustomerNum", "CustomerID"})
```

CUSTOMERID	NAME	PHONE
1	Bob	123-4567

Example 2

Replace the column name "CustomerNum" with "CustomerID" and "PhoneNum" with "Phone" in the table.

```
Table.RenameColumns(Table.FromRecords({[CustomerNum=1, Name="Bob", PhoneNum = "123-4567"]}), {"CustomerNum", "CustomerID"}, {"PhoneNum", "Phone"})
```

CUSTOMERID	NAME	PHONE
1	Bob	123-4567

Example 3

Replace the column name "NewCol" with "NewColumn" in the table, and ignore if the column doesn't exist.

```
Table.RenameColumns(Table.FromRecords({[CustomerID=1, Name="Bob", Phone = "123-4567"]}), {"NewCol", "NewColumn"}, MissingField.Ignore)
```

CUSTOMERID	NAME	PHONE
------------	------	-------

1	Bob	123-4567
---	-----	----------

Table.ReorderColumns

11/25/2019 • 2 minutes to read

Syntax

```
Table.ReorderColumns(table as table, columnOrder as list, optional missingField as nullable number) as table
```

About

Returns a table from the input `table`, with the columns in the order specified by `columnOrder`. Columns that are not specified in the list will not be reordered. If the column doesn't exist, an exception is thrown unless the optional parameter `missingField` specifies an alternative (eg. `MissingField.UseNull` or `MissingField.Ignore`).

Example 1

Switch the order of the columns [Phone] and [Name] in the table.

```
Table.ReorderColumns(Table.FromRecords({[CustomerID=1, Phone = "123-4567", Name = "Bob"]}), {"Name", "Phone"})
```

CUSTOMERID	NAME	PHONE
1	Bob	123-4567

Example 2

Switch the order of the columns [Phone] and [Address] or use "MissingField.Ignore" in the table. It doesn't change the table because column [Address] doesn't exist.

```
Table.ReorderColumns(Table.FromRecords({[CustomerID=1, Name = "Bob", Phone = "123-4567"]}), {"Phone", "Address"}, MissingField.Ignore)
```

CUSTOMERID	NAME	PHONE
1	Bob	123-4567

Table.Repeat

11/25/2019 • 2 minutes to read

Syntax

```
Table.Repeat(table as table, count as number) as table
```

About

Returns a table with the rows from the input `table` repeated the specified `count` times.

Example 1

Repeat the rows in the table two times.

```
Table.Repeat(Table.FromRecords({[a = 1, b = "hello"], [a = 3, b = "world"]}), 2)
```

A	B
1	hello
3	world
1	hello
3	world

Table.ReplaceErrorValues

11/25/2019 • 2 minutes to read

Syntax

```
Table.ReplaceErrorValues(table as table, errorReplacement as list) as table
```

About

Replaces the error values in the specified columns of the `table` with the new values in the `errorReplacement` list. The format of the list is `{{column1, value1}, ...}`. There may only be one replacement value per column, specifying the column more than once will result in an error.

Example 1

Replace the error value with the text "world" in the table.

```
Table.ReplaceErrorValues(Table.FromRows({{1,"hello"},{3,...}}, {"A","B"}), {"B", "world"})
```

A	B
1	hello
3	world

Example 2

Replace the error value in column A with the text "hello" and in column B with the text "world" in the table.

```
Table.ReplaceErrorValues(Table.FromRows({{..., ...},{1,2}}, {"A","B"}), {"A", "hello"}, {"B", "world"})
```

A	B
hello	world
1	2

Table.ReplaceKeys

11/25/2019 • 2 minutes to read

Syntax

```
Table.ReplaceKeys(table as table, keys as list) as table
```

About

Table.ReplaceKeys

Table.ReplaceMatchingRows

11/25/2019 • 2 minutes to read

Syntax

```
Table.ReplaceMatchingRows(table as table, replacements as list, optional equationCriteria as any)  
as table
```

About

Replaces all the specified rows in the `table` with the provided ones. The rows to replace and the replacements are specified in `replacements`, using {old, new} formatting. An optional `equationCriteria` parameter may be specified to control comparison between the rows of the table.

Example 1

Replace the rows [a = 1, b = 2] and [a = 2, b = 3] with [a = -1, b = -2],[a = -2, b = -3] in the table.

```
Table.ReplaceMatchingRows(Table.FromRecords({[a = 1, b = 2], [a = 2, b = 3], [a = 3, b = 4], [a = 1, b = 2]}),  
{[a = 1, b = 2], [a = -1, b = -2]}, {[a = 2, b = 3], [a = -2, b = -3] })
```

A	B
-1	-2
-2	-3
3	4
-1	-2

Table.ReplaceRelationshipIdentity

11/25/2019 • 2 minutes to read

Syntax

```
Table.ReplaceRelationshipIdentity(value as any, identity as text) as any
```

About

Table.ReplaceRelationshipIdentity

Table.ReplaceRows

11/25/2019 • 2 minutes to read

Syntax

```
Table.ReplaceRows(table as table, offset as number, count as number, rows as list) as table
```

About

Replaces a specified number of rows, `count`, in the input `table` with the specified `rows`, beginning after the `offset`. The `rows` parameter is a list of records.

- `table`: The table where the replacement is performed.
- `offset`: The number of rows to skip before making the replacement.
- `count`: The number of rows to replace.
- `rows`: The list of row records to insert into the `table` at the location specified by the `offset`.

Example 1

Starting at position 1, replace 3 rows.

```
Table.ReplaceRows(Table.FromRecords({[Column1=1], [Column1=2], [Column1=3], [Column1=4], [Column1=5]}), 1, 3, {[Column1=6], [Column1=7]})
```

COLUMN1
1
6
7
5

Table.ReplaceValue

11/25/2019 • 2 minutes to read

Syntax

```
Table.ReplaceValue(table as table, oldValue as any, newValue as any, replacer as function,  
columnsToSearch as list) as table
```

About

Replaces `oldValue` with `newValue` in the specified columns of the `table`.

Example 1

Replace the text "goodbye" with the text "world" in the table.

```
Table.ReplaceValue(Table.FromRecords({[a = 1, b = "hello"], [a = 3, b = "goodbye"]}), "goodbye", "world",  
Replacer.ReplaceText, {"b"})
```

A	B
1	hello
3	world

Example 2

Replace the text "ur" with the text "or" in the table.

```
Table.ReplaceValue(Table.FromRecords({[a = 1, b = "hello"], [a = 3, b = "wurld"]}), "ur", "or",  
Replacer.ReplaceText, {"b"})
```

A	B
1	hello
3	world

Table.Reverse

11/25/2019 • 2 minutes to read

Syntax

```
Text.Reverse(text as nullable text) as nullable text
```

About

Reverses the provided `text`.

Example 1

Reverse the text "123".

```
Text.Reverse("123")
```

```
"321"
```

Table.ReverseRows

11/25/2019 • 2 minutes to read

Syntax

```
Table.ReverseRows(table as table) as table
```

About

Returns a table with the rows from the input `table` in reverse order.

Example 1

Reverse the rows in the table.

```
Table.ReverseRows(Table.FromRecords({[CustomerID = 1, Name = "Bob", Phone = "123-4567"], [CustomerID = 2, Name = "Jim", Phone = "987-6543"], [CustomerID = 3, Name = "Paul", Phone = "543-7890"], [CustomerID = 4, Name = "Ringo", Phone = "232-1550"]}))
```

CUSTOMERID	NAME	PHONE
4	Ringo	232-1550
3	Paul	543-7890
2	Jim	987-6543
1	Bob	123-4567

Table.RowCount

11/25/2019 • 2 minutes to read

Syntax

```
Table.RowCount(table as table) as number
```

About

Returns the number of rows in the `table`.

Example 1

Find the number of rows in the table.

```
Table.RowCount(Table.FromRecords({[CustomerID =1, Name ="Bob", Phone = "123-4567"],[CustomerID =2, Name ="Jim", Phone = "987-6543"],[CustomerID =3, Name ="Paul", Phone = "543-7890"]})))
```

3

Table.Schema

11/25/2019 • 2 minutes to read

Syntax

```
Table.Schema(table as table) as table
```

About

Returns a table describing the columns of `table`.

Each row in the table describes the properties of a column of `table`:

Column Name	Description
<code>Name</code>	The name of the column.
<code>Position</code>	The 0-based position of the column in <code>table</code> .
<code>TypeName</code>	The name of the type of the column.
<code>Kind</code>	The kind of the type of the column.
<code>IsNullable</code>	Whether the column can contain <code>null</code> values.
<code>NumericPrecisionBase</code>	The numeric base (e.g. base-2, base-10) of the <code>NumericPrecision</code> and <code>NumericScale</code> fields.
<code>NumericPrecision</code>	The precision of a numeric column in the base specified by <code>NumericPrecisionBase</code> . This is the maximum number of digits that can be represented by a value of this type (including fractional digits).
<code>NumericScale</code>	The scale of a numeric column in the base specified by <code>NumericPrecisionBase</code> . This is the number of digits in the fractional part of a value of this type. A value of <code>0</code> indicates a fixed scale with no fractional digits. A value of <code>null</code> indicates the scale is not known (either because it is floating or not defined).
<code>DateTimePrecision</code>	The maximum number of fractional digits supported in the seconds portion of a date or time value.
<code>MaxLength</code>	The maximum number of characters permitted in a <code>text</code> column, or the maximum number of bytes permitted in a <code>binary</code> column.
<code>IsVariableLength</code>	Indicates whether this column can vary in length (up to <code>MaxLength</code>) or if it is of fixed size.

<code>NativeTypeName</code>	The name of the type of the column in the native type system of the source (e.g. <code>nvarchar</code> for SQL Server).
<code>NativeDefaultExpression</code>	The default expression for a value of this column in the native expression language of the source (e.g. <code>42</code> or <code>newid()</code> for SQL Server).
<code>Description</code>	The description of the column.

Table.SelectColumns

11/25/2019 • 2 minutes to read

Syntax

```
Table.SelectColumns(table as table, columns as any, optional missingField as nullable number) as table
```

About

Returns the `table` with only the specified `columns`.

- `table`: The provided table.
- `columns`: The list of columns from the table `table` to return. Columns in the returned table are in the order listed in `columns`.
- `missingField`: (*Optional*) What to do if the columnn does not exist. Example: `MissingField.UseNull` or `MissingField.Ignore`.

Example 1

Only include column [Name].

```
Table.SelectColumns(Table.FromRecords({ [CustomerID = 1, Name = "Bob", Phone = "123-4567"], [CustomerID = 2, Name = "Jim", Phone = "987-6543"] , [CustomerID = 3, Name = "Paul", Phone = "543-7890"] , [CustomerID = 4, Name = "Ringo", Phone = "232-1550"] }}, "Name")
```

NAME
Bob
Jim
Paul
Ringo

Example 2

Only include columns [CustomerID] and [Name].

```
Table.SelectColumns(Table.FromRecords({[CustomerID=1, Name="Bob", Phone = "123-4567"]}), {"CustomerID", "Name"})
```

CUSTOMERID	NAME
1	Bob

Example 3

If the included column does not exit, the default result is an error.

```
Table.SelectColumns(Table.FromRecords({[CustomerID=1, Name="Bob", Phone = "123-4567"]}), "NewColumn")
```

[Expression.Error] The field 'NewColumn' of the record wasn't found.

Example 4

If the included column does not exit, option `MissingField.UseNull` creates a column of null values.

```
Table.SelectColumns(Table.FromRecords({[CustomerID=1, Name = "Bob", Phone = "123-4567" ]}), {"CustomerID", "NewColumn"}, MissingField.UseNull)
```

CUSTOMERID	NEWCOLUMN
1	

Table.SelectRows

11/25/2019 • 2 minutes to read

Syntax

```
Table.SelectRows(table as table, condition as function) as table
```

About

Returns a table of rows from the `table`, that matches the selection `condition`.

Example 1

Select the rows in the table where the values in [CustomerID] column are greater than 2.

```
Table.SelectRows(Table.FromRecords({ [CustomerID = 1, Name = "Bob", Phone = "123-4567"], [CustomerID = 2, Name = "Jim", Phone = "987-6543"] , [CustomerID = 3, Name = "Paul", Phone = "543-7890"] , [CustomerID = 4, Name = "Ringo", Phone = "232-1550"] })), each [CustomerID] > 2)
```

CUSTOMERID	NAME	PHONE
3	Paul	543-7890
4	Ringo	232-1550

Example 2

Select the rows in the table where the names do not contain a "B".

```
Table.SelectRows(Table.FromRecords({ [CustomerID = 1, Name = "Bob", Phone = "123-4567"], [CustomerID = 2, Name = "Jim", Phone = "987-6543"] , [CustomerID = 3, Name = "Paul", Phone = "543-7890"] , [CustomerID = 4, Name = "Ringo", Phone = "232-1550"] })), each not Text.Contains([Name], "B"))
```

CUSTOMERID	NAME	PHONE
2	Jim	987-6543
3	Paul	543-7890
4	Ringo	232-1550

Table.SelectRowsWithErrors

11/25/2019 • 2 minutes to read

Syntax

```
Table.SelectRowsWithErrors(table as table, optional columns as nullable list) as table
```

About

Returns a table with only those rows of the input table that contain an error in at least one of the cells. If a columns list is specified, then only the cells in the specified columns are inspected for errors.

Example 1

Select names of customers with errors in their rows.

```
Table.SelectRowsWithErrors(Table.FromRecords({ [CustomerID = ..., Name = "Bob", Phone = "123-4567"],  
[CustomerID = 2, Name = "Jim", Phone = "987-6543"] , [CustomerID = 3, Name = "Paul", Phone = "543-7890"] ,  
[CustomerID = 4, Name = "Ringo", Phone = "232-1550"] }))[Name]
```

Bob

Table.SingleRow

11/25/2019 • 2 minutes to read

Syntax

```
Table.SingleRow(table as table) as record
```

About

Returns the single row in the one row `table`. If the `table` has more than one row, an exception is thrown.

Example 1

Return the single row in the table.

```
Table.SingleRow(Table.FromRecords({[CustomerID = 1, Name = "Bob", Phone = "123-4567"]}))
```

CUSTOMERID	1
NAME	Bob
PHONE	123-4567

Table.Skip

11/25/2019 • 2 minutes to read

Syntax

```
Table.Skip(table as table, optional countOrCondition as any) as table
```

About

Returns a table that does not contain the first specified number of rows, `countOrCondition`, of the table `table`. The number of rows skipped depends on the optional parameter `countOrCondition`.

- If `countOrCondition` is omitted only the first row is skipped.
- If `countOrCondition` is a number, that many rows (starting at the top) will be skipped.
- If `countOrCondition` is a condition, the rows that meet the condition will be skipped until a row does not meet the condition.

Example 1

Skip the first row of the table.

```
Table.Skip(Table.FromRecords({ [CustomerID = 1, Name = "Bob", Phone = "123-4567"], [CustomerID = 2, Name = "Jim", Phone = "987-6543"] , [CustomerID = 3, Name = "Paul", Phone = "543-7890"] , [CustomerID = 4, Name = "Ringo", Phone = "232-1550"] }}, 1)
```

CUSTOMERID	NAME	PHONE
2	Jim	987-6543
3	Paul	543-7890
4	Ringo	232-1550

Example 2

Skip the first two rows of the table.

```
Table.Skip(Table.FromRecords({[CustomerID = 1, Name = "Bob", Phone = "123-4567"],[CustomerID = 2, Name = "Jim", Phone = "987-6543"], [CustomerID = 3, Name = "Paul", Phone = "543-7890"], [CustomerID = 4, Name = "Ringo", Phone = "232-1550"] }}, 2)
```

CUSTOMERID	NAME	PHONE
3	Paul	543-7890
4	Ringo	232-1550

Example 3

Skip the first rows where [Price] > 25 of the table.

```
Table.Skip(Table.FromRecords({[OrderID = 1, CustomerID = 1, Item = "Fishing rod", Price = 100.0], [OrderID = 2, CustomerID = 1, Item = "1 lb. worms", Price = 5.0], [OrderID = 3, CustomerID = 2, Item = "Fishing net", Price = 25.0], [OrderID = 4, CustomerID = 3, Item = "Fish tazer", Price = 200.0], [OrderID = 5, CustomerID = 3, Item = "Bandaid", Price = 2.0], [OrderID = 6, CustomerID = 1, Item = "Tackle box", Price = 20.0], [OrderID = 7, CustomerID = 5, Item = "Bait", Price = 3.25], [OrderID = 8, CustomerID = 5, Item = "Fishing Rod", Price = 100.0], [OrderID = 9, CustomerID = 6, Item = "Bait", Price = 3.25]}), each [Price] > 25)
```

ORDERID	CUSTOMERID	ITEM	PRICE
2	1	1 lb. worms	5
3	2	Fishing net	25
4	3	Fish tazer	200
5	3	Bandaid	2
6	1	Tackle box	20
7	5	Bait	3.25
8	5	Fishing Rod	100
9	6	Bait	3.25

Table.Sort

11/25/2019 • 2 minutes to read

Syntax

```
Table.Sort(table as table, comparisonCriteria as any) as table
```

About

Sorts the `table` using the list of one or more column names and optional `comparisonCriteria` in the form `{ { col1, comparisonCriteria }, {col2} }`.

Example 1

Sort the table on column "OrderID".

```
Table.Sort(Table.FromRecords({[OrderID = 1, CustomerID = 1, Item = "Fishing rod", Price = 100.0], [OrderID = 2, CustomerID = 1, Item = "1 lb. worms", Price = 5.0], [OrderID = 3, CustomerID = 2, Item = "Fishing net", Price = 25.0], [OrderID = 4, CustomerID = 3, Item = "Fish tazer", Price = 200.0], [OrderID = 5, CustomerID = 3, Item = "Band aids", Price = 2.0], [OrderID = 6, CustomerID = 1, Item = "Tackle box", Price = 20.0], [OrderID = 7, CustomerID = 5, Item = "Bait", Price = 3.25], [OrderID = 8, CustomerID = 5, Item = "Fishing Rod", Price = 100.0], [OrderID = 9, CustomerID = 6, Item = "Bait", Price = 3.25]}), {"OrderID"})
```

ORDERID	CUSTOMERID	ITEM	PRICE
1	1	Fishing rod	100
2	1	1 lb. worms	5
3	2	Fishing net	25
4	3	Fish tazer	200
5	3	Band aids	2
6	1	Tackle box	20
7	5	Bait	3.25
8	5	Fishing Rod	100
9	6	Bait	3.25

Example 2

Sort the table on column "OrderID" in descending order.

```
Table.Sort(Table.FromRecords({[OrderID = 1, CustomerID = 1, Item = "Fishing rod", Price = 100.0], [OrderID = 2, CustomerID = 1, Item = "1 lb. worms", Price = 5.0], [OrderID = 3, CustomerID = 2, Item = "Fishing net", Price = 25.0], [OrderID = 4, CustomerID = 3, Item = "Fish tazer", Price = 200.0], [OrderID = 5, CustomerID = 3, Item = "Band aids", Price = 2.0], [OrderID = 6, CustomerID = 1, Item = "Tackle box", Price = 20.0], [OrderID = 7, CustomerID = 5, Item = "Bait", Price = 3.25], [OrderID = 8, CustomerID = 5, Item = "Fishing Rod", Price = 100.0], [OrderID = 9, CustomerID = 6, Item = "Bait", Price = 3.25]}), {"OrderID", Order.Descending}))
```

ORDERID	CUSTOMERID	ITEM	PRICE
9	6	Bait	3.25
8	5	Fishing Rod	100
7	5	Bait	3.25
6	1	Tackle box	20
5	3	Band aids	2
4	3	Fish tazer	200
3	2	Fishing net	25
2	1	1 lb. worms	5
1	1	Fishing rod	100

Example 3

Sort the table on column "CustomerID" then "OrderID", with "CustomerID" being in ascending order.

```
Table.Sort(Table.FromRecords({[OrderID = 1, CustomerID = 1, Item = "Fishing rod", Price = 100.0], [OrderID = 2, CustomerID = 1, Item = "1 lb. worms", Price = 5.0], [OrderID = 3, CustomerID = 2, Item = "Fishing net", Price = 25.0], [OrderID = 4, CustomerID = 3, Item = "Fish tazer", Price = 200.0], [OrderID = 5, CustomerID = 3, Item = "Band aids", Price = 2.0], [OrderID = 6, CustomerID = 1, Item = "Tackle box", Price = 20.0], [OrderID = 7, CustomerID = 5, Item = "Bait", Price = 3.25], [OrderID = 8, CustomerID = 5, Item = "Fishing Rod", Price = 100.0], [OrderID = 9, CustomerID = 6, Item = "Bait", Price = 3.25]}), {"CustomerID", Order.Ascending}, {"OrderID"}))
```

ORDERID	CUSTOMERID	ITEM	PRICE
1	1	Fishing rod	100
2	1	1 lb. worms	5
6	1	Tackle box	20
3	2	Fishing net	25
4	3	Fish tazer	200
5	3	Band aids	2

7	5	Bait	3.25
8	5	Fishing Rod	100
9	6	Bait	3.25

Table.Split

11/25/2019 • 2 minutes to read

Syntax

```
Table.Split(table as table, pageSize as number) as list
```

About

Splits `table` into a list of tables where the first element of the list is a table containing the first `pageSize` rows from the source table, the next element of the list is a table containing the next `pageSize` rows from the source table, etc.

Example 1

Split a table of five records into tables with two records each.

```
let Customers = Table.FromRecords({ [CustomerID = 1, Name = "Bob", Phone = "123-4567"], [CustomerID = 2, Name = "Jim", Phone = "987-6543"], [CustomerID = 3, Name = "Paul", Phone = "543-7890"], [CustomerID = 4, Name = "Cristina", Phone = "232-1550"], [CustomerID = 5, Name = "Anita", Phone = "530-1459"] }) in
Table.Split(Customers, 2)
```

[Table]

[Table]

[Table]

Table.SplitColumn

11/25/2019 • 2 minutes to read

Syntax

```
Table.SplitColumn(table as table, sourceColumn as text, splitter as function, optional columnNamesOrNumber as any, optional default as any, optional extraColumns as any) as table
```

About

Splits the specified columns into a set of additional columns using the specified splitter function.

Example 1

Split the [Name] column at position of "i" into two columns

```
let Customers = Table.FromRecords({ [CustomerID = 1, Name = "Bob", Phone = "123-4567"], [CustomerID = 2, Name = "Jim", Phone = "987-6543"], [CustomerID = 3, Name = "Paul", Phone = "543-7890"], [CustomerID = 4, Name = "Cristina", Phone = "232-1550"] }) in Table.SplitColumn(Customers,"Name",Splitter.SplitTextByDelimiter("i"),2)
```

CUSTOMERID	NAME.1	NAME.2	PHONE
1	Bob		123-4567
2	J	m	987-6543
3	Paul		543-7890
4	Cr	st	232-1550

Table.ToColumns

11/25/2019 • 2 minutes to read

Syntax

```
Table.ToColumns(table as table) as list
```

About

Creates a list of nested lists from the table, `table`. Each list item is an inner list that contains the column values.

Example

Create a list of the column values from the table.

```
Table.ToColumns(Table.FromRecords({[CustomerID = 1, Name = "Bob", Phone = "123-4567"], [CustomerID = 2, Name = "Jim", Phone = "987-6543"] })))
```

[List]

[List]

[List]

Table.ToList

11/25/2019 • 2 minutes to read

Syntax

```
Table.ToList(table as table, optional combiner as nullable function) as list
```

About

Converts a table into a list by applying the specified combining function to each row of values in the table.

Example 1

Combine the text of each row with a comma.

```
Table.ToList(Table.FromRows({{Number.ToText(1),"Bob", "123-4567" }, {Number.ToText(2), "Jim", "987-6543" },  
{Number.ToText(3), "Paul", "543-7890" }}), Combiner.CombineTextByDelimiter(","))
```

1,Bob,123-4567
2,Jim,987-6543
3,Paul,543-7890

Table.ToRecords

11/25/2019 • 2 minutes to read

Syntax

```
Table.ToRecords(table as table) as list
```

About

Converts a table, `table`, to a list of records.

Example

Convert the table to a list of records.

```
Table.ToRecords(Table.FromRows({{1, "Bob", "123-4567"} , {2, "Jim", "987-6543"}, {3, "Paul", "543-7890"} },  
{"CustomerID", "Name", "Phone"}))
```

[Record]

[Record]

[Record]

Table.ToRows

11/25/2019 • 2 minutes to read

Syntax

```
Table.ToRows(table as table) as list
```

About

Creates a list of nested lists from the table, `table`. Each list item is an inner list that contains the row values.

Example

Create a list of the row values from the table.

```
Table.ToRows(Table.FromRecords({[CustomerID =1, Name ="Bob", Phone = "123-4567"],[CustomerID =2, Name ="Jim",  
Phone = "987-6543"],[CustomerID =3, Name ="Paul", Phone = "543-7890"]})))
```

[List]

[List]

[List]

Table.TransformColumnNames

11/25/2019 • 2 minutes to read

Syntax

```
Table.TransformColumnNames(table as table, nameGenerator as function, optional options as nullable record) as table
```

About

Transforms column names by using the given `nameGenerator` function. Valid options:

`MaxLength` specifies the maximum length of new column names. If the given function results with a longer column name, the long name will be trimmed.

`Comparer` is used to control the comparison while generating new column names. Comparers can be used to provide case insensitive or culture and locale aware comparisons.

The following built in comparers are available in the formula language:

- `Comparer.Ordinal`: Used to perform an exact ordinal comparison
- `Comparer.OrdinalIgnoreCase`: Used to perform an exact ordinal case-insensitive comparison
- `Comparer.FromCulture`: Used to perform a culture aware comparison

Example 1

Remove the `#(tab)` character from column names

```
Table.TransformColumnNames(Table.FromRecords({["Col#(tab)umn" = 1]}), Text.Clean)
```

COLUMN
1

Example 2

Transform column names to generate case-insensitive names of length 6.

```
Table.TransformColumnNames(Table.FromRecords({[ColumnNum = 1, columnnum = 2, columnNUM = 3]}), Text.Clean, [MaxLength = 6, Comparer = Comparer.OrdinalIgnoreCase])
```

COLUMN	COLUMN1	COLUMN2
1	2	3

Table.TransformColumns

11/25/2019 • 2 minutes to read

Syntax

```
Table.TransformColumns(table as table, transformOperations as list, optional defaultTransformation as nullable function, optional missingField as nullable number) as table
```

About

Returns a table from the input `table` by applying the transform operation to the column specified in the parameter `transformOperations` (where format is { column name, transformation }). If the column doesn't exist, an exception is thrown unless the optional parameter `defaultTransformation` specifies an alternative (eg.

`MissingField.UseNull` or `MissingField.Ignore`).

Example 1

Transform the number values in column [A] to number values.

```
Table.TransformColumns(Table.FromRecords({[A="1", B=2], [A="5", B=10]}),{"A", Number.FromText})
```

A	B
1	2
5	10

Example 2

Transform the number values in missing column [X] to text values, ignoring columns which don't exist.

```
Table.TransformColumns(Table.FromRecords({[A="1", B=2], [A="5", B=10]}), {"X", Number.FromText}, null, MissingField.Ignore)
```

A	B
1	2
5	10

Example 3

Transform the number values in missing column [X] to text values, defaulting to null on columns which don't exist.

```
Table.TransformColumns(Table.FromRecords({[A="1", B=2], [A="5", B=10]}), {"X", Number.FromText}, null, MissingField.UseNull)
```

A	B	X
1	2	
5	10	

Example 4

Transform the number values in missing column [X] to text values, giving an error on columns which don't exist.

```
Table.TransformColumns(Table.FromRecords({[A="1",B=2], [A="5", B=10]}), {"X", Number.FromText})
```

```
[Expression.Error] The column 'X' of the table wasn't found.
```

Table.TransformColumnTypes

11/25/2019 • 2 minutes to read

Syntax

```
Table.TransformColumnTypes(table as table, typeTransformations as list, optional culture as nullable text) as table
```

About

Returns a table from the input `table` by applying the transform operation to the columns specified in the parameter `typeTransformations` (where format is { column name, type name}), using the specified culture in the parameter `culture`. If the column doesn't exist, an exception is thrown.

Example 1

Transform the number values in column [a] to text values from the table `{{[a = 1, b = 2], [a = 3, b = 4]}}`.

```
Table.TransformColumnTypes(Table.FromRecords({[a = 1, b = 2], [a = 3, b = 4]}), {"a", type text}, "en-US")
```

A	B
1	2
3	4

Table.TransformRows

11/25/2019 • 2 minutes to read

Syntax

```
Table.TransformRows(table as table, transform as function) as list
```

About

Creates a table from `table` by applying the `transform` operation to the rows. If the return type of the `transform` function is specified, then the result will be a table with that row type. In all other cases, the result of this function will be a list with an item type of the return type of the transform function.

Example 1

Transform the rows into a list of numbers from the table `({[A = 1], [A = 2], [A = 3], [A = 4], [A = 5]})`.

```
Table.TransformRows(Table.FromRecords({[a = 1], [a = 2], [a = 3], [a = 4], [a = 5]}), each [a])
```

1

2

3

4

5

Example 2

Transform the rows in column [A] into text values in a column [B] from the table

`({[A = 1], [A = 2], [A = 3], [A = 4], [A = 5]})`.

```
Table.TransformRows(Table.FromRecords({[a = 1], [a = 2], [a = 3], [a = 4], [a = 5]}), (row) as record => [B =  
Number.ToText(row[a])])
```

[Record]

[Record]

[Record]

[Record]

[Record]

Table.Transpose

11/25/2019 • 2 minutes to read

Syntax

```
Table.Transpose(table as table, optional columns as any) as table
```

About

Makes columns into rows and rows into columns.

Example 1

Make the rows of the table of name-value pairs into columns.

```
Table.Transpose(Table.FromRecords({[Name = "Full Name", Value = "Fred"], [Name = "Age", Value = 42], [Name = "Country", Value = "UK"]}))
```

COLUMN1	COLUMN2	COLUMN3
Full Name	Age	Country
Fred	42	UK

Table.Unpivot

11/25/2019 • 2 minutes to read

Syntax

```
Table.Unpivot(table as table, pivotColumns as list, attributeColumn as text, valueColumn as text)  
as table
```

About

Translates a set of columns in a table into attribute-value pairs, combined with the rest of the values in each row.

Example 1

Take the columns "a", "b", and "c" in the table

```
([ key = "x", a = 1, b = null, c = 3 ], [ key = "y", a = 2, b = 4, c = null ])
```

 and unpivot them into attribute-value pairs.

```
Table.Unpivot(Table.FromRecords([ key = "x", a = 1, b = null, c = 3 ], [ key = "y", a = 2, b = 4, c = null ])), { "a", "b", "c" }, "attribute", "value")
```

KEY	ATTRIBUTE	VALUE
x	a	1
x	c	3
y	a	2
y	b	4

Table.UnpivotOtherColumns

11/25/2019 • 2 minutes to read

Syntax

```
Table.UnpivotOtherColumns(table as table, pivotColumns as list, attributeColumn as text,  
valueColumn as text) as table
```

About

Translates all columns other than a specified set into attribute-value pairs, combined with the rest of the values in each row.

Example 1

Translates all columns other than a specified set into attribute-value pairs, combined with the rest of the values in each row.

```
Table.UnpivotOtherColumns(Table.FromRecords({ [ key = "key1", attribute1 = 1, attribute2 = 2, attribute3 = 3  
], [ key = "key2", attribute1 = 4, attribute2 = 5, attribute3 = 6 ] }), { "key" }, "column1", "column2")
```

KEY	COLUMN1	COLUMN2
key1	attribute1	1
key1	attribute2	2
key1	attribute3	3
key2	attribute1	4
key2	attribute2	5
key2	attribute3	6

Table.View

11/25/2019 • 2 minutes to read

Syntax

```
Table.View(table as nullable table, handlers as record) as table
```

About

Returns a view of `table` where the functions specified in `handlers` are used in lieu of the default behavior of an operation when the operation is applied to the view. Handler functions are optional. If a handler function is not specified for an operation, the default behavior of the operation is applied to `table` instead (except in the case of `GetExpression`).

Handler functions must return a value that is semantically equivalent to the result of applying the operation against `table` (or the resulting view in the case of `GetExpression`).

If a handler function raises an error, the default behavior of the operation is applied to the view.

`Table.View` can be used to implement folding to a data source – the translation of M queries into source-specific queries (e.g. to create T-SQL statements from M queries).

Please see the published documentation for a more complete description of `Table.View` .

Table.ViewFunction

11/25/2019 • 2 minutes to read

Syntax

```
Table.ViewFunction(function as function) as function
```

About

Creates a view function based on `function` that can be handled in a view created by `Table.View`.

The `OnInvoke` handler of `Table.View` can be used to defined a handler for the view function.

As with the handlers for built-in operations, if no `OnInvoke` handler is specified, or if it does not handle the view function, or if an error is raised by the handler, `function` is applied on top of the view.

Please see the published documentation for a more complete description of `Table.View` and custom view functions.

Tables.GetRelationships

11/25/2019 • 2 minutes to read

Syntax

```
Tables.GetRelationships(tables as table, optional dataColumn as nullable text) as table
```

About

Gets the relationships among a set of tables. The set `tables` is assumed to have a structure similar to that of a navigation table. The column defined by `dataColumn` contains the actual data tables.

#table

11/25/2019 • 2 minutes to read

Syntax

```
#table(columns as any, rows as any) as any
```

About

Creates a table value from columns `columns` and the list `rows` where each element of the list is an inner list that contains the column values for a single row. `columns` may be a list of column names, a table type, a number of columns, or null.

Text functions

11/25/2019 • 4 minutes to read

Text

Information

FUNCTION	DESCRIPTION
Text.InferNumberType	Infers granular number type (Int64.Type, Double.Type, etc.) of <code>text</code> using <code>culture</code> .
Text.Length	Returns the number of characters in a text value.

Text Comparisons

FUNCTION	DESCRIPTION
Character.FromNumber	Returns a number to its character value.
Character.ToNumber	Returns a character to its number value.
Guid.From	Returns a <code>Guid.Type</code> value from the given <code>value</code> .
Json.FromValue	Produces a JSON representation of a given value.
Text.From	Returns the text representation of a number, date, time, datetime, datetimezone, logical, duration or binary value. If a value is null, <code>Text.From</code> returns null. The optional culture parameter is used to format the text value according to the given culture.
Text.FromBinary	Decodes data from a binary value in to a text value using an encoding.
Text.NewGuid	Returns a Guid value as a text value.
Text.ToBinary	Encodes a text value into binary value using an encoding.
Text.ToList	Returns a list of characters from a text value.
Value.FromText	Decodes a value from a textual representation, value, and interprets it as a value with an appropriate type. <code>Value.FromText</code> takes a text value and returns a number, a logical value, a null value, a <code>DateTime</code> value, a <code>Duration</code> value, or a text value. The empty text value is interpreted as a null value.

Extraction

FUNCTION	DESCRIPTION
Text.At	Returns a character starting at a zero-based offset.
Text.Middle	Returns the substring up to a specific length.
Text.Range	Returns a number of characters from a text value starting at a zero-based offset and for count number of characters.
Text.Start	Returns the count of characters from the start of a text value.
FUNCTION	DESCRIPTION
Text.End	Returns the number of characters from the end of a text value.

Modification

FUNCTION	DESCRIPTION
Text.Insert	Returns a text value with newValue inserted into a text value starting at a zero-based offset.
Text.Remove	Removes all occurrences of a character or list of characters from a text value. The removeChars parameter can be a character value or a list of character values.
Text.RemoveRange	Removes count characters at a zero-based offset from a text value.
Text.Replace	Replaces all occurrences of a substring with a new text value.
Text.ReplaceRange	Replaces length characters in a text value starting at a zero-based offset with the new text value.
Text.Select	Selects all occurrences of the given character or list of characters from the input text value.

Membership

FUNCTION	DESCRIPTION
Text.Contains	Returns true if a text value substring was found within a text value string; otherwise, false.
Text.EndsWith	Returns a logical value indicating whether a text value substring was found at the end of a string.
Text.PositionOf	Returns the first occurrence of substring in a string and returns its position starting at startOffset.
Text.PositionOfAny	Returns the first occurrence of a text value in list and returns its position starting at startOffset.
Text.StartsWith	Returns a logical value indicating whether a text value substring was found at the beginning of a string.

FUNCTION	DESCRIPTION
----------	-------------

Transformations

FUNCTION	DESCRIPTION
Text.AfterDelimiter	Returns the portion of text after the specified delimiter.
Text.BeforeDelimiter	Returns the portion of text before the specified delimiter.
Text.BetweenDelimiters	Returns the portion of text between the specified startDelimiter and endDelimiter.
Text.Clean	Returns the original text value with non-printable characters removed.
Text.Combine	Returns a text value that is the result of joining all text values with each value separated by a separator.
Text.Lower	Returns the lowercase of a text value.
Text.PadEnd	Returns a text value padded at the end with pad to make it at least length characters.
Text.PadStart	Returns a text value padded at the beginning with pad to make it at least length characters. If pad is not specified, whitespace is used as pad.
Text.Proper	Returns a text value with first letters of all words converted to uppercase.
Text.Repeat	Returns a text value composed of the input text value repeated a number of times.
Text.Reverse	Reverses the provided text.
Text.Split	Returns a list containing parts of a text value that are delimited by a separator text value.
Text.SplitAny	Returns a list containing parts of a text value that are delimited by any separator text values.
Text.Trim	Removes any occurrences of characters in trimChars from text.
Text.TrimEnd	Removes any occurrences of the characters specified in trimChars from the end of the original text value.
Text.TrimStart	Removes any occurrences of the characters in trimChars from the start of the original text value.
Text.Upper	Returns the uppercase of a text value.

Parameters

PARAMETER VALUES	DESCRIPTION
Occurrence.All	A list of positions of all occurrences of the found values is returned.
Occurrence.First	The position of the first occurrence of the found value is returned.
Occurrence.Last	The position of the last occurrence of the found value is returned.
RelativePosition.FromEnd	Indicates indexing should be done from the end of the input.
RelativePosition.FromStart	Indicates indexing should be done from the start of the input.
TextEncoding.Ascii	Use to choose the ASCII binary form.
TextEncoding.BigEndianUnicode	Use to choose the UTF16 big endian binary form.
TextEncoding.Unicode	Use to choose the UTF16 little endian binary form.
TextEncoding.Utf8	Use to choose the UTF8 binary form.
TextEncoding.Utf16	Use to choose the UTF16 little endian binary form.
TextEncoding.Windows	Use to choose the Windows binary form.

Character.FromNumber

11/25/2019 • 2 minutes to read

Syntax

```
Character.FromNumber(number as nullable number) as nullable text
```

About

Returns the character equivalent of the number.

Example 1

Given the number 9, find the character value.

```
Character.FromNumber(9)
```

```
"#(tab)"
```

Character.ToNumber

11/25/2019 • 2 minutes to read

Syntax

```
Character.ToNumber(character as nullable text) as nullable number
```

About

Returns the number equivalent of the character, `character`.

Example 1

Given the character "#(tab)" 9, find the number value.

```
Character.ToNumber("#(tab)")
```

9

Guid.From

11/25/2019 • 2 minutes to read

Syntax

```
Guid.From(value as nullable text) as nullable text
```

About

Returns a `Guid.Type` value from the given `value`. If the given `value` is `null`, `Guid.From` returns `null`. A check will be performed to see if the given `value` is in an acceptable format. Acceptable formats provided in the examples.

Example 1

The Guid can be provided as 32 contiguous hexadecimal digits.

```
Guid.From("05FE1DADC8C24F3BA4C2D194116B4967")
```

```
"05fe1dad-c8c2-4f3b-a4c2-d194116b4967"
```

Example 2

The Guid can be provided as 32 hexadecimal digits separated by hyphens into blocks of 8-4-4-12.

```
Guid.From("05FE1DAD-C8C2-4F3B-A4C2-D194116B4967")
```

```
"05fe1dad-c8c2-4f3b-a4c2-d194116b4967"
```

Example 3

The Guid can be provided as 32 hexadecimal digits separated by hyphens and enclosed in braces.

```
Guid.From("{05FE1DAD-C8C2-4F3B-A4C2-D194116B4967}")
```

```
"05fe1dad-c8c2-4f3b-a4c2-d194116b4967"
```

Example 4

The Guid can be provided as 32 hexadecimal digits separated by hyphens and enclosed by parentheses.

```
Guid.From("(05FE1DAD-C8C2-4F3B-A4C2-D194116B4967)")
```

```
"05fe1dad-c8c2-4f3b-a4c2-d194116b4967"
```

Json.FromValue

11/25/2019 • 2 minutes to read

Syntax

```
Json.FromValue(value as any, optional encoding as nullable number) as binary
```

About

Produces a JSON representation of a given value `value` with a text encoding specified by `encoding`. If `encoding` is omitted, UTF8 is used. Values are represented as follows:

- Null, text and logical values are represented as the corresponding JSON types
- Numbers are represented as numbers in JSON, except that `#infinity`, `-#infinity` and `#nan` are converted to null
- Lists are represented as JSON arrays
- Records are represented as JSON objects
- Tables are represented as an array of objects
- Dates, times, datetimes, datetimezones and durations are represented as ISO-8601 text
- Binary values are represented as base-64 encoded text
- Types and functions produce an error

Example 1

Convert a complex value to JSON.

```
Text.FromBinary(Json.FromValue([A={1, true, "3"}, B=#date(2012, 3, 25)]))
```

```
"{"A": [1, true, "3"], "B": "2012-03-25"}"
```

RelativePosition.FromEnd

11/25/2019 • 2 minutes to read

About

Indicates indexing should be done from the end of the input.

RelativePosition.FromStart

11/25/2019 • 2 minutes to read

About

Indicates indexing should be done from the start of the input.

Text.AfterDelimiter

11/25/2019 • 2 minutes to read

Syntax

```
Text.AfterDelimiter(text as nullable text, delimiter as text, optional index as any) as any
```

About

Returns the portion of `text` after the specified `delimiter`. An optional numeric `index` indicates which occurrence of the `delimiter` should be considered. An optional list `index` indicates which occurrence of the `delimiter` should be considered, as well as whether indexing should be done from the start or end of the input.

Example 1

Get the portion of "111-222-333" after the (first) hyphen.

```
Text.AfterDelimiter("111-222-333", "-")
```

```
"222-333"
```

Example 2

Get the portion of "111-222-333" after the second hyphen.

```
Text.AfterDelimiter("111-222-333", "-", 1)
```

```
"333"
```

Example 3

Get the portion of "111-222-333" after the second hyphen from the end.

```
Text.AfterDelimiter("111-222-333", "-", {1, RelativePosition.FromEnd})
```

```
"222-333"
```

Text.At

11/25/2019 • 2 minutes to read

Syntax

```
Text.At(text as nullable text, index as number) as nullable text
```

About

Returns the character in the text value, `text` at position `index`. The first character in the text is at position 0.

Example 1

Find the character at position 4 in string "Hello, World".

```
Text.At("Hello, World", 4)
```

```
"o"
```

Text.BeforeDelimiter

11/25/2019 • 2 minutes to read

Syntax

```
Text.BeforeDelimiter(text as nullable text, delimiter as text, optional index as any) as any
```

About

Returns the portion of `text` before the specified `delimiter`. An optional numeric `index` indicates which occurrence of the `delimiter` should be considered. An optional list `index` indicates which occurrence of the `delimiter` should be considered, as well as whether indexing should be done from the start or end of the input.

Example 1

Get the portion of "111-222-333" before the (first) hyphen.

```
Text.BeforeDelimiter("111-222-333", "-")
```

```
"111"
```

Example 2

Get the portion of "111-222-333" before the second hyphen.

```
Text.BeforeDelimiter("111-222-333", "-", 1)
```

```
"111-222"
```

Example 3

Get the portion of "111-222-333" before the second hyphen from the end.

```
Text.BeforeDelimiter("111-222-333", "-", {1, RelativePosition.FromEnd})
```

```
"111"
```

Text.BetweenDelimiters

11/25/2019 • 2 minutes to read

Syntax

```
Text.BetweenDelimiters(text as nullable text, startDelimiter as text, endDelimiter as text,  
optional startIndex as any, optional endIndex as any) as any
```

About

Returns the portion of `text` between the specified `startDelimiter` and `endDelimiter`. An optional numeric `startIndex` indicates which occurrence of the `startDelimiter` should be considered. An optional list `startIndex` indicates which occurrence of the `startDelimiter` should be considered, as well as whether indexing should be done from the start or end of the input. The `endIndex` is similar, except that indexing is done relative to the `startIndex`.

Example 1

Get the portion of "111 (222) 333 (444)" between the (first) open parenthesis and the (first) closed parenthesis that follows it.

```
Text.BetweenDelimiters("111 (222) 333 (444)", "(", ")")
```

```
"222"
```

Example 2

Get the portion of "111 (222) 333 (444)" between the second open parenthesis and the first closed parenthesis that follows it.

```
Text.BetweenDelimiters("111 (222) 333 (444)", "(", ")", 1, 0)
```

```
"444"
```

Example 3

Get the portion of "111 (222) 333 (444)" between the second open parenthesis from the end and the second closed parenthesis that follows it.

```
Text.BetweenDelimiters("111 (222) 333 (444)", "(", ")", {1, RelativePosition.FromEnd}, {1,  
RelativePosition.FromStart})
```

```
"222) 333 (444"
```

Text.Clean

11/25/2019 • 2 minutes to read

Syntax

```
Text.Clean(text as nullable text) as nullable text
```

About

Returns a text value with all non-printable characters of `text` removed.

Example 1

Remove line feeds and other non-printable characters from a text value.

```
Text.Clean("ABC#(lf)D")
```

```
"ABCD"
```

Text.Combine

11/25/2019 • 2 minutes to read

Syntax

```
Text.Combine(texts as list, optional separator as nullable text) as text
```

About

Returns the result of combining the list of text values, `texts`, into a single text value. An optional separator used in the final combined text may be specified, `separator`.

Example 1

Combine text values "Seattle" and "WA".

```
Text.Combine({"Seattle", "WA"})
```

```
"SeattleWA"
```

Example 2

Combine text values "Seattle" and "WA" separated by a comma and a space, ", ".

```
Text.Combine({"Seattle", "WA"}, ", ")
```

```
"Seattle, WA"
```

Text.Contains

11/25/2019 • 2 minutes to read

Syntax

```
Text.Contains(text as nullable text, substring as text, optional comparer as nullable function) as nullable logical
```

About

Detects whether the text `text` contains the text `substring`. Returns true if the text is found.

`comparer` is a `Comparer` which is used to control the comparison. Comparers can be used to provide case insensitive or culture and locale aware comparisons.

The following built in comparers are available in the formula language:

- `Comparer.Ordinal`: Used to perform an exact ordinal comparison
- `Comparer.OrdinalIgnoreCase`: Used to perform an exact ordinal case-insensitive comparison
- `Comparer.FromCulture`: Used to perform a culture aware comparison

Example 1

Find if the text "Hello World" contains "Hello".

```
Text.Contains("Hello World", "Hello")
```

true

Example 2

Find if the text "Hello World" contains "hello".

```
Text.Contains("Hello World", "hello")
```

false

Text.End

11/25/2019 • 2 minutes to read

Syntax

```
Text.End(text as nullable text, count as number) as nullable text
```

About

Returns a `text` value that is the last `count` characters of the `text` value `text`.

Example 1

Get the last 5 characters of the text "Hello, World".

```
Text.End("Hello, World", 5)
```

```
"World"
```


Text.EndsWith

11/25/2019 • 2 minutes to read

Syntax

```
Text.EndsWith(text as nullable text, substring as text, optional comparer as nullable function) as nullable logical
```

About

Indicates whether the given text, `text`, ends with the specified value, `substring`. The indication is case-sensitive.

`comparer` is a `Comparer` which is used to control the comparison. Comparers can be used to provide case insensitive or culture and locale aware comparisons.

The following built in comparers are available in the formula language:

- `Comparer.Ordinal`: Used to perform an exact ordinal comparison
- `Comparer.OrdinalIgnoreCase`: Used to perform an exact ordinal case-insensitive comparison
- `Comparer.FromCulture`: Used to perform a culture aware comparison

Example 1

Check if "Hello, World" ends with "world".

```
Text.EndsWith("Hello, World", "world")
```

false

Example 2

Check if "Hello, World" ends with "World".

```
Text.EndsWith("Hello, World", "World")
```

true

Text.Format

11/25/2019 • 2 minutes to read

Syntax

```
Text.Format(formatString as text, arguments as any, optional culture as nullable text) as text
```

About

Returns formatted text that is created by applying `arguments` from a list or record to a format string `formatString`. Optionally, a culture may be specified.

Example 1

Format a list of numbers.

```
Text.Format("#{0}, #{1}, and #{2}.", { 17, 7, 22 })
```

```
"17, 7, and 22."
```

Example 2

Format different data types from a record according to United States English culture.

```
Text.Format("The time for the #[distance] km run held in #[city] on #[date] was #[duration].", [city = "Seattle", date = #date(2015, 3, 10), duration = #duration(0,0,54,40), distance = 10], "en-US")
```

```
"The time for the 10 km run held in Seattle on 3/10/2015 was 00:54:40."
```

Text.From

11/25/2019 • 2 minutes to read

Syntax

```
Text.From(value as any, optional culture as nullable text) as nullable text
```

About

Returns the text representation of `value`. The `value` can be a `number`, `date`, `time`, `datetime`, `datetimezone`, `logical`, `duration` or `binary` value. If the given value is null, `Text.From` returns null. An optional `culture` may also be provided.

Example 1

Create a text value from the number 3.

```
Text.From(3)
```

```
"3"
```

Text.FromBinary

11/25/2019 • 2 minutes to read

Syntax

```
Text.FromBinary(binary as nullable binary, optional encoding as nullable number) as nullable text
```

About

Decodes data, `binary`, from a binary value in to a text value, using `encoding` type.

Text.InferNumberType

11/25/2019 • 2 minutes to read

Syntax

```
Text.InferNumberType(text as text, optional culture as nullable text) as type
```

About

Infers granular number type (Int64.Type, Double.Type, etc.) of `text` using `culture`. Exception is raised if `text` is not a number

Text.Insert

11/25/2019 • 2 minutes to read

Syntax

```
Text.Insert(text as nullable text, offset as number, newText as text) as nullable text
```

About

Returns the result of inserting text value `newText` into the text value `text` at position `offset`. Positions start at number 0.

Example 1

Insert "C" between "B" and "D" in "ABD".

```
Text.Insert("ABD", 2, "C")
```

```
"ABCD"
```

Text.Length

11/25/2019 • 2 minutes to read

Syntax

```
Text.Length(text as nullable text) as nullable number
```

About

Returns the number of characters in the text `text`.

Example 1

Find how many characters are in the text "Hello World".

```
Text.Length("Hello World")
```

Text.Lower

11/25/2019 • 2 minutes to read

Syntax

```
Text.Lower(text as nullable text, optional culture as nullable text) as nullable text
```

About

Returns the result of converting all characters in `text` to lowercase.

Example 1

Get the lowercase version of "AbCd".

```
Text.Lower("AbCd")
```

```
"abcd"
```


Text.Middle

11/25/2019 • 2 minutes to read

Syntax

```
Text.Middle(text as nullable text, start as number, optional count as nullable number) as nullable text
```

About

Returns `count` characters, or through the end of `text` ; at the offset `start` .

Example 1

Find the substring from the text "Hello World" starting at index 6 spanning 5 characters.

```
Text.Middle("Hello World", 6, 5)
```

```
"World"
```

Example 2

Find the substring from the text "Hello World" starting at index 6 through the end.

```
Text.Middle("Hello World", 6, 20)
```

```
"World"
```

Text.NewGuid

11/25/2019 • 2 minutes to read

Syntax

```
Text.NewGuid() as text
```

About

Returns a new, random globally unique identifier (GUID).

Text.PadEnd

11/25/2019 • 2 minutes to read

Syntax

```
Text.PadEnd(text as nullable text, count as number, optional character as nullable text) as nullable text
```

About

Returns a `text` value padded to length `count` by inserting spaces at the end of the text value `text`. An optional character `character` can be used to specify the character used for padding. The default pad character is a space.

Example 1

Pad the end of a text value so it is 10 characters long.

```
Text.PadEnd("Name", 10)
```

```
"Name "
```

Example 2

Pad the end of a text value with "|" so it is 10 characters long.

```
Text.PadEnd("Name", 10, "|")
```

```
"Name|||||"
```

Text.PadStart

11/25/2019 • 2 minutes to read

Syntax

```
Text.PadStart(text as nullable text, count as number, optional character as nullable text) as nullable text
```

About

Returns a `text` value padded to length `count` by inserting spaces at the start of the text value `text`. An optional character `character` can be used to specify the character used for padding. The default pad character is a space.

Example 1

Pad the start of a text value so it is 10 characters long.

```
Text.PadStart("Name", 10)
```

```
"  Name"
```

Example 2

Pad the start of a text value with "|" so it is 10 characters long.

```
Text.PadStart("Name", 10, "|")
```

```
"|||||Name"
```

Text.PositionOf

11/25/2019 • 2 minutes to read

Syntax

```
Text.PositionOf(text as text, substring as text, optional occurrence as nullable number, optional comparer as nullable function) as any
```

About

Returns the position of the specified occurrence of the text value `substring` found in `text`. An optional parameter `occurrence` may be used to specify which occurrence position to return (first occurrence by default). Returns -1 if `substring` was not found.

`comparer` is a `Comparer` which is used to control the comparison. Comparers can be used to provide case insensitive or culture and locale aware comparisons.

The following built in comparers are available in the formula language:

- `Comparer.Ordinal`: Used to perform an exact ordinal comparison
- `Comparer.OrdinalIgnoreCase`: Used to perform an exact ordinal case-insensitive comparison
- `Comparer.FromCulture`: Used to perform a culture aware comparison

Example 1

Get the position of the first occurrence of "World" in the text "Hello, World! Hello, World!".

```
Text.PositionOf("Hello, World! Hello, World!", "World")
```

7

Example 2

Get the position of last occurrence of "World" in "Hello, World! Hello, World!".

```
Text.PositionOf("Hello, World! Hello, World!", "World", Occurrence.Last)
```

21

Text.PositionOfAny

11/25/2019 • 2 minutes to read

Syntax

```
Text.PositionOfAny(text as text, characters as list, optional occurrence as nullable number) as any
```

About

Returns the position of the first occurrence of any of the characters in the character list `text` found in the text value `characters`. An optional parameter `occurrence` may be used to specify which occurrence position to return.

Example 1

Find the position of "W" in text "Hello, World!".

```
Text.PositionOfAny("Hello, World!", {"W"})
```

7

Example 2

Find the position of "W" or "H" in text "Hello, World!".

```
Text.PositionOfAny("Hello, World!", {"H", "W"})
```

0

Text.Proper

11/25/2019 • 2 minutes to read

Syntax

```
Text.Proper(text as nullable text, optional culture as nullable text) as nullable text
```

About

Returns the result of capitalizing only the first letter of each word in text value `text`. All other letters are returned in lowercase.

Example 1

Use `Text.Proper` on a simple sentence.

```
Text.Proper("the QUICK BrOwN fOx jUmPs oVER tHe LAzy DoG")
```

```
"The Quick Brown Fox Jumps Over The Lazy Dog"
```

Text.Range

11/25/2019 • 2 minutes to read

Syntax

```
Text.Range(text as nullable text, offset as number, optional count as nullable number) as nullable text
```

About

Returns the substring from the text `text` found at the offset `offset`. An optional parameter, `count`, can be included to specify how many characters to return. Throws an error if there aren't enough characters.

Example 1

Find the substring from the text "Hello World" starting at index 6.

```
Text.Range("Hello World", 6)
```

```
"World"
```

Example 2

Find the substring from the text "Hello World Hello" starting at index 6 spanning 5 characters.

```
Text.Range("Hello World Hello", 6, 5)
```

```
"World"
```


Text.Remove

11/25/2019 • 2 minutes to read

Syntax

```
Text.Remove(text as nullable text, removeChars as any) as nullable text
```

About

Returns a copy of the text value `text` with all the characters from `removeChars` removed.

Example 1

Remove characters , and ; from the text value.

```
Text.Remove("a,b;c",{",",",";"})
```

```
"abc"
```

Text.RemoveRange

11/25/2019 • 2 minutes to read

Syntax

```
Text.RemoveRange(text as nullable text, offset as number, optional count as nullable number) as nullable text
```

About

Returns a copy of the text value `text` with all the characters from position `offset` removed. An optional parameter, `count` can be used to specify the number of characters to remove. The default value of `count` is 1. Position values start at 0.

Example 1

Remove 1 character from the text value "ABEFC" at position 2.

```
Text.RemoveRange("ABEFC", 2)
```

```
"ABFC"
```

Example 2

Remove two characters from the text value "ABEFC" starting at position 2.

```
Text.RemoveRange("ABEFC", 2, 2)
```

```
"ABC"
```

Text.Repeat

11/25/2019 • 2 minutes to read

Syntax

```
Text.Repeat(text as nullable text, count as number) as nullable text
```

About

Returns a text value composed of the input text `text` repeated `count` times.

Example 1

Repeat the text "a" five times.

```
Text.Repeat("a", 5)
```

```
"aaaaa"
```

Example 2

Repeat the text "helloworld" three times.

```
Text.Repeat("helloworld.", 3)
```

```
"helloworld.helloworld.helloworld."
```

Text.Replace

11/25/2019 • 2 minutes to read

Syntax

```
Text.Replace(text as nullable text, old as text, new as text) as nullable text
```

About

Returns the result of replacing all occurrences of text value `old` in text value `text` with text value `new`. This function is case sensitive.

Example 1

Replace every occurrence of "the" in a sentence with "a".

```
Text.Replace("the quick brown fox jumps over the lazy dog", "the", "a")
```

```
"a quick brown fox jumps over a lazy dog"
```

Text.ReplaceRange

11/25/2019 • 2 minutes to read

Syntax

```
Text.ReplaceRange(text as nullable text, offset as number, count as number, newText as text) as nullable text
```

About

Returns the result of removing a number of characters, `count`, from text value `text` beginning at position `offset` and then inserting the text value `newText` at the same position in `text`.

Example 1

Replace a single character at position 2 in text value "ABGF" with new text value "CDE".

```
Text.ReplaceRange("ABGF", 2, 1, "CDE")
```

```
"ABCDEF"
```

Text.Reverse

11/25/2019 • 2 minutes to read

Syntax

```
Text.Reverse(text as nullable text) as nullable text
```

About

Reverses the provided `text`.

Example 1

Reverse the text "123".

```
Text.Reverse("123")
```

```
"321"
```

Text.Select

11/25/2019 • 2 minutes to read

Syntax

```
Text.Select(text as nullable text, selectChars as any) as nullable text
```

About

Returns a copy of the text value `text` with all the characters not in `selectChars` removed.

Example 1

Select all characters in the range of 'a' to 'z' from the text value.

```
Text.Select("a,b;c", {"a".."z"})
```

```
"abc"
```

Text.Split

11/25/2019 • 2 minutes to read

Syntax

```
Text.Split(text as text, separator as text) as list
```

About

Returns a list of text values resulting from the splitting a text value `text` based on the specified delimiter, `separator`.

Example 1

Create a list from the "|" delimited text value "Name|Address|PhoneNumber".

```
Text.Split("Name|Address|PhoneNumber", "|")
```

Name
Address
PhoneNumber

Text.SplitAny

11/25/2019 • 2 minutes to read

Syntax

```
Text.SplitAny(text as text, separators as text) as list
```

About

Returns a list of text values resulting from the splitting a text value `text` based on any character in the specified delimiter, `separators`.

Example 1

Create a list from the text value "Jamie|Campbell|Admin|Adventure Works|www.adventure-works.com".

```
Text.SplitAny("Jamie|Campbell|Admin|Adventure Works|www.adventure-works.com", "|")
```

Jamie
Campbell
Admin
Adventure Works
www.adventure-works.com

Text.Start

11/25/2019 • 2 minutes to read

Syntax

```
Text.Start(text as nullable text, count as number) as nullable text
```

About

Returns the first `count` characters of `text` as a text value.

Example 1

Get the first 5 characters of "Hello, World".

```
Text.Start("Hello, World", 5)
```

```
"Hello"
```

Text.StartsWith

11/25/2019 • 2 minutes to read

Syntax

```
Text.StartsWith(text as nullable text, substring as text, optional comparer as nullable function)  
as nullable logical
```

About

Returns true if text value `text` starts with text value `substring`.

- `text`: A `text` value which is to be searched
- `substring`: A `text` value which is the substring to be searched for in `substring`
- `comparer`: *[Optional]* A `Comparer` used for controlling the comparison. For example, `Comparer.OrdinalIgnoreCase` may be used to perform case insensitive searches

`comparer` is a `Comparer` which is used to control the comparison. Comparers can be used to provide case insensitive or culture and locale aware comparisons.

The following built in comparers are available in the formula language:

- `Comparer.Ordinal`: Used to perform an exact ordinal comparison
- `Comparer.OrdinalIgnoreCase`: Used to perform an exact ordinal case-insensitive comparison
- `Comparer.FromCulture`: Used to perform a culture aware comparison

Example 1

Check if the text "Hello, World" starts with the text "hello".

```
Text.StartsWith("Hello, World", "hello")
```

false

Example 2

Check if the text "Hello, World" starts with the text "Hello".

```
Text.StartsWith("Hello, World", "Hello")
```

true

Text.ToBinary

11/25/2019 • 2 minutes to read

Syntax

```
Text.ToBinary(text as nullable text, optional encoding as nullable number, optional  
includeByteOrderMark as nullable logical) as nullable binary
```

About

Encodes the given text value, `text`, into a binary value using the specified `encoding`.

Text.ToList

11/25/2019 • 2 minutes to read

Syntax

```
Text.ToList(text as text) as list
```

About

Returns a list of character values from the given text value `text`.

Example 1

Create a list of character values from the text "Hello World".

```
Text.ToList("Hello World")
```

H

e

l

l

o

W

o

r

l

d

Text.Trim

11/25/2019 • 2 minutes to read

Syntax

```
Text.Trim(text as nullable text, optional trim as any) as nullable text
```

About

Returns the result of removing all leading and trailing whitespace from text value `text`.

Example 1

Remove leading and trailing whitespace from " a b c d ".

```
Text.Trim(" a b c d ")
```

```
"a b c d"
```

Text.TrimEnd

11/25/2019 • 2 minutes to read

Syntax

```
Text.TrimEnd(text as nullable text, optional trim as any) as nullable text
```

About

Returns the result of removing all trailing whitespace from text value `text`.

Example 1

Remove trailing whitespace from " a b c d ".

```
Text.TrimEnd(" a b c d ")
```

```
" a b c d "
```

Text.TrimStart

11/25/2019 • 2 minutes to read

Syntax

```
Text.TrimStart(text as nullable text, optional trim as any) as nullable text
```

About

Returns the result of removing all leading whitespace from text value `text`.

Example 1

Remove leading whitespace from " a b c d ".

```
Text.TrimStart(" a b c d ")
```

```
"a b c d "
```


Text.Upper

11/25/2019 • 2 minutes to read

Syntax

```
Text.Upper(text as nullable text, optional culture as nullable text) as nullable text
```

About

Returns the result of converting all characters in `text` to uppercase.

Example 1

Get the uppercase version of "aBcD".

```
Text.Upper("aBcD")
```

```
"ABCD"
```

TextEncoding.Ascii

11/25/2019 • 2 minutes to read

About

Use to choose the ASCII binary form.

TextEncoding.BigEndianUnicode

11/25/2019 • 2 minutes to read

About

Use to choose the UTF16 big endian binary form.

TextEncoding.Unicode

11/25/2019 • 2 minutes to read

About

Use to choose the UTF16 little endian binary form.

TextEncoding.Utf8

11/25/2019 • 2 minutes to read

About

Use to choose the UTF8 binary form.

TextEncoding.UTF16

11/25/2019 • 2 minutes to read

About

Use to choose the UTF16 little endian binary form.

TextEncoding.Windows

11/25/2019 • 2 minutes to read

About

Use to choose the Windows binary form.

Time functions

11/25/2019 • 2 minutes to read

Time

FUNCTION	DESCRIPTION
Time.EndOfHour	Returns a DateTime value from the end of the hour.
Time.From	Returns a time value from a value.
Time.FromText	Returns a Time value from a set of date formats.
Time.Hour	Returns an hour value from a DateTime value.
Time.Minute	Returns a minute value from a DateTime value.
Time.Second	Returns a second value from a DateTime value
Time.StartOfHour	Returns the first value of the hour from a time value.
Time.ToRecord	Returns a record containing parts of a Date value.
Time.ToText	Returns a text value from a Time value.
#time	Creates a time value from hour, minute, and second.

Time.EndOfHour

11/25/2019 • 2 minutes to read

Syntax

```
Time.EndOfHour(dateTime as any) as any
```

About

Returns a `time`, `datetime`, or `datetimezone` value representing the end of the hour in `dateTime`, including fractional seconds. Time zone information is preserved.

- `dateTime`: A `time`, `datetime`, or `datetimezone` value from which the end of the hour is calculated.

Example 1

Get the end of the hour for 5/14/2011 05:00:00 PM.

```
Time.EndOfHour(#datetime(2011, 5, 14, 17, 0, 0))
```

```
#datetime(2011, 5, 14, 17, 59, 59.9999999)
```

Example 2

Get the end of the hour for 5/17/2011 05:00:00 PM -7:00.

```
Time.EndOfHour(#datetimezone(2011, 5, 17, 5, 0, 0, -7, 0))
```

```
#datetimezone(2011, 5, 17, 5, 59, 59.9999999, -7, 0)
```

Time.From

11/25/2019 • 2 minutes to read

Syntax

```
Time.From(value as any, optional culture as nullable text) as nullable time
```

About

Returns a `time` value from the given `value`. If the given `value` is `null`, `Time.From` returns `null`. If the given `value` is `time`, `value` is returned. Values of the following types can be converted to a `time` value:

- `text`: A `time` value from textual representation. See `Time.FromText` for details.
- `datetime`: The time component of the `value`.
- `datetimezone`: The time component of the local datetime equivalent of `value`.
- `number`: A `time` equivalent to the number of fractional days expressed by `value`. If `value` is negative or greater or equal to 1, an error is returned.

If `value` is of any other type, an error is returned.

Example 1

Convert `0.7575` to a `time` value.

```
Time.From(0.7575)
```

```
#time(18,10,48)
```

Example 2

Convert `#datetime(1899, 12, 30, 06, 45, 12)` to a `time` value.

```
Time.From(#datetime(1899, 12, 30, 06, 45, 12))
```

```
#time(06, 45, 12)
```

Time.FromText

11/25/2019 • 2 minutes to read

Syntax

```
Time.FromText(text as nullable text, optional culture as nullable text) as nullable time
```

About

Creates a `time` value from a textual representation, `text`, following ISO 8601 format standard.

- `Time.FromText("12:34:12")` // Time, hh:mm:ss
- `Time.FromText("12:34:12.1254425")` // hh:mm:ss.nnnnnnn

Example 1

Convert `"10:12:31am"` into a Time value.

```
Time.FromText("10:12:31am")
```

```
#time(10, 12, 31)
```

Example 2

Convert `"1012"` into a Time value.

```
Time.FromText("1012")
```

```
#time(10, 12, 00)
```

Example 3

Convert `"10"` into a Time value.

```
Time.FromText("10")
```

```
#time(10, 00, 00)
```

Time.Hour

11/25/2019 • 2 minutes to read

Syntax

```
Time.Hour(dateTime as any) as nullable number
```

About

Returns the hour component of the provided `time`, `datetime`, or `datetimezone` value, `dateTime`.

Example 1

Find the hour in `#datetime(2011, 12, 31, 9, 15, 36)`.

```
Time.Hour(#datetime(2011, 12, 31, 9, 15, 36))
```

Time.Minute

11/25/2019 • 2 minutes to read

Syntax

```
Time.Minute(dateTime as any) as nullable number
```

About

Returns the minute component of the provided `time`, `datetime`, or `datetimezone` value, `dateTime`.

Example 1

Find the minute in `#datetime(2011, 12, 31, 9, 15, 36)`.

```
Time.Minute(#datetime(2011, 12, 31, 9, 15, 36))
```

Time.Second

11/25/2019 • 2 minutes to read

Syntax

```
Time.Second(dateTime as any) as nullable number`
```

About

Returns the second component of the provided `time`, `datetime`, or `datetimezone` value, `dateTime`.

Example 1

Find the second value from a datetime value.

```
Time.Second(#datetime(2011, 12, 31, 9, 15, 36.5))
```

```
36.5
```

Time.StartOfHour

11/25/2019 • 2 minutes to read

Syntax

```
Time.StartOfHour(dateTime as any) as any
```

About

Returns the first value of the hour given a `time`, `datetime` or `datetimezone` type.

Example 1

Find the start of the hour for October 10th, 2011, 8:10:32AM (`#datetime(2011, 10, 10, 8, 10, 32)`).

```
Time.StartOfHour(#datetime(2011, 10, 10, 8, 10, 32))
```

```
#datetime(2011, 10, 10, 8, 0, 0)
```

Time.ToRecord

11/25/2019 • 2 minutes to read

Syntax

```
Time.ToRecord(time as time) as record
```

About

Returns a record containing the parts of the given Time value, `time`.

- `time`: A `time` value for from which the record of its parts is to be calculated.

Example 1

Convert the `#time(11, 56, 2)` value into a record containing Time values.

```
Time.ToRecord(#time(11, 56, 2))
```

hour	11
minute	56
second	2

Time.ToText

11/25/2019 • 2 minutes to read

Syntax

```
Time.ToText(time as nullable time, optional format as nullable text, optional culture as nullable text) as nullable text
```

About

Returns a textual representation of `time`, the Time value, `time`. This function takes in an optional format parameter `format`. For a complete list of supported formats, please refer to the Library specification document.

Example 1

Get a textual representation of `#time(11, 56, 2)`.

```
Time.ToText(#time(11, 56, 2))
```

```
"11:56 AM"
```

Example 2

Get a textual representation of `#time(11, 56, 2)` with format option.

```
Time.ToText(#time(11, 56, 2), "hh:mm")
```

```
"11:56"
```

#time

11/25/2019 • 2 minutes to read

Syntax

```
#time(hour as number, minute as number, second as number) as time
```

About

Creates a time value from whole numbers hour `hour`, minute `minute`, and (fractional) second `second`. Raises an error if these are not true:

- $0 \leq \text{hour} \leq 24$
- $0 \leq \text{minute} \leq 59$
- $0 \leq \text{second} \leq 59$
- if hour is 24, then minute and second must be 0

Type functions

11/25/2019 • 2 minutes to read

Type

FUNCTION	DESCRIPTION
Type.AddTableKey	Add a key to a table type.
Type.ClosedRecord	The given type must be a record type returns a closed version of the given record type (or the same type, if it is already closed)
Type.Facets	Returns the facets of a type.
Type.ForFunction	Creates a function type from the given .
Type.ForRecord	Returns a Record type from a fields record.
Type.FunctionParameters	Returns a record with field values set to the name of the parameters of a function type, and their values set to their corresponding types.
Type.FunctionRequiredParameters	Returns a number indicating the minimum number of parameters required to invoke the a type of function.
Type.FunctionReturn	Returns a type returned by a function type.
Type.Is	Type.Is
Type.IsNullable	Returns true if a type is a nullable type; otherwise, false.
Type.IsOpenRecord	Returns whether a record type is open.
Type.ListItem	Returns an item type from a list type.
Type.NonNullable	Returns the non nullable type from a type.
Type.OpenRecord	Returns an opened version of a record type, or the same type, if it is already open.
Type.RecordFields	Returns a record describing the fields of a record type with each field of the returned record type having a corresponding name and a value that is a record of the form [Type = type, Opional = logical].
Type.ReplaceFacets	Replaces the facets of a type.
Type.ReplaceTableKeys	Replaces the keys in a table type.

FUNCTION	DESCRIPTION
Type.TableColumn	Returns the type of a column in a table.
Type.TableKeys	Returns keys from a table type.
Type.TableRow	Returns a row type from a table type.
Type.TableSchema	Returns a table containing a description of the columns (i.e. the schema) of the specified table type.
Type.Union	Returns the union of a list of types.

Type.AddTableKey

11/25/2019 • 2 minutes to read

Syntax

```
Type.AddTableKey(table as type, columns as list, isPrimary as logical) as type
```

About

Adds a key to the given table type.

Type.ClosedRecord

11/25/2019 • 2 minutes to read

Syntax

```
Type.ClosedRecord(type as type) as type
```

About

Returns a closed version of the given `record` `type` (or the same type, if it is already closed).

Example 1

Create a closed version of `type [A = number, ...]`.

```
Type.ClosedRecord(type [ A = number, ... ])
```

```
type [ A = number ]
```

Type.Facets

11/25/2019 • 2 minutes to read

Syntax

```
Type.Facets(type as type) as record
```

About

Returns a record containing the facets of `type`

Type.ForFunction

11/25/2019 • 2 minutes to read

Syntax

```
Type.ForFunction(signature as record, min as number) as type
```

About

Creates a `function type` from `signature`, a record of `ReturnType` and `Parameters`, and `min`, the minimum number of arguments required to invoke the function.

Example 1

Creates the type for a function that takes a number parameter named X and returns a number.

```
Type.ForFunction([ReturnType = type number, Parameters = [X = type number]], 1)
```

```
type function (X as number) as number
```


Type.ForRecord

11/25/2019 • 2 minutes to read

Syntax

```
Type.ForRecord(fields as record, open as logical) as type
```

About

Returns a type that represents records with specific type constraints on fields.

Type.FunctionParameters

11/25/2019 • 2 minutes to read

Syntax

```
Type.FunctionParameters(type as type) as record
```

About

Returns a record with field values set to the name of the parameters of `type`, and their values set to their corresponding types.

Example

Find the types of the parameters to the function `(x as number, y as text)`.

```
Type.FunctionParameters(type function (x as number, y as text) as any)
```

x	[Type]
y	[Type]

Type.FunctionRequiredParameters

11/25/2019 • 2 minutes to read

Syntax

```
Type.FunctionRequiredParameters(type as type) as number
```

About

Returns a number indicating the minimum number of parameters required to invoke the input `type` of function.

Example 1

Find the number of required parameters to the function `(x as number, optional y as text)`.

```
Type.FunctionRequiredParameters(type function (x as number, optional y as text) as any)
```

Type.FunctionReturn

11/25/2019 • 2 minutes to read

Syntax

```
Type.FunctionReturn(type as type) as type
```

About

Returns a type returned by a function `type`.

Example 1

Find the return type of `() as any`.

```
Type.FunctionReturn(type function () as any)
```

```
type any
```

Type.Is

11/25/2019 • 2 minutes to read

Syntax

```
Type.Is(type1 as type, type2 as type) as logical
```

About

Type.Is

Type.IsNullable

11/25/2019 • 2 minutes to read

Syntax

```
Type.IsNullable(type as type) as logical
```

About

Returns `true` if a type is a `nullable` type; otherwise, `false`.

Example 1

Determine if `number` is nullable.

```
Type.IsNullable(type number)
```

```
false
```

Example 2

Determine if `type nullable number` is nullable.

```
Type.IsNullable(type nullable number)
```

```
true
```

Type.IsOpenRecord

11/25/2019 • 2 minutes to read

Syntax

```
Type.IsOpenRecord(type as type) as logical
```

About

Returns a `logical` indicating whether a record `type` is open.

Example 1

Determine if the record `type [A = number, ...]` is open.

```
Type.IsOpenRecord(type [ A = number, ... ])
```

```
true
```

Type.ListItem

11/25/2019 • 2 minutes to read

Syntax

```
Type.ListItem(type as type) as type
```

About

Returns an item type from a list `type`.

Example 1

Find item type from the list `{number}`.

```
Type.ListItem(type {number})
```

```
type number
```


Type.NonNullable

11/25/2019 • 2 minutes to read

Syntax

```
Type.NonNullable(type as type) as type
```

About

Returns the non `nullable` type from the `type`.

Example 1

Return the non nullable type of `type nullable number`.

```
Type.NonNullable(type nullable number)
```

```
type number
```

Type.OpenRecord

11/25/2019 • 2 minutes to read

Syntax

```
Type.OpenRecord(type as type) as type
```

About

Returns an opened version of the given `record` `type` (or the same type, if it is already opened).

Example 1

Create an opened version of `type [A = number]`.

```
Type.OpenRecord(type [ A = number])
```

```
type [ A = number, ... ]
```

Type.RecordFields

11/25/2019 • 2 minutes to read

Syntax

```
Type.RecordFields(type as type) as record
```

About

Returns a record describing the fields of a record `type`. Each field of the returned record type has a corresponding name and a value, in the form of a record `[Type = type, Optional = logical]`.

Example

Find the name and value of the record `[A = number, optional B = any]`.

```
Type.RecordFields(type [ A = number, optional B = any])
```

A	[Record]
B	[Record]

Type.ReplaceFacets

11/25/2019 • 2 minutes to read

Syntax

```
Type.ReplaceFacets(type as type, facets as record) as type
```

About

Replaces the facets of `type` with the facets contained in the record `facets`.

Type.ReplaceTableKeys

11/25/2019 • 2 minutes to read

Syntax

```
Type.ReplaceTableKeys(tableType as type, keys as list) as type
```

About

Returns a new table type with all keys replaced by the specified list of keys.

Type.TableColumn

11/25/2019 • 2 minutes to read

Syntax

```
Type.TableColumn(tableType as type, column as text) as type
```

About

Returns the type of the column `column` in the table type `tableType`.

Type.TableKeys

11/25/2019 • 2 minutes to read

Syntax

```
Type.TableKeys(tableType as type) as list
```

About

Returns the possibly empty list of keys for the given table type.

Type.TableRow

11/25/2019 • 2 minutes to read

Syntax

```
Type.TableRow(table as type) as type
```

About

Type.TableRow

Type.TableSchema

11/25/2019 • 2 minutes to read

Syntax

```
Type.TableSchema(tableType as type) as table
```

About

Returns a table describing the columns of `tableType`.

Type.Union

11/25/2019 • 2 minutes to read

Syntax

```
Type.Union(types as list) as type
```

About

Returns the union of the types in `types`.

Uri functions

11/25/2019 • 2 minutes to read

Uri

FUNCTION	DESCRIPTION
Uri.BuildQueryString	Assemble a record into a URI query string.
Uri.Combine	Returns a Uri based on the combination of the base and relative parts.
Uri.EscapeDataString	Encodes special characters in accordance with RFC 3986.
Uri.Parts	Returns a record value with the fields set to the parts of a Uri text value.

Uri.BuildQueryString

11/25/2019 • 2 minutes to read

Syntax

```
Uri.BuildQueryString(query as record) as text
```

About

Assemble the record `query` into a URI query string, escaping characters as necessary.

Example

Encode a query string which contains some special characters.

```
Uri.BuildQueryString([a="1", b="+$"])
```

```
"a=1&b=%2B%24"
```

Uri.Combine

11/25/2019 • 2 minutes to read

Syntax

```
Uri.Combine(baseUri as text, relativeUri as text) as text
```

About

Returns an absolute URI that is the combination of the input `baseUri` and `relativeUri`.

Uri.EscapeDataString

11/25/2019 • 2 minutes to read

Syntax

```
Uri.EscapeDataString(data as text) as text
```

About

Encodes special characters in the input `data` according to the rules of RFC 3986.

Example

Encode the special characters in "+money\$".

```
Uri.EscapeDataString("+money$")
```

```
"%2Bmoney%24"
```

Uri.Parts

11/25/2019 • 2 minutes to read

Syntax

```
Uri.Parts(absoluteUri as text) as record
```

About

Returns the parts of the input `absoluteUri` as a record, containing values such as Scheme, Host, Port, Path, Query, Fragment, UserName and Password.

Example 1

Find the parts of the absolute URI "www.adventure-works.com".

```
Uri.Parts("www.adventure-works.com")
```

SCHEME	http
HOST	www.adventure-works.com
PORT	80
PATH	/
QUERY	[Record]
FRAGMENT	
USERNAME	
PASSWORD	

Example 2

Decode a percent-encoded string.

```
let UriUnescapeDataString = (data as text) as text => Uri.Parts("http://contoso?a=" & data)[Query][a] in  
UriUnescapeDataString("%2Bmoney%24")
```

```
"+money$"
```

Value functions

11/25/2019 • 2 minutes to read

Values

FUNCTION	DESCRIPTION
Value.Compare	Returns 1, 0, or -1 based on value1 being greater than, equal to, or less than the value2. An optional comparer function can be provided.
Value.Equals	Returns whether two values are equal.
Value.NativeQuery	Evaluates a query against a target.
Value.NullableEquals	Returns a logical value or null based on two values .
Value.Type	Returns the type of the given value.

Arithmetic operations

FUNCTION	DESCRIPTION
Value.Add	Returns the sum of the two values.
Value.Divide	Returns the result of dividing the first value by the second.
Value.Multiply	Returns the product of the two values.
Value.Subtract	Returns the difference of the two values.

Arithmetic parameters

FUNCTION	DESCRIPTION
Precision.Double	An optional parameter for the built-in arithmetic operators to specify double precision.
Precision.Decimal	An optional parameter for the built-in arithmetic operators to specify decimal precision.

Parameter types

TYPE	DESCRIPTION
Value.As	Value.As is the function corresponding to the as operator in the formula language. The expression value as type asserts that the value of a value argument is compatible with type as per the is operator. If it is not compatible, an error is raised.

TYPE	DESCRIPTION
Value.Is	Value.Is is the function corresponding to the is operator in the formula language. The expression value is type returns true if the ascribed type of vlaue is compatible with type, and returns false if the ascribed type of value is incompatible with type.
Value.ReplaceType	A value may be ascribed a type using Value.ReplaceType. Value.ReplaceType either returns a new value with the type ascribed or raises an error if the new type is incompatible with the value's native primitive type. In particular, the function raises an error when an attempt is made to ascribe an abstract type, such as any. When replacing a the type of a record, the new type must have the same number of fields, and the new fields replace the old fields by ordinal position, not by name. Similarly, when replacing the type of a table, the new type must have the same number of columns, and the new columns replace the old columns by ordinal position.
IMPLEMENTATION	DESCRIPTION
DirectQueryCapabilities.From	DirectQueryCapabilities.From
Embedded.Value	Accesses a value by name in an embedded mashup.
Value.Firewall	Value.Firewall
Variable.Value	Variable.Value
SqlExpression.SchemaFrom	SqlExpression.SchemaFrom
SqlExpression.ToExpression	SqlExpression.ToExpression

Metadata

FUNCTION	DESCRIPTION
Value.Metadata	Returns a record containing the input's metadata.
Value.RemoveMetadata	Removes the metadata on the value and returns the original value.
Value.ReplaceMetadata	Replaces the metadata on a value with the new metadata record provided and returns the original value with the new metadata attached.

DirectQueryCapabilities.From

11/25/2019 • 2 minutes to read

Syntax

```
DirectQueryCapabilities.From(value as any) as table
```

About

DirectQueryCapabilities.From

Embedded.Value

11/25/2019 • 2 minutes to read

Syntax

```
Embedded.Value(value as any, path as text) as any
```

About

Accesses a value by name in an embedded mashup.

Precision.Decimal

11/25/2019 • 2 minutes to read

About

An optional parameter for the built-in arithmetic operators to specify decimal precision.

Precision.Double

11/25/2019 • 2 minutes to read

About

An optional parameter for the built-in arithmetic operators to specify double precision.

SqlExpression.SchemaFrom

11/25/2019 • 2 minutes to read

Syntax

```
SqlExpression.SchemaFrom(schema as any) as any
```

About

SqlExpression.SchemaFrom

SqlExpression.ToExpression

11/25/2019 • 2 minutes to read

Syntax

```
SqlExpression.ToExpression(sql as text, environment as record) as text
```

About

SqlExpression.ToExpression

Value.Add

11/25/2019 • 2 minutes to read

Syntax

```
Value.Add(value1 as any, value2 as any, optional precision as nullable number) as any
```

About

Returns the sum of `value1` and `value2`. An optional `precision` parameter may be specified, by default `Precision.Double` is used.

Value.As

11/25/2019 • 2 minutes to read

Syntax

```
Value.As(value as any, type as type) as any
```

About

Value.As

Value.Compare

11/25/2019 • 2 minutes to read

Syntax

```
Value.Compare(value1 as any, value2 as any, optional precision as nullable number) as number
```

About

Returns -1, 0, or 1 based on whether the first value is less than, equal to, or greater than the second one.

Value.Divide

11/25/2019 • 2 minutes to read

Syntax

```
Value.Divide(value1 as any, value2 as any, optional precision as nullable number) as any
```

About

Returns the result of dividing `value1` by `value2`. An optional `precision` parameter may be specified, by default `Precision.Double` is used.

Value.Equals

11/25/2019 • 2 minutes to read

Syntax

```
Value.Equals(value1 as any, value2 as any, optional precision as nullable number) as logical
```

About

Returns true if value `value1` is equal to value `value2`, false otherwise.

Value.Firewall

11/25/2019 • 2 minutes to read

Syntax

```
Value.Firewall(key as text) as any
```

About

Value.Firewall

Value.FromText

11/25/2019 • 2 minutes to read

Syntax

```
Value.FromText(text as any, optional culture as nullable text) as any
```

About

Decodes a value from a textual representation, `text`, and interprets it as a value with an appropriate type.

`Value.FromText` takes a text value and returns a number, a logical value, a null value, a datetime value, a duration value, or a text value. The empty text value is interpreted as a null value.

Value.Is

11/25/2019 • 2 minutes to read

Syntax

```
Value.Is(value as any, type as type) as logical
```

About

Value.Is

Value.Metadata

11/25/2019 • 2 minutes to read

Syntax

```
Value.Metadata(value as any) as any
```

About

Returns a record containing the input's metadata.

Value.Multiply

11/25/2019 • 2 minutes to read

Syntax

```
Value.Multiply(value1 as any, value2 as any, optional precision as nullable number) as any
```

About

Returns the product of multiplying `value1` by `value2`. An optional `precision` parameter may be specified, by default `Precision.Double` is used.

Value.NativeQuery

11/25/2019 • 2 minutes to read

Syntax

```
Value.NativeQuery(target as any, query as text, optional parameters as any, optional options as nullable record) as any
```

About

Evaluates `query` against `target` using the parameters specified in `parameters` and the options specified in `options`.

The output of the query is defined by `target`.

`target` provides the context for the operation described by `query`.

`query` describes the query to be executed against `target`. `query` is expressed in a manner specific to `target` (e.g. a T-SQL statement).

The optional `parameters` value may contain either a list or record as appropriate to supply the parameter values expected by `query`.

The optional `options` record may contain options that affect the evaluation behavior of `query` against `target`. These options are specific to `target`.

Value.NullableEquals

11/25/2019 • 2 minutes to read

Syntax

```
Value.NullableEquals(value1 as any, value2 as any, optional precision as nullable number) as  
nullable logical
```

About

Returns null if either argument `value1`, `value2` is null, otherwise equivalent to Value.Equals.

Value.RemoveMetadata

11/25/2019 • 2 minutes to read

Syntax

```
Value.RemoveMetadata(value as any, optional metaValue as any) as any
```

About

Strips the input of metadata.

Value.ReplaceMetadata

11/25/2019 • 2 minutes to read

Syntax

```
Value.ReplaceMetadata(value as any, metaValue as any) as any
```

About

Replaces the input's metadata information.

Value.ReplaceType

11/25/2019 • 2 minutes to read

Syntax

```
Value.ReplaceType(value as any, type as type) as any
```

About

Value.ReplaceType

Value.Subtract

11/25/2019 • 2 minutes to read

Syntax

```
Value.Subtract(value1 as any, value2 as any, optional precision as nullable number) as any
```

About

Returns the difference of `value1` and `value2`. An optional `precision` parameter may be specified, by default `Precision.Double` is used.

Value.Type

11/25/2019 • 2 minutes to read

Syntax

```
Value.Type(value as any) as type
```

About

Returns the type of the given value.

Variable.Value

11/25/2019 • 2 minutes to read

Syntax

```
Variable.Value(identifier as text) as any
```

About

Variable.Value

Quick tour of the Power Query M formula language

11/25/2019 • 2 minutes to read

This quick tour describes creating Power Query M formula language queries.

NOTE

M is a case-sensitive language.

Create a query with Query Editor

To create an advanced query, you use the **Query Editor**. A mashup query is composed of variables, expressions, and values encapsulated by a **let** expression. A variable can contain spaces by using the # identifier with the name in quotes as in #"Variable name".

A **let** expression follows this structure:

```
let
    Variablename = expression,
    #"Variable name" = expression2
in
    Variablename
```

To create an M query in the **Query Editor**, you follow this basic process:

- Create a series of query formula steps that start with the **let** statement. Each step is defined by a step variable name. An M **variable** can include spaces by using the # character as #"Step Name". A formula step can be a custom formula. Please note that the Power Query Formula Language is case sensitive.
- Each query formula step builds upon a previous step by referring to a step by its variable name.
- Output a query formula step using the **in** statement. Generally, the last query step is used as the in final data set result.

To learn more about expressions and values, see [Expressions, values, and let expression](#).

Simple Power Query M formula steps

Let's assume you created the following transform in the **Query Editor** to convert product names to proper case.

Query1 - Query Editor

File Home Transform Add Column View

Close & Load Refresh Preview Properties Advanced Editor Manage Columns Reduce Rows Sort Split Column Group By Data Type: Any Use First Row As Headers Replace Values Combine

Queries

OrderID CustomerID Item Price

1 1 1 Fishing Rod 100

2 1 1 Lb. Worms 5

3 2 Fishing Net 25

4 COLUMNS, 3 ROWS

PREVIEW DOWNLOADED AT 8:00 PM.


You have a table that looks like this:

ORDERID	CUSTOMERID	ITEM	PRICE
1	1	fishing rod	100
2	1	1 lb. worms	5
3	2	fishing net	25

And, you want to capitalize each word in the Item column to produce the following table:

ORDERID	CUSTOMERID	ITEM	PRICE
1	1	Fishing Rod	100
2	1	1 Lb. Worms	5
3	2	Fishing Net	25

The M formula steps to project the original table into the results table looks like this:

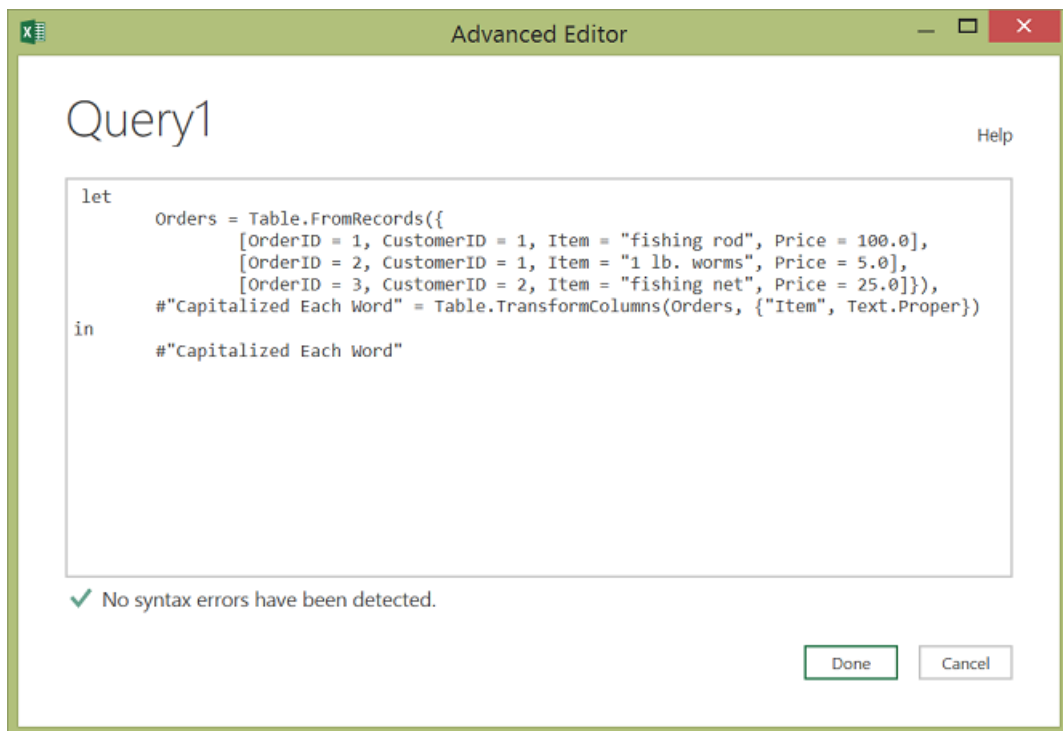

Here's the code you can paste into **Query Editor**:

```
let Orders = Table.FromRecords({
    [OrderID = 1, CustomerID = 1, Item = "fishing rod", Price = 100.0],
    [OrderID = 2, CustomerID = 1, Item = "1 lb. worms", Price = 5.0],
    [OrderID = 3, CustomerID = 2, Item = "fishing net", Price = 25.0]}),
#"Capitalized Each Word" = Table.TransformColumns(Orders, {"Item", Text.Proper})
in
    #"Capitalized Each Word"
```

Let's review each formula step.

1. **Orders** – Create a [Table](#_Table_value) with data for Orders.
2. **#"Capitalized Each Word"** – To capitalize each word, you use Table.TransformColumns().
3. **in #"Capitalized Each Word"** – Output the table with each word capitalized.

See also

[Expressions, values, and let expression](#)

[Operators](#)

[Type conversion](#)

Power Query M language specification

11/25/2019 • 2 minutes to read

The specification describes the values, expressions, environments and variables, identifiers, and the evaluation model that form the Power Query M language's basic concepts.

[Download Power Query M language specification \(July 2019\).pdf](#)

Power Query M type system

11/25/2019 • 2 minutes to read

The Types in Power Query M formula language document describes the M type system.

[Download Types in Power Query M formula language .pdf](#)

Expressions, values, and let expression

11/25/2019 • 5 minutes to read

A Power Query M formula language query is composed of formula **expression** steps that create a mashup query. A formula expression can be evaluated (computed), yielding a value. The **let** expression encapsulates a set of values to be computed, assigned names, and then used in a subsequent expression that follows the **in** statement. For example, a let expression could contain a **Source** variable that equals the value of **Text.Proper()** and yields a text value in proper case.

Let expression

```
let
    Source = Text.Proper("hello world")
in
    Source
```

In the example above, Text.Proper("hello world") is evaluated to "Hello World".

The next sections describe value types in the language.

Primitive value

A **primitive** value is single-part value, such as a number, logical, text, or null. A null value can be used to indicate the absence of any data.

TYPE	EXAMPLE VALUE
Binary	00 00 00 02 // number of points (2)
Date	5/23/2015
DateTime	5/23/2015 12:00:00 AM
DateTimeZone	5/23/2015 12:00:00 AM -08:00
Duration	15:35:00
Logical	true and false
Null	null
Number	0, 1, -1, 1.5, and 2.3e-5
Text	"abc"
Time	12:34:12 PM

Function value

A **Function** is a value which, when invoked with arguments, produces a new value. Functions are written by listing the function's **parameters** in parentheses, followed by the goes-to symbol `=>`, followed by the expression defining the function. For example, to create a function called "MyFunction" that has two parameters and performs a calculation on parameter1 and parameter2:

```
let
  MyFunction = (parameter1, parameter2) => (parameter1 + parameter2) / 2
in
  MyFunction

Calling the MyFunction() returns the result:

let
  Source = MyFunction(2, 4)
in
  Source
```

This code produces the value of 3.

Structured data values

The M language supports the following structured data values:

- [List](#)
- [Record](#)
- [Table](#)
- [Additional structured data examples](#)

NOTE

Structured data can contain any M value. To see a couple of examples, see [Additional structured data examples](#).

List

A List is a zero-based ordered sequence of values enclosed in curly brace characters `{ }`. The curly brace characters `{ }` are also used to retrieve an item from a List by index position. See `[List value](#_List_value)`.

NOTE

Power Query M supports an infinite list size, but if a list is written as a literal, the list has a fixed length. For example, `{1, 2, 3}` has a fixed length of 3.

The following are some **List** examples.

VALUE	TYPE
<code>{123, true, "A"}</code>	List containing a number, a logical, and text.
<code>{1, 2, 3}</code>	List of numbers
<code>{ {1, 2, 3}, {4, 5, 6} }</code>	List of List of numbers

VALUE	TYPE
{ [CustomerID = 1, Name = "Bob", Phone = "123-4567"], [CustomerID = 2, Name = "Jim", Phone = "987-6543"] }	List of Records
{123, true, "A"}{0}	Get the value of the first item in a List. This expression returns the value 123.
{ {1, 2, 3}, {4, 5, 6} }{0}{1}	Get the value of the second item from the first List element. This expression returns the value 2.

Record

A **Record** is a set of fields. A **field** is a name/value pair where the name is a text value that is unique within the field's record. The syntax for record values allows the names to be written without quotes, a form also referred to as **identifiers**. An identifier can take the following two forms:

- identifier_name such as OrderID.
- #"identifier name" such as #"Today's data is: ".

The following is a record containing fields named "OrderID", "CustomerID", "Item", and "Price" with values 1, 1, "Fishing rod", and 100.00. Square brace characters [] denote the beginning and end of a record expression, and are used to get a field value from a record. The follow examples show a record and how to get the Item field value.

Here's an example record:

```
let Source =
    [
        OrderID = 1,
        CustomerID = 1,
        Item = "Fishing rod",
        Price = 100.00
    ]
in Source
```

To get the value of an Item, you use square brackets as Source[Item]:

```
let Source =
    [
        OrderID = 1,
        CustomerID = 1,
        Item = "Fishing rod",
        Price = 100.00
    ]
in Source[Item] //equals "Fishing rod"
```

Table

A **Table** is a set of values organized into named columns and rows. The column type can be implicit or explicit. You can use #table to create a list of column names and list of rows. A **Table** of values is a List in a **List**. The curly brace characters { } are also used to retrieve a row from a **Table** by index position (see [Example 3 – Get a row from a table by index position](#)).

Example 1 - Create a table with implicit column types

```
let
  Source = #table(
    {"OrderID", "CustomerID", "Item", "Price"},
    {
      {1, 1, "Fishing rod", 100.00},
      {2, 1, "1 lb. worms", 5.00}
    }
  )
in
  Source
```

Example 2 – Create a table with explicit column types

```
let
  Source = #table(
    type table [OrderID = number, CustomerID = number, Item = text, Price = number],
    {
      {1, 1, "Fishing rod", 100.00},
      {2, 1, "1 lb. worms", 5.00}
    }
  )
in
  Source
```

Both of the examples above creates a table with the following shape:

ORDERID	CUSTOMERID	ITEM	PRICE
1	1	Fishing rod	100.00
2	1	1 lb. worms	5.00

Example 3 – Get a row from a table by index position

```
let
  Source = #table(
    type table [OrderID = number, CustomerID = number, Item = text, Price = number],
    {
      {1, 1, "Fishing rod", 100.00},
      {2, 1, "1 lb. worms", 5.00}
    }
  )
in
  Source{1}
```

This expression returns the follow record:

OrderID	2
CustomerID	1
Item	1 lb. worms
Price	5

Additional structured data examples

Structured data can contain any M value. Here are some examples:

Example 1 - List with [Primitive](#_Primitive_value_1) values, [Function](#_Function_value), and [Record](#_Record_value)

```
let
    Source =
    {
        1,
        "Bob",
        DateTime.ToText(DateTime.LocalNow(), "yyyy-MM-dd"),
        [OrderID = 1, CustomerID = 1, Item = "Fishing rod", Price = 100.0]
    }
in
    Source
```

Evaluating this expression can be visualized as:

A List containing a Record	
1	
"Bob"	
2015-05-22	
OrderID	1
CustomerID	1
Item	"Fishing rod"
Price	100.0

Example 2 - Record containing Primitive values and nested Records

```
let
    Source = [CustomerID = 1, Name = "Bob", Phone = "123-4567", Orders =
        {
            [OrderID = 1, CustomerID = 1, Item = "Fishing rod", Price = 100.0],
            [OrderID = 2, CustomerID = 1, Item = "1 lb. worms", Price = 5.0]
        }
    ]
in
    Source
```

Evaluating this expression can be visualized as:

A record containing a List of Records		
CustomerID	1	
Name	"Bob"	
Phone	"123-4567"	
Orders	OrderID	1
	CustomerID	1
	Item	"Fishing rod"
	Price	100.0
	OrderID	2
	CustomerID	1
	Item	"1 lb. worms"
	Price	5.0

NOTE

Although many values can be written literally as an expression, a value is not an expression. For example, the expression 1 evaluates to the value 1; the expression 1+1 evaluates to the value 2. This distinction is subtle, but important. Expressions are recipes for evaluation; values are the results of evaluation.

If expression

The **if** expression selects between two expressions based on a logical condition. For example:

```
if 2 > 1 then
  2 + 2
else
  1 + 1
```

The first expression (2 + 2) is selected if the logical expression (2 > 1) is true, and the second expression (1 + 1) is selected if it is false. The selected expression (in this case 2 + 2) is evaluated and becomes the result of the **if** expression (4).

Comments

11/25/2019 • 2 minutes to read

You can add comments to your code with single-line comments `//` or multi-line comments that begin with `/*` and end with `*/`.

Example - Single-line comment

```
let
    //Convert to proper case.
    Source = Text.Proper("hello world")
in
    Source
```

Example - Multi-line comment

```
/* Capitalize each word in the Item column in the Orders table. Text.Proper
is evaluated for each Item in each table row. */
let
    Orders = Table.FromRecords({
        [OrderID = 1, CustomerID = 1, Item = "fishing rod", Price = 100.0],
        [OrderID = 2, CustomerID = 1, Item = "1 lb. worms", Price = 5.0],
        [OrderID = 3, CustomerID = 2, Item = "fishing net", Price = 25.0]}),
    #"Capitalized Each Word" = Table.TransformColumns(Orders, {"Item", Text.Proper})
in
    #"Capitalized Each Word"
```

Evaluation model

11/25/2019 • 2 minutes to read

The evaluation model of the Power Query M formula language is modeled after the evaluation model commonly found in spreadsheets, where the order of calculations can be determined based on dependencies between the formulas in the cells.

If you have written formulas in a spreadsheet such as Excel, you may recognize the formulas on the left will result in the values on the right when calculated:

	A
1	=A2 * 2
2	=A3 + 1
3	1

	A
1	4
2	2
3	1

In M, an expression can reference previous expressions by name, and the evaluation process will automatically determine the order in which referenced expressions are calculated.

Let's use a record to produce an expression which is equivalent to the above spreadsheet example. When initializing the value of a field, you refer to other fields within the record by the name of the field, as follows:

```
[
  A1 = A2 * 2,
  A2 = A3 + 1,
  A3 = 1
]
```

The above expression evaluates to the following record:

```
[
  A1 = 4,
  A2 = 2,
  A3 = 1
]
```

Records can be contained within, or **nested**, within other records. You can use the **lookup operator** ([]) to access the fields of a record by name. For example, the following record has a field named Sales containing a record, and a field named Total that accesses the FirstHalf and SecondHalf fields of the Sales record:

```
[
  Sales = [ FirstHalf = 1000, SecondHalf = 1100 ],
  Total = Sales[FirstHalf] + Sales[SecondHalf]
]
```

The above expression evaluates to the following record:

```
[
  Sales = [ FirstHalf = 1000, SecondHalf = 1100 ],
  Total = 2100
]
```

You use the **positional index operator** (`{ }`) to access an item in a list by its numeric index. The values within a list are referred to using a zero-based index from the beginning of the list. For example, the indexes 0 and 1 are used to reference the first and second items in the list below:

```
[
  Sales =
    {
      [
        Year = 2007,
        FirstHalf = 1000,
        SecondHalf = 1100,
        Total = FirstHalf + SecondHalf // equals 2100
      ],
      [
        Year = 2008,
        FirstHalf = 1200,
        SecondHalf = 1300,
        Total = FirstHalf + SecondHalf // equals 2500
      ]
    },
  #"Total Sales" = Sales{0}[Total] + Sales{1}[Total] // equals 4600
]
```

Lazy and eager evaluation

List, **Record**, and **Table** member expressions, as well as **let** expressions (See [Expressions, values, and let expression](#)), are evaluated using **lazy evaluation**: they are evaluated when needed. All other expressions are evaluated using **eager evaluation**: they are evaluated immediately, when encountered during the evaluation process. A good way to think about this is to remember that evaluating a list or record expression will return a list or record value that knows how its list items or record fields need to be computed, when requested (by lookup or index operators).

Operators

11/25/2019 • 2 minutes to read

The Power Query M formula language includes a set of operators that can be used in an expression. **Operators** are applied to **operands** to form symbolic expressions. For example, in the expression `1 + 2` the numbers 1 and 2 are operands and the operator is the addition operator (+).

The meaning of an operator can vary depending on the type of operand values. The language has the following operators:

Plus operator (+)

EXPRESSION	EQUALS
<code>1 + 2</code>	Numeric addition: 3
<code>#time(12,23,0) + #duration(0,0,2,0)</code>	Time arithmetic: <code>#time(12,25,0)</code>

Combination operator (&)

FUNCTION	EQUALS
<code>"A" & "BC"</code>	Text concatenation: "ABC"
<code>{1} & {2, 3}</code>	List concatenation: {1, 2, 3}
<code>[a = 1] & [b = 2]</code>	Record merge: [a = 1, b = 2]

List of M operators

Common operators which apply to null, logical, number, time, date, datetime, datetimezone, duration, text, binary)

OPERATOR	DESCRIPTION
<code>></code>	Greater than
<code>>=</code>	Greater than or equal
<code><</code>	Less than
<code><=</code>	Less than or equal
<code>=</code>	Equal
<code><></code>	Not equal

Logical operators (In addition to **Common operators**)

OPERATOR	DESCRIPTION
<code>or</code>	Conditional logical OR

OPERATOR	DESCRIPTION
and	Conditional logical AND
not	Logical NOT

Number operators (In addition to **Common operators**)

OPERATOR	DESCRIPTION
+	Sum
-	Difference
*	Product
/	Quotient
+X	Unary plus
-X	Negation

Text operators (In addition to **Common operators**)

OPERATOR	DESCRIPTION
&	Concatenation

List, record, table operators

OPERATOR	DESCRIPTION
=	Equal
<>	Not equal
&	Concatenation

Record lookup operator

OPERATOR	DESCRIPTION
[]	Access the fields of a record by name.

List indexer operator

OPERATOR	DESCRIPTION
{}	Access an item in a list by its zero-based numeric index.

Type compatibility and assertion operators

OPERATOR	DESCRIPTION
is	The expression x is y returns true if the type of x is compatible with y, and returns false if the type of x is not compatible with y.
as	The expression x as y asserts that the value x is compatible with y as per the is operator.

Date operators

OPERATOR	LEFT OPERAND	RIGHT OPERAND	MEANING
x + y	time	duration	Date offset by duration
x + y	duration	time	Date offset by duration
x - y	time	duration	Date offset by negated duration
x - y	time	time	Duration between dates
x & y	date	time	Merged datetime

Datetime operators

OPERATOR	LEFT OPERAND	RIGHT OPERAND	MEANING
x + y	datetime	duration	Datetime offset by duration
x + y	duration	datetime	Datetime offset by duration
x - y	datetime	duration	Datetime offset by negated duration
x - y	datetime	datetime	Duration between datetimes

Datetimezone operators

OPERATOR	LEFT OPERAND	RIGHT OPERAND	MEANING
x + y	datetimezone	duration	Datetimezone offset by duration
x + y	duration	datetimezone	Datetimezone offset by duration
x - y	datetimezone	duration	Datetimezone offset by negated duration
x - y	datetimezone	datetimezone	Duration between datetimezones

Duration operators

OPERATOR	LEFT OPERAND	RIGHT OPERAND	MEANING
$x + y$	datetime	duration	Datetime offset by duration
$x + y$	duration	datetime	Datetime offset by duration
$x + y$	duration	duration	Sum of durations
$x - y$	datetime	duration	Datetime offset by negated duration
$x - y$	datetime	datetime	Duration between datetimes
$x - y$	duration	duration	Difference of durations
$x * y$	duration	number	N times a duration
$x * y$	number	duration	N times a duration
x / y	duration	number	Fraction of a duration

NOTE

Not all combinations of values may be supported by an operator. Expressions that, when evaluated, encounter undefined operator conditions evaluate to errors. For more information about errors in M, see [Errors](#)

Error example:

FUNCTION	EQUALS
$1 + "2"$	Error: adding number and text is not supported

Type conversion

11/25/2019 • 2 minutes to read

The Power Query M formula language has formulas to convert between types. The following is a summary of conversion formulas in M.

Number

TYPE CONVERSION	DESCRIPTION
Number.FromText(text as text) as number	Returns a number value from a text value.
Number.ToText(number as number) as text	Returns a text value from a number value.
Number.From(value as any) as number	Returns a number value from a value.
Int32.From(value as any) as number	Returns a 32-bit integer number value from the given value.
Int64.From(value as any) as number	Returns a 64-bit integer number value from the given value.
Single.From(value as any) as number	Returns a Single number value from the given value.
Double.From(value as any) as number	Returns a Double number value from the given value.
Decimal.From(value as any) as number	Returns a Decimal number value from the given value.
Currency.From(value as any) as number	Returns a Currency number value from the given value.

Text

TYPE CONVERSION	DESCRIPTION
Text.From(value as any) as text	Returns the text representation of a number, date, time, datetime, datetimezone, logical, duration or binary value.

Logical

TYPE CONVERSION	DESCRIPTION
Logical.FromText(text as text) as logical	Returns a logical value of true or false from a text value.
Logical.ToText(logical as logical) as text	Returns a text value from a logical value.
Logical.From(value as any) as logical	Returns a logical value from a value.

Date, Time, DateTime, and DateTimeZone

TYPE CONVERSION	DESCRIPTION
.FromText(text as text) as date, time, datetime, or datetimezone	Returns a date, time, datetime, or datetimezone value from a set of date formats and culture value.
.ToText(date, time, dateTime, or dateTimeZone as date, time, datetime, or datetimezone) as text	Returns a text value from a date, time, datetime, or datetimezone value.
.From(value as any)	Returns a date, time, datetime, or datetimezone value from a value.
.ToRecord(date, time, dateTime, or dateTimeZone as date, time, datetime, or datetimezone)	Returns a record containing parts of a date, time, datetime, or datetimezone value.

Metadata

11/25/2019 • 2 minutes to read

Metadata is information about a value that is associated with a value. **Metadata** is represented as a record value, called a metadata record. The fields of a **metadata record** can be used to store the metadata for a value. Every value has a metadata record. If the value of the metadata record has not been specified, then the metadata record is empty (has no fields). Associating a metadata record with a value does not change the value's behavior in evaluations except for those that explicitly inspect metadata records.

A metadata record value is associated with a value *x* using the syntax `value meta [record]`. For example, the following associates a metadata record with `Rating` and `Tags` fields with the text value "Mozart":

```
"Mozart" meta [ Rating = 5,
Tags = {"Classical"} ]
```

A metadata record can be accessed for a value using the `Value.Metadata` function. In the following example, the expression in the `ComposerRating` field accesses the metadata record of the value in the `Composer` field, and then accesses the `Rating` field of the metadata record.

```
[
  Composer = "Mozart" meta [ Rating = 5, Tags = {"Classical"} ],
  ComposerRating = Value.Metadata(Composer)[Rating] // 5
]
```

Metadata records are not preserved when a value is used with an operator or function that constructs a new value. For example, if two text values are concatenated using the `&` operator, the metadata of the resulting text value is an empty record `[]`.

The standard library functions `Value.RemoveMetadata` and `Value.ReplaceMetadata` can be used to remove all metadata from a value and to replace a value's metadata.

Errors

11/25/2019 • 2 minutes to read

An **error** in Power Query M formula language is an indication that the process of evaluating an expression could not produce a value. Errors are raised by operators and functions encountering **error** conditions or by using the **error** expression. Errors are handled using the **try** expression. When an error is raised, a value is specified that can be used to indicate why the error occurred.

Try expression

A try expression converts values and errors into a record value that indicates whether the try expression handled an error, or not, and either the proper value or the error record it extracted when handling the error. For example, consider the following expression that raises an error and then handles it right away:

```
try error "negative unit count"
```

This expression evaluates to the following nested record value, explaining the `[HasError]`, `[Error]`, and `[Message]` field lookups in the unit-price example before.

Error record

```
[
  HasError = true,
  Error =
    [
      Reason = "Expression.Error",
      Message = "negative unit count",
      Detail = null
    ]
]
```

A common case is to replace errors with default values. The try expression can be used with an optional otherwise clause to achieve just that in a compact form:

```
try error "negative unit count" otherwise 42
// equals 42
```

Error example

```

let Sales =
    [
        ProductName = "Fishing rod",
        Revenue = 2000,
        Units = 1000,
        UnitPrice = if Units = 0 then error "No Units"
                    else Revenue / Units
    ],

    //Get UnitPrice from Sales record
    textUnitPrice = try Number.ToText(Sales[UnitPrice]),
    Label = "Unit Price: " &
        (if textUnitPrice[HasError] then textUnitPrice[Error][Message]
        //Continue expression flow
        else textUnitPrice[Value])
in
    Label

```

The above example accesses the `Sales[UnitPrice]` field and formats the value producing the result:

```
"Unit Price: 2"
```

If the Units field had been zero, then the `UnitPrice` field would have raised an error which would have been handled by the try. The resulting value would then have been:

```
"No Units"
```