

Molfig

Static molecular structure rendering for Typst

v0.1.0

2026-06-16

MIT

Render PDB, mmCIF, and BinaryCIF molecular structures in Typst through `maquette`.

Eito Yoneyama

Molfig turns PDB, mmCIF, and BinaryCIF structures into static OBJ, STL, or PLY meshes inside a Rust WebAssembly plugin, then hands those meshes to `maquette` for document rendering.

Table of Contents

Overview	2	Troubleshooting	20
I.1 Design Goals	2	License And Notices	22
I.2 Rendering Pipeline	2	Development	24
Quickstart	4	Index	25
II.1 Reading Structure Files	5		
II.2 Choosing The First Options	6		
Public API	7		
III.1 Rendering Commands	7		
III.2 Export Commands	9		
III.3 Metadata Commands	10		
III.4 Compatibility Helper	10		
Shared Mesh Options	11		
IV.1 Input Selection	11		
IV.2 Structure Selection	11		
IV.3 Representation Selection	12		
IV.4 Geometry And Quality	12		
Maquette Rendering	14		
V.1 Choosing A Mesh Format	14		
Metadata Reference	16		
VI.1 Assembly And Unit Metadata	17		
Practical Workflows	18		
VII.1 A Publication Figure	18		
VII.2 A Lightweight Draft Figure	19		
VII.3 Export For External Tools	19		

Part I

Overview

Molfig is a Typst package for molecular figures in static documents. It accepts PDB, mmCIF, and BinaryCIF input, converts the structure into a CPU-side Mol*-style Model/Structure/Unit representation, builds static geometry, exports the mesh as OBJ, STL, or PLY, and delegates final rendering to maquette.

Mol* is an open-source molecular visualization toolkit and web viewer. Molfig uses Mol* as the compatibility target for structure interpretation, static geometry, and OBJ/STL export behavior; see molstar.org¹ and [molstar/molstar](https://github.com/molstar/molstar)².

I.1 Design Goals

Molfig is designed around four constraints:

1. Typst packages cannot invent paths into the caller's project. On Typst 0.15.0 or later, the caller may pass a project-side `path(...)` value and Molfig will read it as bytes. For Typst 0.14-compatible documents, the caller should pass bytes produced by `read(..., encoding: none)`.
2. The plugin should run in Typst's WebAssembly environment without WebGL.
3. The molecular path should preserve Mol*-style structure concepts rather than flattening everything at parse time.
4. The final image should be a document-native static rendering through maquette, not an interactive viewer snapshot.

Molfig is not a Mol* WebGL renderer. It intentionally excludes interactive WebGL surface and volume visuals such as molecular surface, gaussian surface, gaussian volume, and density maps. Its public contract is structure parsing, static mesh generation, OBJ/STL/PLY export, and maquette rendering.

I.2 Rendering Pipeline

Stage	Control	Role
Read	<code>path(...)</code> or <code>read(..., encoding: none)</code>	The user document supplies either a Typst 0.15+ project path or already-read structure bytes.
Parse	<code>format</code>	The plugin parses PDB, text CIF/mmCIF, or BinaryCIF MessagePack data.
Model	<code>assembly</code> , <code>alt-loc</code>	Model, Structure, Unit, unit operators, altLoc policy, bonds, secondary structure, and coarse data are selected.

¹<https://molstar.org/>

²<https://github.com/molstar/molstar>

Geometry	representation, quality	The static geometry layer builds spheres, cylinders, tubes, sheets, ribbons, nucleotide visuals, carbohydrate visuals, and related mesh spans.
Export	mesh-format	The mesh is serialized as OBJ, binary STL, or ASCII PLY bytes.
Render	config	The exported bytes and maquette configuration are passed to maquette.

Part II

Quickstart

The following example renders PDB entry 9R1O. Put 9R1O.typ and 9R1O.pdb in the same directory, then compile the Typst file.

Complete 9R1O example

 9R1O.typ

```
1  #import "@preview/molfig:0.1.0" as molfig
2
3  #set page(width: auto, height: auto, margin: 0mm)
4
5  // Uses structural data from RCSB PDB / wwPDB.
6  // PDB ID: 9R1O
7  // PDB DOI: https://doi.org/10.2210/pdb9R1O/pdb
8  // PDB archive data files are available under CC0 1.0.
9  #let pdb = if molfig.v15-or-later() {
10    path("9R1O.pdb")
11  } else {
12    read("9R1O.pdb", encoding: none)
13  }
14
15  #molfig.render(
16    pdb,
17    format: "pdb",
18    representation: "molstar",
19    assembly: "1",
20    mesh-format: "obj",
21    quality: "high",
22    center: true,
23    output-format: "png",
24    config: (
25      azimuth: 35,
26      elevation: 24,
27      zoom: 1.0,
28      background: "",
29    ),
30  )
```

Compile the example first when you want to refresh the figure embedded below:

```
typst compile 9R10.typ
```

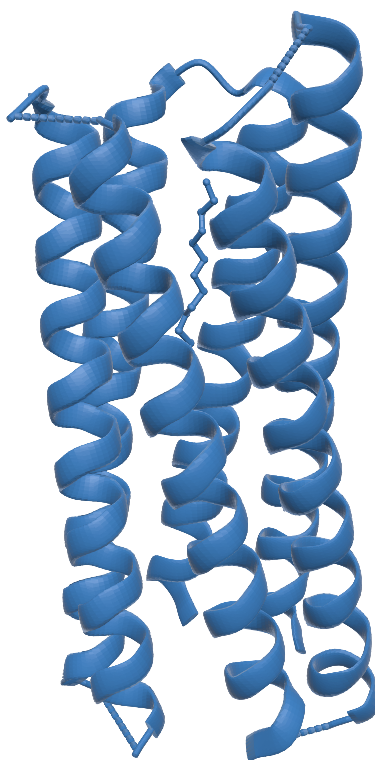


Figure 1: 9R10 rendered by Molfig from PDB entry 9R10.

Structural data source: RCSB PDB / wwPDB, PDB ID 9R10, DOI 10.2210/pdb9R10/pdb. PDB archive data files are distributed under CC0 1.0.

II.1 Reading Structure Files

On Typst 0.15.0 or later, prefer passing a `path(...)` value for file-backed structure data. The path is resolved by Typst relative to the caller's file, and Molfig reads it internally with `encoding: none`. This keeps package calls concise while preserving the caller-side project boundary.

Typst 0.15+ path inputs

```
1 #let pdb = path("entry.pdb")
2 #let cif = path("entry.cif")
3 #let bcif = path("entry.bcif")
```

For documents that must also compile on Typst 0.14, read the file in the caller document and pass the resulting bytes. Always use encoding: none for external structure files; it preserves BinaryCIF bytes and avoids Unicode decoding loss for fixed-width PDB columns.

Typst 0.14-compatible byte inputs

```
1 #let pdb = read("entry.pdb", encoding: none)
2 #let cif = read("entry.cif", encoding: none)
3 #let bcif = read("entry.bcif", encoding: none)
```

Passing a Typst string is accepted for small inline examples. A string is treated as inline molecular text, not as a file path.

II.2 Choosing The First Options

Question	Recommended setting	Why
I want the closest default molecular figure.	representation: "molstar"	Uses the package's Mol*-style static visual set.
I want a protein cartoon.	representation: "cartoon"	Uses polymer trace, secondary structure, nucleotide, and gap visuals.
I need readable geometry diffs.	mesh-format: "obj"	OBJ is text and preserves face groups.
I need compact triangle bytes.	mesh-format: "stl"	STL is binary and simple for downstream mesh tools.
I want text mesh plus group metadata.	mesh-format: "ply"	PLY is ASCII and carries package-owned group comments/properties.
Compilation is slow.	quality: "auto"	Lets Molfig pick lower tessellation for large structures.

Part III

Public API

Every public command takes `{data}` as its first positional argument. It can be bytes from `read(..., encoding: none)`, inline molecular text as a string, or a Typst 0.15+ `path(...)` value. The same mesh options are shared by `render`, `render-object`, `export`, and `metadata` commands unless noted otherwise.

Command	Returns	Use when
<code>#render</code>	content	You want the figure directly in the document.
<code>#render-object</code>	dictionary	You want the rendered content plus raw mesh bytes and metadata.
<code>#to-obj</code>	bytes	You need OBJ mesh bytes for maquette or an external tool.
<code>#to-mtl</code>	bytes	You need the companion material library for OBJ output.
<code>#to-stl</code>	bytes	You need binary STL triangle data.
<code>#to-ply</code>	bytes	You need ASCII PLY output with Molfig meta-data comments/properties.
<code>#info</code>	dictionary	You want structure and render planning meta-data without rendering.
<code>#mesh-info</code>	dictionary	You want maquette's mesh metadata for the generated OBJ/STL/PLY bytes.
<code>#v15-or-later</code>	bool	You want one source file that uses <code>path(...)</code> on Typst 0.15+ and byte input on older Typst.

III.1 Rendering Commands

```
#render(  
  {data},  
  {format},  
  {mesh-format},  
  {representation},  
  {config},  
  {width},  
  {height},  
  {output-format}  
)
```

Converts molecular bytes to a static mesh and delegates rendering to maquette.

Argument	
<code>(data)</code>	bytes str
Molecular structure input. Pass <code>path("file.pdb")</code> on Typst 0.15+, or <code>read("file.pdb", encoding: none)</code> for Typst 0.14-compatible documents.	
Argument	
<code>(format): "auto"</code>	str
Input parser selection. Use an explicit format for reproducible documents.	
Argument	
<code>(mesh-format): "obj"</code>	str
Intermediate mesh format sent to maquette.	
Argument	
<code>(config): (:)</code>	dictionary
JSON-encoded and passed to maquette unchanged. Use it for camera, background, image, and render settings supported by maquette.	
Argument	
<code>(width): "auto"</code>	str
Width forwarded to the maquette rendering command.	
Argument	
<code>(height): "auto"</code>	str
Height forwarded to the maquette rendering command.	
Argument	
<code>(output-format): "png"</code>	str
Output format forwarded to maquette. PNG is the safest default for complex meshes.	

#render-object((data), (mesh-format))

Returns a dictionary with:

Key	Value
kind	The string "render-object".
format	The selected mesh format.
mesh_format	The selected mesh format with snake_case naming.
mesh	Generated OBJ/STL/PLY bytes.
info	The same dictionary returned by #info for the same mesh options.
content	The Typst content returned by #render.

Render and inspect in one call

```
1  #let object = molfig.render-object(  
2    data,  
3    format: "mmCIF",  
4    representation: "cartoon",  
5    mesh-format: "ply",  
6    assembly: "1",  
7    config: (azimuth: 30, elevation: 18, background: ""),  
8    width: 54mm,  
9  )  
10  
11 #object.content  
12  
13 #metadata(  
14   mesh-format: object.mesh_format,  
15   atom-count: object.info.atom_count,  
16 ))
```

III.2 Export Commands

#to-obj(({data}))

Returns OBJ bytes. OBJ is the most useful interchange format when a downstream tool wants text geometry, material references, and group labels.

#to-mtl(({data}))

Returns the companion MTL material library for OBJ output. Use it alongside #to-obj when exporting outside Typst.

#to-stl(({data}))

Returns binary STL bytes. STL follows Mol* static exporter behavior: the header starts with "Exported from Mol*" and the two-byte facet attribute field is kept at zero.

#to-ply(({data}))

Returns ASCII PLY bytes. PLY is a Molfig-owned static mesh format because the pinned Mol* geo-export extension does not provide PLY output.

Direct mesh export

```
1 #let data = read("structure.bcif", encoding: none)
2
3 #let obj = molfig.to-obj(data, format: "bcif", representation: "molstar")
4 #let mtl = molfig.to-mtl(data, format: "bcif", representation: "molstar")
5 #let stl = molfig.to-stl(data, format: "bcif", representation: "molstar")
6 #let ply = molfig.to-ply(data, format: "bcif", representation: "molstar")
```

III.3 Metadata Commands

#info({data})

Parses the structure and returns molecular and mesh-planning metadata without maquette rendering. This is the fastest public command for debugging parser, assembly, altLoc, bond, secondary structure, and representation behavior.

#mesh-info({data}, {mesh-format})

Generates a mesh, then delegates mesh metadata extraction to maquette's get-obj-info, get-stl-info, or get-ply-info helper.

III.4 Compatibility Helper

#v15-or-later

Returns `true` when `sys.version >= version(0, 15, 0)`. Use it in source files that should prefer Typst 0.15+ project paths while remaining compilable on Typst 0.14.

Version-gated file input

```
1 #let pdb = if molfig.v15-or-later() {
2   path("entry.pdb")
3 } else {
4   read("entry.pdb", encoding: none)
5 }
```

Part IV

Shared Mesh Options

The following options are accepted by `#render`, `#render-object`, `#to-obj`, `#to-mtl`, `#to-stl`, `#to-ply`, and `#info`.

IV.1 Input Selection

Option	Default	Meaning
<code>{format}</code>	"auto"	Input parser. Supported values: "auto", "pdb", "cif", "mmCIF", "bcif", "binaryCIF", "binary-cif".
<code>{block-index}</code>	none	Zero-based BinaryCIF data block index. Useful when one BinaryCIF file contains multiple data blocks.
<code>{block-header}</code>	" "	Exact BinaryCIF block header. When set, it takes precedence over <code>{block-index}</code> .

Format	Typical extension	Notes
"pdb"	.pdb	Fixed-width text. Keep bytes to preserve columns.
"cif" or "mmCIF"	.cif, .mmCIF	Text CIF categories and loops.
"bcif"	.bcif	BinaryCIF MessagePack data with encoded columns and optional masks.
"auto"	any	Convenient for exploration, but explicit formats are better for release documents.

BinaryCIF numeric atom-site columns are decoded into typed accessors before falling back to string cells. Molfig does not round-trip BinaryCIF through synthetic CIF text.

IV.2 Structure Selection

Option	Default	Meaning
<code>{assembly}</code>	"1"	Biological assembly id. Use "asymmetric-unit", "none", or an empty string for source coordinates without assembly operators.
<code>{alt-loc}</code>	" "	Alternate location id or policy. Supports concrete ids such as "A", plus "highest-occupancy" and "all".

<code>{infer-bonds}</code>	true	Infer covalent bonds when explicit bond data are absent.
<code>{center}</code>	true	Recenters exported vertices around Mol*-style visible export bounds.

Assembly expansion keeps the source model and unit operators as the semantic structure boundary, then materializes mesh coordinates for export. This means metadata can still report selected assembly operators even though OBJ/STL/PLY are static mesh formats.

IV.3 Representation Selection

Option	Default	Meaning
<code>{representation}</code>	"molstar"	Static Mol*-style default visual set. Also accepts "default" and "auto".

Value	Best for	Main geometry	Notes
"molstar"	General figures	Polymer traces, element spheres, bonds, carbohydrates, nucleotides, gaps	Closest default for static Molfig output.
"spacefill"	Atomic packing	Atom spheres	Uses atom radii and <code>{radius-scale}</code> .
"ball-and-stick"	Ligands and small molecules	Atom spheres plus bond cylinders	Good for local chemistry and explicit bond inspection.
"cartoon"	Proteins and nucleic acids	Polymer trace tubes/sheets/ribbons, nucleotide visuals, gaps	Uses secondary structure and polymer trace metadata.
"ribbon"	Backbone shape	Ribbon-oriented polymer geometry	Good for broad fold visibility.
"backbone"	Trace-only views	Backbone cylinders and spheres	Lower-detail alternative for polymer paths.

IV.4 Geometry And Quality

Option	Default	Meaning
<code>{quality}</code>	"custom"	"custom" preserves explicit numeric controls. "auto" chooses a preset from structure size. Also accepts "highest", "higher", "high", "medium", "low", "lower", "lowest".

<code>{sphere-detail}</code>	2	Sphere tessellation detail. Public input is clamped by the plugin.
<code>{linear-segments}</code>	8	Curve subdivisions for polymer and tube paths.
<code>{radial-segments}</code>	16	Radial subdivisions for cylinders, tubes, and ribbon-like profiles.
<code>{radius-scale}</code>	1.0	Global radius multiplier.
<code>{atom-radius}</code>	0.28	Explicit atom radius for simple representations.
<code>{bond-radius}</code>	0.12	Explicit bond radius for cylinder-based bond visuals.
<code>{ribbon-radius}</code>	0.2	Tube/ribbon radius control.
<code>{ribbon-width}</code>	0.55	Ribbon width control.
<code>{helix-profile}</code>	"elliptical"	"elliptical", "rounded", or "square". "sheet" is accepted as an alias for square.
<code>{round-cap}</code>	false	Enable rounded caps where supported by the selected cartoon/ribbon path.
<code>{sheet-arrow-factor}</code>	1.5	Scales sheet arrow geometry.
<code>{tubular-helices}</code>	false	Prefer tubular helix geometry in supported cartoon paths.

Quality presets override the explicit numeric tessellation controls. Use quality: "custom" when exact reproducibility matters, and use quality: "auto" or a lower preset when large structures compile too slowly.

Preset	Sphere detail	Radial segments	Linear segments
"highest"	3	36	18
"higher"	3	28	14
"high"	2	20	10
"medium"	1	12	8
"low"	0	8	3
"lower"	0	4	2
"lowest"	0	2	1

The public default is quality: "custom", so the numeric defaults in this manual are honored unless you explicitly choose a preset or "auto".

Part V

Maquette Rendering

#render calls one of maquette's mesh renderers based on {mesh-format}: render-obj, render-stl, or render-ply. The {config} dictionary is JSON-encoded and passed through unchanged.

Camera and background passthrough

```
1  #let cif = read("structure.cif", encoding: none)
2
3  #molfig.render(
4    cif,
5    format: "cif",
6    representation: "ball-and-stick",
7    mesh-format: "ply",
8    config: (
9      azimuth: 45,
10     elevation: 20,
11     zoom: 1.15,
12     background: "",
13   ),
14   width: 75mm,
15 )
```

Molfig does not validate maquette-specific keys. Unknown keys are passed to maquette, so maquette remains the source of truth for camera and renderer settings.

V.1 Choosing A Mesh Format

Format	Command	Strength	Tradeoff
OBJ	#to-obj	Readable text, group labels, material references	Larger than binary STL and needs MTL when material rows are consumed externally.
MTL	#to-mtl	Companion material rows for OBJ	Not a geometry format by itself.
STL	#to-stl	Compact binary triangle stream	No stable text metadata channel; facet attribute bytes are zero.
PLY	#to-ply	Text mesh with Molfig group metadata	Package-owned output, not a pinned Mol* exporter format.

For visual documents, start with OBJ. Switch to STL only when the downstream consumer specifically wants binary STL, and use PLY when the group metadata is more useful than OBJ/MTL compatibility.

Part VI

Metadata Reference

#[info](#) returns a dictionary. It is intended for document logic, regression tests, and debugging. The exact set of keys may grow as Molfig's Mol*-parity layer grows, but the current major groups are:

Key	Type	Meaning
atom_count	integer	Visible atom count after selected assembly/alt-Loc handling and geometry expansion.
bond_count	integer	Visible bond count used by static geometry.
alt_locs	array	Available alternate location ids from the source coordinates.
alt_locs_info	dictionary	Selected altLoc policy and available ids.
assemblies	array	Available biological assembly summaries.
assembly	dictionary	Selected assembly id.
source_data	dictionary	Input source categories, row counts, and original source kind.
structure	dictionary	Model/Structure/Unit counts, boundary, conformation, segments, ranges, and lookup3d summary.
secondary_structure	dictionary	Helix and sheet ranges.
representation	dictionary	Selected and realized visual names.
render_objects	array	Semantic render-object spans with geometry type, visual, chain, residue range, group id, and value-cell style counts.
bond_metadata	dictionary	Counts by bond source and flags such as struct_conn, index_pair, chem_comp, aromatic, and resonance.
bounds	dictionary	Expanded coordinate bounds before export centering.

Basic 9R1O metadata query

```

1 #let pdb = read("9R1O.pdb", encoding: none)
2 #let meta = molfig.info(pdb, format: "pdb", assembly: "1")
3
4 Atoms: #meta.atom_count
5 Bonds: #meta.bond_count
6 Assembly: #meta.assembly.id

```

Render-object metadata is useful when validating what Molfig actually built:

Representation assertions

```

1 #let meta = molfig.info(
2   data,
3   format: "mmcif",
4   representation: "cartoon",
5   assembly: "1",
6   alt-loc: "highest-occupancy",
7 )
8
9 #assert(meta.render_objects.any(object => object.secondary_type ==
10  "helix"))
11
12 #assert(meta.representation.realized_visuals.contains("polymer-trace"))

```

VI.1 Assembly And Unit Metadata

Assembly selection is visible through both `info(...).structure` and mesh export metadata. OBJ and PLY include `molfig_operator_metadata` comments when an assembly is selected. STL has no equivalent text channel, so assembly operator metadata should be inspected through `#info` or `#render-object`.

Path	Example	Meaning
<code>structure.unit_count</code>	<code>meta.structure.unit_count</code>	Number of units after structure construction.
<code>structure.symmetry_group_count</code>	<code>meta.structure.symmetry_group_count</code>	Number of symmetry grouping count.
<code>structure.coordinate_system</code>	<code>meta.structure.coordinate_system</code>	Select coordinate operator summary.
<code>structure.boundary</code>	<code>meta.structure.boundary</code>	Boundary sphere radius box used by structure-level geometry.
<code>structure.lookup3d</code>	<code>meta.structure.lookup3d</code>	Lookup3d summary for constructed units.

Part VII

Practical Workflows

VII.1 A Publication Figure

Pinned 9R1O figure

```
1  #import "@preview/molfig:0.1.0" as molfig
2
3  #let pdb = read("9R1O.pdb", encoding: none)
4
5  #figure(
6    molfig.render(
7      pdb,
8      format: "pdb",
9      representation: "molstar",
10     assembly: "1",
11     mesh-format: "obj",
12     quality: "high",
13     center: true,
14     config: (
15       azimuth: 35,
16       elevation: 24,
17       background: "",
18     ),
19     width: 90mm,
20   ),
21   caption: [9R1O rendered with #product-name.],
22 )
```

VII.2 A Lightweight Draft Figure

Large assembly draft

```
1  #molfig.render(  
2    read("data/large-assembly.bcif", encoding: none),  
3    format: "bcif",  
4    representation: "molstar",  
5    assembly: "1",  
6    quality: "auto",  
7    mesh-format: "stl",  
8    config: (background: ""),  
9    width: 60mm,  
10 )
```

VII.3 Export For External Tools

OBJ and MTL bytes

```
1  #let data = read("data/ligand.cif", encoding: none)  
2  #let mesh = molfig.to-obj(  
3    data,  
4    format: "cif",  
5    representation: "ball-and-stick",  
6    assembly: "asymmetric-unit",  
7    center: false,  
8  )  
9  #let material = molfig.to-mtl(data, format: "cif", representation: "ball-  
    and-stick")
```

Typst does not write arbitrary files from a package call. Use these byte values inside Typst document logic, or expose them through a workflow that is allowed to write artifacts outside Typst.

Part VIII

Troubleshooting

Symptom	Likely cause	Action
Plugin says Molfig expects bytes.	The input was not bytes, inline string data, or a Typst 0.15+ path value.	Pass <code>path("entry.pdb")</code> on Typst 0.15+, or pass <code>read("entry.pdb", encoding: none)</code> for Typst 0.14-compatible documents.
BinaryCIF reports a missing encoding.	The file is not valid BinaryCIF MessagePack or a column lacks required BinaryCIF encoding metadata.	Check the source file and use format: "cif" only for text CIF/mmCIF.
The figure is sparse or missing chains.	Assembly or alt-loc selection filtered the structure.	Inspect <code>molfig.info(...).assemblies</code> and <code>alt_locs_info</code> , then set <code>{assembly}</code> and <code>{alt-loc}</code> explicitly.
A large assembly compiles slowly.	High tessellation or too much assembly geometry.	Use <code>quality: "auto"</code> , lower <code>{radial-segments}</code> and <code>{linear-segments}</code> , or choose a lighter representation.
Bonds are missing.	The file lacks explicit bonds and inference is disabled.	Leave <code>{infer-bonds}</code> as <code>true</code> , or inspect <code>bond_metadata</code> to see available bond sources.
Rendered view differs from external OBJ inspection.	Different camera, centering, or mesh format.	Pin <code>{center}</code> , <code>{mesh-format}</code> , <code>maquette {config}</code> , and representation quality options.

For reproducible documents, avoid implicit choices:

Reproducible 9R10 option block

```
1  #let pdb = read("9R10.pdb", encoding: none)
2
3  #molfig.render(
4      pdb,
5      format: "pdb",
6      representation: "molstar",
7      assembly: "1",
8      mesh-format: "obj",
9      quality: "custom",
10     sphere-detail: 2,
11     linear-segments: 8,
12     radial-segments: 16,
13     center: true,
14     config: (azimuth: 35, elevation: 24, background: ""),
15 )
```

Part IX

License And Notices

Molfig package code is distributed under the MIT License. The package also contains third-party material that is covered separately:

Material	Scope	License / notice
Mol*	molfig.wasm contains Rust behavior and generated reference data derived from Mol* parity work.	MIT License; copyright (c) 2017 - now, Mol* contributors.
PDB archive data	examples/data/*.pdb, examples/data/*.cif, examples/data/*.bcif, and generated example PDFs.	CC0 1.0 Universal Public Domain Dedication; attribution to PDB IDs and structure authors is encouraged.
Typst helper packages	maquette for rendering and mantys for this manual.	Imported by Typst; not vendored by Molfig.

The package includes NOTICE.md and THIRD_PARTY_NOTICES.md with the full distribution notice. Example data attributions are also listed in examples/data/README.md and examples/data/ATTRIBUTION.tsv.

For figures made from PDB archive data, cite the PDB ID and DOI. For example:

Suggested data attribution

- 1 Structural data source: RCSB PDB / wwPDB, PDB ID 9R10,
- 2 <https://doi.org/10.2210/pdb9R10/pdb>.
- 3 PDB archive data files are available under CC0 1.0.

When describing Mol* parity or comparing against Mol* output, cite Mol*:

Suggested Mol* citation

- 1 Sehna1 et al. Mol* Viewer: modern web app for 3D visualization and analysis of large biomolecular structures.
- 2 Nucleic Acids Research 49:W431-W437 (2021).
- 3 <https://doi.org/10.1093/nar/gkab314>

No endorsement by Mol*, RCSB PDB, wwPDB, structure authors, or data providers is implied.

Part X

Development

The package consists of a Typst wrapper, a Rust WebAssembly plugin, tests, and documentation:

Path	Role
package/lib.typ	Public Typst API and maquette bridge.
wasm-plugin/src/	Rust parser, Model/Structure/Unit layer, geometry builders, exporters, and Typst plugin ABI.
wasm-plugin/tests/	Rust and Typst smoke/regression tests.
package/docs/documentation.typ	This Mantys manual.
package/docs/documentation.pdf	Compiled reference manual.
package/molfig.wasm	Checked-in WebAssembly plugin consumed by Typst.

```
cd wasm-plugin
cargo fmt --check
cargo test
cargo build --release --target wasm32-unknown-unknown
cp target/wasm32-unknown-unknown/release/molfig.wasm ../package/molfig.wasm
cd ..
typst compile --root package package/docs/documentation.typ package/docs/
documentation.pdf
```

Regenerate package/molfig.wasm after Rust changes that affect the Typst plugin. Regenerate this PDF after documentation or public API changes.

Part XI

Index

I

`#info` 10

M

`#mesh-info` 10

R

`#render` 7

`#render-object` 8

T

`#to-mtl` 9

`#to-obj` 9

`#to-ply` 9

`#to-stl` 9

V

`#v15-or-later` 10