

RAG-Augmented Multi-Agent LLM Framework for Explainable Software Vulnerability Detection Using CWE Knowledge Bases

Richa Verma (25MCSS02) Advisor: Dr. Akshay Pandey

The steps running in one order

Where this fits

The separate pieces are a pattern checker, a CWE book, search, and a fixed answer form. This note connects them into one run.

No paid language model is used here. A template fills the form from the evidence. That template is a stand-in, so we can test the plumbing.

What we did

The run always starts by marking risky lines. Those marks are evidence. They include the file, the line numbers, and a short reason. They are not the final yes or no.


Next, search ranks CWE pages using the risky lines, not the whole file and not any hidden answer key. The pages include the description text, so a later writer can quote the book.

A template then fills the answer form. If the evidence is empty, the template is more likely to say the code is safe. If evidence exists, it leans on that evidence. This is a rule, not a judgment.

A checker then reads the form. The CWE must exist in the book. The cited lines must appear in the file. The fields must not contradict each other. A broken form fails.

If the written decision disagrees with the pattern checker, we keep a warning. We do not force the decision to match the checker. We also save a confidence number. We do not use that number to skip any step.

Picture

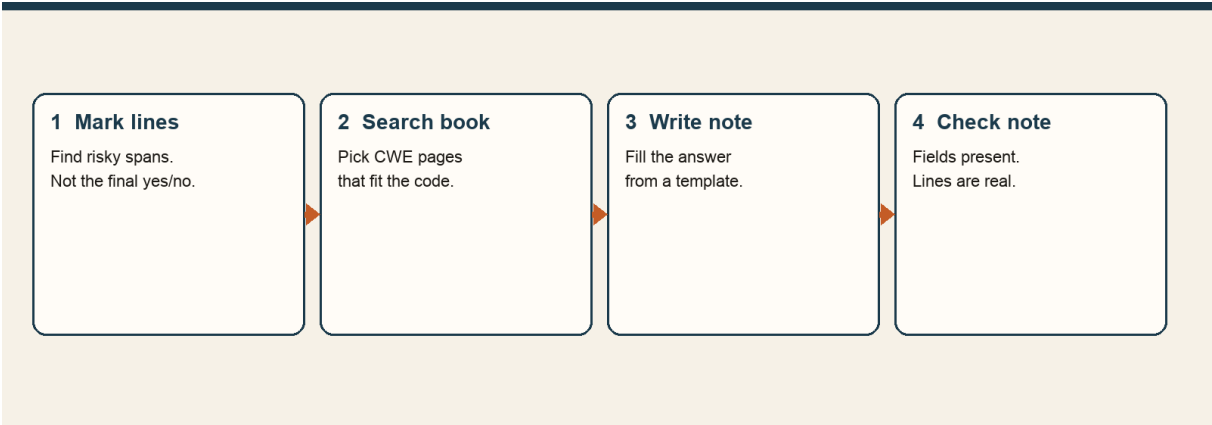

Four steps, always in this order. The first step does not make the final decision.

The numbers

Step	What it is allowed to do
Mark lines	Point at risky spans. Do not decide the case.

Step	What it is allowed to do
Search	Pick CWE pages from the book.
Write	Fill the form. Here, a template does this.
Check	Reject a broken or unsupported form.

On the four held-back practice files, this template path still matches the labels. That only repeats the easy result from the tiny set. It is not a new public score.

Closing

The path is runnable from a command. The written note is still coming from rules, not from a model that can read a harder example.

The next piece of work is a set of files written to fool the pattern checker, and a live model that has to explain them.

What we are not saying

The template is not the system we want to rely on. A saved confidence number is not a real probability.