

```
window.alert('hi')
```


```
a = window.prompt('填写')
```

```
b = window.confirm('确认么? ')
```

```
console.log
```

小结

## window.alert('hi')

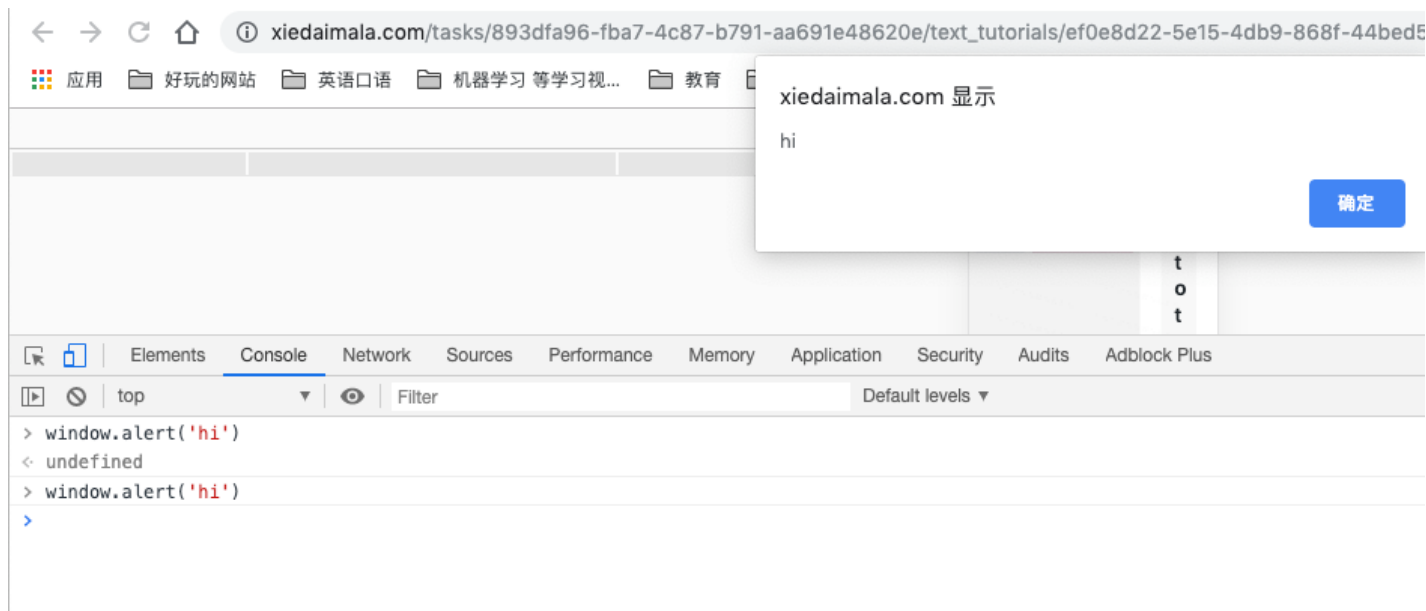

## a = window.prompt('填写')

The screenshot shows a web browser window with the address bar displaying `xiedaimala.com/tasks/893dfa96-fba7-4c87-b791-aa691e48620e/text_tutorials/ef0e8d22-5e15-4db9-868f-44bed528a6...`. The browser's developer tools are open, showing the Console tab. The console contains the following code and output:

```
> window.alert('hi')
< undefined
> window.alert('hi')
> a = window.prompt('填写')
< undefined
>
```

A prompt dialog box is displayed over the browser window. The dialog has a title bar that says "xiedaimala.com 显示". Inside the dialog, there is a text input field with the placeholder text "填写" (Fill in) and the value "sssss". Below the input field are two buttons: "取消" (Cancel) and "确定" (OK).

**b = window.confirm('确认么? ')**

xiedaimala.com 显示

确认么?

取消

确定

🔍 📄 Elements Console Network Sources Performance Memory Application Security Audits Adblock Plus

🔍 🕒 top 🔍 Filter Default levels ▼

```
> window.alert('hi')
< undefined
> window.alert('hi')
> a = window.prompt('填写')
< undefined
< "sssss"
> b = window.confirm('确认么? ')
>
```

```
> window.alert('hi')
< undefined
> window.alert('hi')
> a = window.prompt('填写')
< undefined
< "sssss"
> b = window.confirm('确认么? ')
< true
>
```

e.g. /event\d/ -cdn url:a.x

## console.log

```
> window.console.log('hi')
hi
< undefined
> |
```

## 小结

Window 是属性

ECMA Script 类型

parseInt

parseFloat

Number ( )

String ( )

Boolean ( )

Object ( )

私有 (Chrome / Firefox)

alert (弹框提示)

prompt (用户填写)

confirm (确认)

console (开发者)

document (文档) <sup>W3C</sup> DOM

history (浏览记录) <sup>W3C</sup> BOM