
STANDARD OPERATING PROCEDURE · FIELD GUIDE SERIES

SOP-EP-001

Deploying an Endpoint Management Agent (Tanium Client Example)

Install, register and verify an endpoint management agent five ways: manual, silent command line / PowerShell, remote (PsExec, PowerShell remoting), enterprise (Intune Win32, ConfigMgr, GPO startup script) and Tanium's own client deployment.

Endpoint Management | Agent Deployment | Windows

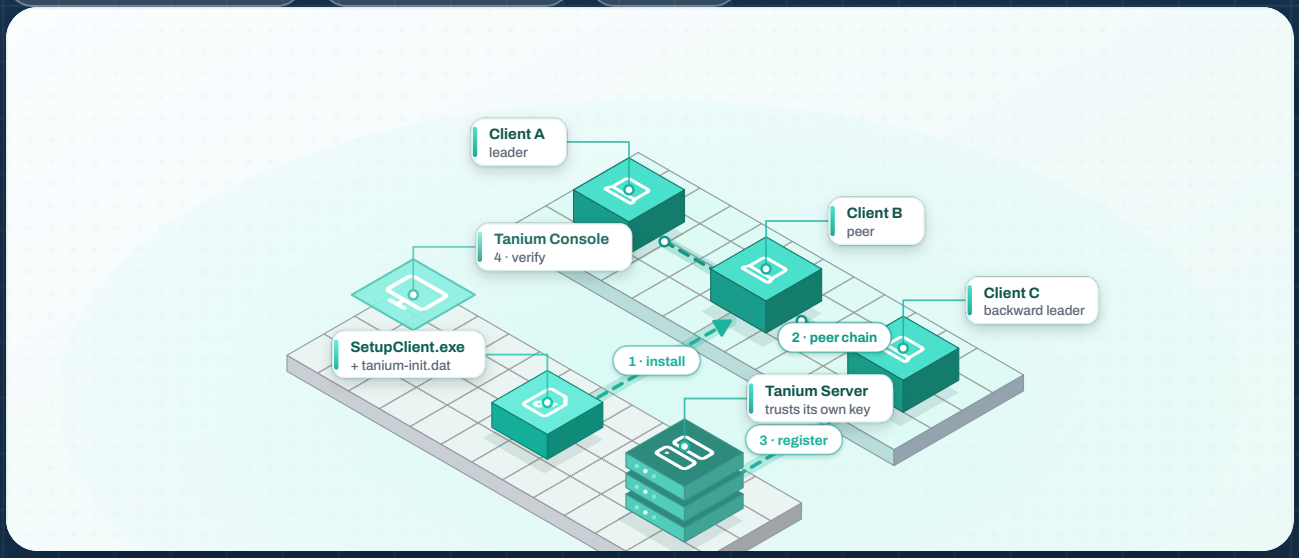

DOCUMENT ID	SOP-EP-001
VERSION	2.0
EFFECTIVE	October 2026
AUDIENCE	Desktop engineers, endpoint administrators, IT support
AUTHOR	Richmond Dieujuste, Principal Consultant

Rich Dieu IT Solutions LLC · richdieu.com

Sanitized reference edition — client identifiers removed

Contents

1. Concepts You Need First 3

1.1 How Tanium's architecture differs 3

1.2 Ports and network requirements 5

1.3 The tanium-init.dat file 6

1.4 Registration 7

1.5 Choosing a method 8

2. Access, Prerequisites and Planning 9

2.1 Level of access required 9

2.2 Prerequisites checklist 10

2.3 Planning decisions 10

3. Methods A and B · Manual and Silent Installation 11

4. Method C · Remote Installation (PsExec and PowerShell Remoting) 14

5. Methods D and E · Enterprise and Tanium-native Deployment 15

5.1 Method D · Intune, ConfigMgr and Group Policy 15

5.2 Method E · Tanium client deployment tooling 16

6. Verification, Rollback and Troubleshooting 17

6.1 Verify on the endpoint 17

6.2 Verify in the console 17

6.3 Rollback 17

6.4 Troubleshooting 18

7. Summary, Glossary and Review 19

7.1 Chapter summary 19

7.2 Glossary 19

LEARNING OBJECTIVES

After working through this procedure you will be able to:

- Explain what an endpoint management agent does and how the Tanium client, server and peer chain communicate.

- Describe the role of the tanium-init.dat file and why the installer must find it beside SetupClient.exe.
- Plan ports (TCP 17472), firewall rules and access before deployment.
- Install the client manually, silently, remotely and through Intune, ConfigMgr, Group Policy or Tanium's own deployment tooling.
- Verify service health, connectivity and registration from both the endpoint and the console.
- Troubleshoot clients that install but never register.

TIME	DIFFICULTY	MINIMUM ACCESS	RISK
≈ 10 min per endpoint (manual)	Beginner to intermediate	Local admin on the endpoint	Low (agent install, reversible)

CHAPTER 1

Concepts You Need First

An **endpoint management agent** is a small, always-running service on a laptop, desktop or server that lets a central platform see and act on that machine: inventory its software, check its patch level, find a file, kill a process, or deploy a fix. Without the agent, the platform is blind to that endpoint. That is why "install the agent" is often the very first task on a new or newly acquired machine, and why missing agents show up as audit findings. This SOP uses the **Tanium Client** as its worked example; the planning, methods and verification apply to most agents (ConfigMgr client, Defender for Endpoint sensor, CrowdStrike, Qualys and so on).

> **KEY CONCEPT · THE AGENT IS THE PLATFORM'S HANDS AND EYES**
>
> Picture a large office building where the security desk can ask every room a question over an intercom and get answers in seconds: "Who has a space heater plugged in?" The intercom speaker in each room is the agent. If a room has no speaker, the desk can't ask it anything, and nobody knows what is in there. Installing the agent is fitting the speaker; registering it is telling the desk which room it belongs to.

1.1 How Tanium's architecture differs

Most agents talk directly to their server in a hub-and-spoke pattern. Tanium uses a **linear chain**: clients on the same subnet discover each other and pass questions and answers along the chain, so only the ends of each chain talk to the server. This is what lets Tanium answer a question across hundreds of thousands of endpoints in seconds while keeping WAN traffic low.

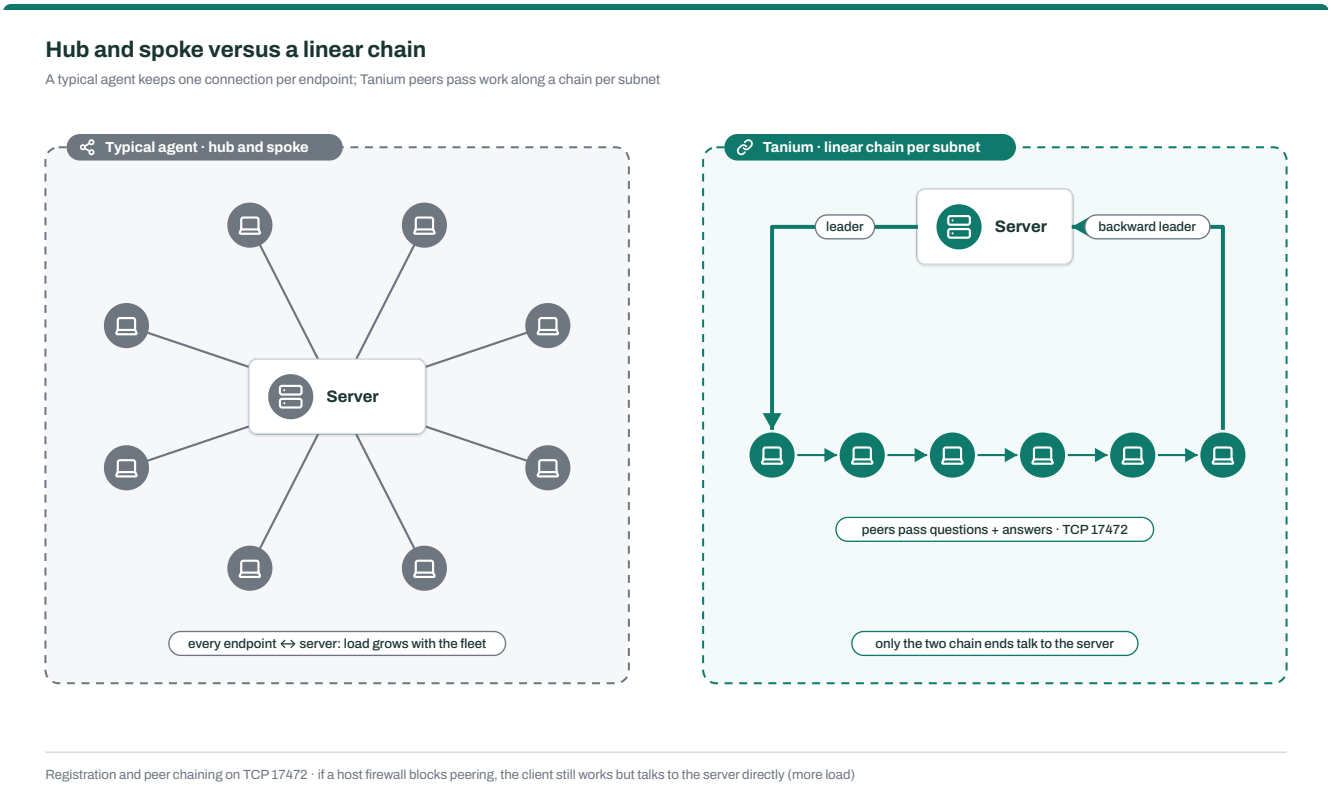


Figure 1. Because peers hand work to each other, server and WAN load stay roughly flat as the fleet grows, which is why Tanium can answer a question across a very large estate in seconds.

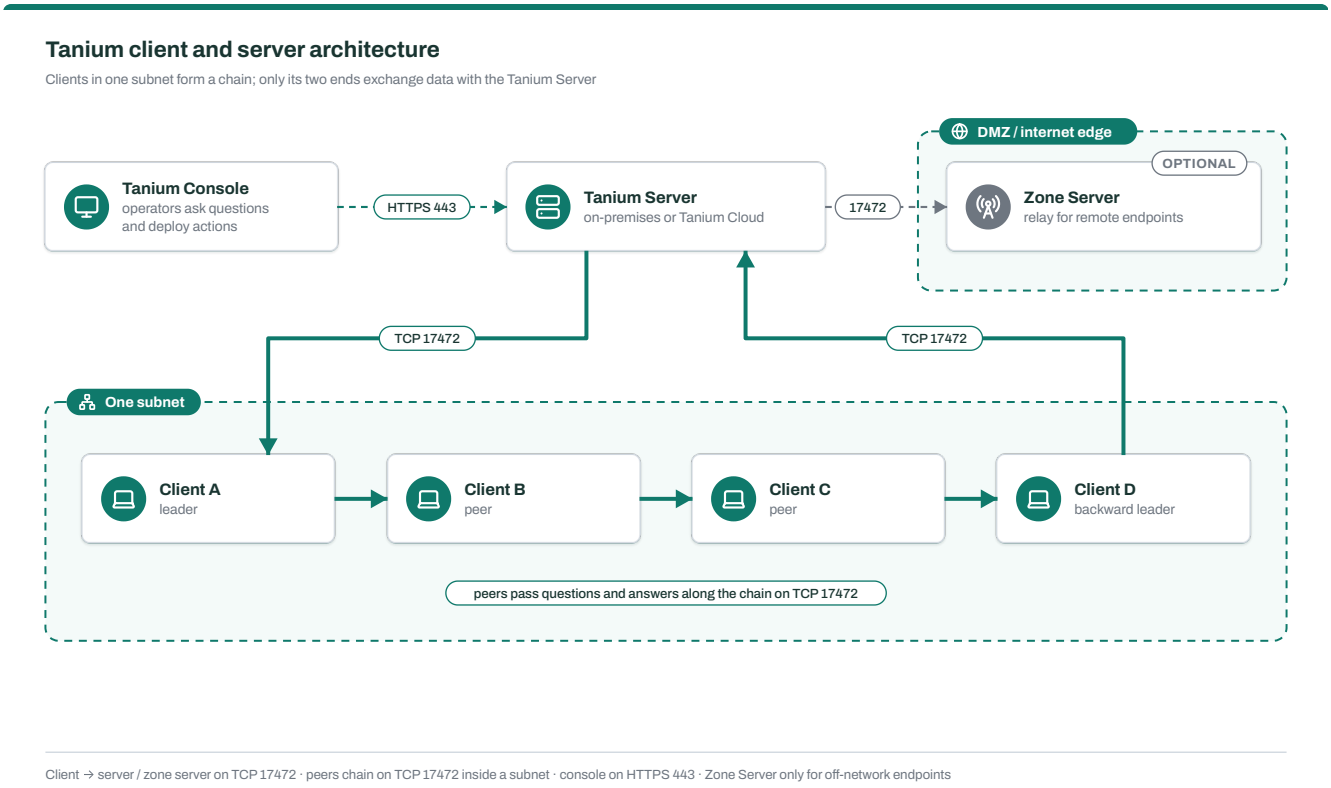


Figure 2. Only the leader and backward leader of each subnet chain talk to the server; a Zone Server extends the same pattern to endpoints off the corporate network.

Component	Role
Tanium Server	Central platform (on-premises or Tanium Cloud). Distributes questions and actions, collects answers, holds content and packages.
Zone Server	Optional relay in a DMZ so that clients off the corporate network can connect without exposing the main server.
Tanium Client	The agent. Runs as the *Tanium Client* Windows service, answers sensors (small scripts that read data), runs actions and caches packages.
Tanium Console	Browser interface for operators: ask questions, deploy, manage clients.

1.2 Ports and network requirements

Port	Direction	Purpose
TCP 17472	Client → Server / Zone Server	Registration, questions, answers and package downloads. The essential port.
TCP 17472	Client ↔ Client (same subnet)	Peer chaining. If blocked by a host firewall, clients still work but each talks to the server directly, increasing load.

TCP 443	Operator browser → Server	Console access. Tanium Cloud deployments also use 443 for some client traffic; follow your tenant's documentation.

NOTE · VERIFY FOR YOUR VERSION

Ports, defaults and command-line options differ between client versions and between on-premises and Tanium Cloud. Check the Tanium Client Management documentation for the version your Tanium administrator supplies; values shown here are the long-standing defaults.

1.3 The tanium-init.dat file

Modern Tanium clients are configured at install time by an **initialization file**, `tanium-init.dat`, generated by the Tanium administrator from the console. It tells the new client *where* the server is (server name list and port) and *which* server to trust (the server's public key). The installer looks for it in the same folder it runs from.

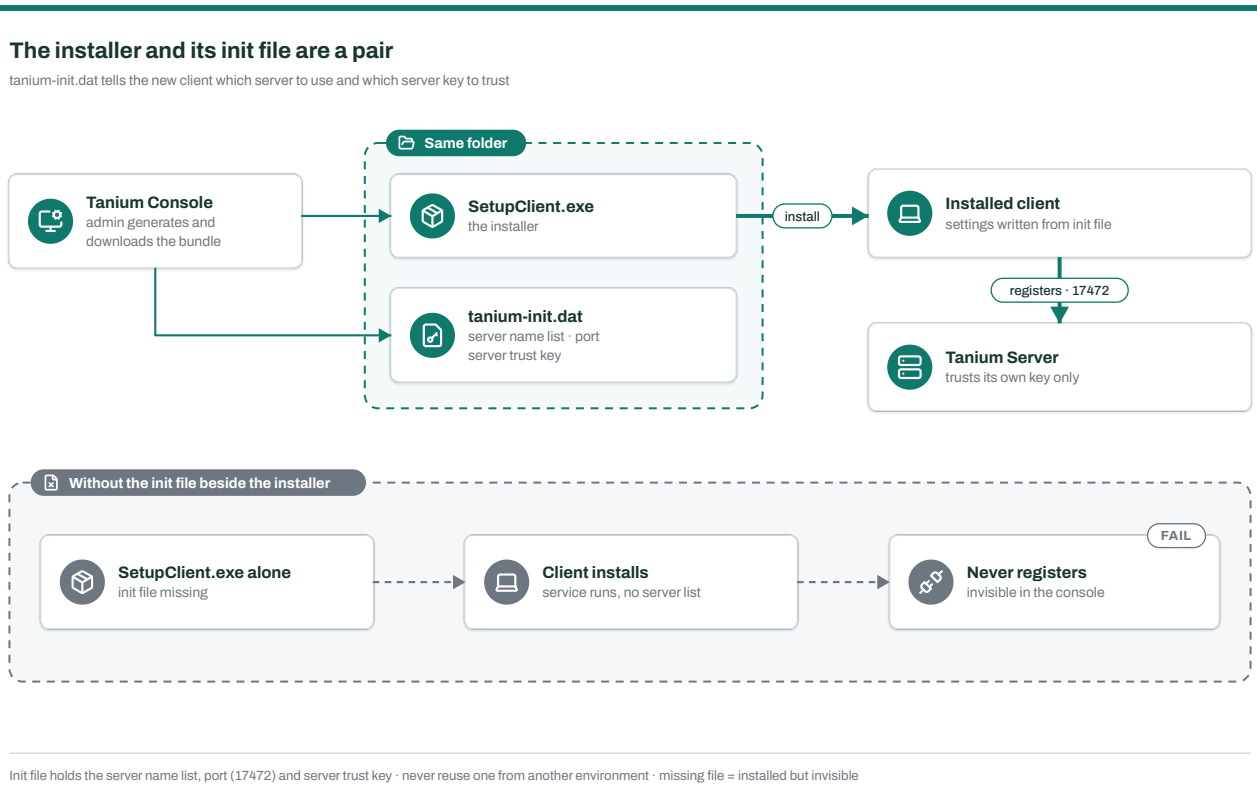


Figure 3. An installer run without its init file still installs a working service that never registers, the classic "installed but invisible" failure this SOP is designed to prevent.

WHY IT MATTERS · TRUST, NOT JUST AN ADDRESS

The server key in the init file means a client will only accept instructions from *your* Tanium Server. That protects you from a rogue server issuing actions to your fleet. It also means you must get the init file from your Tanium administrator, and never reuse one from another environment. In the reference engagement, installers were obtained from the endpoint tooling owner rather than downloaded, precisely so that every package carried the right init file.

1.4 Registration

When the service first starts, the client connects to the server on 17472, presents its identity, and the server assigns or confirms a **Computer ID**. From then on the endpoint appears in console questions and in Client Management health views. Registration needs the right init file, an open network path, and a correct clock (certificate and key validation is time-sensitive).

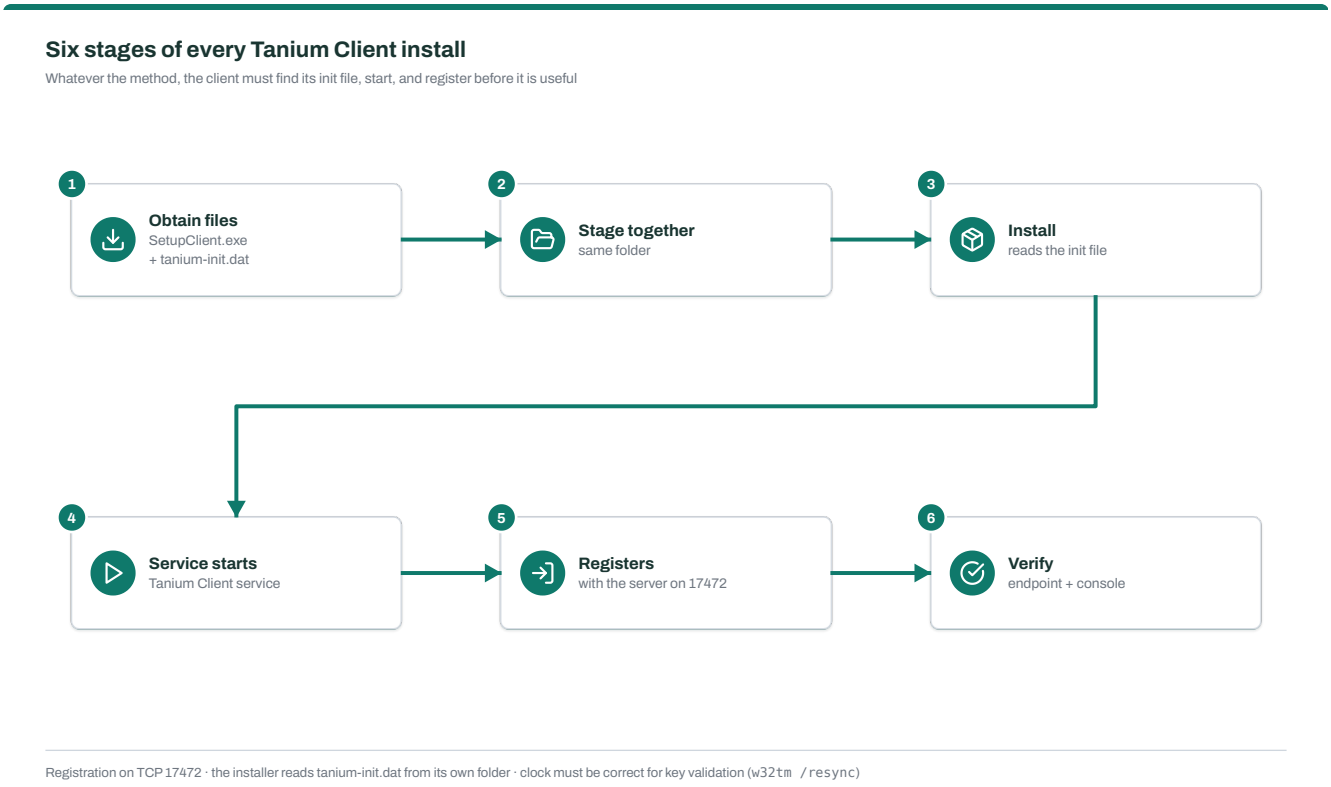


Figure 4. An install is not finished when the service starts; it is finished when the endpoint has registered and answers in the console.

1.5 Choosing a method

A · Manual

Double-click SetupClient.exe with the init file beside it.

BEST FOR: ONE MACHINE, LEARNING

B · Silent CLI / PowerShell

`SetupClient.exe /S` plus verification and logging.

BEST FOR: SCRIPTS, TASK SEQUENCES

C · Remote

PsExec or PowerShell remoting from an admin host.

BEST FOR: A HANDFUL OF REMOTE PCS

D · Enterprise

Intune Win32 app, ConfigMgr application or GPO startup script.

BEST FOR: MANAGED FLEETS

E · Tanium deployment

Tanium's own client deployment tooling pushes to discovered endpoints.

BEST FOR: UNMANAGED ESTATES, M&A

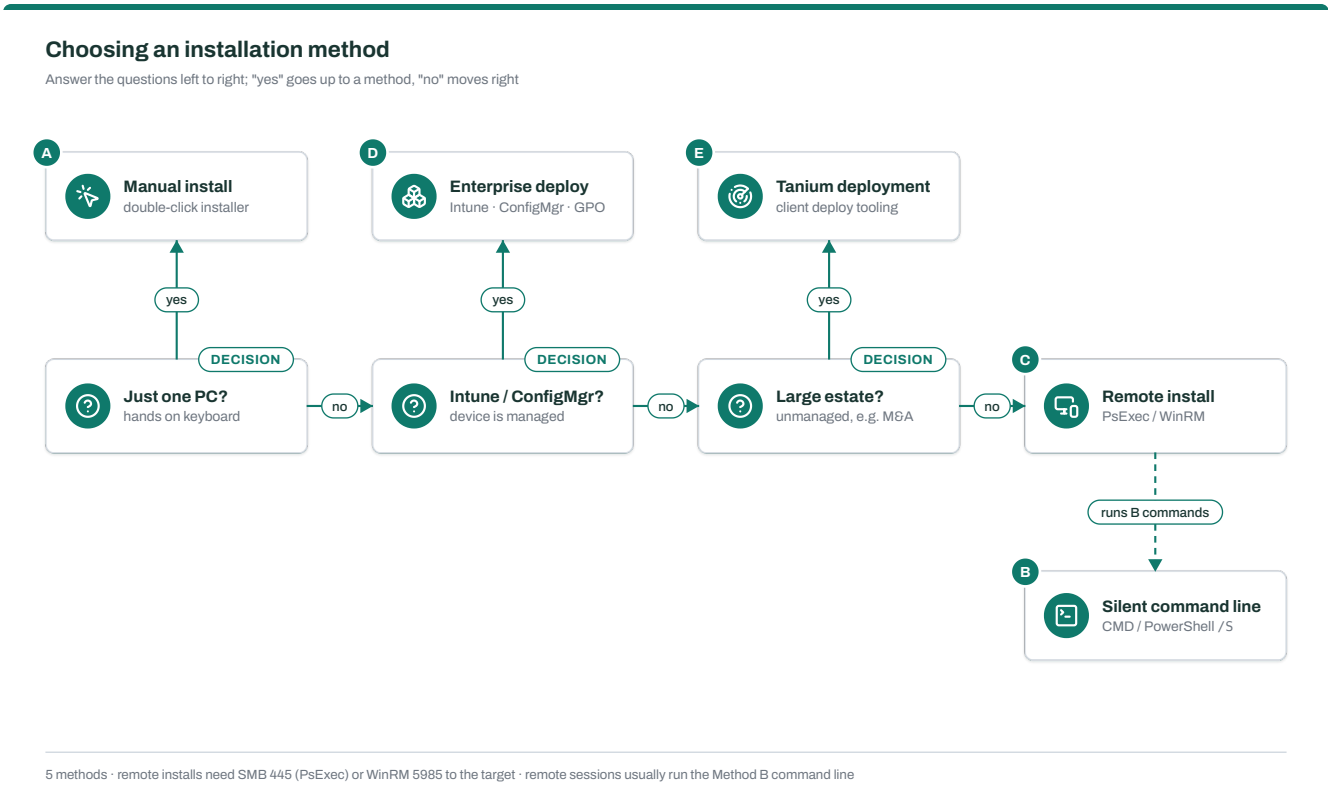


Figure 5. Fleet size and management tooling pick the method, and remote installs usually end up running the Method B command line.

CHAPTER 2

Access, Prerequisites and Planning

2.1 Level of access required

Task	Least-privilege access	Notes
Install / uninstall on an endpoint	Member of the local Administrators group	Use a dedicated admin account or LAPS-managed local admin, not a daily-use account.
Obtain installer + init file	Tanium console role able to download client installation bundles (Client Management)	Usually the endpoint tooling owner. Role names vary by version; ask the Tanium administrator.
Remote install (PsExec / WinRM)	Local admin on targets; ADMIN$ share reachable (PsExec) or WinRM enabled (remoting)	Admin rights via a domain group scoped to workstations, not Domain Admins.
Intune Win32 app	Intune *Application Manager* role (with a scope tag if used)	Entra ID *Intune Administrator* also works but is broader than needed.
ConfigMgr application	*Application Author* to create, *Application Deployment Manager* to deploy	Scope to the target collections with security scopes.
GPO startup script	Edit rights on the GPO (delegated) and link rights on the OU	Read access for *Domain Computers* on the source share.
Tanium client deployment	Tanium role permitted to deploy clients + a deployment credential with local admin on targets	Store the credential in the console's credential store, never in scripts.
Verify registration	Tanium console read access to Interact / Client Management	Or ask the endpoint tooling owner to confirm.

GOOD PRACTICE · JUST-IN-TIME ADMIN

Activate admin roles (Intune, ConfigMgr, local admin groups) through Privileged Identity Management or your PAM tool only for the deployment window. The activation record is useful evidence of who deployed what, when.

2.2 Prerequisites checklist

- [ ] Change or service request referencing the endpoint list (for example `PC-LAB-0001`, `PC-LAB-0002`).
- [ ] `SetupClient.exe` and `tanium-init.dat` from the endpoint tooling owner, with version and SHA-256 hashes recorded.
- [ ] Endpoints can resolve and reach the Tanium Server or Zone Server on TCP 17472 (test below).
- [ ] Endpoint clock synchronized with the domain.
- [ ] Any EDR or application-control product allows the Tanium Client (allow-list by publisher certificate).
- [ ] No previous, broken Tanium installation (check the service list first).

PRE-FLIGHT (ON THE ENDPOINT) — POWERSHELL

```powershell
$server = 'tanium.contoso.com'      # from the Tanium administrator
Resolve-DnsName $server
Test-NetConnection $server -Port 17472 | Select ComputerName, RemoteAddress, TcpTestSucceeded
Get-Service -Name 'Tanium Client' -ErrorAction SilentlyContinue      # should be empty on a new install
w32tm /query /status | Select-String 'Source|Last Successful'
```

2.3 Planning decisions

Decision	Guidance
Source location	A read-only share or the management platform's content store. The source folder in the reference SOP was `C:\temp` on each endpoint; a dedicated `C:\Install\Tanium` folder deleted after install is tidier.
Method	Use the decision tree. Prefer the platform that already manages the endpoint.
Host firewall	Allow 17472 inbound from the local subnet so peer chaining works; outbound normally permitted.
Upgrade path	Once installed, upgrade clients from Tanium itself (Client Management) rather than reinstalling.

CHAPTER 3

Methods A and B · Manual and Silent Installation

METHOD A Manual installation

1. **Obtain the files.** Request the Tanium Client installation files from the endpoint tooling owner, listing the hostnames that need the client. Wait for `SetupClient.exe` (Windows installer) and `tanium-init.dat` (configuration).
2. **Stage them together.** Create `C:\Install\Tanium\` on the endpoint and copy both files into it. They must be in the same folder.
3. Verify the files: `Get-FileHash C:\Install\Tanium\* -Algorithm SHA256` and compare with the values the tooling owner provided.
4. **Run the installer.** Right-click `SetupClient.exe` › **Run as administrator**. Keep `tanium-init.dat` in the folder for the whole installation.
5. Accept the default settings when prompted and complete the wizard.
6. **Verify the service.** Open **Services** (Win+R, `services.msc`), locate *Tanium Client*, and confirm *Status: Running* and *Startup type: Automatic*.
7. **Notify.** Tell the endpoint tooling owner the installation is complete and ask them to confirm the client is reporting (Chapter 6).

> **WATCH OUT · THE INSTALLER WILL NOT ASK FOR A SERVER**
>
> Modern installers take the server from the init file. If the file is missing, the wizard still finishes "successfully" and the service runs, but the client has nowhere to register. This is the most common failure in practice.

METHOD B Silent installation from the command line or PowerShell

The Windows installer is an NSIS-based executable. `/S` (capital S) runs it silently. With the init file in the same folder, no other switches are needed.

ELEVATED COMMAND PROMPT — CMD

```
cd /d C:\Install\Tanium
SetupClient.exe /S
:: wait, then confirm
sc query "Tanium Client"
```

NOTE · OLDER CLIENTS AND EXPLICIT SWITCHES

Before init files, installers were configured with switches such as `/ServerAddress=tanium.contoso.com` and a `tanium.pub` key beside the installer. Some versions also accept `/D=<install path>`, which must be the last argument. Only use switches documented for the exact client version you were given.

PowerShell base template

INSTALL-TANIUMCLIENT.PS1 · BASE TEMPLATE — POWERSHELL

```powershell
<#
.SYNOPSIS  Silently install the Tanium Client from a staged folder, verify the service and
connectivity, write evidence.
.NOTES     Run elevated on the endpoint (locally, via remoting, or as SYSTEM from a deployment
tool).
#>
[CmdletBinding(SupportsShouldProcess)]
param(
  [string] $SourceDir     = 'C:\Install\Tanium',            # contains SetupClient.exe + tanium-
init.dat
  [Parameter(Mandatory)] [string] $ServerName,              # e.g. tanium.contoso.com (for
connectivity test only)
  [int]    $Port          = 17472,
  [hashtable] $ExpectedHash = @{},                          # @{ 'SetupClient.exe'='<sha256>';
'tanium-init.dat'='<sha256>' }
  [string] $EvidenceDir   = 'C:\ProgramData\EndpointIT\Evidence',
  [string] $ChangeRef     = 'CHG0012345'
)
$ErrorActionPreference = 'Stop'
New-Item $EvidenceDir -ItemType Directory -Force | Out-Null
$ev = [ordered]@{ ChangeRef=$ChangeRef; Host=$env:COMPUTERNAME;
Operator="$env:USERDOMAIN\$env:USERNAME"; StartUtc=(Get-Date).ToUniversalTime() }

# ---- Stage 1: sanity checks ------------------------------------------------
$exe  = Join-Path $SourceDir 'SetupClient.exe'
$init = Join-Path $SourceDir 'tanium-init.dat'
foreach ($f in $exe, $init) { if (-not (Test-Path $f)) { throw "Missing $f. Both files must be in
$SourceDir." } }
foreach ($k in $ExpectedHash.Keys) {
  $h = (Get-FileHash (Join-Path $SourceDir $k) -Algorithm SHA256).Hash
  if ($h -ne $ExpectedHash[$k]) { throw "Hash mismatch for $k" }
}
if (Get-Service 'Tanium Client' -ErrorAction SilentlyContinue) {
  Write-Warning 'Tanium Client already installed; skipping install (upgrade it from Tanium
instead).'
} elseif ($PSCmdlet.ShouldProcess($env:COMPUTERNAME, 'Install Tanium Client')) {
  # ---- Stage 2: silent install (working directory = source, so the init file is found)
  $p = Start-Process -FilePath $exe -ArgumentList '/S' -WorkingDirectory $SourceDir -Wait -PassThru
  $ev.InstallExitCode = $p.ExitCode
  if ($p.ExitCode -ne 0) { throw "SetupClient.exe returned $($p.ExitCode)" }
}

# ---- Stage 3: verify service and network -----------------------------------
$deadline = (Get-Date).AddMinutes(3)
do { Start-Sleep 5; $svc = Get-Service 'Tanium Client' -ErrorAction SilentlyContinue }
until (($svc -and $svc.Status -eq 'Running') -or (Get-Date) -gt $deadline)
if (-not $svc -or $svc.Status -ne 'Running') { throw 'Tanium Client service is not running.' }
```

```
Set-Service 'Tanium Client' -StartupType Automatic
$ev.Service   = $svc.Status.ToString()
$ev.PortOpen  = (Test-NetConnection $ServerName -Port $Port -WarningAction
SilentlyContinue).TcpTestSucceeded
$ev.Version   = (Get-ItemProperty 'HKLM:\SOFTWARE\Microsoft\Windows\CurrentVersion\Uninstall\*',

'HKLM:\SOFTWARE\WOW6432Node\Microsoft\Windows\CurrentVersion\Uninstall\*' -EA SilentlyContinue |
                Where-Object DisplayName -like 'Tanium Client*' | Select-Object -First
1).DisplayVersion
$ev.EndUtc    = (Get-Date).ToUniversalTime()
$ev | ConvertTo-Json | Out-File (Join-Path $EvidenceDir "$ChangeRef-$env:COMPUTERNAME-tanium.json")

# ---- Stage 4: tidy up (the init file need not stay on disk) ------------------
if ($PSCmdlet.ShouldProcess($SourceDir, 'Remove staged installer files')) { Remove-Item $SourceDir
-Recurse -Force }
Write-Host "Installed. Ask the Tanium administrator to confirm registration for $env:COMPUTERNAME."
-ForegroundColor Green
```

EXAMPLE · RUNNING THE TEMPLATE

INVOCATION — POWERSHELL

```
.\Install-TaniumClient.ps1 -ServerName 'tanium.contoso.com' -ChangeRef 'CHG0012345' `
  -ExpectedHash @{ 'SetupClient.exe'='<sha256>'; 'tanium-init.dat'='<sha256>' } -WhatIf
```

CHAPTER 4

Method C · Remote Installation (PsExec and PowerShell Remoting)

When you have admin rights on a few remote endpoints but no management platform for them, push the files and run Method B remotely.

METHOD C1 PsExec (Sysinternals)

PsExec copies a service to the target's `ADMIN$` share over SMB (TCP 445), starts it, and runs your command. `-s` runs as SYSTEM, which avoids UAC and profile issues.

FROM AN ADMIN WORKSTATION — CMD

```
set PC=PC-LAB-0001
mkdir \\%PC%\C$\Install\Tanium
copy SetupClient.exe \\%PC%\C$\Install\Tanium\
copy tanium-init.dat \\%PC%\C$\Install\Tanium\
psexec \\%PC% -s -w C:\Install\Tanium C:\Install\Tanium\SetupClient.exe /S
sc \\%PC% query "Tanium Client"
```

WATCH OUT · SECURITY TOOLING AND PSEXEC

Many EDR products flag PsExec because attackers use it. Tell the security operations team before a PsExec campaign, or use PowerShell remoting instead.

METHOD C2 PowerShell remoting

PUSH AND INSTALL OVER WINRM (TCP 5985/5986) — POWERSHELL

```
$targets = 'PC-LAB-0001','PC-LAB-0002'
$cred    = Get-Credential 'CONTOSO\adm-endpoint'
foreach ($pc in $targets) {
  $s = New-PSSession -ComputerName $pc -Credential $cred
  Invoke-Command -Session $s { New-Item C:\Install\Tanium -ItemType Directory -Force | Out-Null }
  Copy-Item .\SetupClient.exe, .\tanium-init.dat, .\Install-TaniumClient.ps1 -Destination
C:\Install\Tanium\ -ToSession $s
  Invoke-Command -Session $s { & C:\Install\Tanium\Install-TaniumClient.ps1 -ServerName
'tanium.contoso.com' }
  Remove-PSSession $s
}
```

Files are copied *through* the session to avoid the Kerberos second-hop problem (a remote session cannot use your credentials to reach a file share).

CHAPTER 5

Methods D and E · Enterprise and Tanium-native Deployment

5.1 Method D · Intune, ConfigMgr and Group Policy

METHOD D1 Intune Win32 app

1. Put `SetupClient.exe`, `tanium-init.dat` and an `install.cmd` in a source folder. `install.cmd` contains `"%~dp0SetupClient.exe" /S` (the `%~dp0` makes the installer run from the package folder, where the init file is).
2. Package it: `IntuneWinAppUtil.exe -c .\src -s install.cmd -o .\out`.
3. In the Intune admin center go to **Apps › Windows › + Add** (**+ Create** in newer tenants), choose *Windows app (Win32)*, and upload the `.intunewin` file.
4. **Program**: install command `install.cmd`; uninstall command `"%ProgramFiles(x86)%\Tanium\Tanium Client\uninst.exe" /S` (confirm the path for your client version); install behaviour *System*.
5. **Detection rule**: *File* rule for `TaniumClient.exe` in the install folder, or a custom script: `if (Get-Service 'Tanium Client' -EA SilentlyContinue) { 'Installed' }`.
6. **Assignments**: *Required* to a device group. Monitor **Device install status**.

METHOD D2 Configuration Manager application

1. Copy both files to the content share, for example `\\SRV-CM-01\Sources$\Apps\Tanium\<version>\`.
2. **Software Library › Application Management › Applications › Create Application** › *Manually specify the application information*.
3. Add a *Script Installer* deployment type: installation program `SetupClient.exe /S`; uninstall program as above.
4. Detection method: file `TaniumClient.exe` exists in the install folder (or the uninstall registry key); installation behaviour *Install for system*; logon requirement *Whether or not a user is logged on*.

5 Distribute content, deploy as *Required* to a device collection, and monitor **Monitoring › Deployments**.

METHOD D3 **Group Policy computer startup script**

For domain-joined PCs with no other management tool, a startup script runs as SYSTEM at boot. Make it idempotent so it does nothing once the client exists.

INSTALL-TANIUMATSTARTUP.PS1 (GPO STARTUP SCRIPT) POWERSHELL

```powershell
$src = '\\contoso.com\NETLOGON\Tanium'          # or a read-only share; Domain Computers need Read
if (Get-Service 'Tanium Client' -ErrorAction SilentlyContinue) { return }
$tmp = 'C:\Windows\Temp\TaniumInstall'
New-Item $tmp -ItemType Directory -Force | Out-Null
Copy-Item "$src\SetupClient.exe", "$src\tanium-init.dat" -Destination $tmp
Start-Process "$tmp\SetupClient.exe" -ArgumentList '/S' -WorkingDirectory $tmp -Wait
Remove-Item $tmp -Recurse -Force
```

Link it under **Computer Configuration › Policies › Windows Settings › Scripts (Startup/Shutdown) › Startup › PowerShell Scripts**. GPO offers no reporting, so pair it with a Tanium or AD query to find stragglers.

5.2 Method E · Tanium client deployment tooling

Tanium can install its own client. The console's **Client Management** capability discovers endpoints (from existing clients' network scans, AD or a list you upload) and pushes the client using a deployment credential over SMB and remote service creation, much like PsExec but tracked in the console. A standalone Windows **Client Deployment Tool** has also been offered for environments that need to push from an admin workstation. Its discovery reports are valuable in their own right: they list machines with no client, which is exactly where attackers hide.

1. Ask the Tanium administrator to confirm which deployment option and client version apply to your environment.
2. Provide the target list (hostnames or IP ranges) and a deployment credential with local admin rights on the targets. Store it in the console's credential store.
3. Ensure targets allow SMB (TCP 445) and remote service management from the deploying host, and that host firewalls will allow 17472 afterwards.
4. Run the deployment and review per-endpoint results (typical failures: access denied, unreachable SMB, an existing broken install). When the campaign ends, remove the credential's rights or rotate its password.

CHAPTER 6

Verification, Rollback and Troubleshooting

6.1 Verify on the endpoint

ENDPOINT CHECKS (ELEVATED) POWERSHELL

```powershell
Get-Service 'Tanium Client' | Select Name, Status, StartType
Get-NetTCPConnection -RemotePort 17472 -ErrorAction SilentlyContinue | Select LocalAddress,
RemoteAddress, State
$dir = (Get-CimInstance Win32_Service -Filter "Name='Tanium Client'").PathName -replace '"','' | Split-
Path
Get-Content "$dir\Logs\log0.txt" -Tail 30                    # look for successful registration lines
& "$dir\TaniumClient.exe" config get ServerNameList           # supported on current clients
```

An *Established* connection to the server on 17472 and recent log lines without repeated errors mean the client is talking. On older clients, configuration values appear under `HKLM\SOFTWARE\WOW6432Node\Tanium\Tanium Client`.

6.2 Verify in the console

- [ ] In **Interact**, ask a question filtered to the host (for example *Get Computer Name from all machines with Computer Name contains PC-LAB-0001*) and receive an answer.
- [ ] Client Management health view shows the endpoint as online with the expected client version.
- [ ] Endpoint appears in the expected computer groups.
- [ ] The endpoint tooling owner confirms reporting (as in the reference SOP's notification step).

6.3 Rollback

Uninstall with the client's uninstaller (`uninst.exe /S` in the install folder) or the platform's uninstall deployment, then reboot if prompted. Ask the Tanium administrator to remove the endpoint record if it will not return. Never delete the install folder by hand while the service exists.

6.4 Troubleshooting

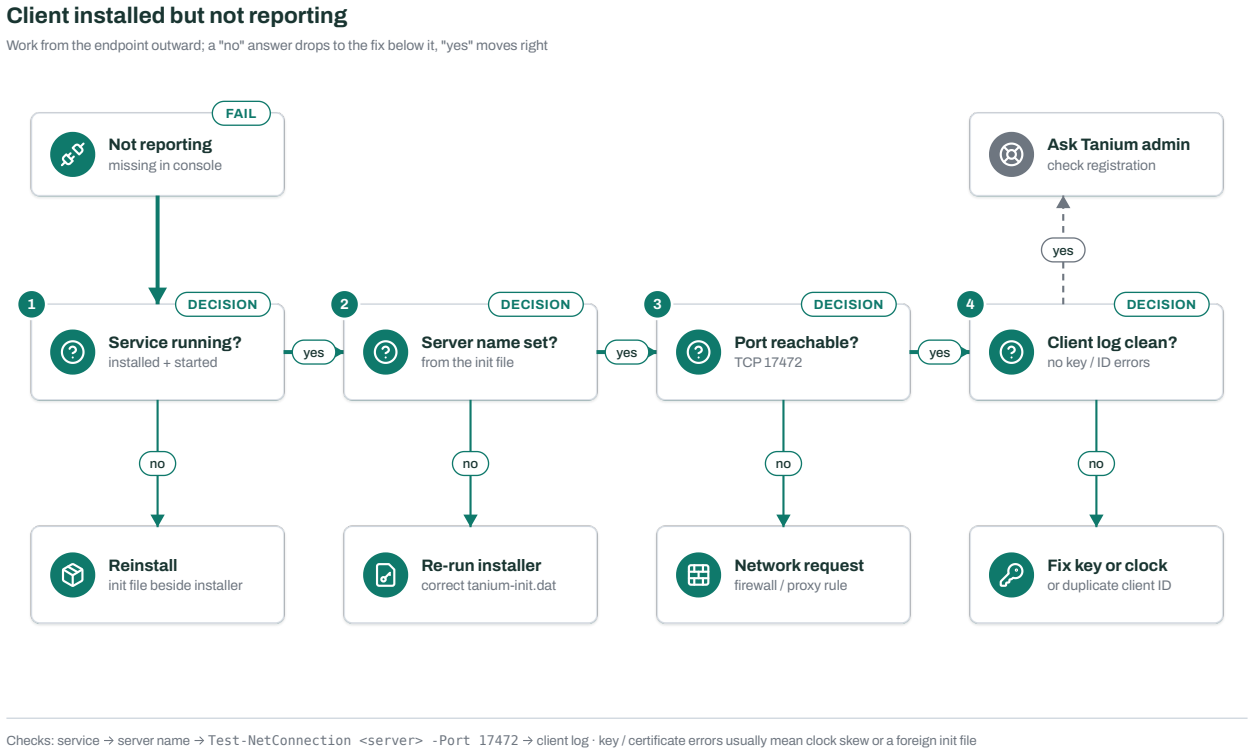


Figure 6. Check what is on the endpoint (service, init file) before the network and the logs; asking the Tanium administrator comes last, once everything local is clean.

Symptom	Likely cause and fix
Service running, never registers	Installed without the init file, or with one from another environment. Uninstall, stage both files together, reinstall.
`TcpTestSucceeded : False` on 17472	Firewall, proxy or routing. Request a rule from the endpoint subnet to the server/zone server on TCP 17472.
Log shows key or certificate errors	Wrong init file or clock skew. Fix time sync (`w32tm /resync`), then reinstall with the correct file.
Two endpoints share one identity	Machine was cloned after the client was installed. Follow Tanium's guidance for imaging (prepare the client before capturing the image) and reset the cloned client's identity.
Installer blocked	Application control or EDR. Allow-list the Tanium publisher certificate.
Silent install appears to do nothing	Not elevated, or the working directory was not the source folder. Use `-WorkingDirectory` or `%~dp0` .

CHAPTER 7

Summary, Glossary and Review

7.1 Chapter summary

- An endpoint management agent gives the platform visibility and control; an endpoint without it is unmanaged.
- Tanium clients form linear peer chains on TCP 17472 and register with the server or a zone server.
- `SetupClient.exe` and `tanium-init.dat` travel together; the init file carries server and trust settings.
- Install manually, silently (`/S`), remotely, through Intune / ConfigMgr / GPO, or with Tanium's own deployment tooling.
- Verify on the endpoint (service, connection, logs) and in the console (question answered, health view).

7.2 Glossary

Agent / client	Service on an endpoint that executes the management platform's instructions.
Linear chain	Tanium's peer topology in which clients in a subnet relay data to each other.
Zone Server	Tanium relay that lets clients outside the network reach the platform securely.
tanium-init.dat	Initialization file supplying server address, port and trust key to a new client.
Computer ID	Unique identity the server tracks for each registered client.
NSIS	Installer framework; its `/S` switch runs silently.
PsExec	Sysinternals tool to run commands on remote Windows machines via ADMIN$.
Detection rule	Intune/ConfigMgr test that decides whether an app is already installed.

Check your understanding

1. What does `tanium-init.dat` provide, and what happens if it is not beside the installer?
2. Why is TCP 17472 needed both to the server and between peers?
3. Why does the Intune install command use `%~dp0`?
4. Name two reasons a correctly installed client might not register, and how you would confirm each.
5. When would you choose Tanium's own deployment tooling over Intune or ConfigMgr?