
STANDARD OPERATING PROCEDURE · FIELD GUIDE SERIES

SOP-EP-002

Removing a Legacy Antivirus Agent Before EDR Migration

A Trend Micro example: uninstall with the agent password, the vendor SCUT tool, the management console or scripted mass removal (PowerShell, ConfigMgr, Intune), then prove the endpoint is clean and hand over to the new EDR.

Endpoint Security | EDR Migration | Windows

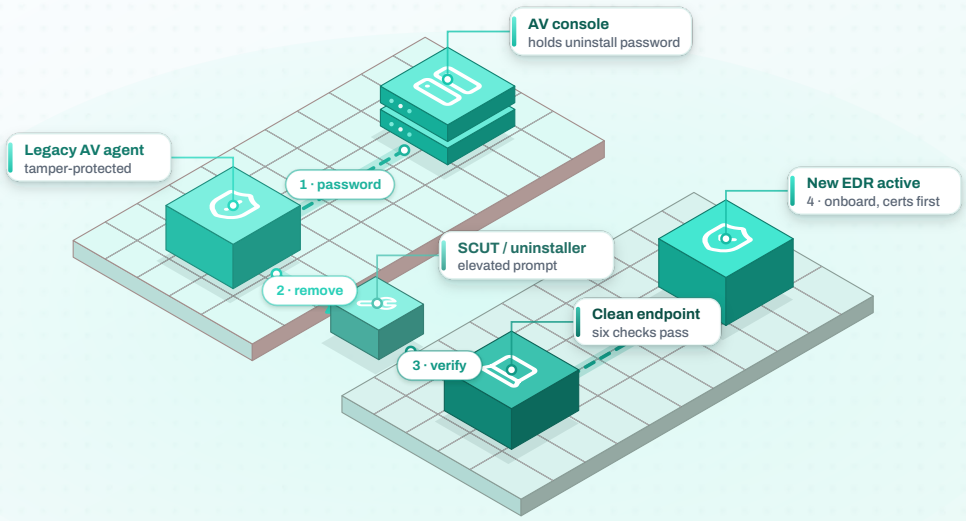

DOCUMENT ID	SOP-EP-002
VERSION	2.0
EFFECTIVE	October 2026
AUDIENCE	Desktop engineers, endpoint security administrators, IT support
AUTHOR	Richmond Dieujuste, Principal Consultant

Rich Dieu IT Solutions LLC · richdieu.com

Sanitized reference edition — client identifiers removed

Contents

1. Concepts You Need First 3

1.1 Why two engines conflict 3

1.2 Tamper protection and uninstall passwords 4

1.3 Vendor removal tools 5

1.4 Sequencing with the new EDR 6

1.5 Certificate preparation 7

1.6 Choosing a method 8

2. Access, Prerequisites and Planning 9

2.1 Level of access required 9

2.2 Prerequisites checklist 10

2.3 Capture the "before" state 10

3. Methods A and B · Interactive Removal 11

4. Methods C and D · Console and Scripted Mass Removal 13

5. Verification and Hand-over to the New EDR 16

5.1 Proving the endpoint is clean 16

5.2 Installing the new EDR 17

6. Rollback and Troubleshooting 18

6.1 Rollback 18

6.2 Troubleshooting flow 18

7. Summary, Glossary and Review 20

7.1 Chapter summary 20

7.2 Glossary 20

LEARNING OBJECTIVES

After working through this procedure you will be able to:

- Explain why two antivirus or EDR engines on one endpoint conflict, down to the file-system filter drivers.
- Describe tamper protection and uninstall passwords, and how to obtain or bypass them legitimately.

- Remove a Trend Micro agent through Programs and Features, the vendor SCUT tool, the vendor console, or scripted mass removal with ConfigMgr or Intune.
- Verify a clean removal: services, processes, drivers, registry, installed-programs list and files.
- Sequence the removal with the new EDR (Defender for Endpoint or CylancePROTECT), including certificate preparation and the protection gap.
- Troubleshoot agents that refuse to uninstall or leave remnants.

TIME	DIFFICULTY	MINIMUM ACCESS	RISK
≈ 15–30 min per endpoint + reboot	Intermediate	Local admin + AV console (uninstall password)	Medium (temporary protection gap)

CHAPTER 1

Concepts You Need First

Organizations replace their endpoint protection every few years: a traditional antivirus (AV) product such as Trend Micro Apex One/OfficeScan gives way to an **endpoint detection and response (EDR)** platform such as Microsoft Defender for Endpoint or CylancePROTECT. The new product cannot simply be installed on top of the old one. The legacy agent must be removed cleanly, at the right moment, without leaving the machine unprotected for longer than necessary. This SOP teaches why, and shows four ways to do it using Trend Micro as the worked example.

> **KEY CONCEPT · TWO BOUNCERS AT ONE DOOR**
>
> Imagine a club with two bouncers who each insist on searching every guest, both holding the guest's bag until they finish, and each willing to throw out anything the other one touched. The queue stalls, arguments break out, and sometimes the door jams. That is what two real-time AV engines do to every file a Windows PC opens.

1.1 Why two engines conflict

Real-time protection works by inserting a **file-system minifilter driver** into the Windows I/O path. Every file open, write or execute passes through the Filter Manager and every registered filter before reaching NTFS. Two AV engines therefore both intercept the same operation:

- **Performance**: double scanning slows log-ons, application launches and builds dramatically.
- **Stability**: competing drivers can deadlock or crash the system (blue screens are a classic symptom).
- **Mutual quarantine**: one engine may detect the other's signature files or memory hooks as malicious and quarantine them.
- **Self-protection fights**: each agent blocks changes to its own files and services, so they can block each other's updates.

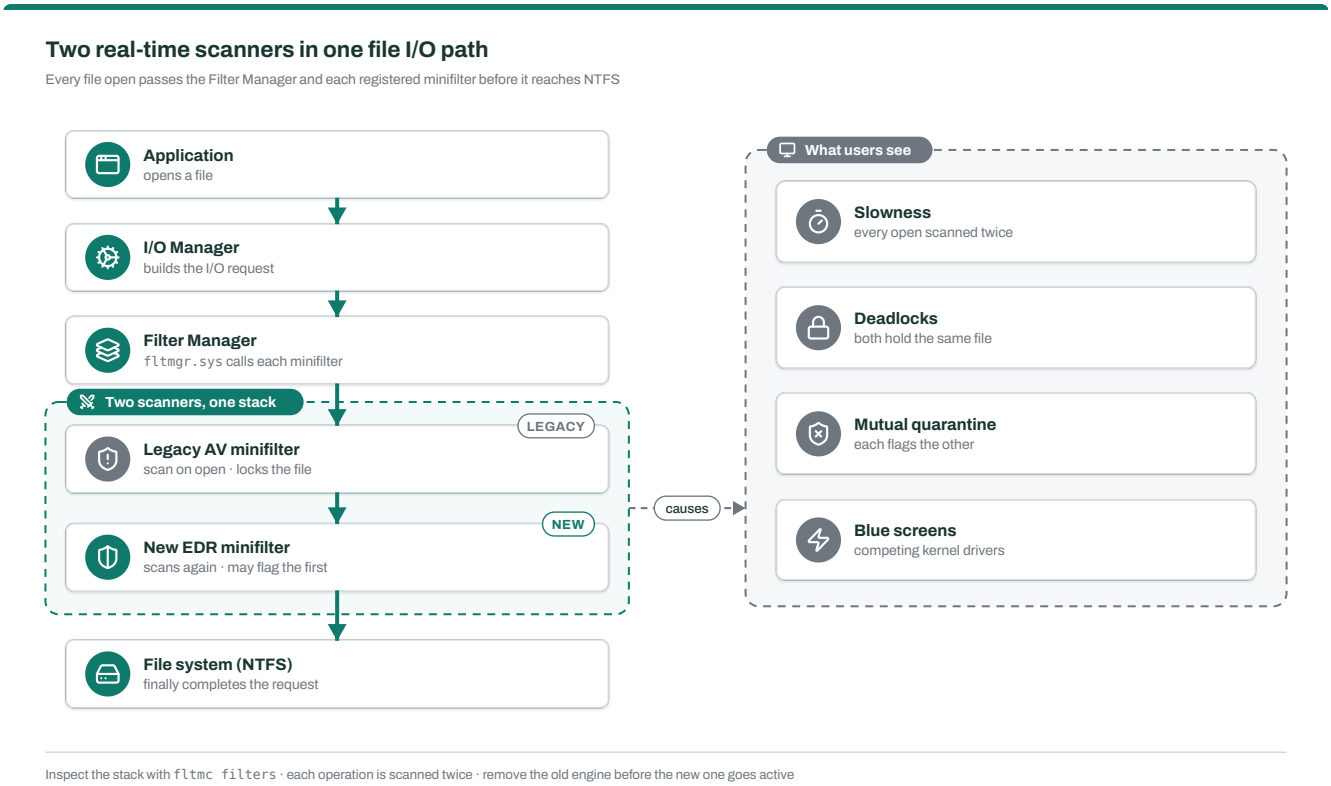


Figure 1. Two real-time engines inspect every file operation in turn, and the symptoms on the right are what that looks like from the user's chair.

Microsoft Defender Antivirus is designed to coexist: when another AV registers with **Windows Security Center**, Defender Antivirus on Windows clients steps aside automatically, and when that AV is removed, Defender turns itself back on. Third-party EDRs rarely coexist this gracefully, so vendors require the old product to be removed first.

1.2 Tamper protection and uninstall passwords

Malware's first move is often to disable security software. Vendors therefore protect their agents: services cannot be stopped, files cannot be deleted, registry keys cannot be changed, and the uninstaller asks for a **password** configured centrally. In Trend Micro's management console this is part of the agent privileges and settings policy (uninstall and unload passwords).

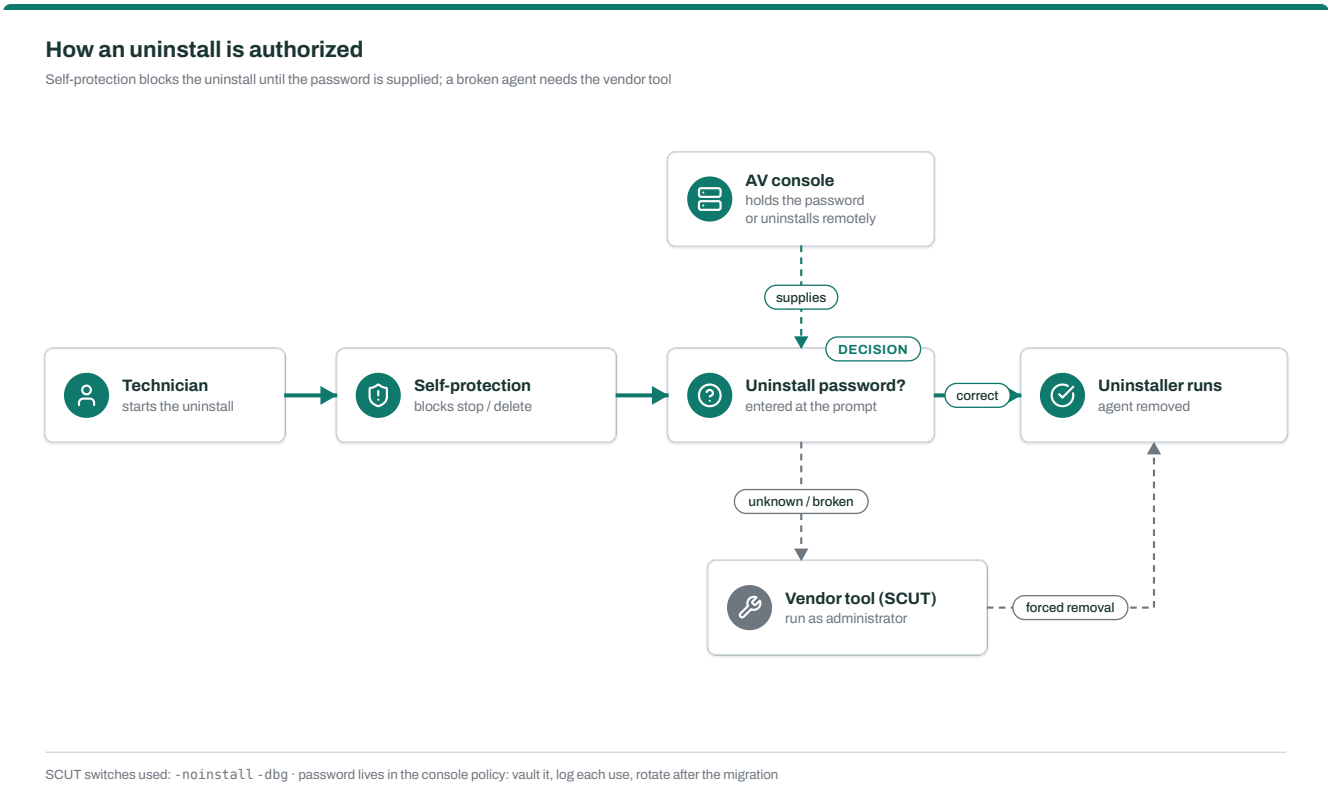


Figure 2. With the password the normal uninstaller runs; without it, or with a damaged agent, the vendor removal tool forces removal with administrator rights.

WHY IT MATTERS · PROTECT THE PASSWORD, RECORD ITS USE

Anyone with the uninstall password can switch off protection on every endpoint. Store it in the privileged-access vault, give it only to the people running the migration, rotate it afterwards, and log each use against the change record.

1.3 Vendor removal tools

Every major AV vendor publishes a **removal tool** for agents that cannot be uninstalled normally: corrupted installations, unknown passwords, or orphaned agents whose management server has gone. Trend Micro's is **SCUT**, distributed by Trend Micro support as a ZIP for a specific product generation. In the reference engagement it was run with two switches:

Switch	Effect (as used in the reference engagement)
`-noinstall`	Remove the agent only; do not reinstall a fresh copy afterwards.
`-dbg`	Write debug output and a log, which is valuable evidence and essential if vendor support is needed.

> **NOTE · USE THE MATCHING TOOL VERSION**
>
> Removal tools are specific to product versions and are updated regularly. Always obtain the current tool from the vendor (or your tooling owner) for the exact agent version installed, and read its readme for supported switches.

1.4 Sequencing with the new EDR

There are two valid ways to order the work. Choose deliberately; the wrong order is how fleets end up with either two engines or none.

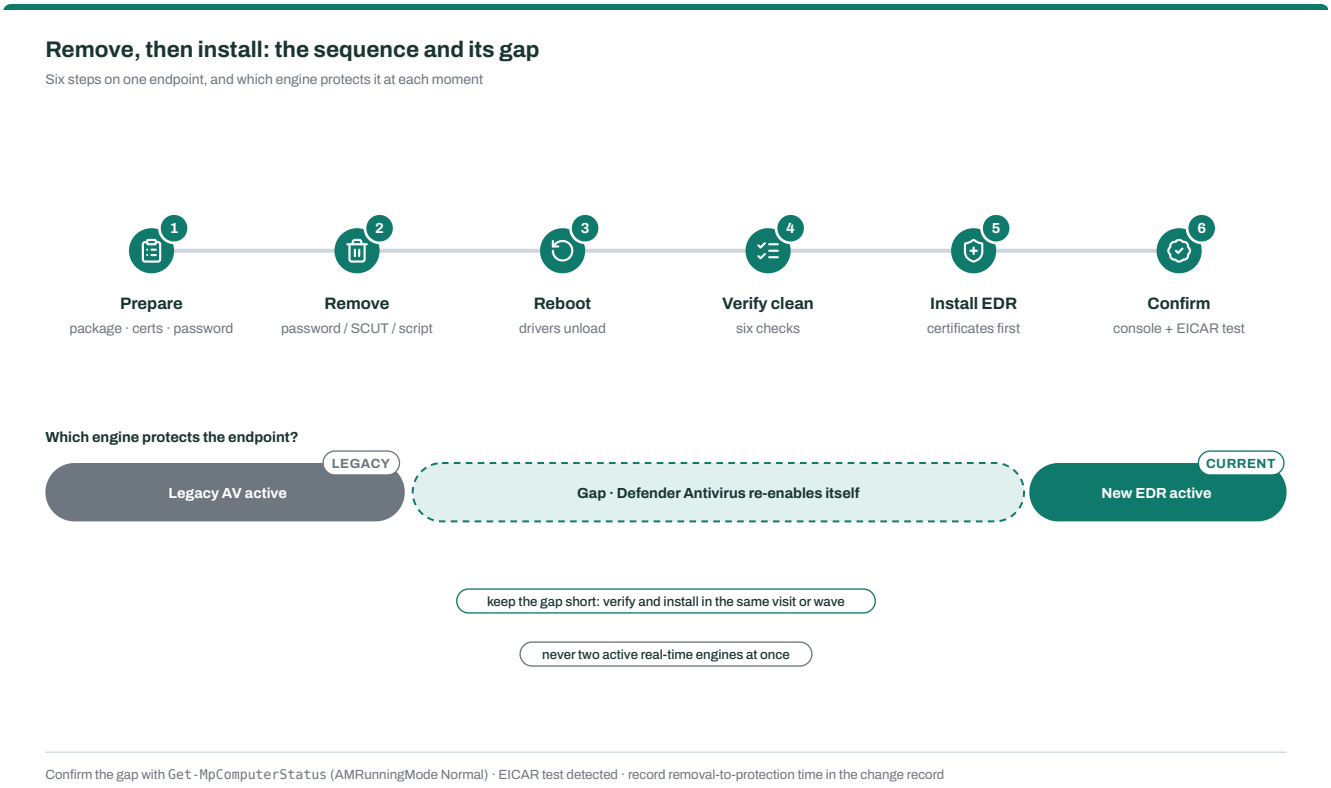


Figure 3. Microsoft Defender Antivirus covers the endpoint during the gap, so the goal is to keep that gap short, never to skip it by stacking two engines.

Model	How it works	Use when
Remove, then install	Uninstall legacy AV, reboot, verify, install the new EDR. Defender Antivirus covers the gap automatically on Windows 10/11.	New EDR is a third-party product (for example CylancePROTECT) that requires a clean machine.

Overlap, then remove	Onboard the new EDR first with its antivirus in *passive* mode, add mutual exclusions, then remove the legacy AV and let the new product go active.	Migrating to Defender for Endpoint, following Microsoft's migration guidance; no protection gap at all.

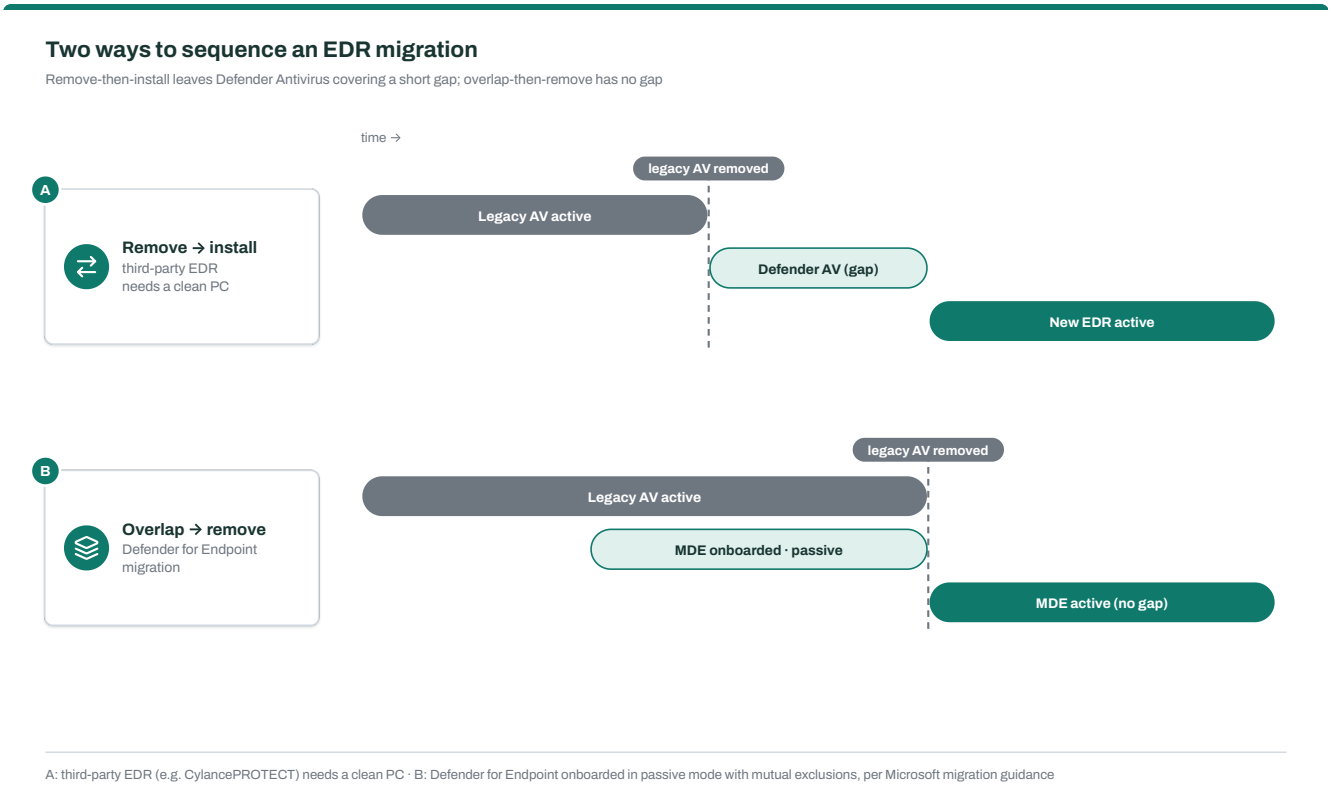


Figure 4. Choose the model before the first wave: a third-party EDR needs a clean PC, while a Defender for Endpoint migration can overlap and avoid the gap entirely.

1.5 Certificate preparation

Some EDR agents and their installers rely on certificates that a hardened build may not trust: a vendor's code-signing chain, or your organization's TLS-inspection root so the agent can reach its cloud through the proxy. In the reference engagement a certificate bundle (`.p7b`) was imported before the CylancePROTECT deployment. Importing it first prevents an install that "succeeds" but never registers.

1.6 Choosing a method

A · Programs and Features
Normal uninstall, supplying the uninstall password.
BEST FOR: HEALTHY AGENT, PASSWORD KNOWN

B · Vendor SCUT tool
Forced removal from an elevated prompt.
BEST FOR: BROKEN AGENT, UNKNOWN PASSWORD

C · Vendor console
Remote uninstall from the AV management server.
BEST FOR: AGENTS STILL REPORTING IN

D · Scripted mass removal
PowerShell + ConfigMgr / Intune, with verification.
BEST FOR: FLEET MIGRATION

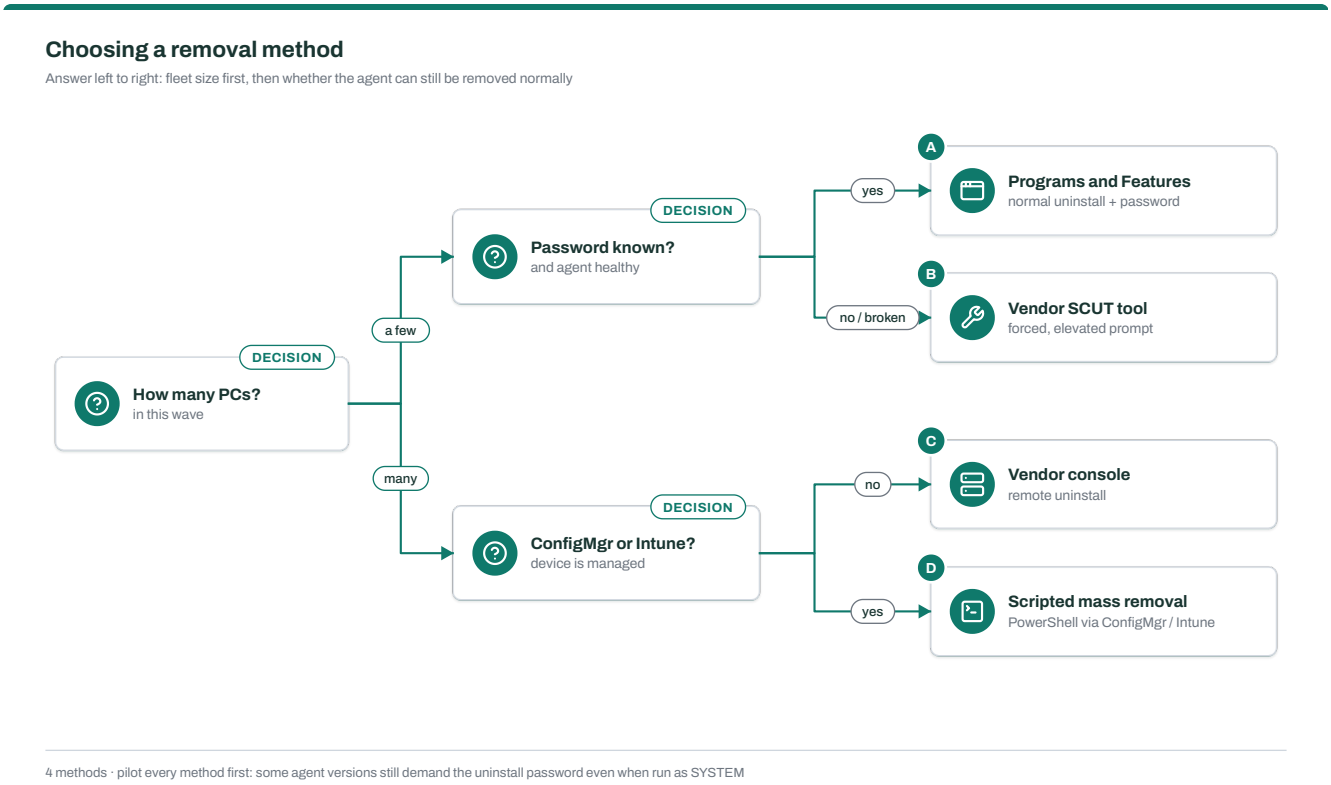


Figure 5. Healthy agents with a known password come off normally; the vendor tool is for broken agents, and fleets are removed by script or from the console.

CHAPTER 2

Access, Prerequisites and Planning

2.1 Level of access required

Task	Least-privilege access	Notes
Uninstall on an endpoint	Local Administrators group	Dedicated admin or LAPS account; elevated prompt required for SCUT.
Uninstall password	Read access to the vault entry, or AV console admin who can view/change the agent privilege policy	Rotate after the migration.
Remote uninstall (Method C)	AV console role with agent-management / uninstall rights for the target domain or group	Role names differ between Apex One on-premises and SaaS.
ConfigMgr mass removal	*Application Author* + *Application Deployment Manager* (or *Operations Administrator* for scripts) scoped to pilot collections	Use the *Run Scripts* feature only with script approval enabled.
Intune mass removal	Intune *Application Manager* (Win32 app) or a role with *Remediations* permissions	Remediations require Windows Enterprise E3/E5 (or equivalent) licensing.
Install new EDR + certificates	Local admin; new EDR console role to download installer / token	Defender for Endpoint onboarding package needs the *Security Administrator* or a Defender RBAC role with onboarding rights.
Approve the gap	Security operations / change advisory board	Removing protection is a security-relevant change.

GOOD PRACTICE · JUST-IN-TIME ADMIN

Activate Intune, ConfigMgr and Defender roles through Privileged Identity Management for the change window only. Pair it with the vault check-out of the uninstall password so both are recorded against the same change.

2.2 Prerequisites checklist

- [ ] Approved change (for example `CHG0012345`) with the endpoint list and the chosen sequencing model.
- [ ] Current removal tool for the installed agent version (for example `SCUT_<release>.zip`), hash recorded.
- [ ] Uninstall password from the vault, or confirmation that SCUT will be used.
- [ ] New EDR installer, install token or onboarding package, and any certificate bundle (`.p7b`).
- [ ] The endpoint's Windows Security Center shows the legacy AV as registered (so you know what "before" looks like).
- [ ] Users warned of a reboot; laptops on AC power and on the corporate network or VPN.
- [ ] Pilot group defined (5–20 endpoints across hardware models) before fleet roll-out.

2.3 Capture the "before" state

BEFORE-STATE SNAPSHOT (ELEVATED) POWERSHELL

```powershell
Get-CimInstance -Namespace root/SecurityCenter2 -ClassName AntiVirusProduct |
  Select displayName, productState, pathToSignedReportingExe          # Windows 10/11 clients only
Get-Service | Where-Object { $_.Name -match '^Tm|ntrtscan|TMBMServer' -or $_.DisplayName -match 'Trend
Micro|Apex One|OfficeScan' } |
  Select Name, DisplayName, Status
fltmc filters                                                         # note the Trend Micro minifilters
(tm*)
Get-MpComputerStatus | Select AMRunningMode, AntivirusEnabled, RealTimeProtectionEnabled
```

CHAPTER 3

Methods A and B · Interactive Removal

METHOD A Programs and Features with the uninstall password

1. Sign in with your admin account and open **Settings › Apps › Installed apps** (or **Control Panel › Programs and Features**, `appwiz.cpl`).
2. Select the Trend Micro security agent and choose **Uninstall**.
3. When prompted, enter the uninstall password from the vault. The agent's self-protection allows its own uninstaller to proceed only with this password.
4. Let the uninstaller finish, then reboot when prompted; the drivers unload only at restart.
5. Continue with verification (Chapter 5).

> **NOTE · UNLOAD VERSUS UNINSTALL**
>
> Many agents also offer an *unload* password that stops protection temporarily without removing anything. Unloading is useful for troubleshooting, but it is not removal: the agent restarts at the next boot.

METHOD B Vendor removal tool (SCUT)

1. **Stage the tool.** Copy the SCUT ZIP to the endpoint (for example from the software repository to `C:\Install\SCUT\`), verify its hash, right-click › **Extract All**.
2. **Open an elevated prompt.** **Start**, type `cmd`, right-click **Command Prompt** › **Run as administrator**. Without elevation the tool fails to launch or cannot remove drivers.
3. **Change to the tool folder**: `cd C:\Install\SCUT`.
4. **Run the tool**: `.\SCUT.exe -noinstall -dbg` (a command prompt also accepts `SCUT.exe -noinstall -dbg`).
5. **Monitor the output.** Expect lines such as *This is 64bit OS*, *Remove duplicate key!*, *Running common uninstall tool for agent*, a sequence of *Finished StepN* messages, and finally a cleanup message. Do not close the window early.
6. **Reboot** when the tool finishes, or if services or files were locked.

7 Keep the debug log the tool writes with the change record, then continue with verification.



Figure 6. SCUT running with `-noinstall -dbg`. Eleven removal steps complete, followed by the common uninstall tool and a final cleanup pass.

ELEVATED COMMAND PROMPT CMD

```
cd /d C:\Install\SCUT
SCUT.exe -noinstall -dbg
shutdown /r /t 60 /c "Restart to complete legacy AV removal"
```

WATCH OUT · DO NOT RUN THE TOOL FROM A USER'S PROFILE

The reference notes extracted the tool to an admin profile's Desktop. Use a neutral folder such as `C:\Install\SCUT` instead: it avoids long or redirected profile paths, keeps logs easy to find, and keeps usernames out of screenshots and evidence.

CHAPTER 4

Methods C and D · Console and Scripted Mass Removal

METHOD C Remote uninstall from the vendor console

If agents still report to their management server, the server can tell them to uninstall themselves. No password is needed because the instruction comes from the trusted server.

1. Sign in to the Trend Micro management console with an account that can manage agents.
2. Open the agent management view, select the target endpoints (or a pilot group) and choose the **Uninstall** task. The exact menu path varies between Apex One on-premises, Apex One SaaS and older OfficeScan versions.
3. Monitor task status in the console; offline endpoints receive the instruction when they next connect.
4. Reboot endpoints (or let your normal restart policy do it) and verify with the Chapter 5 script.

Limitation: endpoints with a damaged agent, or that no longer reach the server, never receive the task. Catch them with Method B or D.

METHOD D Scripted mass removal

For a fleet, wrap the removal tool in a script that is safe to run repeatedly, logs everything, and reports a clear exit code. The deployment platform runs it as SYSTEM.

REMOVE-LEGACYAV.PS1 · BASE TEMPLATE POWERSHELL

```powershell
<#
.SYNOPSIS  Remove the Trend Micro agent with the vendor tool, verify, and report. Safe to re-run.
.NOTES     Runs as SYSTEM (ConfigMgr / Intune) or elevated admin. Exit 0 = clean, 3010 = clean
after reboot, 1 = failed.
#>
[CmdletBinding(SupportsShouldProcess)]
param(
  [string] $ToolDir   = "$PSScriptRoot",                    # folder containing SCUT.exe (package
root)
  [string] $ToolArgs  = '-noinstall -dbg',
  [string] $LogDir    = 'C:\ProgramData\EndpointIT\AVMigration',
  [string] $ChangeRef = 'CHG0012345'
)
$ErrorActionPreference = 'Stop'
New-Item $LogDir -ItemType Directory -Force | Out-Null
```

```
Start-Transcript -Path (Join-Path $LogDir "$ChangeRef-$env:COMPUTERNAME.log") -Append | Out-Null

function Get-TrendFootprint {
  [pscustomobject]@{
    Services  = @(Get-Service | Where-Object { $_.Name -match '^Tm|ntrtscan|TMBMServer' -or
$_.DisplayName -match 'Trend Micro|Apex One|OfficeScan' }).Name
    Processes = @(Get-Process | Where-Object { $_.Name -match '^Tm|PccNT|NTRtScan|CNTAoSMgr'
}).Name
    Programs  = @(Get-ItemProperty 'HKLM:\SOFTWARE\Microsoft\Windows\CurrentVersion\Uninstall\*',

'HKLM:\SOFTWARE\WOW6432Node\Microsoft\Windows\CurrentVersion\Uninstall\*' -EA SilentlyContinue |
                  Where-Object { $_.DisplayName -match 'Trend Micro|Apex One|OfficeScan'
}).DisplayName
    Registry  = (Test-Path 'HKLM:\SOFTWARE\TrendMicro') -or (Test-Path
'HKLM:\SOFTWARE\WOW6432Node\TrendMicro')
  }
}
function Test-Clean($f) { -not ($f.Services -or $f.Processes -or $f.Programs -or $f.Registry) }

# ---- Stage 1: is there anything to do? -------------------------------------
$before = Get-TrendFootprint
Write-Output "Before: $($before | ConvertTo-Json -Compress)"
if (Test-Clean $before) { Write-Output 'Already clean.'; Stop-Transcript | Out-Null; exit 0 }

# ---- Stage 2: run the vendor removal tool ----------------------------------
$tool = Join-Path $ToolDir 'SCUT.exe'
if (-not (Test-Path $tool)) { Write-Output "Tool not found: $tool"; Stop-Transcript | Out-Null;
exit 1 }
if ($PSCmdlet.ShouldProcess($env:COMPUTERNAME, "Run $tool $ToolArgs")) {
  $p = Start-Process -FilePath $tool -ArgumentList $ToolArgs -WorkingDirectory $ToolDir -Wait -
PassThru -WindowStyle Hidden
  Write-Output "SCUT exit code: $($p.ExitCode)"
}

# ---- Stage 3: verify; anything left is usually cleared by the next reboot -------
Start-Sleep -Seconds 15
$after = Get-TrendFootprint
Write-Output "After: $($after | ConvertTo-Json -Compress)"
[pscustomobject]@{ ChangeRef=$ChangeRef; Host=$env:COMPUTERNAME; TimeUtc=(Get-
Date).ToUniversalTime()
                   Before=$before; After=$after } |
  ConvertTo-Json -Depth 3 | Out-File (Join-Path $LogDir "$ChangeRef-$env:COMPUTERNAME.json")
Stop-Transcript | Out-Null
if (Test-Clean $after) { exit 0 }
if (-not $after.Programs) { exit 3010 }      # only locked services/registry remain: reboot
completes removal
exit 1
```

Deploying the script

Platform	How
ConfigMgr	Create an application whose deployment type runs `powershell.exe -ExecutionPolicy Bypass -File Remove-LegacyAV.ps1` from a package containing SCUT. Detection method: a script that reports *installed* when no Trend footprint remains (so "installed" means "removed"). Map return code 3010 to *soft reboot*. Deploy *Required* to the pilot collection, then widen.

Intune Win32 app	Package the script and SCUT with `IntuneWinAppUtil.exe`; install command as above; install behaviour *System*; detection rule *custom script* that writes output only when the endpoint is clean; return code 3010 = soft reboot. Assign *Required* to a device group.
Intune Remediations	Detection script exits 1 when a Trend footprint exists; remediation script runs the removal. Shows fleet-wide status in **Devices › Scripts and remediations**.
PowerShell remoting	For a handful of PCs: copy the folder with `Copy-Item -ToSession` and run it with `Invoke-Command`, as in the other SOPs in this library.

DETECTION SCRIPT (INTUNE CUSTOM DETECTION / CONFIGMGR SCRIPT DETECTION) POWERSHELL

```powershell
$left = Get-Service | Where-Object { $_.Name -match '^Tm|ntrtscan|TMBMServer' -or $_.DisplayName -
match 'Trend Micro' }
$reg  = (Test-Path 'HKLM:\SOFTWARE\TrendMicro') -or (Test-Path
'HKLM:\SOFTWARE\WOW6432Node\TrendMicro')
if (-not $left -and -not $reg) { Write-Output 'Legacy AV removed' }    # any output + exit 0 =
"installed" (i.e. clean)
exit 0
```

WATCH OUT · REMOVAL TOOLS AND SELF-PROTECTION UNDER SYSTEM

Pilot first. Some agent versions still demand the uninstall password even from SYSTEM, or need a reboot between steps. Fix those cases in the pilot, not across ten thousand machines.

CHAPTER 5

Verification and Hand-over to the New EDR

5.1 Proving the endpoint is clean

"The uninstaller said it finished" is not evidence. A clean endpoint has no legacy services, processes, filter drivers, registry keys, programs entry or program folder.

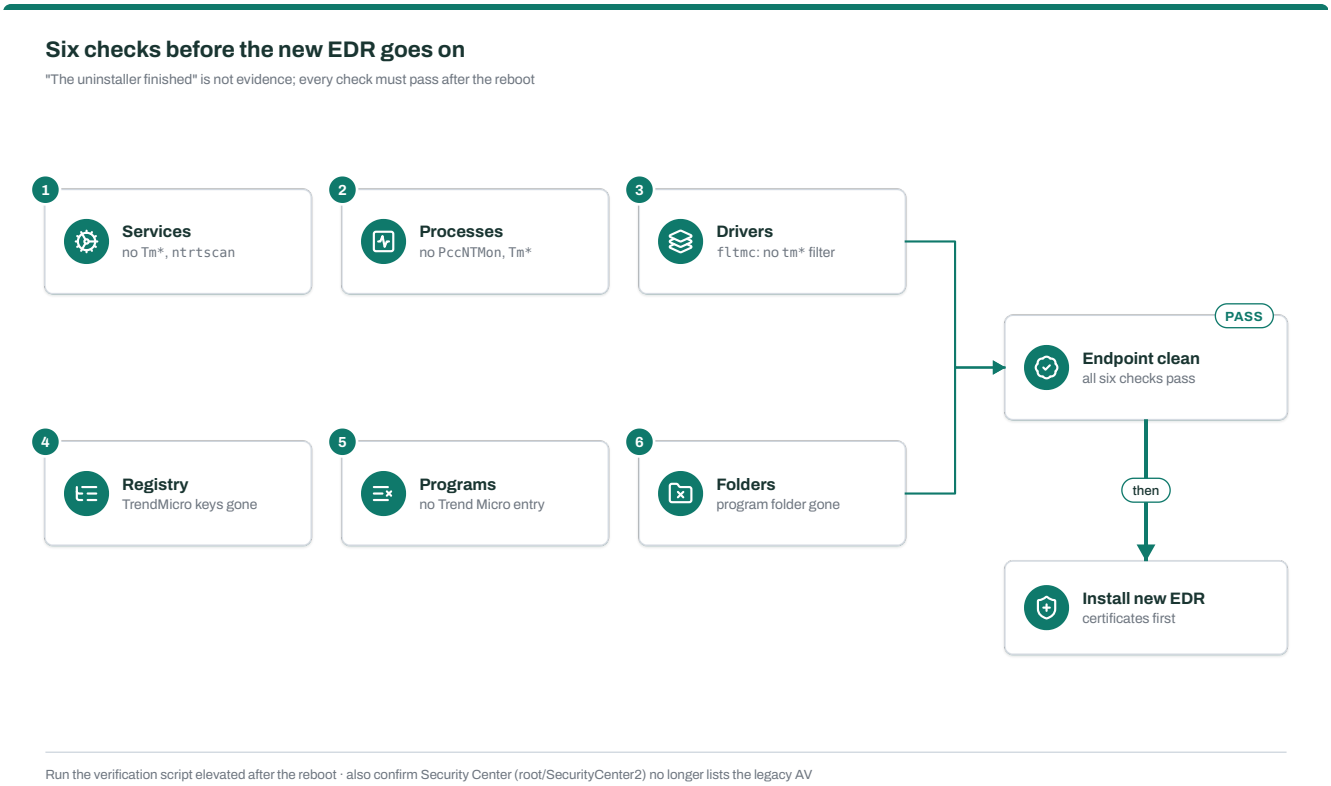


Figure 7. A single failed check means the old engine may still be hooked into the file system, so the new EDR waits until all six pass.

TEST-LEGACYAVREMOVED.PS1 (ELEVATED) POWERSHELL

```powershell
$checks = [ordered]@{
  Services  = -not (Get-Service | Where-Object { $_.Name -match '^Tm|ntrtscan|TMBMServer' -or
$_.DisplayName -match 'Trend Micro' })
  Processes = -not (Get-Process | Where-Object { $_.Name -match '^Tm|PccNT|NTRtScan' })
  Drivers   = -not ((fltmc filters) -match '^\s*tm')
  Registry  = -not ((Test-Path 'HKLM:\SOFTWARE\TrendMicro') -or (Test-Path
'HKLM:\SOFTWARE\WOW6432Node\TrendMicro'))
  Programs  = -not (Get-ItemProperty 'HKLM:\SOFTWARE\Microsoft\Windows\CurrentVersion\Uninstall\*',

'HKLM:\SOFTWARE\WOW6432Node\Microsoft\Windows\CurrentVersion\Uninstall\*' -EA SilentlyContinue |
                  Where-Object DisplayName -match 'Trend Micro')
  Folders   = -not (Test-Path "${env:ProgramFiles(x86)}\Trend Micro") -and -not (Test-Path
"$env:ProgramFiles\Trend Micro")
  SecCenter = -not (Get-CimInstance -Namespace root/SecurityCenter2 -ClassName AntiVirusProduct -EA
SilentlyContinue |
```

```
                    Where-Object displayName -match 'Trend Micro')
}
$checks.GetEnumerator() | ForEach-Object { '{0,-10} {1}' -f $_.Key, $(if ($_.Value) {'PASS'} else
{'FAIL'}) }
Get-MpComputerStatus | Select AMRunningMode, RealTimeProtectionEnabled      # expect Normal / True during
the gap
```

NOTE · LEFTOVER EMPTY FOLDERS

An empty `Trend Micro` folder containing only logs is harmless, but record it. Files still locked after a reboot indicate a driver that did not unload; see troubleshooting.

5.2 Installing the new EDR

1. **Certificates first.** Import the supplied bundle into the store the vendor specifies, for example: `Import-Certificate -FilePath C:\Install\EDR\vendor-chain.p7b -CertStoreLocation Cert:\LocalMachine\Root` (use `Cert:\LocalMachine\CA` for intermediates or `TrustedPublisher` for code-signing, as instructed). At scale, deploy certificates with an Intune *Trusted certificate* profile or Group Policy.
2. **Install the EDR.** For CylancePROTECT, run the vendor MSI with the installation token from the console (property names per the vendor guide, for example `msiexec /i CylancePROTECT_x64.msi /qn PIDKEY=<install-token>`). For Defender for Endpoint on Windows 10/11, run the onboarding package or deploy the onboarding policy from Intune (**Endpoint security › Endpoint detection and response**).
3. **Confirm protection.** The new agent shows healthy locally and online in its console; Windows Security Center lists it (or Defender shows `AMRunningMode : Normal`); an EICAR test file is detected.
4. **Close the gap.** Record the time between removal and confirmed protection in the change record.

CHAPTER 6

Rollback and Troubleshooting

6.1 Rollback

If the new EDR cannot be installed on an endpoint, do not leave it on Defender indefinitely by accident: either keep Defender Antivirus as a documented interim control, or reinstall the legacy agent from its management console package and re-register it until the blocker is fixed. Record which state the endpoint is in.

6.2 Troubleshooting flow

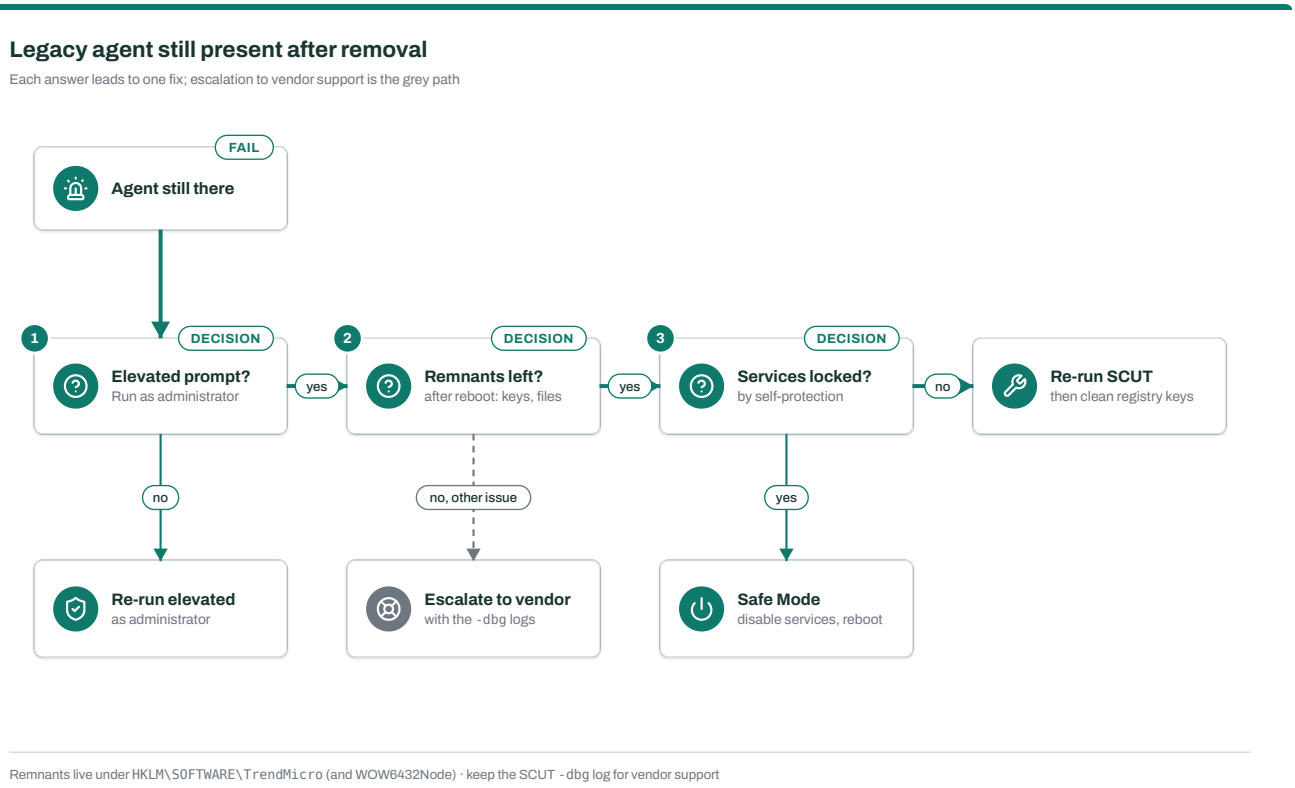


Figure 8. Rule out the simple causes (elevation, remnants, locked services) in order, and escalate to the vendor only with the debug logs in hand.

Symptom	Likely cause and fix
Tool fails to launch	Not an elevated prompt. Re-open Command Prompt with `Run as administrator`.
Agent still visible in Programs	Removal incomplete. Re-run the tool, reboot, then check for remnants under `HKLM\SOFTWARE\TrendMicro` (and the WOW6432Node equivalent).

Services still active after reboot	Self-protection driver still loaded. The reference fix was to disable the services in `msconfig` and reboot; a cleaner route is to boot into Safe Mode, run the tool again, and reboot normally.
Uninstaller asks for a password nobody knows	Retrieve it from the AV console policy, use Method C from the console, or use the removal tool.
`fltmc` still lists `tm*` filters	Driver not removed. Reboot; if it persists, collect the tool's debug log and contact vendor support. Do not delete driver files by hand.
New EDR install fails or never registers	Legacy remnants, missing certificate, proxy blocking the EDR cloud. Re-run verification, import certificates, test connectivity.
Defender stays off after removal	A Group Policy or registry setting disables it (`DisableAntiSpyware` is ignored on current versions, but other policies may remain), or Windows Security Center still lists a stale product. Check policies and `Get-MpComputerStatus`.

CHAPTER 7

Summary, Glossary and Review

7.1 Chapter summary

- Two real-time engines conflict because both insert file-system filter drivers into every I/O operation.
- Tamper protection and uninstall passwords exist to stop malware; manage the password as a privileged secret.
- Remove with the password (A), the vendor tool SCUT (B), the vendor console (C) or a scripted, verified mass removal (D).
- Verify services, processes, drivers, registry, programs and folders before installing the new EDR.
- Prepare certificates first, keep the protection gap short (Defender covers it), and record it.

7.2 Glossary

EDR	Endpoint detection and response: continuous recording and analysis of endpoint activity, with response actions.
Minifilter driver	Kernel driver registered with the Filter Manager to inspect file-system operations.
Tamper protection	Agent self-defense that blocks stopping, changing or removing it.
SCUT	Trend Micro's agent removal tool, supplied by vendor support.
Windows Security Center	Windows component that tracks registered AV products and toggles Defender accordingly.
Passive mode	Defender Antivirus state in which it scans but does not remediate, used alongside another AV.
.p7b	PKCS #7 certificate bundle containing one or more certificates (no private keys).
Remediations	Intune feature that runs detection and remediation script pairs on a schedule.

Check your understanding

1. Explain, in terms of the Windows I/O path, why two real-time AV products should not run together.
2. When would you use SCUT rather than the normal uninstaller?
3. Your Intune detection script prints nothing and exits 0. What does Intune conclude, and is that what you want for a removal app?
4. Compare "remove, then install" with "overlap, then remove". Which suits a move to Defender for Endpoint, and why?
5. List the six checks that prove an endpoint is clean.