

User Manual - Manhattan

Panduan Pengguna

1. Buka aplikasi di browser.
2. Masukkan display name dan nama room.
3. Pilih create room atau join room.
4. Jika room memiliki password, masukkan password.
5. Setelah masuk room, kirim pesan melalui input chat.
6. Pesan akan terenkripsi dari browser sebelum dikirim.

Manhattan
End-to-end encrypted group chat

manhattan@secure:~\$

[E2E ENCRYPTED · ANONYMOUS · EPHEMERAL]

\$ DISPLAY_NAME

Richo

\$ ROOM_NAME


e.g. darknet42

0/15

+ Create Room Join Room

✓ E2EE · ✓ No accounts · ✓ No logs

Connecting to server...

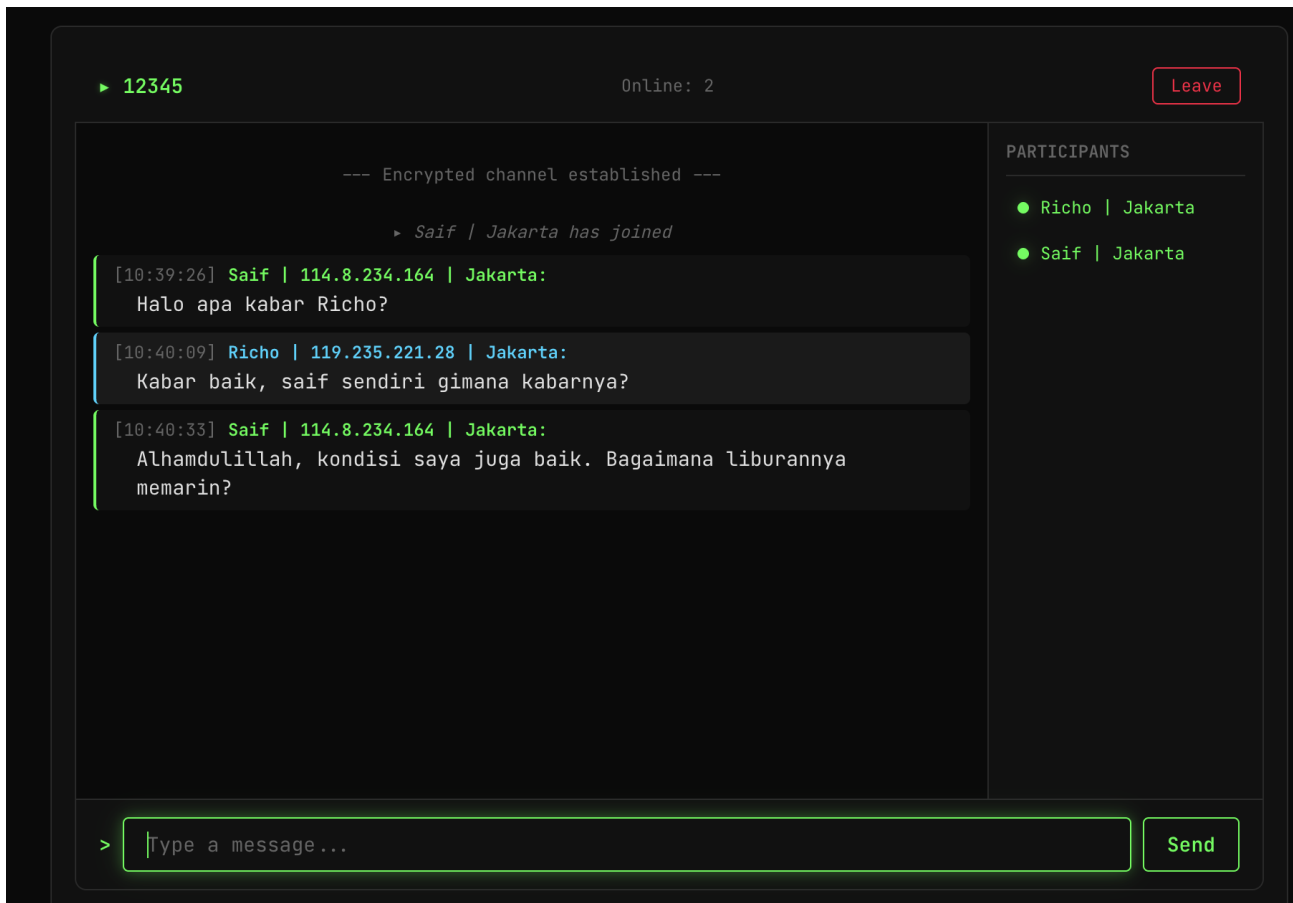

Screenshot Kode

Requirement Evidence - Client RoomController

```
39      * Validate a room name against the naming rules.
40      * Rules:
41      *   - Must be 3-15 characters in length
42      *   - Only alphanumeric characters (a-z, A-Z, 0-9)
43      *   - No spaces
44      *   - Case-sensitive (validation does not normalize case)
45      *
46      * @param {string} name - The room name to validate
47      * @returns {{ valid: boolean, error: string|null }}
48      */
49      validateRoomName(name) {
50          if (name === null || name === undefined) {
51              return { valid: false, error: 'Room name is required' };
52          }
53
54          if (typeof name !== 'string') {
55              return { valid: false, error: 'Room name must be a string' };
56          }
57
58          if (name.length < 3) {
59              return { valid: false, error: 'Room name must be at least 3 characters' };
60          }
61
62          if (name.length > 15) {
63              return { valid: false, error: 'Room name must be at most 15 characters' };
64          }
65
66          if (/\/s/.test(name)) {
67              return { valid: false, error: 'Room name must not contain spaces' };
68          }
69
70          if (!/^[a-zA-Z0-9]+$/.test(name)) {
71              return { valid: false, error: 'Room name must contain only alphanumeric characters' };
72          }
73
74          return { valid: true, error: null };
75      }
76
77      /**
78       * Subscribe to the private queue for receiving server responses.
79       * Should be called after WebSocket connection is established.
80       */
81      subscribeToPrivateQueue() {
82          if (this._privateSubscription) {
83              return; // Already subscribed
84          }
85
86          this._privateSubscription = this._wsClient.subscribe(
87              '/user/queue/private',
88              (message) => {
89                  this._handleServerMessage(message);
90              }
91          );
92      }
93  }
```