


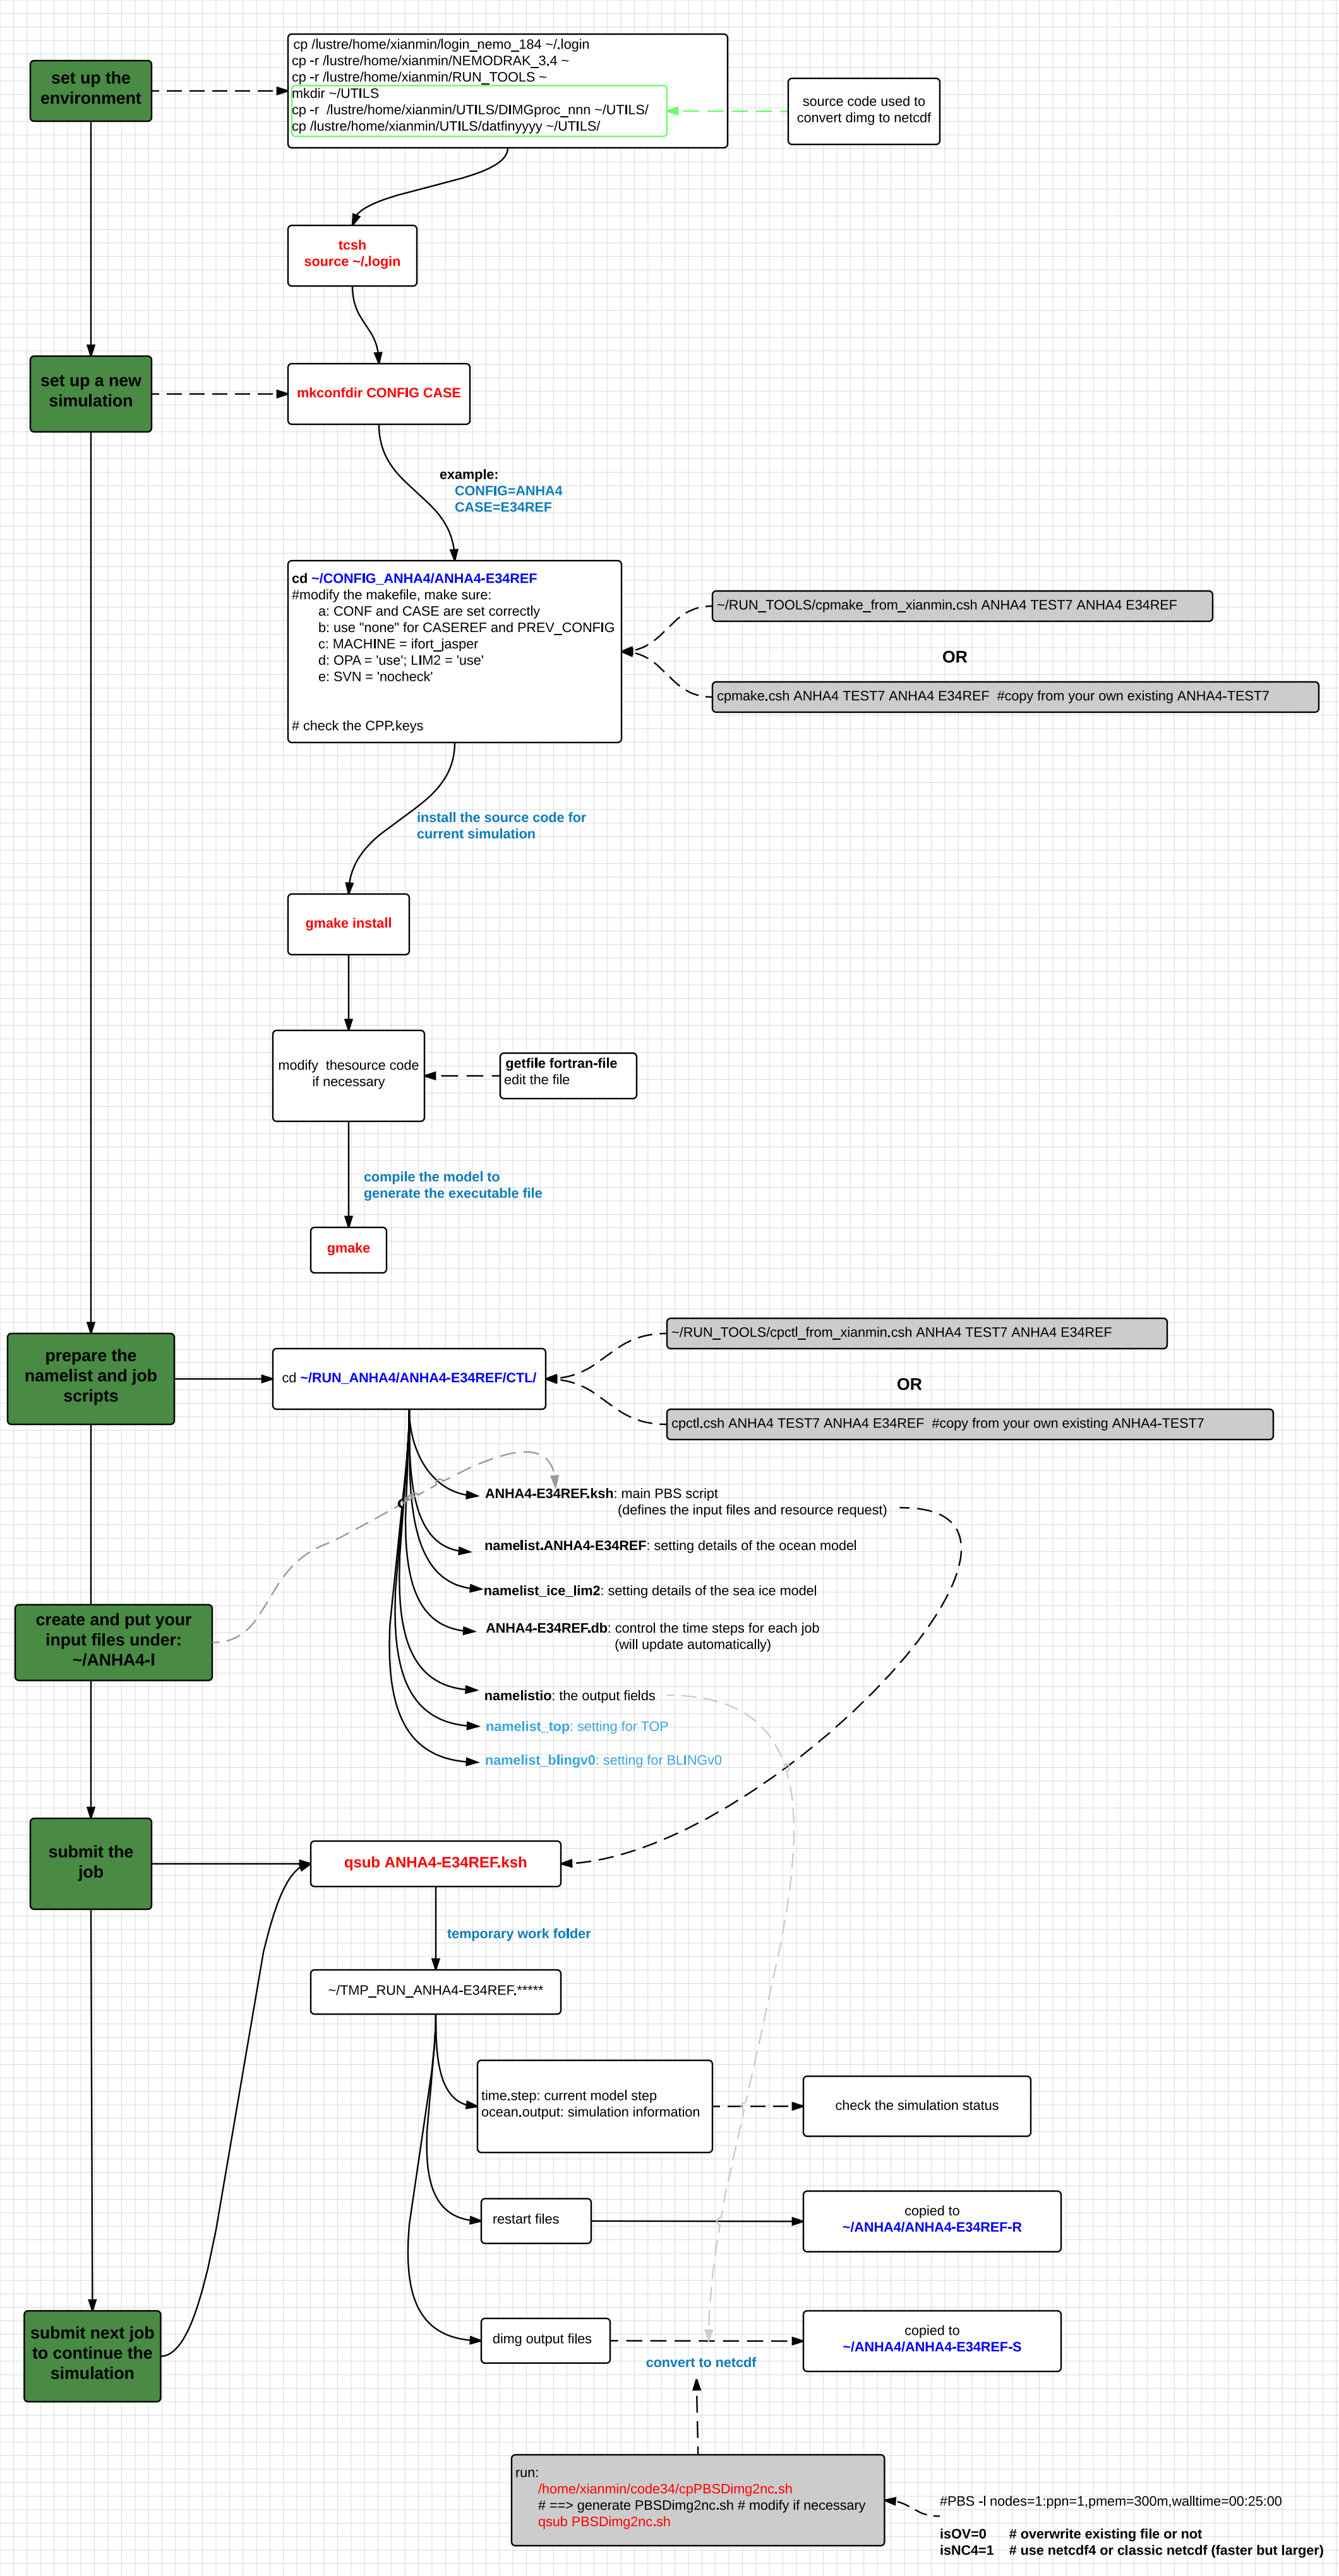

namelist.CF-EXP

```
!-----  
&nammpp      !  Massively Parallel Processing              ("key_mpp_mpi")  
!-----  
  cn_mpi_send = 'I'      ! mpi send/recieve type  ='S', 'B', or 'I' for standard send,  
                          ! buffer blocking send or immediate non-blocking sends, resp.  
  nn_buffer   =  0        ! size in bytes of exported buffer ('B' case), 0 no exportation  
  ln_nnogather= .false.   ! activate code to avoid mpi_allgather use at the northfold  
  jpmi        =  6        ! jpmi  number of processors following i (set automatically if < 1)  
  jpmj        =  8        ! jpmj  number of processors following j (set automatically if < 1)  
  jpmij       = 48        ! jpmij number of local domains (set automatically if < 1)  
/
```

CF-EXP.ksh

```
## Number of cpus required by the job  
#PBS -l nodes=4:ppn=12,pmem=512m,feature=X5675,walltime=32:30:00
```

4 nodes, 12 cores from each
node ==> 48 cores