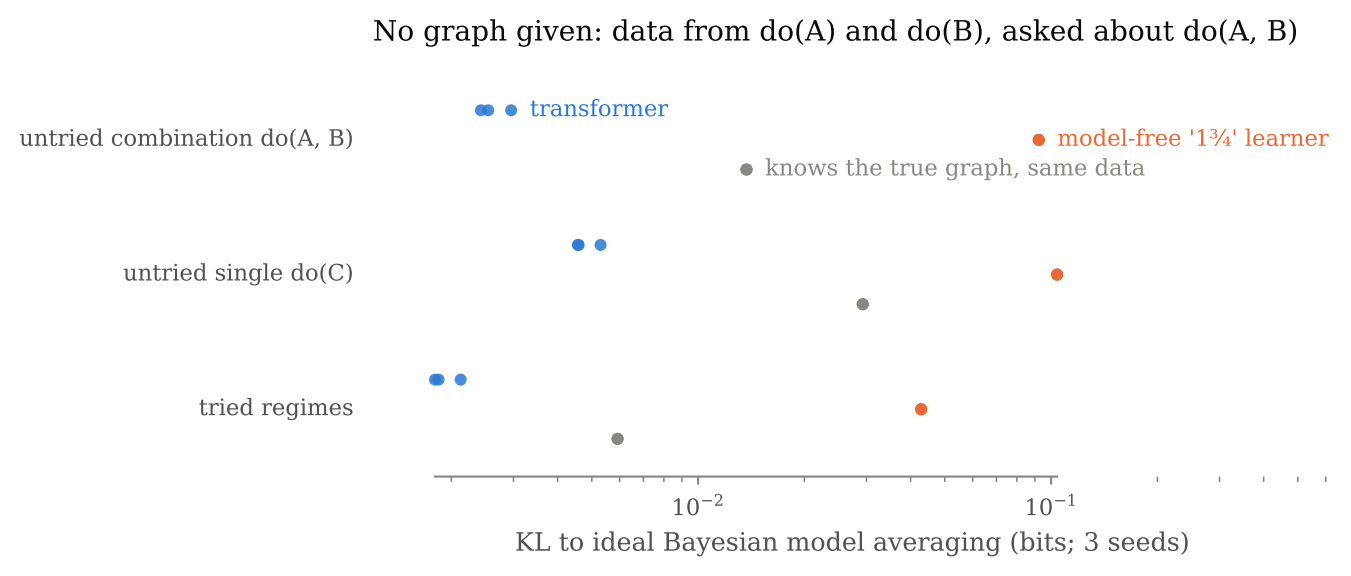
No graph given: data from do(A) and do(B), asked about do(A, B)
transformer
model-free '1¾' learner
knows the true graph, same data
untried combination do(A, B)
untried single do(C)
tried regimes
10^{-2}
10^{-1}
KL to ideal Bayesian model averaging (bits; 3 seeds)