

Knowing When to Trust a Co-Folded Pose: foldgate, a Risk-Controlled Accept/Abstain Layer for Co-Folding Confidence under Novelty Shift

Rikhin Kavuru

Independent Researcher

rikhin@virahacks.com

Abstract

A practitioner who acts on a predicted protein–ligand pose needs to know when to trust it. Co-folding models (AlphaFold3, Boltz, Chai) report confidence scores that track pose accuracy, but a correlation is not a decision rule, and it is weakest on the novel pockets and chemotypes a discovery program pursues. We build *foldgate*, a training-free layer that turns frozen co-folding confidence into an accept/abstain gate with a finite-sample error guarantee, and we map where that guarantee holds. It fails where it is needed most: a gate calibrated on familiar targets and deployed on novel ones realizes error 0.55 against a 0.20 target, because the transferred threshold accepts nearly every pose and inherits the base rate of a set the model gets wrong half the time. Lowering coverage does not recover it, and neither does a better score: across a frozen score family (ranking score, interface ipTM, ligand-local pLDDT), 11 of the 20 non-reference novel-stratum cells are provably uncertifiable on every score, the Clopper-Pearson lower bound exceeding α at all coverages, so abstention is the certified action on structurally novel targets. The score still ranks poses there; the base rate is simply too low to certify, which an exact decomposition shows no label-free reweighting can fix. Group-conditional recalibration restores per-stratum control and, under leakage-free cross-validation, retains 73% of AlphaFold3 poses at a certified risk bound of 0.192, though the native single-score gate certifies little leakage-free and this working gate costs several model inferences per target rather than one released prediction. We price the repair: on the order of 80 in-stratum structures is where a moderate stratum begins to certify, and the most novel targets admit no repair by stratification at any budget. The break is a property of the confidence, not the benchmark or the metric: it reproduces on regenerated PoseBusters and PLINDER predictions and on any endpoint that requires recovering the binding-determinant interactions. The layer ships a certificate card per model and novelty stratum reading FEASIBLE, ABSTAIN-and-abandon, or ABSTAIN-and-collect-labels.

1 Introduction

Co-folding models now place a ligand in its protein pocket accurately enough to seed real drug-discovery decisions, and they emit a confidence score with every prediction (interface predicted TM-score, ipTM; ranking score; predicted aligned error). What is missing is the step that turns that score into a decision a program can act on: accept this pose and commit medicinal-chemistry effort, or abstain. That step needs an error guarantee the score alone does not carry. Conformal selective prediction supplies one: accept a pose when its score clears a threshold, abstain otherwise, and certify that the error rate among accepted poses stays below a target α with high probability [7, 23]. The catch is that this guarantee assumes exchangeability, that a new target is statistically interchangeable with the calibration examples, and that breaks precisely where deployment matters, on ligands and pockets dissimilar to the training set. In drug-discovery terms the model is most overconfident on the never-before-seen molecules a program cares about, so the operational question is not average accuracy but whether a single delivered pose can be trusted.

We make three contributions, all training-free with respect to the co-folding model and all computed from released predictions on CPU. (1) We give a finite-sample selective-risk gate over frozen co-folding confidence, show its guarantee collapses under novelty shift, and map the collapse with a per-stratum *feasibility frontier* that decays to zero on novel strata; the collapse is base-rate-bound rather than a loss of the score’s ranking signal, and score-conditional reliability drift measures it. The collapse is a property of the confidence, not of the metric: it survives on any endpoint that requires reproducing

the binding-determinant interactions, and reproduces on regenerated PoseBusters and PLINDER predictions (Sec. 3–4, Sec. 8). **(2)** We prove an exact decomposition of the realized selective risk into a covariate-corrected reference and an accept-region score-fiber gap that no training-free reweighting can move, turning it into a measurable diagnostic that selects, from a labeled probe, which repair a deployment region admits (Sec. 5). **(3)** We repair what is repairable with group-conditional calibration and a label-free worst-subpopulation certificate, match the certifier to the loss, and *price* the repair: the label cost as a design curve, a deployment-computable proxy stratifier, and the bottom line that the extreme novel tail is uncertifiable by stratification alone (Sec. 6). A leakage-free utility evaluation and a decision-curve analysis follow (Sec. 7).

The closest prior work is CoDrug [14], which conformalizes a *scalar* molecular property under covariate shift with the same weighted-conformal tool [3] our decomposition shows concept shift defeats in this domain; a search of Google Scholar, Semantic Scholar, and arXiv/bioRxiv (2019–2026; terms combining {conformal, selective prediction, risk control, abstention} with {co-folding, AlphaFold3, Boltz, Chai, protein-ligand pose, docking pose}) returned no prior conformal treatment of co-folding pose correctness, nor training-set similarity used as the shift variable for it. Confidence-tracks-accuracy studies for co-folding virtual screening [10] rank by ipTM but supply neither a coverage guarantee nor an abstention rule, which is the gap this layer fills. A reweighting-invariant selective-risk floor of the same abstract character was shown independently and concurrently for LLM abstention [19] (arXiv preprint, June 2026); ours is its co-folding specialization, localized per novelty stratum with a matching in-stratum achievability bracket. Conformal selection [15, 16] (the latter an arXiv preprint) is complementary: it certifies which *compounds* to advance given a labeled calibration set, while this layer certifies the *pose* correctness a co-folding screen rests on, training-free. Two 2026 preprints sit adjacent and neither occupies this cell. CalPro [46] conformalizes protein-structure prediction and reports a downstream docking gain, but it *trains* an evidential head rather than consuming a frozen model’s released confidence, and it keys on modality and disorder rather than on training-set similarity, so the training-free constraint that makes our infeasibility result bite does not apply to it. Concurrently, marginal conformal coverage was shown to hide minority-class collapse in ligand-based virtual screening [47] (arXiv preprint), with a group-conditional repair; that is the same shape as our break and repair in a different corner of the field, on a scalar activity label stratified by class rather than on pose geometry stratified by novelty, and we read it as independent corroboration that marginal validity is the wrong target for drug-discovery deployment.

We connect four literatures. Using training-set similarity as a reliability predictor is the cheminformatics *applicability domain* [40–42], and our claim is narrowly the conformal treatment of co-folding *pose* correctness with that similarity as the shift variable, not the idea of similarity-as-reliability. The abstention gate is selective prediction [7, 43] and its learning-to-defer descendants [44, 45]. The failure of exchangeability under shift is exactly the regime of conformal prediction beyond exchangeability [33], which bounds the coverage gap by a total-variation distance and is the alternative route to our problem; conformal prediction under covariate shift is established for biomolecular design [52] and for guaranteed protein search [53], and our contribution is to carry it to the structured pose-correctness label of co-folding with training-set similarity as the shift variable. Adaptive conformal [34] and label-shift conformal [35] address the online and label-shift variants we do not. On the repair side, multicalibration and multivalid prediction [36, 37] handle overlapping, computationally-identifiable groups rather than a fixed partition, a strictly more flexible alternative to the Mondrian repair we deploy, and the DRO certificate follows Duchi and Namkoong [38] and Cauchois et al. [24]. Net-benefit analysis is due to Vickers and Elkin [39].

2 Data and definitions

Unit and loss. The decision-relevant unit is a delivered top-1 pose per system with a native confidence s . The loss is $L = \mathbf{1}[\text{symmetry-corrected ligand-RMSD} > 2 \text{ \AA}]$ against the released BiSyRMSD label (binding-site-superposed, symmetry-corrected ligand RMSD: superpose on the pocket, then measure ligand-atom RMSD up to molecular symmetry), so a certified selective risk is a bound on the accepted-set error rate. We use L throughout (Table S1); recomputed geometry is used only where

noted (Table S2).

Novelty axes. We stratify by training-set similarity along two structural axes: a ligand axis (ECFP4 Morgan Tanimoto to the nearest training ligand; a Tanimoto near 1 means an almost-identical training ligand exists) and a pocket axis (SuCOS shape $\times$ pocket query-coverage, a shape-overlap score weighted by how much of the query pocket is covered), both released by Runs N’ Poses as similarity to the public pre-cutoff PDB. Each axis is binned into quartiles S_0 (familiar) to S_3 , with systems for which the released similarity search returns no neighbor (missing similarity, about 3% of poses, AlphaFold3 $n \approx 76$) forming a fifth *no-computable-analog* stratum S_4 . We are careful with S_4 : on inspection it is a mixture, because the similarity is missing for the whole system rather than the ligand alone, and roughly half of S_4 is multi-ligand-chain systems or ubiquitous cofactors and sugars (ADP, FAD, NAG, ...) that certainly have training analogs but fall outside the shipped search, so their missing similarity is a coverage gap, not novelty. The genuinely drug-like, single-component, non-cofactor core is ~ 29 of the 76 instances (its pose accuracy 0.44 against 0.67 elsewhere confirms it is genuinely hard). We therefore treat S_4 as a diagnostic extreme rather than a headline, report its composition, and note that externally recomputed ECFP4/pocket similarity would purify it to the ~ 29 -member core; the load-bearing break is carried by S_3 , which has no such ambiguity. The quartile edges are taken from the full-benchmark *similarity* marginal (a covariate, not a label, so this is not label leakage), and the frontier is robust to replacing them with fixed absolute similarity cuts, which we promote as an alternative (the zero-frontier fraction stays near 0.4 across 3/5/7 bins and fixed edges); a per-model, per-axis table of n and the similarity range each bin spans is in the SI. One similarity reference stratifies all five governed models because they share the same ~ 2021 training cutoff, so a ligand or pocket novel to one is novel to the others; the reference year is not incidental (re-keying the pocket similarity to a 2023 PDB snapshot rank-correlates with the 2021 one at only Spearman 0.14, since the PDB grows), which is precisely why we match the reference to the cohort’s cutoff and analyze the single 2023-cutoff model (Boltz-2) separately with its own 2023 reference. We treat structural similarity, not deposition recency, as the operative shift variable, for a reason the data forces (Sec. 3).

Cohort. We evaluate five models (AF3 [11], Boltz-1 [20], Boltz-1x [21], Chai-1 [12], Protenix [13]) on Runs N’ Poses [8], the benchmark of post-cutoff (deposited after 30 September 2021) systems with released predictions and training-similarity annotations. Runs N’ Poses also ships RoseTTAFold-All-Atom predictions; we exclude that model because it is not an AF3-lineage diffusion co-folder and does not emit the ranking-score / interface-ipTM confidence fields the gate normalizes onto a common scale. Figure S1 is the reduction chain: 13,535 raw delivered poses (six models) minus the 933 Boltz-2 [22] poses used only as an ungoverned affinity comparator (Sec. 7) give 12,602 governed poses over 2,425 systems; deduplicating to one pose per (system, model) gives 11,254 independent target-labels for the five governed models. Certificates that must be per deployed model use the target-label unit, since several ligand instances of one system fail together and pooling them as independent draws is anti-conservative. Boltz-2 plays three distinct and deliberately separated roles, which we declare once here: it is held out of the governed five-model cohort because its 2023 cutoff does not match the cohort’s 2021 reference and it carries an affinity head the others do not (its screening use is in Sec. 7); it is analyzed as a fully governed model against its own 2023-referenced similarity for the single genuine temporal boundary (Sec. 8); and its regenerated 2.2.1 predictions are one of the two external co-folders in the cross-dataset test (Sec. 8). Each analysis states which role is in force. The cohort is chemically diverse and not a single-family monoculture: 55% drug-like (300–500 Da) with a 24% fragment tail, 954 receptor sequence clusters (the largest covering 7% of systems), and no PDB header class above 17%.

Data curation. Every record consumed here is a released artifact, and the curation is the chain that turns them into one analysis table. From the Runs N’ Poses release we read the delivered predictions, the shipped BiSyRMSD labels, the PoseBusters results, and the similarity annotations, and we join them on (system id, model, ligand instance). Records are dropped at four points, each of which appears as a node in Fig. S1 so the counts reconcile: predictions carrying no ranking score (unparseable or absent confidence, so no gate input exists), systems carrying no shipped BiSyRMSD (no label, so no loss is defined), the 933 Boltz-2 poses (a 2023-cutoff model in a 2021-cutoff cohort, held out as an ungoverned comparator rather than pooled), and, for the per-model certificates only, duplicate ligand instances of one

system (deduplicated to one delivered top-1 pose per (system, model), since instances of a system fail together). We do not impute missing confidences or missing labels, and we do not filter on PoseBusters validity, pose quality, or any quantity correlated with the label, so the retained set is not enriched for easy targets. Similarity annotations are consumed as released rather than recomputed, with one consequence we treat explicitly: systems whose similarity search returns no neighbor are retained as the S_4 stratum instead of being dropped, which is why S_4 is a mixture of genuine novelty and search coverage gaps and why we lead on S_3 . Ligand-local pLDDT is the one feature extracted from the predicted structures rather than read from a table (per-atom confidence over the ligand chain), and crystal resolution is fetched per PDB entry; both are cached in the repository. Units are fixed once and used throughout (RMSD in Å, pLDDT on 0–100, Tanimoto and coverage on 0–1). The single per-pose analysis table that results, with the scores, the label, both similarities and strata, sequence cluster, resolution, and ligand-local pLDDT, is committed, and every tabular result in this paper re-derives from it without the structure stream.

Deployment cost. The native-score gate is CPU-only and consumes one released prediction per target. An optional combined score (a calibration-only gradient-boosted map from cheap per-prediction features to $P(\text{correct})$: confidence, interface ipTM, ensemble spread, cross-model agreement, PoseBusters validity, ligand descriptors) improves the operating point but consumes the five-sample ensemble and cross-model features, so it needs N model inferences per target. Both matter and we keep the prices attached: the native gate is the cheap, single-prediction, CPU-only option but certifies little under a leakage-free protocol, and the combined gate is what reaches usable certified coverage (Sec. 7) at the cost of the several inferences per target. The combined score’s cross-model features are moderately correlated with novelty ($|\rho|$ up to 0.35), so it is a partly novelty-aware re-score; this is legitimate and places the *combined* score on the achievability side of the theorem below, which governs the frozen *native* score. Feeding novelty in even harder confirms where its value lies: a score trained end-to-end with the training-set similarities as explicit features beats the training-free combined score by only a median 0.013 AURC (max 0.026, Protenix), against the 0.06–0.12 that the combined score already gains over native — so novelty is worth far more as the conformal *stratifier* than as a score *feature*, and the training-free constraint costs little. This is the measured price of staying training-free.

A benchmark-integrity finding, of independent value. Anyone recomputing pose geometry on Runs N’ Poses will hit a silent trap we document in full in SI Sec. C: the benchmark ships only the receptor chain while co-folding models predict the full assembly, so a chain-ordinal superposition can seat the ligand in the wrong protomer of a homodimer, and a distance-consistency check flags none of the 13,146 pairs while 15% of the recomputed binary labels are wrong; only comparison against the shipped BiSyRMSD exposes it, and restricting to single-chain receptors raises agreement from Spearman 0.62 to 0.995. We surface it here because it is a reusable finding for the benchmark, and we report which of our own results touch recomputed geometry (Table S2).

Gate. The gate accepts when $s \geq \tau$ and picks the largest accept set whose selective risk is certified $\leq \alpha$ by Learn-then-Test with fixed-sequence testing [1], testing each $H_0(\tau) : P(L=1 \mid s \geq \tau) \geq \alpha$ with an exact binomial tail along a pre-specified, data-independent coverage grid (top- k ranks, $c \in \{0.05, 0.06, \dots, 1.00\}$, fixed before any risk was computed and archived in the repository). The fixed sequence runs from low coverage (conservative) to high, stopping at the first non-rejection, which controls the family-wise error at δ without a Bonferroni penalty. This gives $P(\text{selective risk} \leq \alpha) \geq 1 - \delta$, finite-sample and distribution-free.

Statistical conventions. Every confidence interval on a risk or a coverage in this paper is either an exact Clopper-Pearson interval (labeled CP, on a single accepted set) or a percentile bootstrap that resamples whole *targets* (sequence clusters where noted), never poses, since pose-level resampling is anti-conservative when a system contributes several ligand instances; bootstraps use ≥ 1000 replicates. Where a figure shows variability over calibrate/deploy resamples (Fig. 1) we label it a resample interval, not a CP interval, and never plot the two on one axis. The feasibility-frontier infeasibility test (Sec. 4) is a conjunction over the coverage grid (Clopper-Pearson lower bound $> \alpha$ at *every* measurable coverage), an intersection-union test that is conservative at level δ , not exact, which we state rather than treat as tight. The reliability-drift grid uses a Romano-Wolf step-down on studentized max- t statistics with 2000 bootstrap resamples (Sec. 6).

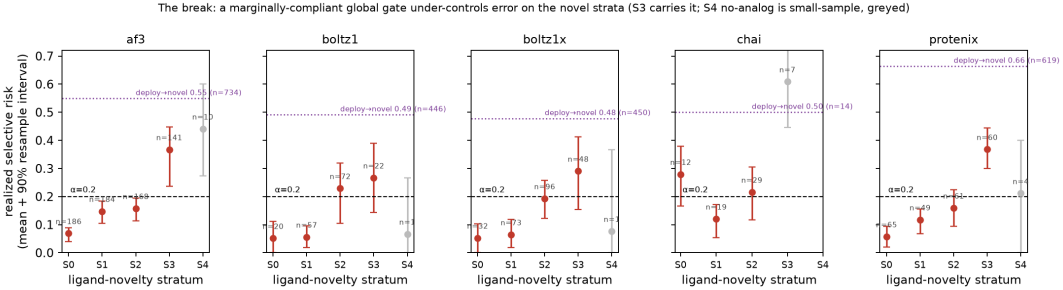


Figure 1: The break. Per-stratum realized selective risk of a marginally-compliant global gate, over 300 target-grouped calibrate/deploy resamples (mean, 90% resample interval, median accepted n per point); the no-analog S_4 is greyed as small-sample. Realized risk climbs above the target $\alpha = 0.20$ as ligand similarity falls, and the dotted line marks the calibrate-on-familiar / deploy-on-novel realized risk (AF3 0.55). The break is carried by S_3 .

3 The exchangeability break

The premise, and what we add. That co-folding accuracy degrades on targets dissimilar to the training set is established: Škrinjar et al. [8], whose benchmark we consume, report that current methods largely memorise poses and that success rate falls almost linearly with training-set coverage, to roughly 20% in the sparsest bin, and FoldBench [9] independently finds ligand-docking accuracy diminishing with training-set similarity on a second low-homology benchmark. We take that degradation as the premise, not the finding. Our subject is the decision it forces. A program does not act on an average success rate; it acts on a single delivered pose and needs to know whether to trust it. We turn the degradation into a risk-controlled accept/abstain gate with a finite-sample guarantee, prove exactly where that guarantee can and cannot be kept (the feasibility frontier and its closed-form reading, Secs. 4–5), and price the repair. The base-rate collapse below is the mechanism this decision layer must survive, restated in selective-risk terms so the certificate can be read against it.

The break. A single global threshold hides severe per-stratum under-coverage. For AF3 the marginal realized risk $R_{\text{marg}} = 0.177$ masks $R_{\text{marg}, S_3} = 0.375$ on the novel ligand stratum (Fig. 1, with Clopper-Pearson intervals and accepted n per point). The operational failure is starker: calibrating the gate on the familiar strata (S_0, S_1) and deploying on the novel tail (S_3, S_4) drives the realized error to $R_{\text{transfer}} = 0.55$ (AF3, 90% CI [0.52, 0.58], $n = 734$; 0.48–0.66 across the five models) against the 0.20 target, so the certificate is inverted, not merely loose. The sharpest way to see the failure is the transferred gate’s coverage: it accepts 99% of the novel poses (Table 2, naive-transfer conformal at coverage 0.99, realized risk 0.412, essentially the accept-all rate 0.417). Under transfer the threshold is not a weak filter but no filter, and the base rate on the tail is what the accepted set then inherits. We lead the break on S_3 ; the no-computable-analog S_4 (AF3 $n \approx 76$, greyed in the figure) is small-sample and enters only in the feasibility frontier, where zero coverage is the point.

The break is a base-rate collapse, not a signal collapse. A natural worry is that the score simply carries no information on novel targets. It does not: within S_3 the native score still ranks correct from incorrect poses well above chance — AUROC 0.71 (AF3, 90% CI [0.68, 0.75]), 0.64 (Protenix), 0.56 (Chai) — so the gate is not anti-selective. What breaks is the base rate: correctness on S_3 falls to 0.44 (AF3), so even a well-ranking score cannot place a threshold whose accepted set clears α at usable coverage. The score’s discriminative signal only collapses to chance on the extreme tail (AF3 S_4 AUROC 0.54, CI [0.43, 0.66]; Protenix S_4 0.50). This is the sharper statement of the break: the frozen score remains a usable *ranker* on novel strata but not a usable *certifier*, because certification is a statement about the accepted-set error rate and that is base-rate-bound. A reliability diagram (Fig. S2) makes this visible: the per-stratum score-vs-accuracy curves keep their monotone shape (the score ranks within every stratum) but shift down together on novel strata (the base rate drops), which is precisely the score-conditional drift $D(v)$ measures.

The operating characteristic makes the break concrete (Fig. 2): a selective-prediction reader can see that

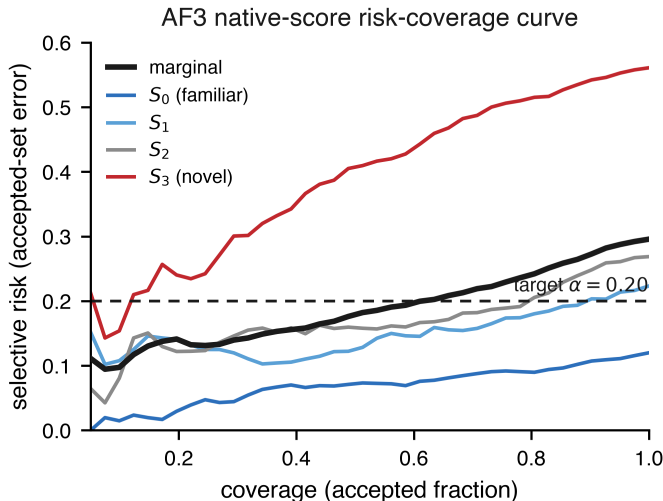


Figure 2: The break as an operating characteristic. AF3 native-score selective risk against coverage, marginal and per ligand-novelty stratum (point estimates). The familiar stratum S_0 stays far below α at every coverage; the novel stratum S_3 sits above α except at the lowest coverage, and S_4 (omitted for scale) is above it throughout. We show point estimates without bands deliberately: the rigorous per-coverage claim is the certified frontier of Sec. 4, which reads the Clopper-Pearson upper bound under a ≥ 20 -accept rule and is uniformly stricter than these curves, so bands here would double-count the uncertainty the frontier already carries.

no coverage brings the novel-stratum risk to α , while the familiar stratum clears it comfortably.

Why it breaks: score-conditional reliability drift, not recency. Weighted conformal would fix this if the shift were pure covariate shift, where $P(L | s)$ is stable and only the marginal $P(s)$ moves. We test that by measuring *reliability drift* $D(v) = \sum_{\text{bins}} w [P(L=0 | s, S_0) - P(L=0 | s, S_v)]$, the confidence-conditional correctness gap between the familiar reference and stratum v . Drift is large on structural novelty and its 90% bootstrap interval excludes zero for every model (Protenix reaches +0.63 on pocket novelty, Chai +0.52); the +0.63 is not a sparse-bin artifact, as every confidence quintile behind it holds ≥ 103 novel-pocket targets and the top-confidence bin still recovers to only 0.54 correct against 0.95 on the familiar stratum. Confidence is optimistic on novel structure: at the same reported score, poses in the novel stratum are less often correct. A signed accept-region decomposition makes this quantitative: for AF3 on S_3 the target-risk gap of 0.328 splits into a score-fiber term of 0.309 (90% CI [0.27, 0.35], resampling targets) and a coverage-alignment term of 0.018, which Sec. 5 turns into an identity. The effect is not an artifact of the differing per-model composite scores: recomputed on a common interface-ipTM score definable for all five models the S_3 drift is large and positive for every model (Protenix +0.63 pocket, +0.50 ligand; Chai +0.56 pocket; CIs far from zero), and the two most overconfident models (Protenix, Chai) rank the same on either score, so we report cross-model magnitudes but not fine-grained mid-pack ordering.

The temporal axis is a benchmark artifact, not a null result. Earlier framings contrasted a large structural drift with a near-zero temporal drift. That contrast is real but must be stated precisely: every Run N’ Poses structure is deposited after the 2021-era models’ training cutoff, so the temporal axis ranks recency *among already-out-of-training structures* rather than in- versus out-of-training, and a flat drift there is a property of the benchmark, not evidence of temporal robustness. The one model with a genuine within-benchmark cutoff boundary is Boltz-2 (2023-06-30), which is outside the governed five-model cohort and enters only here: of its 933 poses, 77 predate the cutoff and 856 follow it, and the reliability drift across that boundary (on its *pose* ranking confidence, not the affinity head) is +0.005 (90% CI [-0.075, 0.079]), while its structural S_3 break is unchanged whether keyed on the 2021- or the correctly-referenced 2023-training similarity (0.364 vs. 0.367 correct). This is a single-model observation with 77 in-cutoff targets, not a cohort result; we report it as the one available genuine temporal test and do not claim a temporal-generalization result. Structural similarity is the operative

shift variable throughout. A protein sequence-identity axis is likewise uninformative here, but for the same benchmark-redundancy reason: $\sim 37\%$ of Runs N’ Poses systems sit at the sequence-identity ceiling, so its novelty quartiles collapse and produce no break (worst-stratum excess -0.02 against $+0.24$ ligand, $+0.29$ pocket); this is a property of the benchmark’s homology redundancy, not evidence that sequence novelty is safe, and a low-homology benchmark is needed to test it.

4 The feasibility frontier

The break is a fixed-coverage statement; it leaves open whether α is reachable by lowering coverage, so we measure that directly. We fix the deployed rule on the familiar stratum and, per target stratum, report the largest source coverage $c_g^* = \max\{c : R_{Q,g}(\tau(c)) \leq \alpha\}$ at which it still holds α , one delivered pose per (system, model). Two frontiers matter and we keep them separate: the *point-estimate* frontier, on the realized risk $R_{Q,g}(\tau(c)) \leq \alpha$ that this section counts, and the stricter *CP-certified* frontier, on the Clopper-Pearson upper bound $\leq \alpha$ under the ≥ 20 -accept rule, which is what the certificate cards (Fig. 5) and Table 5 report and what a user can stand behind. The point-estimate frontier decays with novelty and then vanishes: for AF3 on the ligand axis c^* runs 1.00, 0.85, 0.75, 0.20, 0.00 across S_0 to S_4 at $\alpha = 0.20$, and 0.65, 0.40, 0.10, 0.00, 0.00 at $\alpha = 0.10$; the CP-certified frontier is uniformly stricter (AF3 ligand S_1, S_2 certify to 0.72 and 0.58 against the point 0.85 and 0.75), which is why the two appear at different values in the card and the table. The frontier is computed per governed model, one delivered pose per (system, model); the all-six dedup pool of Fig. S1 (12,125 target-labels) includes the ungoverned Boltz-2, which is excluded from these cells. Of the 50 model-by-stratum cells (two axes $\times$ five governed models $\times$ five strata), the ten S_0 reference cells are feasible by construction (the rule is calibrated on S_0 : $c^* = 1.00$ at $\alpha = 0.20$, 0.65 at $\alpha = 0.10$), leaving 40 non-reference cells. Requiring at least 20 accepted targets to call a stratum feasible, on the global ranking score **22** of those 40 admit no operating point at any coverage at $\alpha = 0.20$ by the point estimate; 20 survive the stricter per-cell Clopper-Pearson lower bound $> \alpha$ at every coverage, and **13** survive a family-wise Holm or Benjamini-Yekutieli correction of the point-estimate frontier over the 40-cell family, so the ranking-score frontier is not a multiplicity artifact. Each such cell is the empirical realization of a closed-form feasibility condition: when the accepted-set base risk exceeds α , no distribution-free rule can certify, and the required abstention mass has a closed form, shown for structured risk control by (author?) [19] (arXiv preprint, June 2026). Our contribution here is not that condition but its per-stratum map in this domain, the demonstration that structural novelty is what drives the base rate above α , and the score-family conjunction below. That conjunction is the load-bearing claim: because the frontier is bounded by the accepted-set base rate rather than by ranking quality (Sec. 3), the count is *score-dependent*: the point-estimate zero-frontier counts over the four scores are 22 (ranking), 16 (ipTM), 18 (mean ligand pLDDT), and 18 (worst-quartile ligand pLDDT), the last two from a materially better ranker (AUROC 0.72–0.85 against 0.59–0.70 for the global score). Intersecting over the whole frozen family, **13** of the 40 cells have no threshold on *any* of these four scores whose realized risk falls to α or below at any coverage, and 21 of 40 at $\alpha = 0.10$. That 13 is a *point-estimate* intersection, distinct from the multiplicity-corrected ranking-score 13 above. Because “abstention is the certified action” is a claim about a bound, we lead on the stricter *CP-certified* intersection: **11** cells are provably uncertifiable on every score, the Clopper-Pearson lower bound on the accepted-set error exceeding α at every measurable coverage for all four (per-score CP-infeasible counts 20 ranking, 14 ipTM, 14 mean and 17 worst-quartile ligand pLDDT). Two facts sharpen this. All 11 sit in the novel strata: they are **11** of the 20 non-reference *novel*-stratum cells (S_3, S_4), with none in the moderate strata, so the certified uncertifiability lands exactly on the structurally novel targets the claim is about. And the count needs no further correction: the per-cell test is a Clopper-Pearson intersection-union over the coverage grid, already conservative at δ , and the four-score conjunction only tightens it; across-cell multiplicity is the separate, ledger-reported Holm/BY choice we apply to the point-estimate frontier. The 11 is the number the abstention conclusion rests on; the 13 is the broader point-estimate map. Ligand pLDDT is a better ranker yet does not close the frontier precisely because the break is base-rate-bound, not discrimination-bound; the one pose-triage signal we could not test, the protein-ligand PAE block, is absent from the released prediction dump (it ships coordinates and ranking scores only) and would require regeneration. The infeasibility is not an artifact of a convention. The count is stable in the quartile binning (0.4 zero-frontier fraction across 3, 5,

or 7 strata or fixed-similarity edges), in the ≥ 20 -accept feasibility rule (the ranking-score count moves only within 19–24 of 40 as the rule slides from 10 to 50, and the zero-frontier cells retain a healthy median 20–25 accepted targets, so they are not zero-frontier for want of samples), and in the RMSD label cutoff (loosening the 2 Å line to 1.0/1.5/2.5/3.0 Å gives 35/24/18/16 of 40 — the infeasibility persists even at 3 Å). It tracks the frozen score’s ranking, not the thresholds we chose. On the two axes jointly, the both-novel corner (ligand- and pocket-novel) is the single worst cell in 3 of 5 models (base correctness 0.29–0.41, realized risk up to 0.87), with novel-pocket-alone nearly as damaging. The deployed view is starkest of all: the AF3 rule that Learn-then-Test certifies at $\alpha = 0.20$ on familiar targets realizes risk $R_{\text{gate}, S_3} = 0.538$ on S_3 , a margin of -0.338 .

A one-sided escape survives the infeasibility, which constrains only certified *upper* bounds. We call it the cross-model danger floor: because pairwise pose disagreement across the models lower-bounds the ensemble error by the triangle inequality to the crystal pose, a large disagreement certifies that at least one accepted pose is wrong without any label, flagging danger even where no upper-bound certificate exists. It extends an oracle-free disagreement floor known for discrete outputs [27, 28] and the folklore that pose agreement filters wrong poses [29] to a continuous structured target. It is blind to consensus error, where all models share one wrong mode: the consensus regime covers 64% of the analyzed complexes at risk 0.152 against 0.698 on the diverse remainder, and the hidden error grows from 0.058 on S_0 to 0.120 on S_3 even as consensus mass shrinks. The construction and its single-chain provenance are in the SI.

5 An exact decomposition, and what a training-free reweighting cannot fix

The contribution of this section is a *diagnostic*: a single quantity, measurable from a small labeled probe, that tells a practitioner in advance whether a label-free repair (weighted conformal) will work or whether only in-stratum recalibration will. The supporting fact is an exact identity, a one-line tower-property lemma; we state it first and then show it is the diagnostic. Fix the frozen score s and the accept rule $\{s \geq \tau\}$; write $Y = L$ for the error label. We work in the score’s own σ -algebra $\sigma(s)$, because that is what a gate on s and a covariate-measurable weight on s can see: let $\eta_P(s) = P_P(Y=1 \mid s)$ and $\eta_Q(s) = P_Q(Y=1 \mid s)$ be the score-conditional error rates under the calibration law P and the deployment law Q , and call a reweighting *training-free* if its weights are $\sigma(s)$ -measurable and use no target labels (density-ratio, classifier, KLIEP, or kernel-mean-matching weights on s [48], including the point mass of weighted conformal). Write $R_{\text{ref}}(\tau_c) = \mathbb{E}_Q[\eta_P(s) \mid s \geq \tau_c]$ and $\bar{\Delta}_c = \mathbb{E}_Q[\eta_Q(s) - \eta_P(s) \mid s \geq \tau_c]$. We estimate $\bar{\Delta}_c$ by binning s (Sec. 3), so it is the accept-region gap between the source and target label rates *at the same score*. Whether that gap is a change in $P(Y \mid \text{full covariate})$ (concept shift proper) or covariate shift within a score fiber is not identifiable from s alone; either way it is invisible to any $\sigma(s)$ -measurable reweighting, which is exactly what the infeasibility requires, so we name it *score-conditional reliability drift* rather than concept shift, and report its binning sensitivity.

Lemma (exact decomposition; SI Sec. A). At fixed coverage c the realized target selective risk is $R_Q(\tau_c) = R_{\text{ref}}(\tau_c) + \bar{\Delta}_c$, and $\bar{\Delta}_c$ is invariant to the choice of training-free ($\sigma(s)$ -measurable) weights. Hence the oracle-weighted plug-in certificate reports R_{ref} and under-states the realized risk by exactly $\bar{\Delta}_c$.

We deliberately do not dress this as an impossibility theorem: “ α is achievable at coverage c iff $R_Q(\tau_c) \leq \alpha$ ” is a definitional rearrangement, and whether α is reachable by *lowering* coverage is the empirical feasibility frontier of Sec. 4, not a corollary. The content is that the accept-region score-fiber gap $\bar{\Delta}_c$ is *measurable and invariant*: the part of the error that comes from the score meaning something different on novel molecules is exactly the part no unlabeled reweighting can see or remove. Two distinct reasons are at work and we keep them apart: a $\sigma(s)$ -measurable weight cannot change the within-fiber label rate (the tower-property identity below), while any weight at all, even a full-covariate one, that realizes coverage c accepts the identical set and so cannot move the realized risk (coverage pinning). The proof is a tower-property identity: a $\sigma(s)$ -measurable weight recovers only the source score-conditional η_P and cannot reach η_Q , completing the covariate-shift boundary of weighted conformal [3] and analogous in spirit to the irreducible term of domain-adaptation lower bounds [25]; a reweighting-invariant floor

of the same character was shown concurrently and independently for LLM abstention [19], and our contribution is the co-folding instantiation with per-stratum localization, not priority on the abstract floor. Matching achievability: in-stratum recalibration attains the floor R_{Q_g} given n_g stratum labels; pointwise conditional coverage being impossible [6], the guarantee is neighborhood-conditional, and its ratio functional is controlled with high probability by Learn-then-Test, whose finite-sample cost is exactly the label-cost curve of Sec. 6 rather than an asserted rate.

The decomposition’s equalities assume the score has no atom at the operating threshold. On the primary `ranking_score` gate this holds exactly in the data (the ties mass at the deployed τ is 0 for every model); on the `interface-ipTM` feature the boundary-randomization bracket is at most 0.7% of coverage. So the identity is exact for the deployed native gate, with a $\leq 0.7\%$ -coverage bracket noted where ipTM is used.

Validation. A synthetic generator with a known $P(Y | s, v)$ reproduces every term: $R_{\text{ref}} = 0.273$ and $\bar{\Delta} = 0.205$ sum to the realized $R_Q = 0.478$, the invariance of the realized risk across nine reweightings (residual < 0.001) is a regression test of the decomposition, and sweeping the target drift locates the coverage at which no reweighting reaches α . On the public non-co-folding benchmarks `elec2` (worst-block concept gap 0.36) and `ACS Income` (gap 0.05), a single-threshold gate under-controls the worst block, weighted conformal issues a certificate its realized risk then violates on `elec2` but repairs on `ACS`, and group-conditional calibration certifies control by abstaining, with the `elec2/ACS` realized worst-block risks in SI Sec. B.

Drift selects the repair. Reliability drift $D(v)$ is a label-based diagnostic that tracks $\bar{\Delta}_c$, so it decides, from a labeled probe rather than after a failed deployment, which repair a region admits. A small drift signals a covariate-dominated shift that weighted conformal repairs by choosing a more conservative threshold from unlabeled data (weighted conformal’s *only* lever is threshold selection; on the moderate ligand shift $S_0, S_1 \rightarrow S_2$ it pulls AF3 realized error from 0.27 at 98% coverage to 0.19 at 70% coverage). A large drift signals a drift-dominated shift where weighted conformal silently violates its own certificate, leaving group-conditional recalibration as the only valid repair.

6 Repairing the guarantee, and pricing it

Group-conditional calibration [17] keys a separate threshold per novelty stratum, restoring per-stratum control at a real coverage cost (with the combined score AF3 accepts 52% of S_1 and 39% of S_2 at risk $\leq \alpha$, against 8% and 12% natively; Fig. 3). Where the marginal gate over-shoots α on the novel strata the per-stratum gate holds risk at or below it and, on the no-analog tail where no certified slice remains, folds to zero coverage rather than issue a false certificate. The repair does not require the gradient-boosted combiner: a per-stratum Venn–Abers recalibration of the native score reaches the same stratum-conditional guarantee (AF3 realized risk 0.166 at 24% coverage vs. 0.190 at 18% for the group-conditional combiner), while the field baselines break under the same shift, a fixed ipTM ≥ 0.8 gate at realized risk 0.30 and naive-transfer conformal at 0.41 (Table 2). A randomized localized conformal gate (RLCP) reaches lower risk at higher coverage still (0.187 at 44%), but under a weaker, randomized marginal-over-localization guarantee rather than the stratum-conditional finite-sample one we require, so we keep group-conditional as the operative repair and report RLCP as the higher-coverage option a practitioner may prefer when a randomized guarantee suffices.

What the certificate does and does not cover. The guarantee is over the stratum marginal, not over every sub-slice of a stratum. We state the residual plainly because it bounds what a certificate card promises: splitting each ligand stratum on its pocket-similarity median leaves a signed within-stratum gap of +0.07 to +0.32, so a card issued on the ligand axis alone can under-cover on the pocket-novel half of a stratum by as much as 0.32, an amount comparable to the 0.328 headline break itself. The two-axis (ligand $\times$ pocket) grid removes this by construction, at the label cost of finer cells, and is the stratification we recommend when both similarities are available; the one-axis cards are the cheaper view whose scope is the stratum marginal. Finer bins shrink the residual further but spend the exact-binomial budget faster ($1/(n_g+1)$ grows), which is the trade the label-cost curve prices. A card therefore certifies the neighborhood, not the point, and we mark on each card which axis it conditions.

Table 1: Two-axis certified gate (AF3, native `ranking_score`, $\alpha = 0.20$), each cell calibrated and certified on its own. Bins are S_0 – S_1 (familiar), S_2 (moderate), S_3 – S_4 (novel) on each axis. Entries are the CP-certified coverage and verdict, base correctness in parentheses. The familiar/moderate cell certifies at *reduced* coverage (0.20), where accept-all would fail, so the selective gate contributes; pocket novelty alone (right column) removes certifiability from a familiar ligand. Here n is the number of targets in the cell; the ligand-novel / pocket-familiar cell is underpowered ($n = 32$, a 5% point-estimate feasible region that 32 targets cannot certify at the ≥ 20 -accept rule, so more labels could still certify it).

ligand \ pocket	familiar	moderate	novel
familiar	FEAS. 1.00 (0.87)	FEAS. 0.20 (0.72)	ABSTAIN (0.51)
moderate	FEAS. 1.00 (0.86)	FEAS. 0.25 (0.74)	ABSTAIN (0.47)
novel	ABSTAIN, $n=32$ (0.69)	ABSTAIN (0.58)	ABSTAIN (0.40)

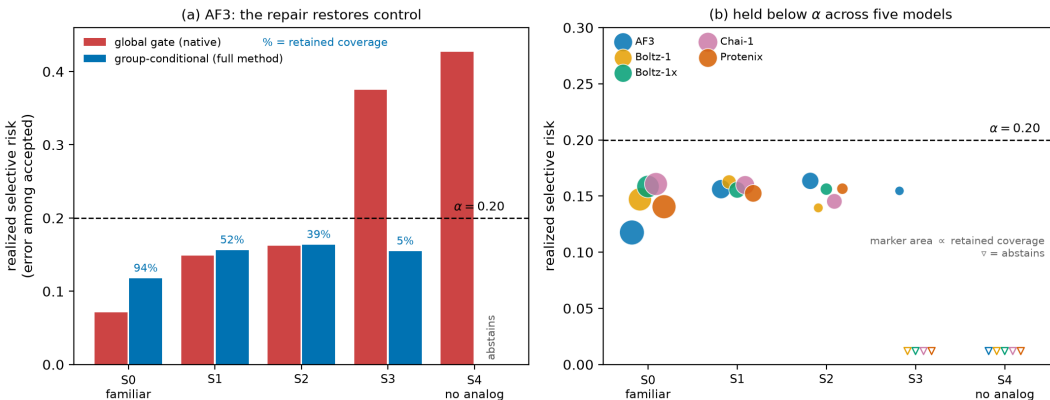


Figure 3: The repair. Group-conditional calibration holds realized selective risk at or below $\alpha = 0.20$ on the strata where the marginal gate over-shoots, folding to zero coverage on the no-analog tail rather than issuing a false certificate. Coverage is printed on each bar; the coverage cost grows with novelty.

We demonstrate the two-axis grid rather than only recommend it (Table 1). Cross-classifying AF3 targets on both axes into familiar (S_0 – S_1), moderate (S_2), and novel (S_3 – S_4) and certifying each cell on its own separates situations a ligand-only card conflates. Two cells make the point. The gate does real work in the ligand-familiar / pocket-moderate cell: base correctness there is 0.72, so accept-all would realize error 0.28 and miss the $\alpha = 0.20$ target, yet the gate certifies at 20% coverage by keeping only the most confident poses; a coarse rule that took the whole familiar-ligand stratum could not. And pocket novelty degrades an otherwise-familiar ligand: the ligand-familiar / pocket-novel cell (base 0.51) is ABSTAIN, not the FEASIBLE a ligand-only card grants the familiar-ligand stratum, which is the up-to-0.32 under-coverage made explicit. The finer grid has a real cost, which the table already shows: one of the nine AF3 cells is underpowered ($n = 32$ targets, too few to certify its 5% point-estimate region at the ≥ 20 -accept rule). We recommend it when both similarities are available, and give the full five-model grid in the SI. This is the native score, so its coverages are not comparable to the combined-score label-cost curve (Fig. 4).

The label cost, as a design curve. Group-conditional repair spends target labels, and how many depends on what is being certified. For the binary pose label the count is a sufficient statistic and the exact binomial tail is its exact inversion, so across the 23 feasible cells it certifies at a median of 38 independent target-labels against 60 for a Hoeffding-Bentkus bound and 102 for pure Hoeffding. But that 38 is a *certification* sample size on already-feasible (familiar) strata, not the budget to push coverage one stratum outward. Figure 4 turns the latter into a design tool: certified coverage as a function of the label budget n_g , per stratum. With the native score, no budget buys usable coverage on the novel strata, because there the rule fails, not the estimate of it, the infeasibility made empirical. The combined score, a partly novelty-aware re-score and so on the achievability side, unlocks the moderate strata: AF3

Table 2: Baselines under the novelty shift (AF3, calibrate on familiar, deploy on novel; realized risk / coverage at $\alpha = 0.20$). The field baselines break; every gate that keys calibration on novelty holds by abstaining. RLCP reaches lower risk at higher coverage, but its guarantee is randomized and marginal-over-localization, not the stratum-conditional finite-sample guarantee this paper certifies, so group-conditional remains the operative repair and RLCP is the higher-coverage option under a weaker guarantee. Venn–Abers matches the combiner at a stratum-conditional guarantee, so the repair does not require the gradient-boosted combiner.

	realized risk	coverage
Fixed ipTM ≥ 0.8 (field baseline)	0.301	0.69
Naive-transfer conformal	0.412	0.99
Accept-all	0.417	1.00
Group-conditional (combiner)	0.190	0.18
Localized / continuous novelty (RLCP) [5]	0.187	0.44
Per-stratum Venn–Abers [18]	0.166	0.24

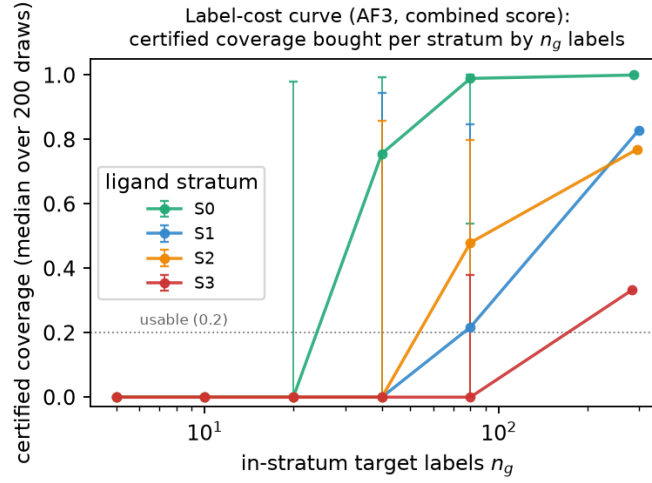


Figure 4: Label-cost curve. Certified coverage bought by n_g in-stratum target-labels, per ligand stratum (AF3, combined score, median over 200 draws with a 90% band). The band is wide by design: at $n_g = 80$ the median certified coverage is 0.22 on S_1 and 0.48 on S_2 , but the 90% band spans $[0, 0.85]$ and $[0, 0.80]$ and only 56% and 61% of random label draws certify any coverage at all. The 80-label figure is therefore the budget at which moderate strata *begin* to certify, not a guarantee; reaching reliable coverage takes the full in-stratum pool. Near-novel S_3 is label-starved even at the full pool.

reaches a median 22% certified coverage on S_1 at ~ 80 in-stratum labels (with a wide $[0, 0.85]$ band, and only 56% of label draws certifying any coverage) rising to 83% with the full pool, and a median 48% on S_2 , while S_3 needs close to the full label pool for any coverage at all. The combined score raises the ceiling, not the label floor. The budget is not just measured but predictable: for a stratum whose cleanest accept region has error rate $r < \alpha$, the exact binomial certifies non-zero coverage at (α, δ) once $n_g \geq \lceil \ln(1/\delta)/\text{KL}(r||\alpha) \rceil$ (binary relative entropy), a closed form a practitioner evaluates for their own α ; it floors at 11 labels for a perfect accept region ($r=0$) and diverges as $r \uparrow \alpha$, which is exactly why a stratum whose best accept region already errs at $r \geq \alpha$ (every model’s S_4 , and Chai’s S_3) cannot be certified at any budget.

Deployment-computable stratifier. The repair needs a novelty stratum at deployment, but the oracle similarity is computed against the model’s training set, which for a closed model like AF3 a user cannot enumerate. A public proxy built from the count of pre-cutoff PDB analogs (deposition recency and protein sequence identity are at chance) recovers the oracle stratification with rank correlation 0.59 and 83% adjacent agreement, and matches oracle per-stratum control on the low and moderate strata, but loosens control on the near-novel tail (true- S_3 risk $0.23 \rightarrow 0.37$; adjacent-stratum agreement over five

Table 3: Certificate ledger. $K = 5$ models; joint claims split δ by a Bonferroni union bound.

Claim	δ	multiplicity	n (unit)	scope
Global / LOTO gate	0.10	fixed-sequence LTT	target-labels	per-model
Joint LOTO gate	0.02	Bonferroni δ/K	target-labels	joint (5 models)
CVaR / DRO bound	0.02	Bonferroni δ/K	accepted poses	joint (5 models)
Betting bound (graded)	0.10	anytime-valid (Ville)	accepted poses	per-model
Drift grid	0.10	Romano-Wolf step-down	55 cells	family-wise
Feasibility frontier, per-cell	0.10	CP exact, per-cell (uncorrected)	40 cells	per-test
Ranking-score frontier, corrected	0.10	Holm / Benjamini-Yekutieli	22 $\rightarrow$ 13 cells	family-wise
Score-family, CP-certified (11/40)	0.10	CP lower $> \alpha$, all scores	40 cells	per-cell
Score-family, point estimate (13/40)	0.10	conjunction, no across-cell corr.	40 cells	per-test
“For every model” effects	0.10	intersection-union	per-model p	no penalty

bins is a lenient criterion, so this is the measured degradation). The binding limit, however, is not the proxy: the no-analog tail cannot be held even with the oracle stratifier, because its base error there is about 0.55–0.60, so a point-threshold gate keyed on the *true* stratum still realizes risk ≈ 0.60 and the certified Learn-then-Test group-conditional gate abstains outright (zero coverage) rather than issue a false certificate. So for closed-training models the repair is deployable one stratum out with a public proxy, and the extreme novel tail is uncertifiable by stratification alone, whether the stratifier is proxy or oracle. That, not a missing training set, is the binding ceiling.

A label-free worst-subpopulation certificate. When the novel subpopulation is unnamed we control the conditional value-at-risk of the accepted loss, the mean error of its worst $(1 - \beta)$ -fraction. For the binary label $\text{CVaR}_\beta = \min(1, r/(1 - \beta))$ with accepted error rate r , so a finite-sample bound on r [2] yields a CVaR_β bound at every β , and by CVaR–DRO duality this certifies that every accepted subpopulation of mass at least $m^* = 1 - \beta^*$ has error $\leq \alpha$ [4], with no stratum labels and no importance weights, reparameterizing to a χ^2 robustness radius ρ^* [24]. A Bonferroni δ/K correction gives one certificate jointly across the five models (at 20% coverage, $m^* \leq 0.52$ and $\rho^* \geq 0.10$). This certificate is a real capability on moderate shift and, we report, *vacuous exactly where it is most needed*: on deploy-to-novel $m^* \rightarrow 1$ for most models, so the label-free certificate cannot rescue the novel tail either.

Match the certifier to the loss. On the *graded* loss $\min(\text{RMSD}, 4)/4$ a variance-adaptive betting bound [30] certifies a usable operating point where a distribution-free bound certifies none: AF3 certifies 43% coverage at a 1 Å mean-RMSD target with realized capped-mean RMSD 0.90 Å, against essentially zero (0.04%) for a worst-case Hoeffding bound; the empirical guarantee coverage is 0.90 (46 of the 51 non-empty gates over 120 pose-level resamples met the target; at this resample count the estimate is consistent with the nominal $1 - \delta = 0.90$ to within its Monte-Carlo error). The reliability layer is therefore not tied to the 2 Å convention, and “1 Å” is an actionable operating point where “ $\alpha = 0.20$ ” is not.

Certificate ledger. Table 3 states, per claim, the δ , the multiplicity method, the n , and whether the claim is joint or per-model, so no favorable δ is chosen per claim. The 55-cell drift grid (5 models $\times$ 11 axis-strata: 4 ligand + 4 pocket + 3 temporal non-reference strata) uses a Romano-Wolf step-down bootstrap [31] at family-wise 0.10; all 40 structural cells survive, an effect-dominated family, and only 2 of 15 temporal cells do.

A proposed deliverable: certificate cards. We propose packaging every repair verdict as a standardized card per (model, novelty stratum): α , δ , calibration n , accepted n , realized risk, exact Clopper-Pearson risk upper bound, retained coverage, reliability drift D , the recommended repair, and a three-way verdict (Fig. 5). We present the card as a proposal — its numbers are validated but its ergonomics are not user-tested, and the FEASIBLE / ABSTAIN-infeasible / ABSTAIN-underpowered distinction is exactly the kind a reader can collapse. The verdict distinguishes the two actions a practitioner must not confuse: a FEASIBLE card carries a certified operating point; an ABSTAIN-infeasible card means the rule provably fails (the Clopper-Pearson lower bound exceeds α at every coverage), so the target should be abandoned for this model; an ABSTAIN-underpowered card means the stratum is undecided

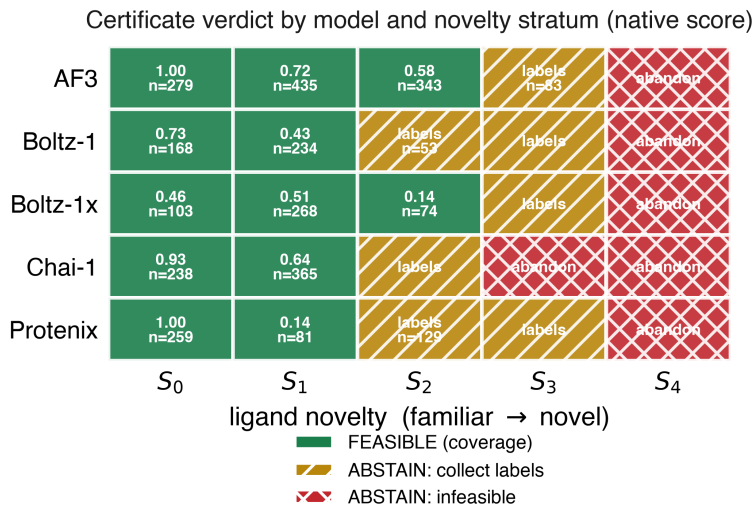


Figure 5: Certificate verdict per (model, ligand-novelty stratum), native `ranking_score`, $\alpha = 0.20$. Green FEASIBLE cells carry a certified operating point and are annotated with retained coverage and the accepted target count n (so the ≥ 20 -accept feasibility rule is checkable from the figure); amber ABSTAIN cells are undecided for want of labels, annotated with the tested n ; red ABSTAIN cells provably fail (the Clopper-Pearson lower bound exceeds α at every coverage), so the target is abandoned for that model. Verdicts are encoded by both color and hatch to survive grayscale. Green gives way to red as novelty rises across every model. The full per-card detail (accepted n , realized risk with its Clopper-Pearson upper bound, drift D , recommended repair) and the pocket-axis grid are in the SI; the combined-feature group-conditional gate (Fig. 3) is a different, higher-coverage protocol.

for lack of labels, so the action is to collect them. The cards are the native-score view (the score a user has for free); the combined-feature group-conditional gate of Fig. 3 recovers usable coverage on some ABSTAIN-underpowered strata, which is why the two figures differ on, e.g., AF3 S_3 (native ABSTAIN, combined 5% certified).

7 Utility, priced and leakage-free

Ranking utility. Every utility number is target-grouped. Under a nested leave-one-target-out protocol (outer GroupKFold on system id; within each training fold a grouped fit/calibration split, so the combiner, the threshold, and the test target are mutually disjoint), the certificate is the per-fold Learn-then-Test guarantee, and we read it off the pooled Hoeffding-Bentkus upper bound rather than the fold count, which has little power (5 folds cannot resolve a 0.10 failure probability, so “4 of 5” is descriptive, not evidential). On that standard the combined-score gate keeps **73%** of AF3 poses at a pooled Hoeffding-Bentkus upper bound of $0.192 \leq \alpha$ (folds holding 4/5, reported for context), whereas the native gate does *not* certify usable coverage leakage-free: at its 20% coverage only 1 of 2 non-empty folds holds and the pooled upper bound is $0.223 > \alpha$, and the Chai and Protenix native gates abstain outright (Table 4). So the leakage-free story is that the combined score is what makes the gate certifiable at usable coverage, not that it beats an equally-certified native gate; the earlier held-out pair (71% vs. 22%) is discarded because a pooled split leaks 95% of test targets into calibration where the grouped protocol shares zero. Grouping on system id still permits a homologous receptor in both folds, so we re-run the whole gate grouped on Runs N’ Poses sequence cluster (954 clusters in the governed cohort): the AF3 headline is stable (0.72 combined coverage, still certified, HB upper bound 0.192), while two models lose coverage under the stricter grouping (Boltz-1 $0.60 \rightarrow 0.24$, Protenix $0.57 \rightarrow 0.41$), which we report. At the stringent $\alpha = 0.10$ the combined gate certifies 13% of AF3 poses at realized risk 0.066 (pooled upper bound 0.094).

One map for every AF3 coverage number. Because the paper reports AF3 coverage under several protocols, Table 5 lists each with the experiment that produced it, so no two figures are mistaken for the

Table 4: Leakage-free nested-LOTO gate, native vs. combined score ($\alpha = 0.20$, $\delta = 0.10$). The certificate is the per-fold Learn-then-Test guarantee; “folds” is the number of non-empty held-out folds whose realized risk landed $\leq \alpha$ (its validation), and $\text{HB}^\uparrow$ is the more conservative pooled Hoeffding-Bentkus upper bound. The $\checkmark$ marks a pooled $\text{HB}^\uparrow \leq \alpha$: it is a property of the aggregate bound alone, independent of the fold count, so a gate can hold in 4/5 folds yet miss the $\checkmark$ (Boltz-1 native, HB 0.222) or hold in fewer folds and earn it (Boltz-1x native, 4/5, HB 0.197). Chai/Protenix native gates abstain outright.

model	score	cov	risk	$\text{HB}_{90}^\uparrow$	folds
AF3	native	0.20	0.189	0.223	1/2
	combined	0.73	0.176	0.192 $\checkmark$	4/5
Boltz-1	native	0.21	0.188	0.222	4/5
	combined	0.60	0.181	0.201	4/5
Boltz-1x	native	0.20	0.164	0.197 $\checkmark$	4/5
	combined	0.48	0.182	0.203	3/4
Chai-1	native		abstains		
	combined	0.64	0.178	0.196 $\checkmark$	4/5
Protenix	native		abstains		
	combined	0.57	0.182	0.201	4/5

Table 5: Every AF3 coverage and label figure in the paper, mapped to its protocol ($\alpha = 0.20$), so no two are read as the same quantity. The headline is the first row: the leakage-free nested-LOTO combined gate, which retains 0.73 of AF3 poses at realized risk 0.176. The remaining rows are the same layer read under stricter or more generous protocols and are reported so no two are conflated; the three “ S_1/S_2 ” rows differ by protocol, not by contradiction (an S_0 -calibrated native rule’s frontier reach is generous, per-stratum group-conditional recalibration is stricter, and the label-cost maximum is the full-pool ceiling).

Quantity	Protocol	Scope	coverage	risk
Combined gate, marginal	nested target-grouped LOTO	all strata	0.73	0.176
Native gate, marginal	nested target-grouped LOTO	all strata	0.20	0.189
Frontier / certificate card (native)	S_0 -calib., CP-certified reach	S_1 / S_2	0.72 / 0.58	$\leq \alpha$
Frontier, point estimate (native)	S_0 -calib., $R_Q \leq \alpha$ reach	S_1 / S_2	0.85 / 0.75	$\leq \alpha$
Group-conditional (native)	per-stratum α -certified gate	S_1 / S_2	0.08 / 0.12	$\leq \alpha$
Group-conditional (combined)	per-stratum α -certified gate	S_1 / S_2	0.52 / 0.39	$\leq \alpha$
Deploy-to-novel (combined)	calibrate familiar, deploy novel	S_2, S_3	0.18	0.190
Label-cost maximum (combined)	full in-stratum label pool	S_1 / S_2	0.83 / 0.77	$\leq \alpha$

Label budgets (not coverages): certification sample size = median 38 over the 23 feasible cells;

one-stratum-out extension budget ≈ 80 labels to *begin* certifying a moderate stratum, wide variance, full pool for reliable coverage (Fig. 4).

same quantity. The 0.52-on- S_1 and 0.83-on- S_1 pair is the sharpest: the first is the coverage of a single α -certified per-stratum gate, the second is the maximum coverage the full in-stratum label pool certifies (the label-cost-curve endpoint) — different questions, same stratum.

A decision curve retires the choice of α . Rather than defend a level, we sweep the cost ratio $\lambda = \text{cost}(\text{act on a wrong pose})/\text{cost}(\text{abstain on a right pose})$ and plot net benefit (Fig. S3). The conformal gate is best for $\lambda \in [0.65, 4.55]$ (AF3; every model shows the same window), dominating a fixed-ipTM threshold at *every* λ and beating accept-all once wrong poses are more than $\sim 0.65\times$ as costly as a missed right one. Below $\lambda = 0.65$ accept-all wins (abstention only forfeits benefit when wrong poses are cheap), and above $\lambda = 4.55$ abstain-all wins (no accepted set is worth its false positives). We do not assert that a discovery program lives inside this window; λ is program-specific, and a team that judges a wrong pose to cost more than about $4.5\times$ a passed-over right one should read the same curve as saying abstain-all, which is still a decision the layer delivers rather than a failure of it. The window locates where an accept/abstain gate beats both extremes, and a program anchors λ from its own economics, the cost of a wasted synthesis-and-assay cycle against the opportunity cost of a skipped active.

A non-circular quality, conditioned. Accepted-pose purity is 1 – selective risk by construction, so it

cannot show the gate buys anything past the guarantee. Interaction-fingerprint recovery is a different quantity a medicinal chemist reads: the fraction of the crystal’s protein-ligand contacts a pose reproduces, where a contact is any receptor residue with a heavy atom within 4.5 Å of a ligand heavy atom, enumerated within each structure and matched to the crystal contact set by residue identity (no interaction typing or protonation modeling). Pooling all accepted against all rejected poses shows a large recall gap (0.19 for AF3), but most of that is the accepted set being enriched for low-RMSD poses. Conditioning removes the confound: *within* the sub-2 Å (correct) set, which holds 8,277 poses pooled across models, the untyped accepted-minus-rejected recall gap is +0.02 to +0.04 (all five 90% intervals target-grouped and excluding zero), stable on the single-chain subset. Every interaction interval here bootstraps whole targets under the same leakage-free grouped protocol as the coverage results, not poses, so it is not anti-conservative from repeated instances of one system. The chemically important question is whether this survives when contacts are *typed*: recomputed with a PLIP-style typed scheme [51] (H-bond, salt bridge, π -stacking, hydrophobic; heavy-atom geometry, since the deposited coordinates carry no hydrogens), the within-correct gate lift is *largest on the polar, directional interactions* — H-bond +0.072 (AF3) and +0.082 (Chai), π -stacking +0.073 and +0.061, both intervals excluding zero and both exceeding the hydrophobic gap (+0.05, +0.04). So the lift is not merely hydrophobic burial: among equally-correct poses, the gate-accepted ones recover the SAR-relevant contacts a medicinal chemist reads markedly better than the rejected ones. Separately, the accepted set is PoseBusters-valid at a higher rate than the rejected set for every model (AF3 0.77 vs. 0.58), a free strengthening; certifying the joint label ($\text{RMSD} \leq 2 \text{ Å}$ and physically valid) directly is expensive because the confidence ranks for correctness, not validity, and we report that cost.

The interaction endpoint as a correctness label, and the scope of the infeasibility. A single geometric cutoff can over-count failures for a flexible ligand whose solvent-exposed tail moves the whole-ligand RMSD past 2 Å while the core pose and the binding-determinant interactions are right, so we test the infeasibility against interaction recovery treated as the correctness *label*, not only as a downstream quality read. Interaction recovery as a co-folding evaluation is itself established: ignoring it overestimates model quality because current co-folding methods often miss key interactions [50]; our step is to use it as a certification *endpoint* inside the risk-controlled gate, not as a metric. The mechanism is real: 614 AF3 poses are RMSD-incorrect yet interaction-correct, concentrated on the flexible ligands (rotatable bonds ≥ 8), against 33 the other way. The infeasibility then resolves cleanly by endpoint strictness. Under strict endpoints the novel-stratum break holds: on the 2 Å geometry the AF3 deploy-to-novel error is 0.41, and on recovery of $\geq 70\%$ of the key directional interactions (H-bond, salt bridge, π -stacking, the binding determinants) it is 0.39, both with zero-frontier cells on the novel tail. It relaxes only under a lenient all-contact fingerprint (untyped F_1 , or $\geq 50\%$ key-interaction recall), where hydrophobic contacts are numerous and easy to recover, novel-stratum base correctness rises above $1 - \alpha$, and a conservative gate certifies at reduced coverage. So the infeasibility is not an artifact of the RMSD convention: it governs any endpoint that requires reproducing the binding-determinant interactions, and the endpoint choice is itself the deployment decision the match-the-certifier-to-loss result (Sec. 6) makes explicit. The whole-ligand geometry we lead with is the standardized pocket-aligned symmetry-corrected RMSD of the DockQ family [49], which sharpens the metric but, being whole-ligand, shares the flexible-tail behavior; the interaction endpoint is what separates the two regimes.

8 Generality and limitations

Pseudo-prospective. Freezing calibration on everything deposited before 2023-05-31 and deploying on everything after (per model ~ 1300 pre- and ~ 900 post-cutoff targets), with no stratum information at calibration: on the native gate, AF3, Boltz-1x, and Protenix hold the post-cutoff certificate (realized-risk upper bound $\leq \alpha$), Boltz-1 overshoots by its upper bound (0.207), and Chai abstains; on the combined gate, AF3 and Boltz-1 hold, Chai overshoots (0.202), and Boltz-1x and Protenix abstain. Abstention is a non-certification, not a violation, and every held gate’s realized post-cutoff risk stays within 0.01 of its pre-cutoff expectation (the realized-minus-expected gap ranges -0.04 to $+0.003$ across models), so temporal deployment does not silently break control. This is a recency transfer, complementary to the structural story, and inherits the caveat that Runs N’ Poses is entirely post-cutoff.

A newer-cutoff model, and seed stability. Run as a fully governed model with its own 2023 similarity reference, Boltz-2 (a 2023-cutoff model) shows the same break: its marginal risk of 0.17 hides worst-stratum realized risk 0.41 (ligand) and 0.51 (pocket) against $\alpha = 0.20$, with S_3 drift +0.40 (ligand) and +0.59 (pocket, 2023-referenced), CIs excluding zero. The collapse is therefore not an artifact of the 2021 cohort. The gate is also deployment-stable across the diffusion randomness that produces the pose: refitting the AF3 certified gate within each of the five diffusion seeds moves the threshold by 0.002 and the coverage by 0.02, and gating a random sample per target rather than the top-1 changes coverage by ~ 0 at the same certified risk, so the certificate is not an artifact of the delivery policy.

Cross-dataset. A frozen Runs N’ Poses threshold deployed on a FoldBench [9] regeneration reproduces the coverage *starvation* of Sec. 3 on low-homology targets, but that regeneration did not reproduce the released model (self-scored top-1 success 0.40 against the released 0.57), so we keep it only as a directional coverage check and give the numbers in the SI. The load-bearing external test is the break itself.

To test the break, rather than only coverage starvation, on benchmarks that ship no released predictions, we regenerated Boltz-2 and Chai-1 predictions with confidence (5 diffusion samples) on PoseBusters-V2 and PLINDER-test and self-scored them under the same pocket-superposed symmetry-corrected 2 Å convention (feature and label from the same run; 458 targets survive scoring, 210 PoseBusters and 248 PLINDER). Self-scoring here carries a trap of exactly the kind Sec. 2 warns about: RCSB assemblies deposit several copies of a ligand in different sites (63% of the PLINDER subset, up to eight copies), and pooling their pockets into one superposition frame inflates every recomputed RMSD, so each copy must be scored in its own pocket frame; done correctly the four model-by-dataset cells recover the published pose accuracy (0.66–0.76 correct, median ligand-RMSD 0.67–1.16 Å). On these predictions the break reproduces: a marginally-valid gate calibrated on the familiar targets over-covers on the novel ones, realized error 0.315 (PLINDER, Boltz-2), 0.267 and 0.240 (PoseBusters, Boltz-2 and Chai-1) against the 0.20 target, with the fourth cell marginal (0.182). The full feasibility-frontier collapse is milder than on Runs N’ Poses (2 of 10 zero-frontier cells here against 22 of 40 there), for two reasons: base pose accuracy is genuinely higher on these curated benchmarks (per-stratum 0.65–0.83 against Runs N’ Poses’ 0.44 on S_3), and the novelty axis here is a chemical-similarity proxy (maximum ECFP4 Tanimoto to a broad reference ligand set) rather than the training-cutoff similarity Runs N’ Poses ships, so the strata are less cleanly separated by the shift the break responds to. A training-cutoff-matched novelty axis on these benchmarks is the proper sharpening and the one remaining external step; the direction of the break, though, does not depend on the benchmark.

Label quality is not the confound. The label is a 2 Å BiSyRMSD against a single deposited crystal pose, inheriting the field’s pose-correctness convention [32]. We tested whether crystallographic quality drives the break: fetching resolution for all 2,412 entries, the median resolution is flat across strata (S_0 1.98, S_3 2.00 Å, novel targets are not lower-resolution), the S_3 break persists on high-resolution-only entries (0.42 $\rightarrow$ 0.46 if anything), and it survives 5% and 10% random label flips (S_3 risk stays above α in 100% and 99% of resamples). So the novel-pocket collapse is a property of confidence reliability, not label noise; the graded-loss betting bound (Sec. 6) additionally removes the hard 2 Å cutoff.

Limitations. We hold three boundaries in view. The no-computable-analog stratum S_4 is a mixture (Sec. 2): ~ 29 of 76 instances are a genuine drug-like no-analog core and the rest are a similarity-search coverage gap, so its “uncertifiable” reading applies cleanly only to that core, and we lead every claim on S_3 . The external validation stratifies novelty by a chemical-similarity proxy, whose cutoff-matched sharpening Sec. 8 names as the one remaining external step. And the framework certifies a pose-correctness label, so certifying an affinity ranker, which the SI screening analysis shows out-ranks pose confidence but which carries no coverage guarantee, is the natural extension once an affinity-error label is in hand. Evaluation is retrospective by design, since the point is to certify decisions on released predictions before any wet-lab commitment; a prospective screen is the direct test of the payoff.

What to do with this, concretely. The layer is not only an abstention rule; the label-cost curve is a plan. A worked example: a team running AlphaFold3 on a congeneric series whose scaffold is one novelty stratum out from the training set (an S_1 – S_2 regime) should not trust the raw ranking score — it certifies almost nothing there leakage-free — but can recover a certified acceptance rate by building a

group-conditional gate. At ~ 80 in-stratum structures this is a median 0.22 coverage on S_1 and 0.48 on S_2 (wide draw-to-draw variance, only $\sim 56\%$ of draws certifying anything), rising toward 0.5–0.8 only with the full in-stratum pool. As an order-of-magnitude anchor only, and not a costing we claim precision over, a solved structure runs a rough \$10k–\$50k and days to weeks (the low end optimistic for a first structure on a novel target), so the calibration is a five-to-low-six-figure, one-to-few-month investment set against a mis-prioritized medicinal-chemistry campaign, and partly defrayable by in-house legacy structures or homolog transfer. If the series is genuinely novel (S_3 – S_4 , no close training analog), the certificate card reads ABSTAIN-infeasible and the recommendation is to treat every delivered pose as unverified and fall back to experiment. The deliverable is the card that tells the team which of these three situations it is in, before it commits medicinal-chemistry effort to a wrong pose.

9 Conclusion

Co-folding confidence becomes a risk-controlled decision only when the guarantee is audited where it fails. On structural novelty a marginally valid gate that calibrates on familiar targets and deploys on novel ones realizes error 0.55 against a 0.20 target (about $2.7\times$; the frozen score still *rank*s poses there, AUROC 0.56 to 0.71 across models, but the base rate is too low for any threshold to certify), and 11 of the 20 novel-stratum cells are provably uncertifiable on every score in the family — global, interface, or ligand-local — with the moderate strata all certifiable and 13 of 40 uncertifiable by the point estimate. An exact decomposition explains why: the score-fiber gap that opens there closes under in-stratum recalibration but under no training-free reweighting. This gives a program a map of exactly where a co-folding pose can be trusted, and at what price. Co-folding confidence is certifiable on the familiar strata, where the exact binomial certifies from a median of 38 labels over the 23 feasible cells against 102 for Hoeffding. It is extendable one stratum outward at a measured and now-quantified price, on the order of 80 in-stratum target structures for a moderate stratum to begin certifying (reliable coverage takes the full pool), and with a public proxy stratifier for closed-training models. On the extreme novel tail, exactly where a program most needs a guarantee, no training-free certificate exists, and the safe action is the one the layer certifies: abstain. The break is a property of the confidence rather than of the benchmark or the metric; it reproduces on regenerated PoseBusters and PLINDER predictions and on any endpoint that requires reproducing the binding-determinant interactions. The layer runs on frozen models’ released predictions on CPU and ships as certificate cards per model and novelty stratum, so a team can read its trust map before it commits.

Data and code availability. Code and calibration tables are at <https://github.com/rikhinkavuru/foldgate> under the MIT license, with an immutable Zenodo snapshot of the repository at submission (DOI assigned on deposit) so the artifact is citable and permanent; a one-command `make repro` reproduces the full tabular pipeline by default from a pinned environment (`uv.lock`, fixed numpy seeds and `PYTHONHASHSEED`), with the structure-stream and external-GPU arms behind opt-out flags. The analysis is deterministic under the pinned environment (pure CPU numpy/scikit-learn, no nondeterministic reductions); the co-folding predictions we consume are frozen released artifacts, and the model versions used are recorded in a table in the repository (AF3 server outputs as released by Runs N’ Poses; Boltz-1/1x, Chai-1, Protenix at the commits Runs N’ Poses shipped; Boltz-2 2.2.1 and Chai-1 0.6.1 for the external regeneration). We ship a single per-pose analysis table (`analysis_table.csv`, one row per delivered pose with the scores, the label, both similarities and strata, sequence cluster, crystal resolution, and ligand-local pLDDT) from which every tabular result can be re-derived without the structure stream, and a machine-readable certificate-card schema with a reference `card(scores, labels, strata,  $\alpha$ ,  $\delta$ )` implementation. Runs N’ Poses is at Zenodo (10.5281/zenodo.14794785); the regenerated FoldBench and external predictions with self-scored labels are at Zenodo (10.5281/zenodo.21417241); the screening scores are from (author?) [10]. The output-usage terms of each model’s predictions and of the reused benchmarks are noted in the repository. The coverage grid, fixed-sequence order, binning, and endpoints are frozen in a pre-registration file, timestamped independently of the git history (OpenTimestamps).

Funding. No external funding; the author is an independent researcher with no institutional support, and no funder had any role in the study design, analysis, or decision to publish. **Competing interests.**

The author declares no competing financial interest. **Acknowledgments.** The author thanks H.-P. Peng for the suggestion to treat protein–ligand interaction recovery as a pose-correctness endpoint, which motivated the analysis in Sec. 7. **Broader impact.** The layer is a decision gate for drug-discovery pipelines; its central message is conservative (abstain where the guarantee is vacuous), and its main risk is misuse as a certificate on the novel tail, which Secs. 4–6 explicitly forbid.

References

- [1] A. Angelopoulos, S. Bates, E. Candès, M. Jordan, L. Lei. Learn then Test: Calibrating Predictive Algorithms to Achieve Risk Control. arXiv:2110.01052 (preprint), 2021.
- [2] S. Bates, A. Angelopoulos, L. Lei, J. Malik, M. Jordan. Distribution-Free, Risk-Controlling Prediction Sets. J. ACM 68(6), 2021.
- [3] R. Tibshirani, R. Foygel Barber, E. Candès, A. Ramdas. Conformal Prediction Under Covariate Shift. NeurIPS, 2019.
- [4] J. Snell, T. Zollo, Z. Deng, T. Pitassi, R. Zemel. Quantile Risk Control. arXiv:2212.13629 (preprint), 2022.
- [5] R. Hore, R. Foygel Barber. Conformal Prediction with Local Weights: Randomization Enables Robust Guarantees. J. R. Stat. Soc. B, 2024.
- [6] R. Foygel Barber, E. Candès, A. Ramdas, R. Tibshirani. The Limits of Distribution-Free Conditional Predictive Inference. Information and Inference 10(2), 2021.
- [7] Y. Geifman, R. El-Yaniv. Selective Classification for Deep Neural Networks. NeurIPS, 2017.
- [8] P. Škrinjar, J. Eberhardt, G. Studer, G. Tauriello, T. Schwede, J. Durairaj. Evaluating generalization in protein-ligand cofolding methods. Nature Structural & Molecular Biology 33(5), 782–794, 2026, doi:10.1038/s41594-026-01797-5 (Runs N’ Poses benchmark; earlier as bioRxiv 2025.02.03.636309, “Have protein-ligand cofolding methods moved beyond memorisation?”; Zenodo 10.5281/zenodo.14794785).
- [9] S. Xu, Q. Feng, L. Qiao, H. Wu, T. Shen, Y. Cheng, S. Zheng, S. Sun. Benchmarking all-atom biomolecular structure prediction with FoldBench. Nature Communications 17, 442, 2026, doi:10.1038/s41467-025-67127-3.
- [10] C. Shen, et al. Unlocking the application potential of AlphaFold3-like approaches in virtual screening. Chemical Science, 2026. Zenodo 10.5281/zenodo.17568813.
- [11] J. Abramson, et al. Accurate structure prediction of biomolecular interactions with AlphaFold3. Nature 630, 2024.
- [12] Chai Discovery Team. Chai-1: Decoding the Molecular Interactions of Life. bioRxiv (preprint), 2024.
- [13] ByteDance AML AI4Science Team. Protenix: Advancing Structure Prediction Through a Comprehensive AlphaFold3 Reproduction. bioRxiv (preprint), 2025.
- [14] S. Laghuvarapu, Z. Lin, J. Sun. CoDrug: Conformal Drug Property Prediction with Density Estimation under Covariate Shift. NeurIPS, 2023.
- [15] Y. Jin, E. Candès. Selection by Prediction with Conformal p-values. JMLR, 2023 (arXiv:2210.01408).
- [16] T. Bai, Y. Jin. Conformal Selective Prediction with General Risk Control. arXiv:2603.24704 (preprint), 2026.
- [17] V. Vovk. Conditional Validity of Inductive Conformal Predictors. Machine Learning 92, 2013 (Mondrian / group-conditional conformal).
- [18] V. Vovk, I. Petej. Venn-Abers Predictors. UAI, 2014.
- [19] V. Kotte. When Can Conformal Risk Control Certify LLM Outputs? Bounds, Impossibility, and Adaptation for Structured Generation. arXiv:2606.29054 (preprint), 2026 (concurrent, independent; gives the closed-form base-risk feasibility condition and abstention floor we realize per stratum).
- [20] J. Wohllwend, et al. Boltz-1: Democratizing Biomolecular Interaction Modeling. bioRxiv (preprint), 2024.

- [21] J. Wohlwend, et al. Boltz-1x: confidence-refined structure prediction. Model release, 2025; exact version recorded in the repository.
- [22] S. Passaro, et al. Boltz-2: Towards Accurate and Efficient Binding Affinity Prediction. bioRxiv (preprint), 2025; used only as an ungoverned affinity comparator.
- [23] V. Vovk, A. Gammerman, G. Shafer. Algorithmic Learning in a Random World. Springer, 2005.
- [24] M. Cauchois, S. Gupta, A. Ali, J. Duchi. Robust Validation: Confident Predictions Even When Distributions Shift. JASA, 2024.
- [25] S. Ben-David, J. Blitzer, K. Crammer, A. Kulesza, F. Pereira, J. Vaughan. A Theory of Learning from Different Domains. Machine Learning 79, 2010.
- [26] A. Angelopoulos, S. Bates, A. Fisch, L. Lei, T. Schuster. Conformal Risk Control. ICLR, 2024.
- [27] T. Valentin, A. Madadi, G. Sapia, M. Böhme. Incoherence as Oracle-less Measure of Error in LLM-Based Code Generation. AAAI, 2026 (arXiv:2507.00057, preprint).
- [28] V. Venkatesh, E. Hüllermeier, B. Bischl, M. Rezaei. Structured Credal Learning. arXiv:2603.14070 (preprint), 2026.
- [29] R. Houston, M. Walkinshaw. Consensus Docking: Improving the Reliability of Docking in a Virtual Screening Context. J. Chem. Inf. Model. 53(2), 2013.
- [30] I. Waudby-Smith, A. Ramdas. Estimating Means of Bounded Random Variables by Betting. J. R. Stat. Soc. B, 2024 (arXiv:2010.09686).
- [31] J. Romano, M. Wolf. Stepwise Multiple Testing as Formalized Data Snooping. Econometrica 73, 2005.
- [32] M. Buttenschoen, G. M. Morris, C. M. Deane. PoseBusters: AI-based docking methods fail to generate physically valid poses or generalise to novel sequences. Chemical Science 15, 2024.
- [33] R. Foygel Barber, E. Candès, A. Ramdas, R. Tibshirani. Conformal Prediction Beyond Exchangeability. Annals of Statistics 51(2), 2023.
- [34] I. Gibbs, E. Candès. Adaptive Conformal Inference Under Distribution Shift. NeurIPS, 2021.
- [35] A. Podkopaev, A. Ramdas. Distribution-Free Uncertainty Quantification for Classification Under Label Shift. UAI, 2021.
- [36] Ú. Hébert-Johnson, M. Kim, O. Reingold, G. Rothblum. Multicalibration: Calibration for the (Computationally-Identifiable) Masses. ICML, 2018.
- [37] C. Gupta, C. Jung, G. Noarov, M. Pai, A. Roth. Online Multivalid Conformal Prediction. arXiv:2101.01739, 2022.
- [38] J. Duchi, H. Namkoong. Learning Models with Uniform Performance via Distributionally Robust Optimization. Annals of Statistics 49(3), 2021.
- [39] A. J. Vickers, E. B. Elkin. Decision Curve Analysis: A Novel Method for Evaluating Prediction Models. Medical Decision Making 26(6), 2006.
- [40] R. P. Sheridan, et al. Similarity to Molecules in the Training Set is a Good Discriminator for Prediction Accuracy in QSAR. J. Chem. Inf. Comput. Sci. 44(6), 2004.
- [41] F. Sahigara, et al. Comparison of Different Approaches to Define the Applicability Domain of QSAR Models. Molecules 17(5), 2012.
- [42] U. Norinder, et al. Introducing Conformal Prediction in Predictive Modeling. J. Chem. Inf. Model. 54(6), 2014.
- [43] C. K. Chow. On Optimum Recognition Error and Reject Tradeoff. IEEE Trans. Information Theory 16(1), 1970.

- [44] D. Madras, T. Pitassi, R. Zemel. Predict Responsibly: Improving Fairness and Accuracy by Learning to Defer. NeurIPS, 2018.
- [45] H. Mozannar, D. Sontag. Consistent Estimators for Learning to Defer to an Expert. ICML, 2020.
- [46] I. F. Shihab, S. Akter, A. Sharma. CalPro: Prior-Aware Evidential-Conformal Prediction with Structure-Aware Guarantees for Protein Structures. arXiv:2601.07201 (preprint), 2026.
- [47] M. Tursunbadalov, M. Tursunbadalov. A Quiet Failure in Calibrated Virtual Screening: Marginal Conformal Prediction Under-Covers the Minority Class, and a Class-Conditional Fix Recovers It. arXiv:2607.06605 (preprint), 2026.
- [48] S. Laghuvarapu, R. Deb, J. Sun. KMM-CP: Practical Conformal Prediction under Covariate Shift via Selective Kernel Mean Matching. arXiv:2603.26415 (preprint), 2026.
- [49] T. Bianchi, A. Elofsson. DockQ v2: improved automatic quality measure for protein complexes, nucleic acids and small molecules. Bioinformatics 40(10), btae586, 2024.
- [50] D. Errington, C. Schneider, C. Bouysset, F. A. Dreyer. Assessing interaction recovery of predicted protein-ligand poses. Journal of Cheminformatics 17, 2025 (arXiv:2409.20227).
- [51] S. Salentin, S. Schreiber, V. J. Haupt, M. F. Adasme, M. Schroeder. PLIP: fully automated protein-ligand interaction profiler. Nucleic Acids Research 43(W1), W443–W447, 2015.
- [52] C. Fannjiang, S. Bates, A. N. Angelopoulos, J. Listgarten, M. I. Jordan. Conformal Prediction Under Feedback Covariate Shift for Biomolecular Design. PNAS 119(43), e2204569119, 2022.
- [53] R. S. Boger, S. Chithrananda, A. N. Angelopoulos, P. H. Yoon, M. I. Jordan, J. A. Doudna. Functional Protein Mining with Conformal Guarantees. Nature Communications 16, 2025.

Supporting Information

Supporting Information available: dataset flow diagram; notation and label-provenance tables; reliability diagram; decision-curve analysis; per-stratum bin sizes and similarity ranges; the screening arm; the cross-model danger floor; the synthetic-generator and public-benchmark validation; the full certificate-card grid (both novelty axes); the five-model two-axis and pocket-axis certified grids; proof of the decomposition (PDF).

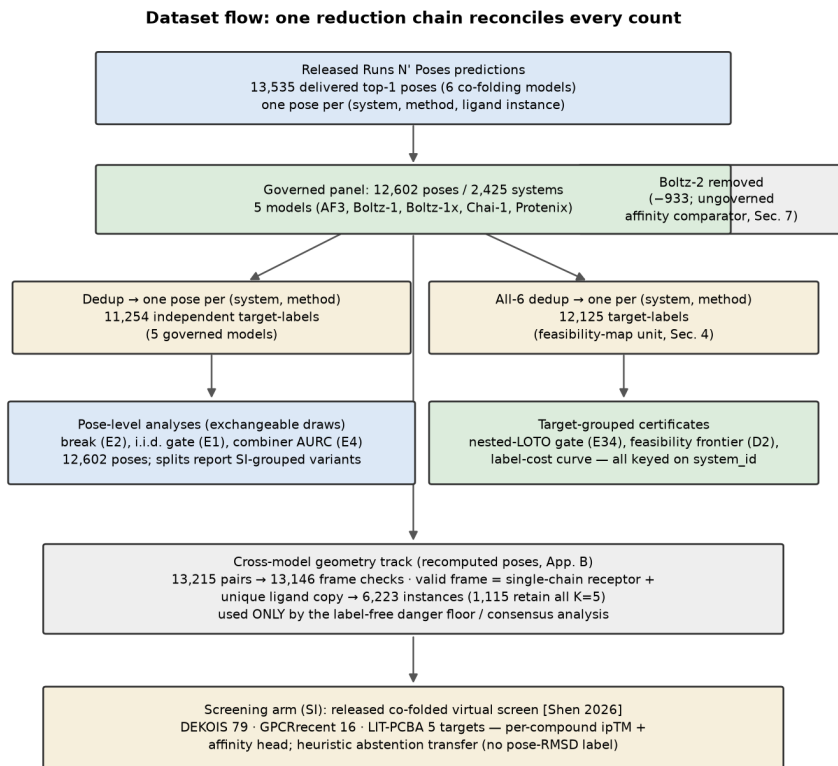


Figure S1: Dataset flow. One reduction chain reconciles every count; each node is annotated with the experiments that consume it. Counts are recomputed live from the released predictions.

Table S1: Notation.

L	loss $\mathbf{1}[\text{RMSD} > 2 \text{ \AA}]$	α, δ	risk target, failure prob. (0.20, 0.10)
s, τ	score, accept threshold ($s \geq \tau$)	c	coverage (accepted fraction)
v, S_v	novelty axis, stratum	η_P, η_Q	source/target score-conditional error $P(L=1 \mid s)$
R_{ref}	covariate-corrected reference risk	$\bar{\Delta}_c$	accept-region score-fiber gap
$D(v)$	reliability drift at stratum v	m^*, β^*	certified min. subpop. mass, CVaR level
ρ^*	DRO robustness radius	n_g	in-stratum labels

A Proof of the decomposition, and the ties bracket

Setup. Frozen score $s = s(X)$, error label $Y \in \{0, 1\}$, accept region $A_\tau = \{s \geq \tau\} \in \sigma(s)$. We work with the score-conditional error rates $\eta_P(s) = \mathbb{E}_P[Y \mid s]$ and $\eta_Q(s) = \mathbb{E}_Q[Y \mid s]$, since a threshold gate and a density-ratio weight on the score both live in $\sigma(s)$; a training-free reweighting has weights $w = w(s) \geq 0$ that are $\sigma(s)$ -measurable and

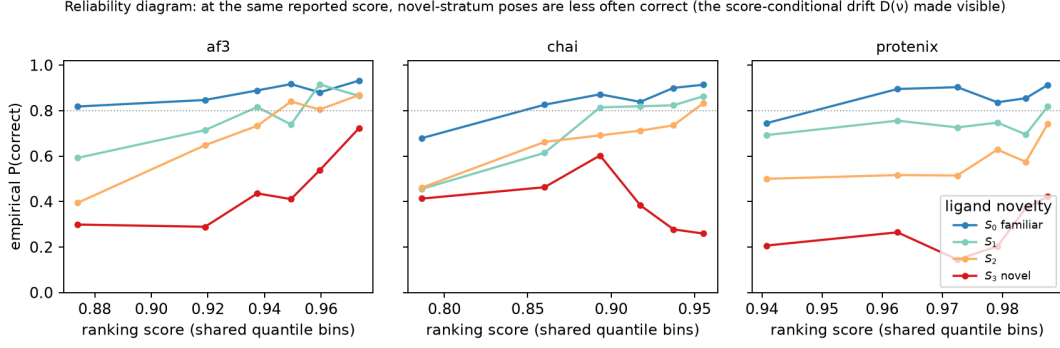


Figure S2: Reliability diagram. Empirical $P(\text{correct})$ against the frozen ranking score (shared quantile bins), one curve per ligand-novelty stratum. The curves stay monotone (the score discriminates within each stratum, so the gate is not anti-selective) but drop together on novel strata (the base rate collapses), the visible form of the score-conditional reliability drift $D(v)$.

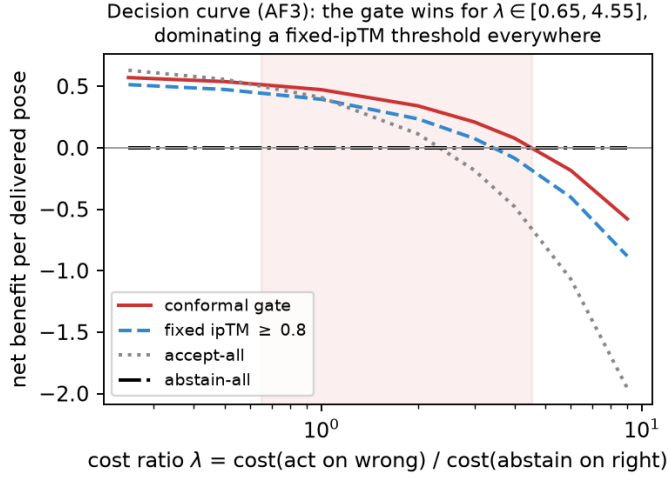


Figure S3: Decision curve (AF3). Net benefit per delivered pose vs. the cost ratio λ ; the shaded band is where the conformal gate is the best of the four strategies. It dominates a fixed-ipTM threshold everywhere and serves the high-cost regime, so there is no single α to defend.

use no target labels. Assume s has no atom at the operating threshold, so for each coverage c there is a unique τ_c with $Q(s \geq \tau_c) = c$ (on the top- k rank lattice this is τ_c up to the $1/n$ granularity); real scores carry ties handled by boundary randomization, under which the equalities become $\leq / \geq$ brackets, and Sec. 5 bounds the bracket empirically (0 on the ranking-score gate, $\leq 0.7\%$ coverage on ipTM).

Lemma (a score-measurable reweighting sees only the source score-conditional). For any such w , the reweighted plug-in selective risk is $\tilde{E}^w(\tau) = \mathbb{E}_P[wY \mathbf{1}_{A_\tau}] / \mathbb{E}_P[w \mathbf{1}_{A_\tau}] = \mathbb{E}_{Q_w}[\eta_P(s) | A_\tau]$, with $dQ_w \propto w dP_s$. *Proof.* w and $\mathbf{1}_{A_\tau}$ are $\sigma(s)$ -measurable, so tower over s : $\mathbb{E}_P[wY \mathbf{1}_{A_\tau}] = \mathbb{E}_P[w \eta_P(s) \mathbf{1}_{A_\tau}]$; normalize. The target score-conditional $\eta_Q(s)$ cannot appear. $\square$

Proposition. At coverage c : (a) $R_Q(\tau_c) = R_{\text{ref}}(\tau_c) + \bar{\Delta}_c$ with $R_{\text{ref}}(\tau_c) = \mathbb{E}_Q[\eta_P(s) | A_{\tau_c}]$ and $\bar{\Delta}_c = \mathbb{E}_Q[\eta_Q(s) - \eta_P(s) | A_{\tau_c}]$; (b) *coverage pinning*: any rule — any weight, $\sigma(s)$ -measurable or not — that realizes coverage c on Q accepts exactly A_{τ_c} , so its realized risk equals $R_Q(\tau_c)$, independent of the weight; (c) with the oracle score-weight $w^* = dQ_s/dP_s$ the Lemma’s certificate equals $R_{\text{ref}}(\tau_c)$, under-reporting the realized risk by exactly $\bar{\Delta}_c$. *Proof.* (a) add and subtract $\mathbb{E}_Q[\eta_P(s) | A_{\tau_c}]$. (b) the no-atom assumption pins τ_c from c , so realized risk is a functional of (Q, τ_c) alone. (c) Lemma with w^* gives $Q_{w^*} = Q$. $\square$ (A part-(d) “ α achievable at coverage c iff $\bar{\Delta}_c \leq \alpha - R_{\text{ref}}$ ” is only (a)+(b) rearranged and we do not count it as a result; achievability by *lowering* coverage is the empirical frontier of Sec. 4.) The statement binds only scalar thresholds of a fixed score with score-measurable weights; re-scoring on v or a per-stratum threshold escapes it, which is the achievability side:

Table S2: Label provenance. The primary selective-risk results use the shipped BiSyRMSD label. The protomer trap of SI Sec. C afflicts only cross-frame *superposition*, so the cross-model danger floor is restricted to the single-chain subset; interaction-fingerprint recovery enumerates contacts *within* each structure and matches them by residue identity (seqid, resname), which is invariant to a protomer swap (homodimer copies share numbering), and its result is unchanged on the single-chain subset (gate coefficient +0.04+0.06 there vs. +0.03+0.07 on the full set).

Result	Label / geometry	n
Break, frontier, repair, utility (Secs. 3–7)	shipped BiSyRMSD	11,254 target-labels
Cross-model danger floor / consensus (SI)	recomputed, single-chain receptors	6,163 instances
Interaction-fingerprint recovery (Sec. 7)	per-structure contacts vs. crystal	12,475 poses

Proposition (achievability). Fix a stratum g and let its n_g calibration labels be exchangeable with the deployment draw *within* g . Then the split-conformal per-stratum gate [23] has stratum-conditional miscoverage $\leq 1/(n_g+1)$ regardless of the cross-stratum drift, conformal risk control [26] gives the same slack for the joint accept-and-err rate, and the ratio functional (a random-denominator selective risk) is controlled at level δ by Learn-then-Test with the finite-sample label cost the curve of Sec. 6 measures. *Remark.* Within-stratum exchangeability is exact only for a homogeneous bin; because strata are quantile bins of a continuous similarity, a residual within-stratum drift remains, which we measure (splitting each ligand stratum on its pocket-similarity median leaves a signed gap of +0.07 to +0.32, Sec. 6 data). Finer bins shrink this residual at the cost of fewer labels per bin ($1/(n_g+1)$ grows), so the two-axis grid is the practical compromise we recommend when both similarities are available; the one-axis cards we ship are the cheaper view whose scope is the stratum marginal. The residual is the gap between the neighborhood-conditional guarantee and a pointwise one, which is impossible [6].

B Benchmark and validation details

The synthetic generator draws a stratum from a tilted v -marginal, a score logit $z \sim \mathcal{N}(m_0 - E\mathbf{v}, \sigma^2)$, and a label with $P(Y=1) = \varepsilon + (1 - 2\varepsilon) \text{sigmoid}(\beta_0 + \beta_1 z - D_{\text{eff}}\mathbf{v})$, isolating covariate shift (E), concept drift (D), and an error floor (ε); every proposition quantity is available in closed form and cross-checked by Monte Carlo. The real benchmarks reduce any classifier to $(s, y, \mathbf{v})$; realized worst-stratum selective risk at $\alpha = 0.20$: elec2 marginal 0.31, weighted-conformal 0.34, group-conditional 0.20; ACS Income marginal 0.23, weighted-conformal 0.20, group-conditional 0.20, the reliability drift separating the two being 0.36 (elec2, concept) against 0.05 (ACS, covariate).

C A benchmark-integrity note for cross-model pose geometry

Recomputing pose RMSD in a common frame carries a silent trap. Runs N’ Poses ships only the system’s receptor chain while co-folding models predict the full biological assembly, so a chain-ordinal superposition can land the ligand in the wrong protomer of a homodimer: the backbone still fits (superposition residual ~ 0.3 Å) while the ligand sits tens of Ångström away. Neither the residual nor a triangle-inequality consistency check detects it, and a distance-consistency check flags none of the 13,146 pairs while 21% of recomputed distances and 15% of binary correctness labels were wrong. Only comparison against the shipped BiSyRMSD label exposes it; restricting to single-chain receptors with an unambiguous ligand copy raises agreement from Spearman 0.620 to 0.995 and defines the 6,163-instance subset any recomputed-geometry result in this paper uses (Table S2). We flag this for reuse; a symmetry-aware chain assignment is the general fix.