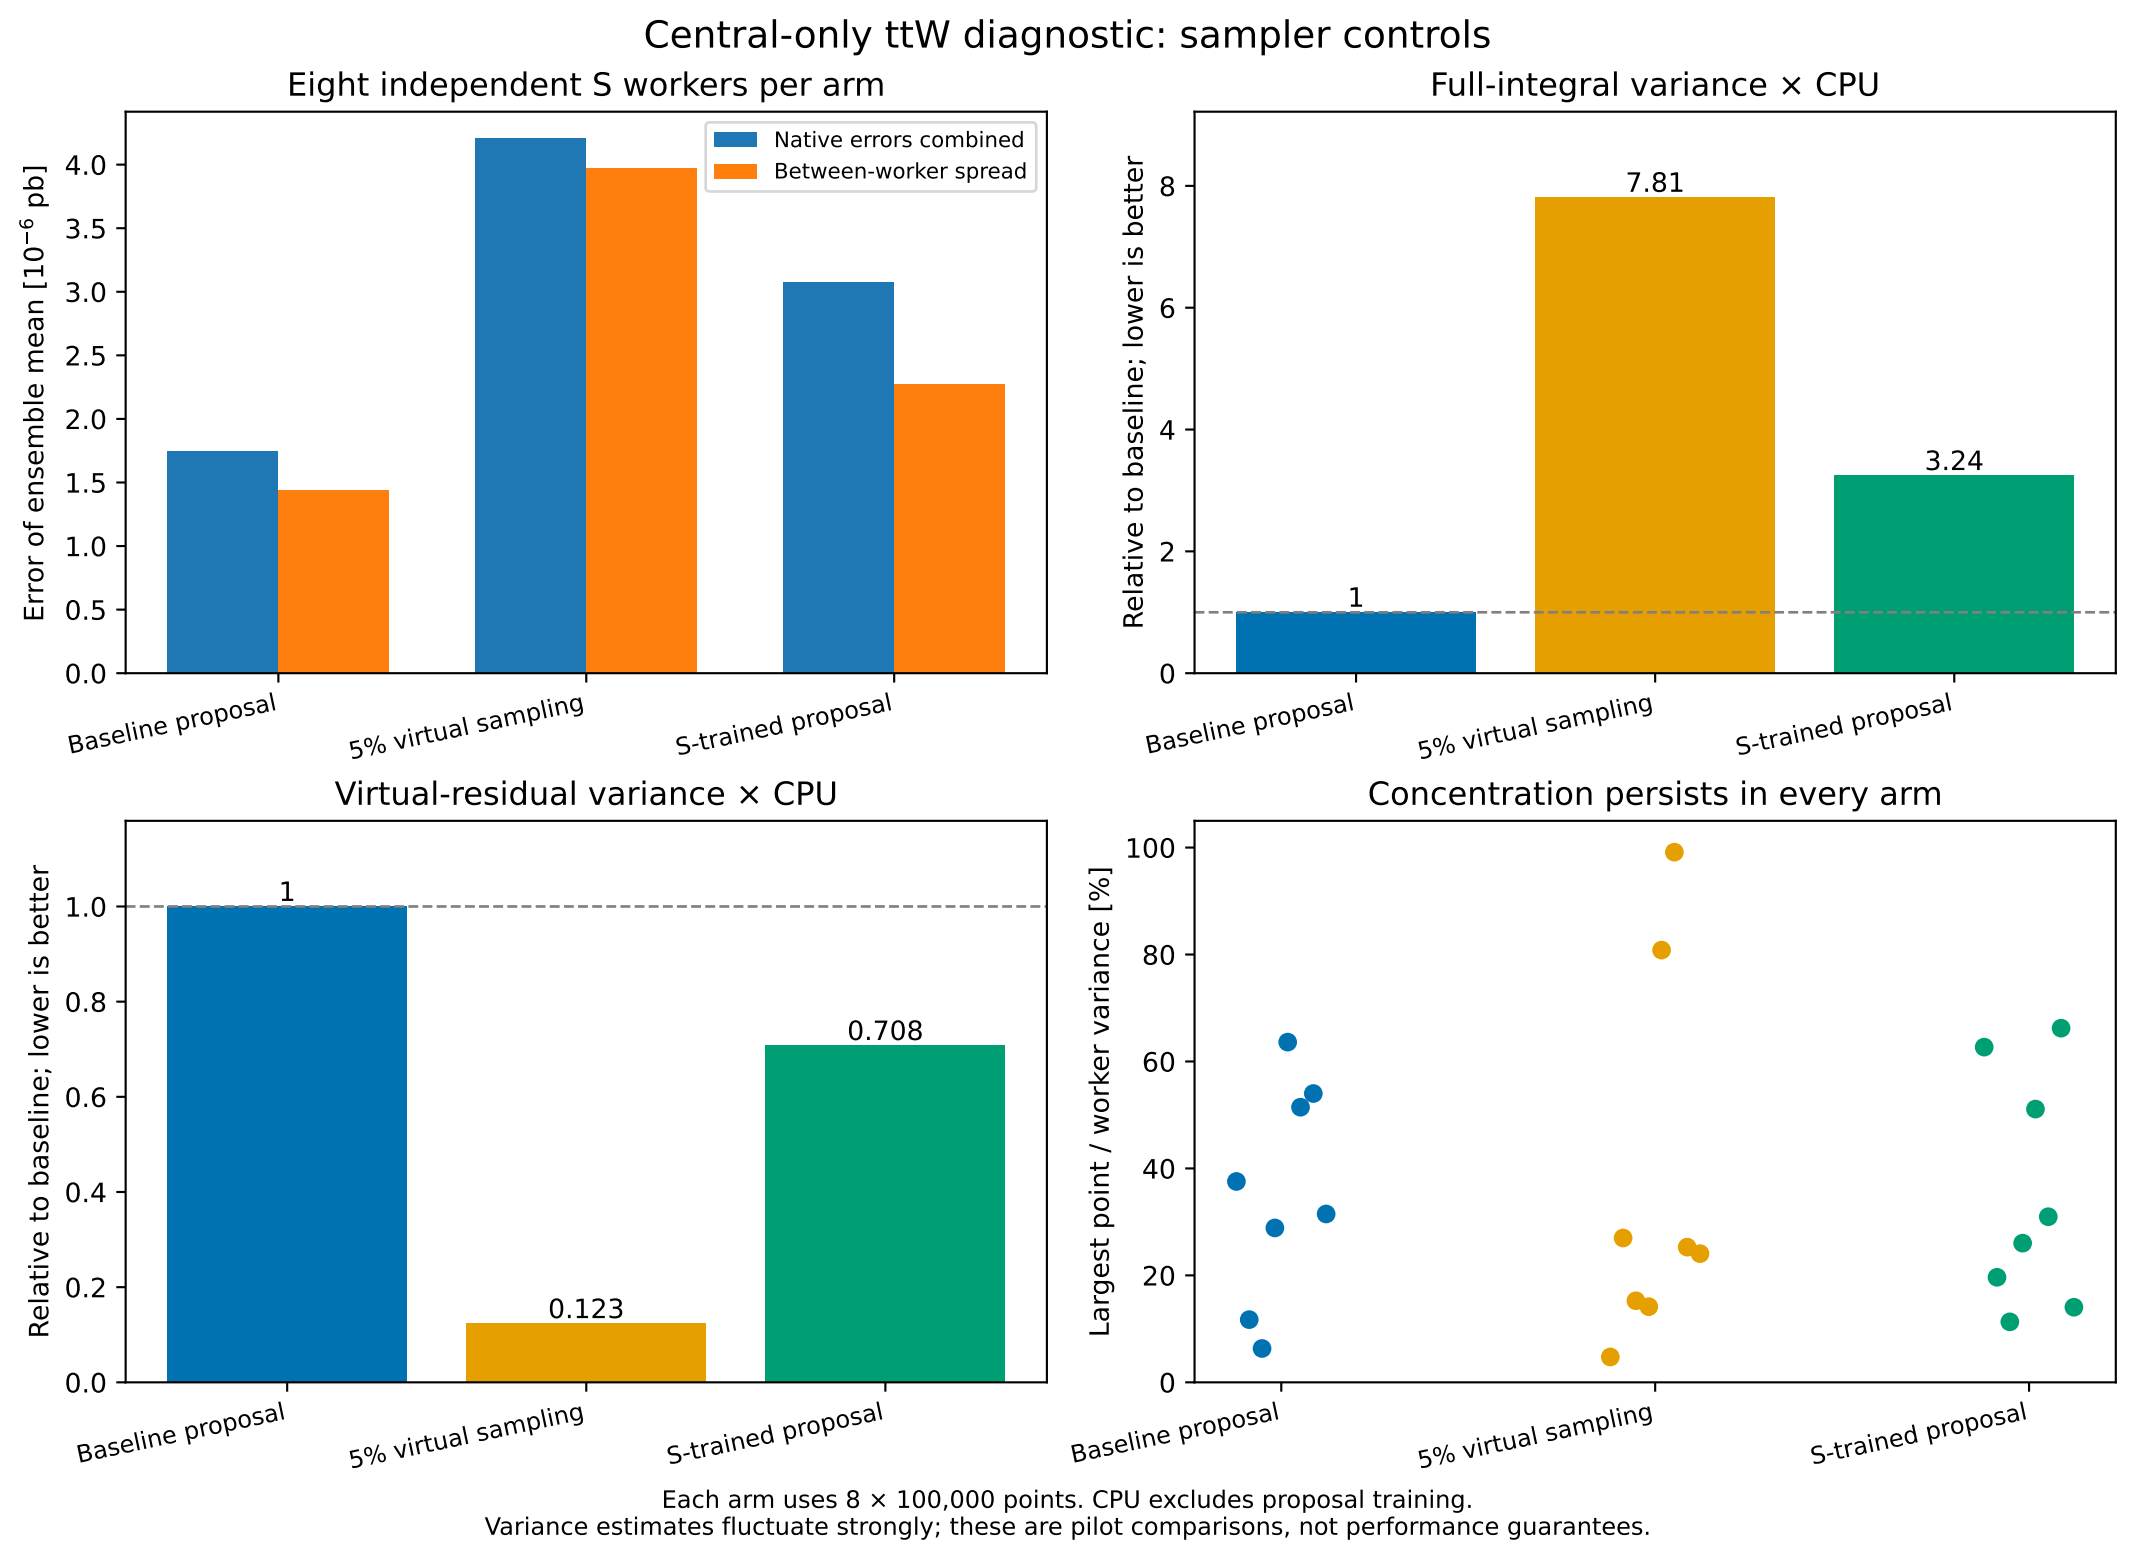
Central-only ttW diagnostic: sampler controls
Eight independent S workers per arm
Native errors combined
Between-worker spread
Error of ensemble mean [10⁻⁶ pb]
Baseline proposal
5% virtual sampling
S-trained proposal
Full-integral variance × CPU
Relative to baseline; lower is better
1
7.81
3.24
Virtual-residual variance × CPU
0.123
0.708
Concentration persists in every arm
Largest point / worker variance [%]
Each arm uses 8 × 100,000 points. CPU excludes proposal training.
Variance estimates fluctuate strongly; these are pilot comparisons, not performance guarantees.