

Speak2Summarise: Daily Task Recap

This project report is submitted to
Yeshwantrao Chavan College of Engineering
(An Autonomous Institution Affiliated to Rashtrasant Tukadoji Maharaj Nagpur University)

In partial fulfilment of the requirement
for the award of the degree
of
Bachelor of Technology in
Computer Science and Engineering

By
Hemanshu Waghmare
Dhruv Dalvi
Rishabh Jain
Sanket Asole
Yuvraj Chavan

Under the guidance of

Prof. Chanchla Tripathi



Department of Computer Science and Engineering
Nagar Yuwak Shikshan Sanstha's
YESHWANTRAO CHAVAN COLLEGE OF ENGINEERING,
(An autonomous institution affiliated to Rashtrasant Tukadoji Maharaj Nagpur University, Nagpur)
NAGPUR – 441 110

2024-25

Speak2Summarise: Daily Task Recap

*This project report is submitted to
Yeshwantrao Chavan College of Engineering
(An Autonomous Institution Affiliated to Rashtrasant Tukdoji Maharaj Nagpur
University)*

*In partial fulfilment of the requirement
for the award of the degree
of
Bachelor of Technology in
Computer Science and Engineering*

By
Hemanshu Waghmare

Dhruv Dalvi

Rishabh Jain

Sanket Asole

Yuvraj Chavan

Under the guidance of

Prof. Chanchla Tripathi



Department of Computer Science and Engineering

Nagar Yuwak Shikshan Sanstha's

YESHWANTRAO CHAVAN COLLEGE OF ENGINEERING,

(An autonomous institution affiliated to Rashtrasant Tukadoji Maharaj Nagpur University, Nagpur)

NAGPUR – 441 110

2024-25

CERTIFICATION of APPROVAL

Certified that the project report entitled “**Speak2Summarise: Daily Task Recap**” has been successfully completed by the Mr. Hemanshu Waghmare, Dhruv Dalvi, Rishabh Jain, Sanket Asole and Yuvraj Chavan under the guidance of Prof. Chanchla Tripathi in recognition to the partial fulfilment for the award of the degree of Bachelor of Technology in Computer Science and Engineering, **Yeshwantrao Chavan College of Engineering (An Autonomous Institution Affiliated to Rashtrasant Tukdoji Maharaj Nagpur University)**

Signature	Signature	Signature	Signature
Prof. Chanchla Tripathi	Prof. Priyanka Khandekar	Prof. Amruta T. Paul	Dr. Lalit B. Damahe
(Guide)	Project Coordinator	Project Coordinator	(HoD)

ACKNOWLEDGEMENT

We extend our heartfelt gratitude to **Prof. Chanchla Tripathi** for their unwavering support, invaluable guidance, and encouragement throughout this project on **Speak2Summarise: Daily Task Recap**. Their expertise and insights have been instrumental in shaping the direction and execution of this research. We are also grateful to **Dr. Lalit B. Damahe**, Head of the CSE Department, for providing essential resources and facilities crucial for the successful completion of this project. Additionally, we appreciate **Dr. U. P. Waghe, Principal of YCCE**, for fostering an environment conducive to academic exploration and innovation. Special thanks are due to **Prof. Amruta Tapas Paul** and **Prof. Priyanka Khandekar**, Coordinator of CSE Department, for overseeing the coordination and administrative aspects of this project. Lastly, we would like to thank all the faculty and non-teaching staff members who helped us directly or indirectly for the successful completion of this project.

DECLARATION

We certify that

- a. The work contained in this project has been done by us under the guidance of my supervisor(s).
- b. The work has not been submitted to any other Institute for any degree or diploma.
- c. We have followed the guidelines provided by the Institute in preparing the project report.
- d. We have conformed to the norms and guidelines given in the Ethical Code of Conduct of the Institute.
- e. Whenever we have used materials (data, theoretical analysis, figures, and text) from other sources, we have given due credit to them by citing them in the text of the report and giving their details in the references. Further, we have taken permission from the copyright owners of the sources, whenever necessary.

Name of the Students

Signature of the Student

Hemanshu Waghmare

Dhruv Dalvi

Rishabh Jain

Sanket Asole

Yuvraj Chavan

TABLE OF CONTENTS

Title Page	
Certificate of Approval	i
Acknowledgement	ii
Declaration	iii
Table of Contents	iv-v
List of Figures	vi
Abstract	ix
Project CO-PO matrix	x
Abstract	8
CHAPTER 1. INTRODUCTION	1
1.1 Overview	1
1.2 Problem Statement	2
CHAPTER 2. REVIEW OF LITERATURE	3
2.1 Review on Previous years research and work	3
2.2 Patent Search	9
CHAPTER 3 WORK DONE	11
3.1 WORKFLOW	11
3.2 METHODOLOGY	12
3.3 Methods	13
3.3.1 Cloud based	13
3.3.2 Neural Network	14
Long Short-Term Memory (LSTMs)	14
Recurrent Neural Networks (RNN)	14
3.3.3 Extractive Summarization	15
Transformer based	15
Generative Adversarial Networks (GANs)	15
Two-Stage Transformer	16
Dual-encoding using transformer	17
PodSumm Architecture	17
3.4 DESCRIPTION OF DATA SET TO BE USED	25
3.5 PLAN OF PROJECT	26
3.5.1 Audio Preprocessing	27
3.5.2 Speech Recognition and Speaker Diarization	27
3.6 ARCHITECTURE	27

3.6.1 WhisperX (PROJECT MODEL ARCHITECTURE)	27
3.6.2 Wav2vec 2.0	29
3.7 Hardware Components	31
3.7.1 Architecture Diagram and System Overview	37
Functionality and Workflow	38
CHAPTER 4. RESULTS AND DISCUSSION	39
4.1 High Transcription Accuracy	39
4.2 Noise Reduction Using pydub	39
4.3 Effective Speaker Diarization	40
4.4 Identifying Speaker Time Periods	41
4.5 Transcription Output	41
4.6 Accuracy Measurement (WER and CER)	42
4.7 Summarization	43
4.8 Social Utility of the Project	43
4.8.1 Task Management and Productivity	43
4.8.2 Educational and Accessibility Applications	44
4.8.3 Data-Driven Decision-Making	44
4.8.4 Community Engagement and Development	44
CHAPTER 5. SUMMARY AND CONCLUSION	45
5.1 Summary	45
5.2 Conclusion	46
5.3 Future Scope	47
References	48
 Appendix	 54
Project Preliminary Investigation Report	61
Social Impact of Project	68

LIST OF FIGURES

Figure No.	Figure Name	Page No.
3.1	High level overview of Project	12
3.2	PodSumm Architecture	18
3.3	Dataset CSV file	25
3.4	Common Voices audio data	26
3.5	Whisper architecture	27
3.6	Phrase-level timestamps, multilingual speech transcription, and to-English speech translation	28
3.7	Wav2vec 2.0 architecture and its pre-training process	29
3.8	Wav2vec 2.0 latent Feature Encoder	30
3.9	MAX9814 Electret Microphone Module	31
3.10	DS1302 Real-Time Clock (RTC) Module + CR2032 Battery	32
3.11	Arduino Nano (ATmega328P)	32
3.12	sdcard	32
3.13	usbMiniBcable	33
3.14	Breadboard	33
3.15	MaleToFemalewire	34
3.16	LEDs	34
3.17	TactilePushButtton	35

3.18	Resistor220ohm	35
3.19	MaleToMaleWire	36
3.20	Card Reader	36
3.21	Hardware Circuit diagram	37
4.1	Noise Reduction	40
4.2	Speaker Diarization	40
4.3	Time period for each speaker	41
4.4	Transcription	42
4.5	WER and CER	42
4.6	Summarization of audio along with diarization	43

Abstract

By virtue of the burgeoning nature of digital audio data, Speech-to-Text (STT) conversive and text summarization are stated to be the vital foresightedness within Natural Language Processing (NLP). These developments make simultaneous speech-to-text conversion and text condensation of large volumes of textual information possible. It is applied in areas such as meeting transcription, virtual assistants, podcasts review and auto-generation of content where its importance in both research studies & business operations cannot be overemphasized.

Here the result and activity holders of the first two of the five phases in all, for creating the united framework of the STT and summarization are presented. The first phase focuses on audio processing which includes improved noise attenuation measures like use of audio spectral gating and also use of long audio files in segments for processing. The second phase aims at investigating the potential of speaker diarization using the potent WhisperX model with regards to seeking improvements in transcribing as well as effectively diarizing multiple speakers during a single event.

This work's major contributions are: focusing on certain aspects in preprocessing and transcription procedures, evaluating the relevance of the applied methods and analysing the discussed topics. It can be see that there exist significant coupling between these phases to facilitate integration of transformer based text summarization models for subsequent processes. In addition to demonstrating the current enhancements of this paper, this paper also serves as a foundation towards achieving a more unified pipeline for the processing, analyzing, and summarizing the passed audio data in different applications.

Index Terms: *Speech-to-Text, WhisperX, Noise Reduction, Audio Segmentation, Diarization, Text Summarization*

Project CO-PO Matrix

CO-PO/PSO Articulation Matrix

CO No.	CO Statements	PO 1	PO 2	PO 3	PO 4	PO 5	PO 6	PO 7	PO 8	PO 9	PO 10	PO 11	PS O1	PS O2
CO1	CO-1: Investigate the Problem domain knowledge in their area of study and analyse the problem domain for executing the projects	3	3		3								3	3
CO2	CO-2: Design and develop the solution using appropriate tools and techniques and communicate effectively with society at large for betterment.			3		3	3			3			3	3
CO3	CO-3: Analyze and Interpret the obtained results using acquired research-based knowledge.				3							3	3	3
CO4	CO-4: Function effectively as an individual,							3	3		3	3	3	3

	and as a member or leader in a team under multidisciplinary settings following ethical practices													
CO5	CO-5 : Demonstrate lifelong learning through the use of modern tools, critical thinking, and adaptability to emerging technologies for sustainable development and societal needs.				3	3		3				3	3	3

CHAPTER 1

INTRODUCTION

1.1 Overview

Consequently, in the technological-dominated large universe that is characterized by automation and analytical decision-making, audio is a critical means of information. Whether it is a business meeting, online class, podcast or an interview, audio data is a goldmine that needs to be captured and analysed correctly. This is where **Speech-to-Text (STT)** as well as the text summarization technologies have significantly extremely useful part.

There are two types of functionalities, namely producing easily searchable textual or other output modality from raw speeches, in Speech-to-Text systems. This empowers users to turn what is often ephemeral; audio data into more tangible forms that are actionable, effective and practical influencing decision-making, work flow and providing accessibility to beneficial information.

Thus, text summarization enhances the functioning of STT by transforming a huge amount of text data produced by transcription services into brief summaries. The purpose of these summaries helps the users from getting overwhelmed with more information and deal with the overload to save much time. This is especially helpful when compared to transcribing several hours of speeches, podcasts, or even recordings, so long that it is impossible to listen to the entire thing in one sitting, and entire meetings, conferences, or seminars where key points are given.

Altogether these technologies are useful to facilitate the process improvements and support knowledge management activities. Workers can convert notes taken during meetings and convert them into summaries or notes of action points important for follow up. In education, lectures recorded in writing can be advisable reduced, in order that the most important aspects of the lecture can be emphasized. In media and entertainment, these technologies assist in the time-consuming interviews, podcasts and recordings by easing the process of summarizing them for publications and archiving purposes. Besides, in medical and legal professions, they help experts record conversations or meetings, undertake case, deposition, or patient consultation notes. In customer support, they use text analysis to log and

summarise call centre conversations, in order to gain insights into common issues and customers' sentiments.

These technologies are gradually being applied in diverse processes, leading to better resources utilization and retaining knowledge and information gathering efficiency. organizations continue to look for ways to harness the increase in the amount of audio data available, the combination of STT and text summarization is fast becoming one of the foundations for the modern processing and analysis of data.

1.2 Problem Statement

The hectic way we live today causes people to lose focus which results in reduced productivity combined with missed assignments and increased tension. Multiple work and personal duties collect in our lives which overloads our ability to maintain organization along with focus. Actions that lead to task.errors or activity omissions extend their negative impact throughout our schedules and those around us which creates a never-ending cycle of stress and reduced efficiency.

The workplace consequences of multitasking include lower productivity along with economic loss but at the personal level excessive multitasking creates unfilled duties that heighten mental tension. Task management alongside memory aids helps users stay better organized while reducing decision fatigue and improving their focus abilities. Operation platforms pairing task management systems with calendars plus AI-based digital helpers prioritize work and guarantee timely finishing of assignments. Smart workflows emerge from using techniques including Eisenhower Matrix along with Pomodoro Technique and time management approaches. Note-taking with mnemonic techniques and activity stretching methods enhance performance throughout each day.

Voice prompts and wearable schedulers function through advanced technology to deliver real-time task communication. Tools enhance both organization and productivity while reducing stress so individuals maintain focus on meaningful creative work. A personalized system selection process converts disorganized daily struggle into orderly productive sequences while freeing both time and enhancing life quality.

CHAPTER 2

REVIEW OF LITERATURE

2.1 Review on Previous years research and work

The researchers in "A Review on Sentiment Analysis on Text, Image, and Audio Data" demonstrate how multimodal frameworks brought about improvements in sentiment analysis by moving beyond text-only approaches into systems that process audio and visual data [1]. According to Mehta et al. (2021) new hybrid models derived from lexicon-based and machine learning approaches bring enhanced accuracy to sentiment analysis techniques. Traditional VADER dictionaries founded sentiment classification through pre-defined lexica yet prove inadequate for detecting new or specialized language elements. Complex data gets decoded by machine learning models which help them find detailed insights but demand major compute power to run properly. Hybrid sentiment analysis systems combine the easy execution of lexicon-based approaches for smaller datasets with machine learning adaptable capabilities on bigger datasets for achieving better accuracy results.

Mehta et al. (2021) identify the necessity of systems which integrate audio, text, and visual data to better handle the shortcomings of working with individual data sources. Audio format strength increases when transcription text combines with acoustic elements including pitch and intensity to detect sentiment in audio sources. The analysis of audio according to text data delivers complementary information that strengthens the accuracy of sentiment evaluation. Researchers support ongoing investigation of advanced multimodal analysis methods in order to process complex datasets and boost sentiment analysis success rates. The expanding importance of hybrid approaches and multimodal systems with audio data plays a key role according to Mehta et al. (2021) for improving sentiment detection systems.

The work of Reddy et al. (2024) conducts audio analysis through text characterization and summarization while leveraging high-tech NLP tools including Facebook's BART model for summaries and Google's Speech-to-Text API for transcription [2]. The tools convert unstructured audio data into accessible text format for multiple uses that include video and podcast transcription and automated meeting summaries along with content searching functions. This research explores important barriers including noise reduction alongside context protection for automated audio summary solutions. Planned NLP models that

combine LSTM systems with transformer-based hybrids BERT and BART enable superior context interpretation and precise audio-to-text conversions. Research by Reddy et al. (2024) supports merging contemporary NLP technologies with audio analytics to elevate operational efficiency while enhancing value-driven analysis. The systems prove their usefulness in various domains including business and education because effective audio data summarization has become essential to these sectors. The researchers at Graves et al. (2013) proposed Recurrent Neural Networks (RNNs) to operate on speech recognition applications because the networks excel at processing sequential data. The integration of RNNs with Long Short-Term Memory (LSTM) units enhances sequence labeling performance to reshape tasks involving cursive handwriting recognition [3].

Initial speech recognition tasks proved difficult for RNNs even though these models demonstrated better performance than deep feedforward networks for context-sensitive recognition. The research team of Graves et al. (2013) invented deep recurrent neural networks that combine diverse representation models with extended temporal context through end-to-end procedures enabled by Connectionist Temporal Classification (CTC) for unaligned pair data. The deep LSTM RNNs gained state-of-art recognition performance on the TIMIT phoneme benchmark by achieving 17.7% test set accuracy. Graves et al. (2013) highlight the effectiveness of uniting deep architecture structures with LSTMs but propose using these systems for big vocabulary applications and developing frequency-domain convolutional networks by integrating them with LSTMs.

The research by Ghadekar et al. (2023) demonstrates how Python libraries such as NLTK and SpaCy transform vocal inputs into text then create summaries. Tokenization along with stemming and lemmatization features exist in NLTK yet SpaCy excels at handling English language data. The application spectrum of this technology spans podcast summaries along with meeting transcriptions and indexing platforms and search functionalities. The usability of a friendly Graphical User Interface allows for better handling of extended audio files leading to improved efficiency in audio-to-text summarization [4]. Su, Wu and Cheng (2020) designed a Transformer-based model that operates in two stages for text summarization which produces flexible summaries adjusting to multiple user requirements [5]. The system comprises two primary components: Two major sections compose the system: a text segmentation module followed by a two-stage summarization module. The primary function of this module employs a BERT-based BiLSTM to segment extensive written material into

meaningful pieces. Improving sentence relationship detection remains essential to extracting key information because this segmentation method enhances the summary model's understanding.

The extractive summarization module built with BERTSUM selects important sentences from separate segments while performing redundancy minimization during its first operational stage. These extracted sentences are then passed to the second stage: the document summarization module. During this stage all extracted content receives additional filtering while parameter adjustments come from evaluating scores from both modules to direct training operations collectively. Combined modules deliver enhanced alignment of summary units at different levels to maintain both structure and cohesion within the final document summary. The system allows users to customize summary length through an output concatenation process from the segment summarization module. Human evaluations confirm that the BERT-biLSTM segmentation module succeeds in capturing sentence relationships when tested on the ChWiki_181k dataset by achieving 70.0% score in human evaluations on the LCSTS dataset.

On the other hand, the model also has limitations that stem from the Chinese corpus, which is more about one-line summaries. The system cannot generate detailed, multi-sentence summaries, which result in poor information-rich content. Furthermore, segmenting the less-constrained article could call for less-than-optimal segmenting with an overall negative impact on summary quality. This could assist the model's performance and applicability by solving these issues: including multi-sentence summaries in the corpus and segmenting optimization.

Vaswani et al. (2017) present the Transformer, an epoch-making sequence transduction model that takes an entire paradigm shift away from recurrent and convolutional neural networks to become wholly reliant on the attending mechanism. The salient drawback of this model compared to the previous ones is that it is not computationally inefficient and yet amenable to parallelism. It further employs multi-headed self-attention and feed-forward layers to simplify the encoder-decoder framework in such a way that distinguishes relationships among sequences without the restrictions imposed by recurrence or convolution[6].

It has performed exceptionally well on various machine translation tasks and has set several

new records in the field. A "big" Transformer supervised the WMT 2014 English-to-German translation task, obtaining a BLEU score of 28.4, surpassing all previous results by more than 2.0 BLEU points, including ensemble models. Likewise, on the WMT 2014 English-to-French translation task, the score was 41.8, indicating an enormous margin over the best single model results. Most outstandingly, this was done with a significantly improved training efficiency, taking only 3.5 days on eight P100 GPUs, a drastic reduction in computation costs compared to earlier approaches.

The model's competence in translation alone shows how the Transformer has been adapted extensively to other sequence-related problems where longer outputs are often involved, such as constituency parsing of English. Therein, it scored an F1 of 91.3 when trained only on Wall Street Journal data, improved to 92.7 in a semi-supervised setting, aided by further additional corpus. Thus, the reviewed results underline the ability of the Transformer to generalize across different tasks by varying a few task-specific parameters. With inventive architecture and great computational efficiency, it has set forth a foundation model for natural language processing, resulting in new developments in summarization, question-answering, etc.

The audio transcription and summarization system introduced by Khonde, Shah, and Patel, in the 2023 issue of the International Journal on Recent and Innovative Trends in Computing and Communication, provides a radical step forward in meeting transcription and summarization. The proposed system combines cloud computing and Artificial Intelligence to provide a new way of documenting the meeting in the form of concise and personalized summaries including agendas, important takeaways, and action items. In turn, this would enhance communication and efficiency in organizations by providing users with a time-saving and productivity tool[7].

This solution is exceptionally scalable to fit organizations of any size, flexible in regard to being customized according to organizational needs, and most importantly-safe. This product is still under development, however, if developed it is anticipated to bring key changes in how companies, from small startups to big enterprises, deal with their meeting documentation. It is expected that the benefits include improving meeting productivity through clear and straight-to-the-point summaries, allowing the users to focus on action points, and bettering communication through a common point of reference for matters discussed at the meeting.

The paper also touches upon a complementary topic, "Text Summarization Using NLP" by Dhumal, Priyanka, Sutar, Sudarshan, Surve, Indraneel, Munawwar, Mirza, and Nanaware, Vishal. This paper outlines the problems predicted by information overload in today's digital society and the necessity for efficient methods in the extraction and presentation of core content. The authors propose an NLP-based approach concerning extractive text summarization with the underlying intent of increasing retrieval of content by weeding out trivial information yet retaining the major sense of the original text[8].

The methodology follows an extractive path with four stages: pre-treatment for cleaning the input text, sentence scoring for judging importance, sentence selection for extracting key content, and post-processing to ensure coherent summaries. All these together provide brief summaries that capture the essence of the original material. The method here expresses the applicability of NLP in solving the present-day issues of content overload and efficient information management.

In their article Towards End-to-End Speech-to-Text Summarization, Monteiro and Pernes concentrate on the challenge of large-scale audio-visual content, primarily broadcast news. They describe the limitations of conventional speech-to-text (S2T) systems, which adopt extractive summarization techniques that select key sentences from a transcript but often yield summaries that lack coherence and readability. In their view, the decline of coherence and Readability in these summaries must be compensated by more absorption of abstractive summarization systems, which are able to present adequate and fluent human-like summaries for audio-visual content. This current research proves to be an even more pressing demand with the rapidly evolving deep learning and large language models, marking a pivotal milestone in text generation.

The paper critique the so-called traditional cascade models that separate speech recognition from the summarization process, claiming these won't gather the necessary nuance and latent representations for effective summarization. To overcome these limitations, the authors thus suggest that an innovative end-to-end (E2E) model integrates together the speech-to-text transcription and the abstractive summarization all into one framework. One of the key contributions of the E2E model is the cross-modal attention mechanism, which tightens the link between speech features and corresponding textual representations. Thus, allowing the model to tap into so much-more-rich contextual information, which boosts the quality of the produced summaries.

The E2E model behaves under an encoder that comprises a 1-layer BiLSTM to process speech features and a 1-layer LSTM decoder for summary generation, whereas to tackle the low frequency of speech features, the authors apply a 2-layer convolutional network prior to the encoder for reducing the sequence length. This way, the model can stress the most pertinent parts of the input without overloading itself with processing irrelevant information.

In their experiments, the authors relied on a French broadcast news corpus to test the two different prototype systems: the cascade system and their novel E2E model. The cascade system exploits pre-trained Text-to-Text (T2T) summarizers and large external corpora such as MLSUM to perform speech recognition-independent abstraction. On its part, the E2E model is trained on the BNews corpus, favoring a much more integrated view of speech-to-text summarization at the cost of richness in context representations [9].

The paper-"Audio Summarization for Podcasts" of Vartakavi, A., Garg, A., and Rafii, Z. describes certain challenges faced in audio content discovery and recommendation systems in context to podcasts. These challenges abound due to distinctive characteristics of podcasts, including different voices of speakers, overlapping speech, background noise, and audio effects. Some traditional systems for summarization were built to handle structured text like news articles on a large scale and would thus hardly perform well in the nuanced and insipidly structured environments of podcasts. So, to overcome this, the authors propose the PodSumm-based system that generates audio summaries for the podcasts based predominantly on Automatic Speech Recognition (ASR) and extractive text summarization techniques [10].

In essence, PodSumm transcribes the audio of the podcast using ASR, while an extractive summarization mechanism reduces the transcript to smaller portions. Unlike the text-to-text summarization methods that only provide a summary, PodSumm provides audio summary generation by stitching selected segments of the podcast transcript. By preserving significant cues from the speaker's voice, production quality, and audio style, the mood and intention behind the original content are kept intact. The audio summaries thus provide a sneak preview, like a movie trailer, of the full episode to aid the listener in deciding whether to listen to it.

Lack of freely available data has caused the authors to prepare their own dataset containing manually annotated samples of selected podcasts and generated summaries. The authors

accordingly tuned the Transformer-based model PreSumm, which is basically a news summarization model, for the peculiarities of podcasts. The authors achieved a promising performance, obtaining ROUGE scores of ROUGE-1: 0.63, ROUGE-2: 0.53, and ROUGE-L: 0.63, indicating that the model was capable of extracting important aspects from podcast episodes and providing summaries of them.

2.2 Patent Search

Multi-Modal Voice Recognition System and Method for Conversation Summarization (Patent No. 18/540,594, Filed: 2024)

The patent deals with the methodologies and systems for summarizing any conversation in conjunction with multi-modality voice recognition inputs, which may include the following issues in real-time performance, bias, and sensitivity to context: here follow the salient features of the invention:

Core Features:

1. Conversation Data Segmentation:

Two main components of the conversation data include the following: media (for instance, audio, images, videos) and text. The division is so that different types of data can be focused on for summarization.

2. Machine Learning Mechanisms for Multi-Modal Analysis:

- Text Component Analysis: It help to addresses improving the topic modeling mechanisms on text by using a machine learning process. Thus, it discovers associated keywords that create a significant portion of the discussion.
- Media Component Analysis: This includes usage of another machine learning mechanism which will be responsible for identifying key words or components which are relevant to the conversation thread.

3. Key Element Extraction & Grouping:

- From media and text elements, key components are produced, which are crucial for the process of summarizing conversation.
- The key features are collated and subdivided into two groups: the first group is made up of the initial analysis, whereas the other group has additional important terms from both components.

4. Headline Banner & Summary Generation:

- **Headline Banner Creation:** The initial set of key inputs articulates into a headline banner, based on predetermined criteria. This gives a quick snapshot of the main topics under discussion, concisely and targettedly capturing that conversation.
- **Summary Generation:** Summary builds out of the second group of key elements. These have been drawn from more critical and expanded analysis. The selection criteria for such elements would always focus on their being accuracy and contextual relevance.

5. Real-Time Summarization in Multi-User Environments:

- Such a system is especially well suited for real-time applications involving multiple users in conversational settings, such as a messaging platform, where it is critical to effect immediate summarization.
- It is guaranteed that both media and text inputs participate in a fair and holistic summarization process.

CHAPTER 3

WORK DONE

3.1 WORKFLOW

1. Module 1: Audio Data Preprocessing

- Input: Raw audio data.
- Output: Segmented and diarized audio data ready for transcription.
- Steps:
 1. Collect and preprocess the dataset.
 2. Apply speech diarization to classify and differentiate speakers in the audio.
 3. Segment audio into manageable and meaningful chunks for further processing.

2. Module 2: Speech-to-Text (STT)

- Input: Segmented audio data from Module 1.
- Output: Text transcripts of the audio.
- Steps:
 1. Train and implement an STT model on the preprocessed audio.
 2. Evaluate model performance using metrics like WER and CER.
 3. Post-process the transcriptions with annotations to improve readability.

3. Module 3: Text Preparation for Summarization

- Input: Transcribed text from Module 2.
- Output: Clean and tokenized text ready for summarization.
- Steps:
 1. Prepare and tokenize the text data.
 2. Remove stopwords and irrelevant data.
 3. Perform data cleaning and format the text for model compatibility.

4. Module 4: Text Summarization

- Input: Processed text from Module 3.
- Output: Summarized text.
- Steps:
 1. Use RNN/transformer-based architectures to compile the text.
 2. Test and validate the summarization output for coherence and accuracy.

5. Module 5: Hardware Implementation

- Input: Fully functioning software components.

- Output: Hardware device capable of real-time recording and summarization.
- Steps:
 1. Design and implement a device with a microphone for audio capture.
 2. Incorporate a memory card for recording and storing data.
 3. Ensure compatibility with the software pipeline for real-time summarization.

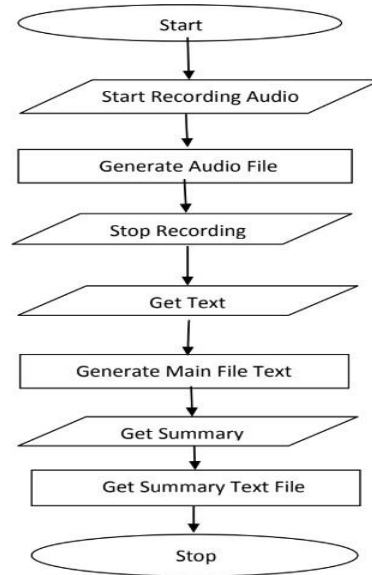


Figure 3.1 High level overview of Project

3.2 METHODOLOGY

1) Module 1: Audio Data Preprocessing

- a) Approach:
 - i) Leverage audio processing libraries such as Librosa or PyDub for noise reduction and normalization.
 - ii) Employ speech diarization tools like Pyannote or Kaldi to separate and classify speakers.
- c) Goal: Ensure the audio data is clean and segmented for accurate transcription.

2) Module 2: Speech-to-Text (STT)

- a) Approach:
 - i) Use pretrained STT models (e.g., Wav2Vec, DeepSpeech) or fine-tune models on specific data.
 - ii) Evaluate transcription quality with WER and CER.
 - iii) Add annotations using NLP libraries like SpaCy for readability enhancements.

- b) Goal: Convert audio to accurate text with minimal error.
- 3) Module 3: Text Preparation for Summarization
 - a) Approach:
 - i) Use tokenizers such as NLTK, SpaCy, or HuggingFace Tokenizer.
 - ii) Remove unnecessary text artifacts and normalize the data.
 - b) Goal: Provide well-structured text input for summarization models.
- 4) Module 4: Text Summarization
 - a) Approach:
 - i) Implement RNN-based methods (LSTM, GRU) or transformer models (BERT, T5, GPT).
 - ii) Fine-tune summarization models on specific domains if necessary.

Validate output using metrics like ROUGE or BLEU.
 - b) Goal: Generate concise and meaningful summaries from transcripts.
- 5) Module 5: Hardware Implementation
 - a) Approach:
 - i) Design the hardware with a microphone and memory module.
 - ii) Integrate the software pipeline into the hardware system.
 - iii) Test real-time recording and summarization capability.
 - b) Goal: Build a portable device for practical use.

3.3 Methods

The methods for speech to text conversion and text summarization can be divided into categories such as cloud based, Neural Network based and Transformer based. Using the combination of these approaches multiple architectures are created. Some of these architectures are PodSumm architecture [11] and BertSumm (transformer) architecture

3.3.1 Cloud based

The speech is transformed into text by cloud hosted advanced speech-to-text technologies by using sophisticated machine learning models. Alike Google Cloud Speech-to-Text, Amazon

Transcribe, and Microsoft Azure Speech Service offer integration and customization for transcription services, automated punctuation, identification of call participants, and support for multiple languages, both real-time and in bulk. They provide accurate services due to the presence of multi deep learning models on these platforms. Additionally, cloud-based services eliminate the need for local infrastructure, offering accessibility from anywhere, easy integration into applications, and the ability to handle large volumes of audio data efficiently. Though the cloud-based methods are effective over the time for the production use the cost of the services may add up and cost heavily with increase in the number of the consumers. Cloud based methods are best used for a small-scale project. These methods are easy to setup and implement due to them being heavily abstracted.

3.3.2 Neural Network

Long Short-Term Memory (LSTMs)

The paper [2] dives into the design and usefulness of LSTM systems, emphasizing their capacity to capture successive conditions in content information Through an examination of context- based text generation techniques, the author showcases the efficacy of LSTM networks in generating coherent and contextually relevant textual content. text generation models, highlighting their significance in tasks such as machine translation, dialogue systems, and summarization. Furthermore, the author presents experimental results and performance evaluations to demonstrate the effectiveness of LSTM networks in context-based text generation, paving the way for advancements in natural language processing and artificial intelligence research." Through a detailed examination of context-based text generation techniques, the author demonstrates the effectiveness of LSTM networks in generating coherent and contextually relevant textual output. The document outlines methods of incorporating contextual information into LSTM-based models, illustrating their use in machine translation, dialogue generation, summarization, and other fields.

Recurrent Neural Networks (RNN)

The paper [1] and [3] present us with structure of RNN network and its various implementations such as RNN Transducer. RNNs are ideal in tasks such as speech to text and text summarization RNNs have a unique perspective on speech because they continuously strive to convert audio features into text sequences. This enables them to transform audio

features into textual forms. Such an ability is advantageous as it allows a network to understand context in the spoken language. RNNs are therefore able to compensate for varying patterns of speech and pronunciation accents that may exist across different individuals. These transcribers are more effective for RNNs' greater transcription success increases their effectiveness in a broad range of applications including voice- command mechanics and automated transcription systems.

Deep RNNs also consists of various layers such as Connectionist Temporal Classification, RNN transducer which are decoded by a decoding function and its output is regularised using Regularization process Eq (1). The paper experiment on various combinations of the layer to find the most optimal and low error producing layer.

$$\begin{aligned} h_t &= \mathcal{H}(W_{xh}x_t + W_{hh}h_{t-1} + b_h) \\ y_t &= W_{hy}h_t + b_y \end{aligned} \quad \text{.....Eq (1)}$$

Hidden layer function in RNN

3.3.3 Extractive Summarization

The authors of paper [4] utilize Extractive summarization [8] to generate a text summary of the input text. The words in the text are usually split and made ready for processing as the first step. The next step is feature engineering, where relevant qualities are chosen, like creating a feature representing a word using word embeddings which encode words semantically in numerical forms. After this, a RNN, an LSTM network, or any other neural network model is implemented and trained on labeled data to understand how sentences correspondence to their context and how important they are. To sum up, the model processes every sentence independently and assigns each a score indicating how important it is in the context of the paragraph. After that, the scores are used to filter the sentences, and the highest scoring sentences are selected and put together into a summary that is not only clear but also comprises significant information from the original text. Finally, the selected sentences are organized and formatted to produce the final summary.

Transformer based

Generative Adversarial Networks (GANs)

The overview [2] comprehensively explores the application of GANs in creating literary

substance, highlighting their potential over different spaces. The GANs are built over the top of transformers [6]. By analyzing the basic standards and designs of GANs in content era, the overview illustrates the points of interest and challenges related with this approach. Assessment strategies particular to GAN-based content era, along with relevant evaluation measurements, are examined to evaluate the quality and coherence of created content. Moreover, the study addresses eminent progressions, rising patterns, and future investigate bearings in leveraging GANs for text generation, underscoring their importance in progressing the field of common language preparing. The overview fastidiously analyzes the utilization of GANs over a range of text generation assignments, counting language modeling, dialogue generation, and story generation. By dissecting the engineering and preparing methods of GANs in text generation. The study explains the challenges and openings characteristic in this approach.

Two-Stage Transformer

In the paper [5], the authors proposed and created a two-stage approach using the transformers [6] for variable-length summary has been proposed. Initially, the text segmentation module makes use of a pre-trained BERT and a bidirectional LSTM network to segment the input text. Next, BERTSUM or the BERT based extractive summarization model is constructed in order to perform the essential task of extracting the most salient sentence from each segment. With respect to training the two-stage summation model, the first step would involve employing the extracted sentences to train or language build the document summarization model depicted in the second stage. Thereafter, the extracted segments are used to train the specific summarisation module depicted in the first stage with the consideration of the outputs of this module and the documents summarisation module from the second stage. The parameters defining the segment summarization module are perturbed based upon the cumulative loss scores of the document summarization and segment summarisation modules. After this stage of training, an alternate training method termed as collaborative training is performed in which the parameters defining the segment summarisation and documents summarisation modules are trained repeatedly until the parameters converge. To test the framework the outputs from the segment summarization module are integrated, to produce variable-length, one-shot, abstractive summary. For evaluation, the BERT-biLSTM- based text segmentation model is evaluated using ChWiki_181k database and obtains a good effect in capturing the relationship between

sentences. Finally, the proposed variable-length abstractive summarization system achieved a maximum of 70.0% accuracy in human subjective evaluation on the LCSTS dataset.

Dual-encoding using transformer

Recurrent neural network-based sequence-to-sequence attentional models have proven effective in abstractive text summarization [8]. In the paper [7], the author has proposed a model for abstractive text summarization using a dual encoding. The proposed method employs a dual encoder including the primary and the secondary encoders. Specifically, the primary encoder conducts coarse encoding in a regular way, while the secondary encoder models the importance of words and generates more fine encoding based on the input raw text and the previously generated output text summarization. The two-level encodings are combined and fed into the decoder to generate more diverse summary that can decrease repetition phenomenon for long sequence generation. The experimental results on two challenging datasets (i.e., CNN/DailyMail and DUC 2004) demonstrate that our dual encoding model performs against existing methods.

PodSumm Architecture

PodSumm first generates a transcript of the podcast audio using an ASR module and parses the text transcript into individual sentences [10]. It then uses a text summarization model to select relevant sentences, along with their time offsets in the audio, and generates the final audio summary associated with the text summary. Each stage is discussed in detail below. 1) Automatic Speech Recognition: ASR methods perform the task of automatic speech-to-text transcription. As the purpose of this work is not to develop a new ASR system or improve on an existing one, we choose to use a well-known and publicly-available solution

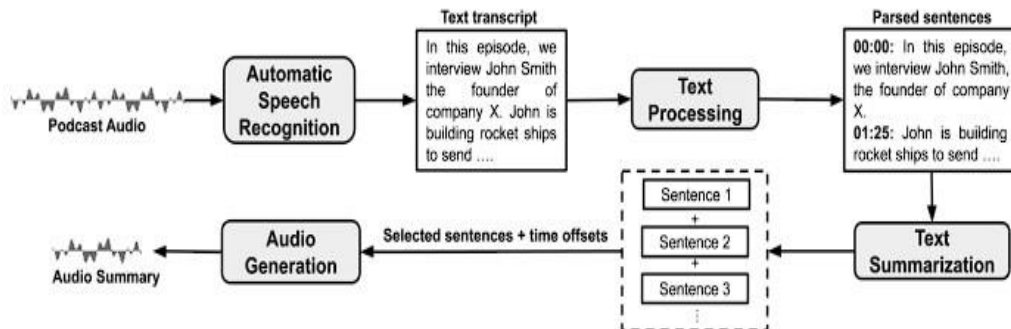


Figure 3.2 PodSumm Architecture

for this task, namely AWS Transcribe. 2) Text Processing: The transcripts obtained from the ASR module contain the text for the individual words and punctuation marks, their start and end times in the audio, and their confidence scores regarding the prediction. The author chooses to use an open- source library for NLP, namely spaCy3, to parse the text into individual sentences with their corresponding start and end times. Additionally, they force a sentence break when a pause of over two seconds between words occurs. 3) Text Summarization: We generate text summaries by selecting relevant sentences from the transcripts, using automatic extractive summarization. They used the recently proposed Pre-Summ4 model [10], which builds upon BERT [10] to obtain a sentence level encoding, and stacks inter- sentence Transformer layers to capture document- level features for summarization. The final trained model showed the best performance (ROUGE-L F- score of 0.64) in comparison with the baseline method (ROUGE-L F-score of 0.52).

Table -3.1: Various methods applied for Speech-To-Text

S. No.	Technique Used	Description
1	Automatic Speech Recognition, HMM model and human machine interface	The paper studied the deployment of STT by HMM and suggested to develop a machine interface system that depends on voice. The system could be deployed for helping 2 types of users: • People with disability who cannot access their email through use of mouse and keyboard, this category of users will be benefitted by the usage of a Speech-to-Text conversion system. • People who do not understand English or are not efficient in English and feel good to communicate in their native language i.e. English, Punjabi, Hindi.

2	MFCC and HMM	[4] Proposed a STT system replacing traditional MFCC with HMM. The conventional MFCC approach was less efficient in extracting the features from the speech signals hence a new approach was suggested using HMM. The features passed to the HMM network resulted in better feature recognition from the input audio in contrast with the MFCC method. HMM exhibited vast improvement in the quality of feature extraction from the audio resulting in better computational time and accuracy for a Speech-To-Text conversion system.
3	Text processing, Text- To- Speech (TTS) synthesizer, Speech Enhancement	[10] Suggested that Test-to-Speech synthesizer is developing rapidly from past few years to gain the current shape. The most suitable methods for TTS are Formant, Articulator and Concatenative synthesis. Even in India some research organizations are also working on Text-to-Speech in regional languages like Marathi, Hindi, Telugu, Punjabi, Kannada, so on. A vast scope of improvement can be achieved in TSS synthesis to obtain a good amount of natural and emotion aspect.
4	S2T summarization	S2T summarization systems help by identifying the most relevant content within human speech and producing a condensed form text suitable for the need. Extractive summarization selects relevant sentences or paragraphs from transcripts, but this method may sometimes lack cohesion and readability [6]. S2T summarization is usually achieved using a cascade

		approach, where an automatic speech recognition (ASR) model generates transcripts, followed by a text-to-text (T2T) summarization model that produces summaries [18].
5	BERT and Bidirectional LSTM	[5] The variable-length abstractive summarization model is divided into a text segmentation module and a two-stage Transformer-based summarization module. The proposed text segmentation module, which utilizes BERT and Bidirectional LSTM, shows improved performance over existing methods. The two-stage Transformer-based summarization module combines extractive and abstractive methods to produce fluent and variable-length abstractive summaries.
6	Machine Learning, ANN ASR, Cuck Search Algorithm	[10] The paper summarizes the basic processes involved in a STT system which covers architecture of ASR(Automated Speech Recognition). The main focus for this paper is using Machine Learning in ASR, SVM, ANN with Cuckoo search algorithm along with ANN and back propagation classifier. The basic phases like: pre-processing, extraction of features and classification, of the STT system are studied by using machine learning. According to the generated results Hybridization of an algorithm with an optimization technique is considered better technique, traditional classifier results can be further improved by doing hybridization of it with other algorithms for optimization.

7	RNN and Sentiment Analysis	The structure of RNN network and its various implementations such as RNN Transducer. RNNs are ideal in tasks such as speech to text and text summarization. RNNs have a unique perspective on speech because they continuously strive to convert audio features into text sequences. This enables them to transform audio features into textual forms. Such an ability is advantageous as it allows a network to understand context in the spoken language [1]. RNNs are therefore able to compensate for varying patterns of speech and pronunciation accents that may exist across different individuals. These transcribers are more effective for RNNs' greater transcription success increases their effectiveness in a broad range of applications including voice-command mechanics and automated transcription systems [3].
---	----------------------------	---

Eliminating extraneous sound is very important for improving the quality of speech-to-text systems. This improvement also enhances the clarity of noise, is accomplished using the pydub library for loading and handling audio and noisereduce for applying spectral gating, which reduces undesired background noise. The audio is first converted into a numpy array, enabling noisereduce to analyze and suppress lower-intensity frequencies associated with noise, while preserving key speech elements. The cleaned audio is then saved in a compatible format for further processing, ensuring clearer transcription results.

Noise reduction is crucial for STT systems, as background noise lowers transcription accuracy. Using spectral gating methods with noisereduce enables targeted suppression of noise frequencies, improving the signal-to-noise ratio. This ensures that speech is clear and more precisely transcribed, especially in real-world noisy environments.

Segmenting audio into smaller, manageable chunks optimizes processing efficiency and enhances transcription accuracy. By dividing longer audio files, we can handle memory constraints better, allowing for smoother performance in STT processing.

Audio segmentation is particularly beneficial in reducing processing load for long recordings and improving STT performance. Shorter audio segments reduce the risk of memory issues and make it easier to handle turn-taking or silences in multi-speaker scenarios, leading to clearer, more organized transcriptions.

Speech recognition and diarization are conducted using WhisperX, which transcribes audio and identifies speaker turns with timestamps. This enables accurate differentiation between speakers and assigns precise start and end times for each segment, making the STT output useful for multi-speaker environments.

Table -3.2: Various Models for Transcriptions

Technique	Description	Advantages	Limitations	Example s/Applic ations
Hidden Markov Model (HMM)	Statistical model that Uses Probabilities to predict sequences of sounds to words.	Well-established, simple, and interpretable .	Struggles with noisy environments and diverse accents.	EarlyAS R systems, dictation software.
Gaussian Mixture Model (GMM)	Used with HMMs to model different sound distributions.	Improved acoustic modeling over pure HMMs.	Sensitive to variations in accents, noise, and requires large datasets.	Used in early versions of Siri, Google ASR.
Recurrent Neural Networks (RNN)	Neural network that processes sequences, making it suitable for speech.	Better at capturing sequential dependencies than statistical models.	Struggles with long- range dependencies and complex speech patterns.	Real-time speech recognition, language translation.
Long Short-Term Memory (LSTM)	A type of RNN designed to retain information over long sequences.	Handles long-range dependencies well, robust in noisy environments.	Computationally intensive, difficult to scale to large datasets.	Used in real-time transcription, virtual assistants .

End-to-End Models	Models like transformers that directly convert speech to text without intermediate steps.	Simplifies pipeline, high accuracy, adaptable to multiple languages.	Requires large datasets for training, may struggle with low-resource languages.	Wav2Vec, Deep Speech, automated transcription services.
Transformer - Based Models	Deep learning Models that process entire speech sequences in parallel.	High accuracy, faster processing, adaptable to various accents and dialects.	Complex to train, resource intensive, large data requirements.	Wav2Vec 2.0, Google's Speech-to-Text API.
Cloud based Models	Cloud based speech to text model provided by various	Achieves high accuracy in transcribing audio into text, making it suitable for various applications.	Limited customization options are available; also relies on a stable internet connection for optimal performance.	Google Cloud Speech-to-Text, Amazon Transcribe, Microsoft Azure Speech Service, IBM Watson Speech to Text.

The comparative analysis of text summarization technologies presented in the table reveals a diverse array of approaches, each with its unique strengths and limitations. The table below list the most common used algorithms for text summarization.

Table -3.3: Various methods applied for Text Summarization

Year	Algorithm	Key Developments	Pros	Cons
2016	Rule-based Systems	Utilization of linguistic rules and heuristics for text generation.	Offers transparency and interpretability in the generation process.	Scalability is limited; crafting rules manually can be labor-intensive.
2017	Hidden Markov Models	Application in both speech recognition and generative tasks.	Established approach with a wide range of applications in text modeling.	Struggles to capture complex dependencies between words or phrases.
2018	Recurrent Neural Networks (RNN)	Enhanced mechanisms for improved context modeling, specifically for sequential data.	Effectively manages and processes sequential information, making it suitable for text generation.	Prone to issues like gradient vanishing; slow convergence during training can hinder performance.
2020	Generative Adversarial Networks (GANs)	Introduction of improved training techniques to enhance model stability.	Capable of producing diverse and realistic text samples that mimic human-like generation.	Often faces challenges related to training instability and mode collapse, which can affect quality.
2021	Long Short-Term Memory Networks (LSTM)	Advanced architectures focused on capturing sequential dependencies in text data.	Effectively retains context over longer sequences, improving performance in tasks requiring understanding of continuity.	May still struggle with very long-term dependencies, leading to loss of information over time.

2022	Facebook's BART Model	Utilization of a transformer-based architecture specifically designed for summarization tasks.	Produces coherent and concise summaries, enhancing readability and comprehension.	Requires significant computational resources and can be complex to train effectively.
------	-----------------------	--	---	---

3.4 DESCRIPTION OF DATA SET TO BE USED

Mozilla's Common Voice is an open dataset with the purpose of making voice recognition better, especially for minoritised languages and accents. Volunteers individually contribute to the dataset by either reading a sentence to the camera or selecting a video of someone else reading a sentence aloud, making for a variety of videos. It contains more than one hundred different dialects, including English, Spanish, Hindi, Welsh and Tamil to name only a few; all the contributors are native speakers to provide a great variety of accents. Data for sentence level includes the sentence text, age, gender, accent of the speaker, length of the individual audio clip and the file path. The dataset is in the form of folders containing audio files and .tsv metadata files that document validated, unvalidated, and discarded clips. Available to use commercially and non-commercially without the need for attribution, the Alzheimer's Research & Reports is published under Creative Commons Zero (CC0) license. The Common Voice dataset serves various needs such as use in speech-to-text broadcasting, text-to-speech, speaker recognition, and for making the content accessible by visually impaired individuals. The advantage is it is diverse, open-access, covers numerous languages and is frequently updated, the disadvantage is that some recordings contain background noises, contributors may have certain biases, and the database may not be large enough for languages which are not used widely. From the [Common Voice website](#), researchers and developers can download the dataset and through the [Common Voice platform](#), others can record or validate sentences.

client_id	path	sentence
00778b93611e5c3551c3769f0b90f0c7a08476ad6f0e1176386783c40b2167959032db674e7b7259e4026d5e98048e48adb903a3c97977945e7c0	common_voice_en_37476269.mp3	This led to both the Red Terror and the White Terror.
023a5efca835ad913925057277485fae96a78970633582ab31d8c3d3e9f02678889b672ae00c985c52e4e5e435411bb98dbd163f0a7229e2	common_voice_en_37406282.mp3	Its members include representatives of the teaching staff, students, and the parents of students.
02efbf700a190d3114277b05e1ad000503fcd215e31d258e1a1165115ceaf9eb7062d8011e827c7a1543035958953958386a3c4d5218685572e1758	common_voice_en_37740889.mp3	Paper wine labels have long been collected.
0336e9f26039240c3e5a9074c9580a5928dbcd40c426a8e77172a22337f04331c0f41578ca13f059ac492569648e7ab7bdc49ed410cc6e5492644	common_voice_en_37355311.mp3	I wondered if those birds were redwings?
05627b7a6641caab6b1137282049699805e901b5c54e1eb4a436429c357cde4c5a663f0eb793726a3ac95259591686a6774757c12084d717729	common_voice_en_37442699.mp3	Henry Heimlich also promoted abdominal thrusts as a treatment for drowning and asthma attacks.
064e6793d5002997b73680cb3a0e971b159582226a846753654893e0f7208baa5475a12940388ae711b067dbaae5012049e6f01020911a52e4f66	common_voice_en_37538724.mp3	Bonafack was born in Chigwell, Essex.
0606671a9808b0de8e6578bc34735c223ac2dbd89f1c0a25ee6e60fab290c84151930960951807cabea4d15942539866571c600130b7570738c15ca14	common_voice_en_37607972.mp3	The number of chime sets matches the number of quarter hours that have passed.
07a3550eb852640c7167535aa83a8043f99b9959d300e5621a717945e53828d067146e7edfbc0f48a0a048493ac03ff2ac5e98c287b637115fe9	common_voice_en_37329538.mp3	Subsequently, an anterior approach was introduced.
0a8dc825942b9202aac7f6658998365733649430bae4570cc2109dc40c3c495949f16742f43031549745ab4f632b20192b19000e5cb609f15e2eb0666f	common_voice_en_37437567.mp3	The Atbara flows only while there is rain in Ethiopia and dries very rapidly.
0bc3f8cc2c5db590a973271677086b048b1847ad773979d352b302e911090685f68bc422978e54759551dca89947000b3b8e550000710530772e6d	common_voice_en_37431810.mp3	He devoted the rest of his years to Saint Thomas.
0e5996008a0275d6e03737f6e6c6858671a09f54007241281245af0ec6da1b0496607c12839a62792bae8c812331b6e6ac488c4f413394f846c2ce53	common_voice_en_37288403.mp3	Katsande and her son were accused of voter intimidation.
0fe76789ca23961fa05db51c6b515be32a07212e9a4805afae41489300253594fedeaa504701cc8e7643ae9d94c2d9c998986e2ebdae222359f080	common_voice_en_37654589.mp3	Later they were thought to be deposits of volcanic ash or streaks of dust.
112c03116a240026097e952af05fcbef4971d11f66dc3e190901715775daab04d1c91894dc9644e58700f80c1c50ad834a8b8aac39134eb045a706339	common_voice_en_37308834.mp3	Data was stored in big-endian format.
122a08f09b231f5f858a154042177519e5cf0a66594d0f4392361d0bf5066ab77973800a6fae0bf0d41d04afaf07d61d7aaef40e7caf8784a33eb9fc	common_voice_en_37597195.mp3	The Tourist Information Center is run by the Vinden Chamber of Commerce.
13c54120a460e0fc7971c40a4a08642d70a16175c02488eae0472ff5c56a801546f31bd1945094c0fe045c7a79d1a3f0eds3dc2c73cf6641b3f731	common_voice_en_37569251.mp3	Many of these stands were never cleaned for agriculture.
1566a28022c0a2e0d0a1bee73b49af004a9a18c024109156632dc68ba0e0efc52701150fafc5426b75a1f0108f597f7130452333f3d4f80c32f0b	common_voice_en_37389720.mp3	Gluck is grandmother to actress Stephanie Zimbalist.
175e5f9470421000f8371221f1763b61e9f570b0243208f57f5c374ad696625299a37d2ae9f837171d6611e11e67430e95265c5aaf695072677bc97	common_voice_en_37840118.mp3	Another village is the Aldabra Research Station on Aldabra.
17ea9722a7d39c2d80af5f68944dc163274610f57b0bc389a78747801f3096156dcfe8943956467bdc33324423730c5661e72a3b0c02f8af5aa0ea0e2e	common_voice_en_37398637.mp3	Birds from humid regions are darker than those from dry regions.
18959416230570648273abcb9f5dc5f97c12f2bf2127c055780121e568074686193914c7358678b0eb087646aabb880118a2c45185e0e4f8552079	common_voice_en_37798232.mp3	He constantly overeats and watches classic movies, and his hero is Ward Cleaver.
1a6e4c9bac62b2c780b86c444cd958288a720a7f3a33ab64bdc199348356db54956debec1c8756802d9b34fe1c1e5592516afe14c236e377717f6f	common_voice_en_37614458.mp3	She has written about it in "The Sun" and in "Pensions Week".
1af0cb2c9f0640005b20863315995dc0c771294655519e09cc2d9bdc45606085f0a27202021a3db638b20738f5709613c1144eaf302a114c13c	common_voice_en_37879195.mp3	The helicopter manages to land on the plateau and extract Swann.
1ea509cc354540510cc140a3780c1080e212294b014e076764f83422ebefadfe7abeb31b5a029c2997975976747043a09041bf1968f938ef78c3d8bc89064	common_voice_en_37323803.mp3	Jef Raskin jokingly stated: Yes, we named our software after a bug.
1ecd97a3ac38e3c596128f9c2121f1bca0f3d6c8378a302c77a9941c26cc3301884567ade64a4592533c34ebc27ee8ba6f181acff0b2b032440c385f	common_voice_en_37799330.mp3	Archaeological evidence and old drawings indicate that many more once existed.
1e08d5f7e18d1c6d707b18771346467e07b17364c7c0f3c86dab5ae58c6a21ef93a193d13c2cc51676cd0c1cc4501c1a2569c992618aefbc2a9220398	common_voice_en_37433497.mp3	A basketball was too heavy while the basketball bladder was too light.
203fbac8c5cf092a21c34f0eb3350ed7c3847c3545d0e7ad642d4efec83cc29c7530e477a31c4932c6900c933eb8ab6d5b0b18a9ca50b5c05d54860e	common_voice_en_38006516.mp3	Todman was born and raised in the United States Virgin Islands.
2087eba8cf95f170842c02867fb3e3adeae68185045e7d8fa373d104f89005e747563a0aa8dc517bd7f92d8003330a3e060ab0986c99eb8dbd40a	common_voice_en_37506916.mp3	It was the first and last time Hitler watched a football match.
22c0c38a5ef3849361b281814942f99a084608c185d9a0b7e9ef3a7e4e5c54e824dc34584952e2e45c49b0b6f69948a950f0a0cf3f7322aeaf6b	common_voice_en_37463815.mp3	The book contains Coleridge's celebrated and veered distinction between "imagination" and "fancy".
23c57e2ba3e0918e4855a95f080ad3686997704cf9f635d14252e04ce42c784dc0f80ae47f10538736799d899035429933c5e82c46d0a52cad05dc41b17	common_voice_en_37344370.mp3	He was introduced into silver screen by Wilson Karu.
2461c02183039faaa3cc176402211583e724a80af92575093376a399093702a1ab0be00f0ef92859d300a6rebb12507b5877361da0e0574185d67a97	common_voice_en_37432703.mp3	His internal organs were sent to the church of Saint Martin at Halle.
27459c808cb85eb517547e44a480bae26dedd9d75e0d465dc1ff088e1da85147ec511905402eaa6c3b8961a4a0ca3278b372b247af53c8038adacae9ba	common_voice_en_37511524.mp3	Mech looks at high-tech policing in the future.
29562069a5048e67b8386a55d0ca21700d4f199f0af4d34144a7096c27e655bca721d29a9e702026c195d1e58d73124f242420a4d0593f00ce6039a968	common_voice_en_37559211.mp3	He had six children, three boys and three girls.
2b902a13adcc7e5495578ebcc9e19334971271735e07355f66d742ef38d241a9eb33e548f388237649ee1e967760780715d10c0e4dc3599be1	common_voice_en_37475392.mp3	He gives you confidence.
2c1f669c127670d64069a28617027cb3471c9064c18348196b6641dcb471235742351b955a794c349615b2ca2c1ca0a5097972a25d9771f58f5c6667	common_voice_en_37617995.mp3	Morgan received Figure along with two other horses as payment of a debt.
2cfd0d76d75623f2421185b6d4640b7c3dedeeaa1ca8040f94bbd720535cabc2eeab415e0a3394c461a3e4c340ed0c5a0a0c420e45447387703	common_voice_en_37543489.mp3	Amateur champion who went on to play the Champions Tour.
2d49e6098936537f5f8121526b2d495346b7d687f9150532a4f6959454cebeed0a52b386181f0ebd086680e9738a880834001343075400c10495f5939	common_voice_en_37553048.mp3	In her complex nature it is perhaps possible to detect the original nucleus.
2edf2d51ce320a40f454b1ee0f81f71243a991d888f0f3654c4cc0c48c258a8da00c23619939f99eab9d7eeb2a5f163ed381c5548c0846d80	common_voice_en_37778073.mp3	You come into the world and then you go.

Figure 3.3 Dataset CSV file

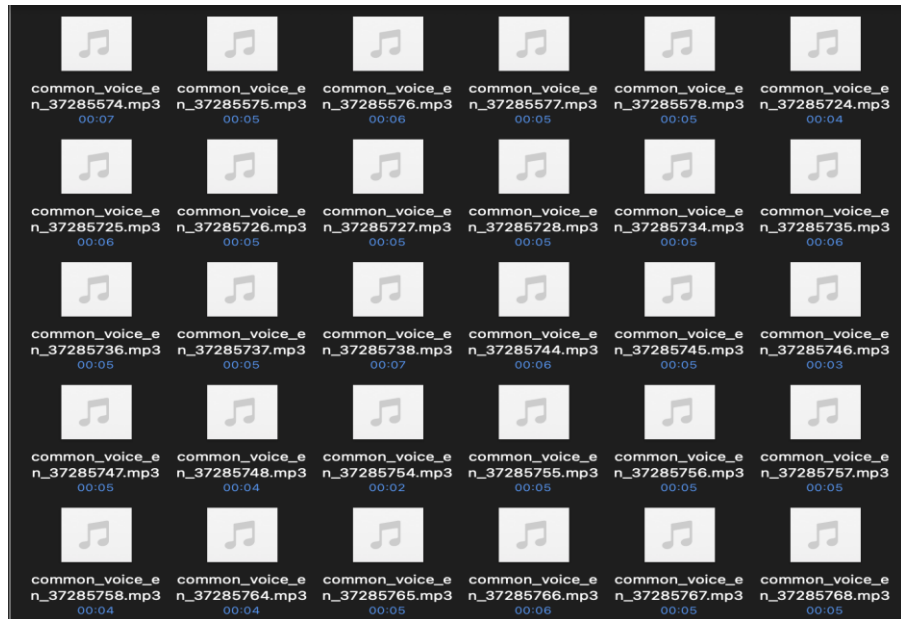


Figure 3.4 Common Voices audio data

3.5 PLAN OF PROJECT

The research goal concerns a combined concept of the multimedia platform with STT and text summarization in five stages in total. The paper specifically describes the first two phases:

3.5.1 Audio Preprocessing

This phase focuses on preparing audio data for effective processing:

- Noise Reduction: Employing spectral gating through the noisereduce library in an endeavor to enhance Signal to Noise Ratio (SNR).
- Audio Segmentation: Slicing long formats of audio files into usable portions with Pydub.
- Silence Detection: The scheme for natural segmentation: finding probes with silence periods longer than 2 seconds.
- Memory Optimization: Long recordings taking considerable record amounts of time must be able to be processed in an efficient manner.

3.5.2 Speech Recognition and Speaker Diarization

This phase handles the conversion of audio to text with speaker identification:

- WhisperX Implementation: Using an enhanced STT model derived from the OpenAI's Whisper.
- Time-Aligned Transcription: Audio segregation for ideal timestamps for the segmented audio..
- Speaker Diarization: It involved speaking and listening/speech recognition when counting the number of speakers and naming them correctly.
- Manual Verification: The analysis of differences between the obtained results and reference data.

3.6 ARCHITECTURE

3.6.1 WhisperX (PROJECT MODEL ARCHITECTURE)

Whisper is an ASR system developed on 680,000 hours of Multilingual and Multitask Supervised data from the web. Thus we prove that the utilization of such a great amount of data differentiated coming from various sources results in higher stability concerning accents, background noise, and specialist terminology. Furthermore, it allows the taking of transcription in a number of languages as well as translation of those languages into English. In order to have a practical impact and to facilitate research endeavors for making speech recognition more resistant to adversarial perturbations, we are releasing the models and the implementation of the inference

code at the present time as open-source.

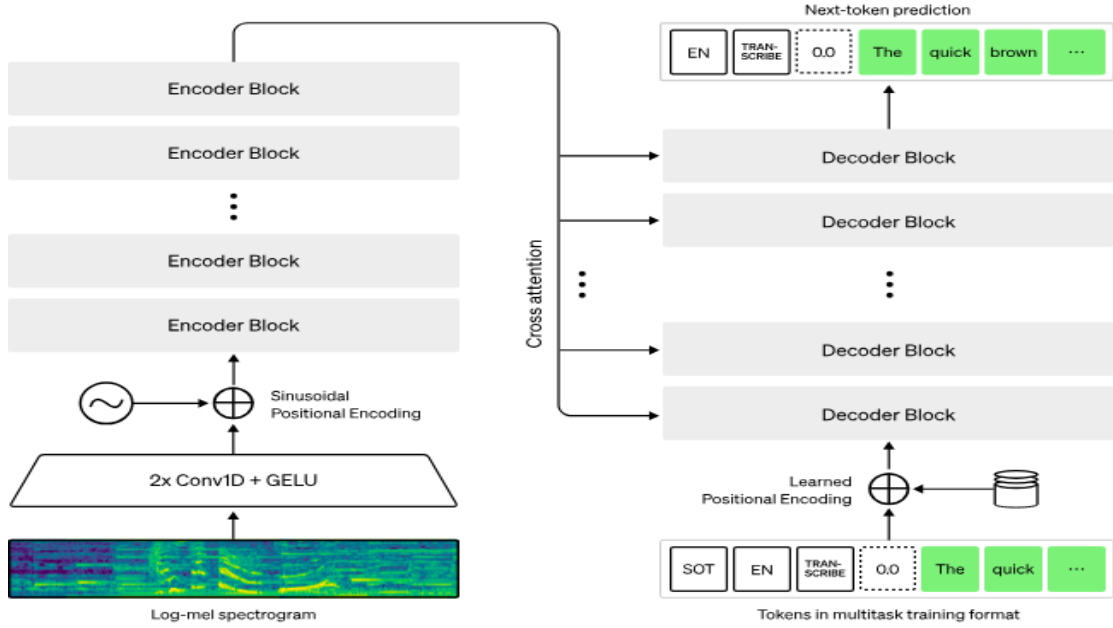


Figure 3.5 Whisper architecture

Whisper architecture is the straightforward end-to-end method that was proposed with an encoder-decoder Transformer. The input audio is divided into 30 second segments, Have the spectra computed for the segmented audio by converting the segment into a log-Mel spectrogram, Then the output goes through an encoder. A decoder is trained to anticipate the associated text caption which is blended with numerous special tokens that steer the single model to perform some of the tasks as follows- language identification, phrase-level timestamps, multilingual speech transcription, and to-English speech translation.

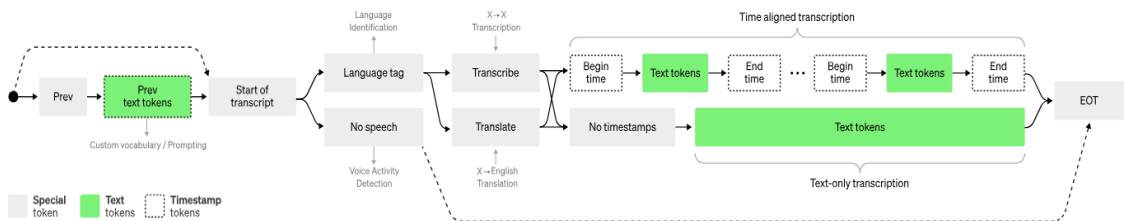


Figure 3.6 Phrase-level timestamps, multilingual speech transcription, and to-English speech translation

.Other prior strategies often employ smaller and significantly more focused training corpora,^{1 2, 3} or apply large but general audio training.^{4, 5, 6} That Whisper was trained on a huge and diverse data set and was not further optimized toward LibriSpeech shows why Whisper does not outperform models designed explicitly for that task, which is a favorite for demonstrations of speech recognition prowess. But, when we diagnose the performance of Whisper in the zero-shot setting for numerous various datasets, we note that it is significantly less erroneous and makes 50% fewer mistakes than those models. A portion of Whisper’s audio dataset is in a language other than English, which is sometimes asked to transcribe in the language of origin or translate into English in the other. we call this approach learn.trans and observe that it is especially suited to learning speech to text translation and surpasses the supervised SOTA for single run translation from CoVoST2 to English zero shot.

3.6.2 Wav2vec 2.0

Many transformer-based neural networks are now being used in the field of natural language processing, but they are still relatively new to the speech processing community. Wav2vec 2.0 is on track to disrupt it. Unlike BERT, it does not use a masked language model training objective but instead has one that is specific to speech similar to what the Transformer’s encoder has.

This new method allows for efficient semi-supervised training: that is, first, obtain a large amount of speech data which are not accompanied by specific labels, and later use a smaller labeled set to fine-tune the initial model. The original paper of wav2vec 2.0 further showed that by fine-tuning the model on only one hour of labelled speech data, it significantly outperforms all previous state-of-the-art systems trained on 100 times as much supervised data.

Wav2vec 2.0 Pre-training

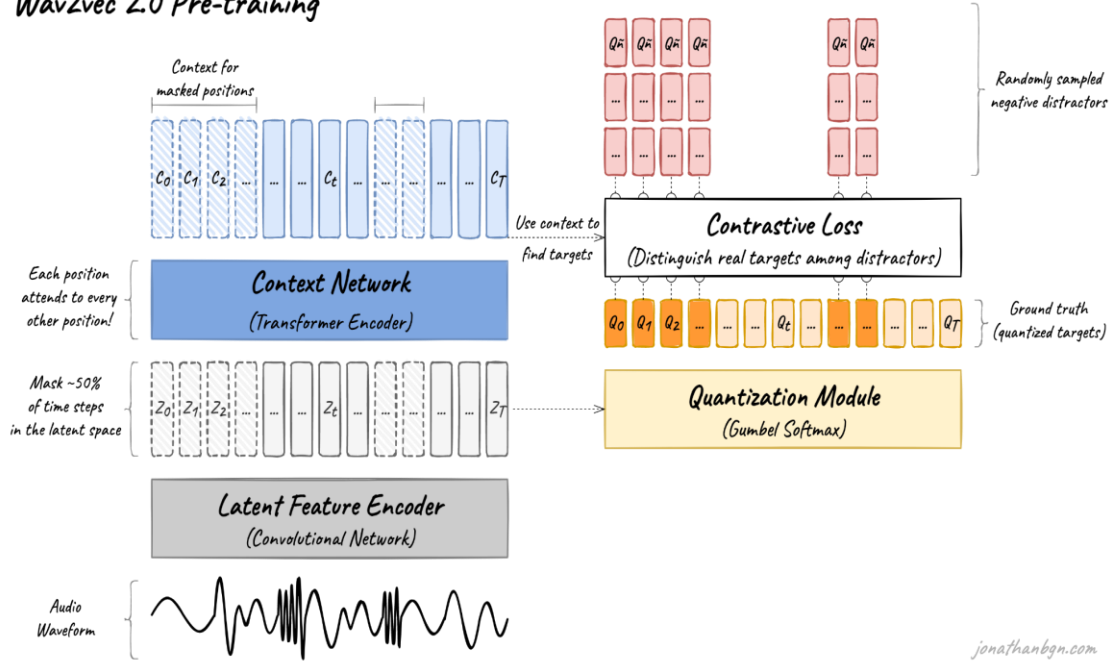


Figure 3.7 wav2vec 2.0 architecture and its pre-training process

In this work, we have provided an introduction to the wav2vec 2.0 model and a brief overview of its pre-training. There are four important elements in this diagram: The feature encoder, the context network, the quantization module and the contrastive loss (pre-training loss). Let's open the hood and explore each one as a way of understanding it in detail.

● Feature encoder

The feature encoder's job is to reduce the dimensionality of the audio data, converting the raw waveform into a sequence of feature vectors $Z_0, Z_1, Z_2, \dots, Z_T$ each 20 milliseconds. Its architecture is simple: a 7-layer convolutional neural network (single-dimensional) with 512 channels at each layer.

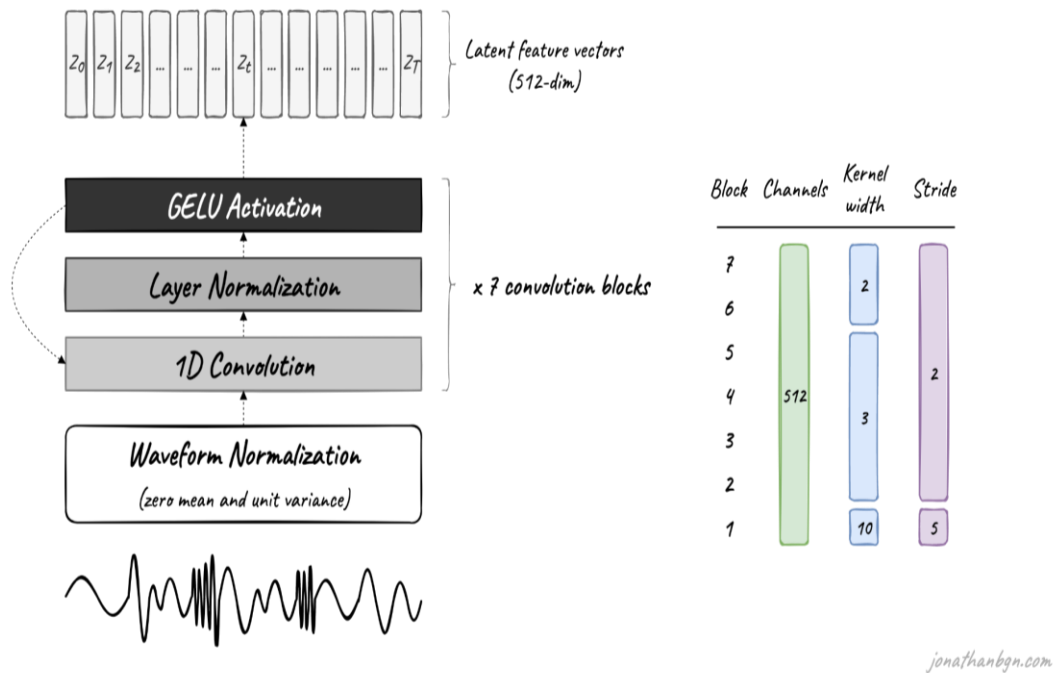


Figure 3.8 Wav2vec 2.0 latent Feature Encoder

Calculate the waveform prior to transmission through the network. Decrease the kernel width for the convolutional layers and the strides before one gets higher into the network. The feature encoder can thus have a total receptive field of 400 samples or 25 ms of audio (audio data encoded at a sample rate of 16 kHz).

That ends our journey through wav2vec 2.0 with the pre-training process. The form produced will ultimately be pre-trained for many speech downstream tasks such as automatic speech recognition, emotion detection, speaker recognition, language detection, etc. The model was then directly fine-tuned - by the authors of the original paper - for speech recognition with a CTC loss that included a linear projection on top of the context network for predicting a word token for each time step.

3.7 Hardware Components

1. SD Card Reader Module (SPI-based) - 1
2. Micro SD Card (8GB - 32GB, FAT32) - 1
3. USB Mini B Cable - 1
4. USB Power Bank (2000mAh - 10,000mAh) - 1
5. Breadboard -1

6. Jumper Wires (Male-to-Male, Male-to-Female) - 20+
7. Tactile Push Buttons - 3
8. LEDs (3x, Red/Green/Blue, 5mm) – 4
9. Resistors:
 1. 220Ω – 6 , $10k\Omega$ - 6
10. Capacitors:
 1. $0.1\mu\text{F}$ (104) Ceramic Capacitor - 2
11. MAX9814 Electret Microphone Module – 1

Components :-

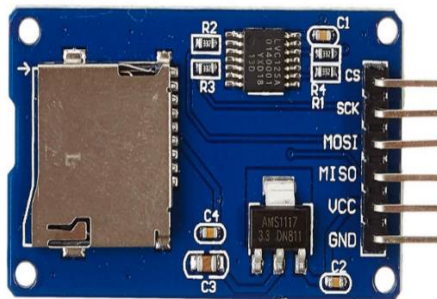


Figure 3.9 MAX9814 Electret Microphone Module

MAX9814 Electret Microphone Module – The MAX9814 Electret Microphone Module is an audio microphone amplifier optimized for audio detection tasks due to its low-noise and high-gain characteristics. It includes automatic gain control (AGC) to ensure output levels are uniform which helps in bringing out all sounds clearly regardless of the activity in the background.

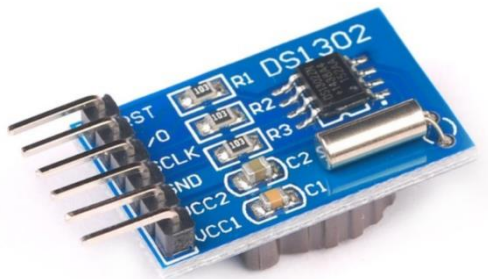


Figure 3.10 DS1302 Real-Time Clock (RTC) Module

DS1302 Real Time Clock (RTC) Module + CR2032 Battery: This module is one of the most popular and preferred RTC modules in the world due to its efficiency. It allows the user to keep accurate time and date even when the main system is powered down. This is possible due to the built-in CR2032 cell battery which ensures that time is kept, even when there is no external power.

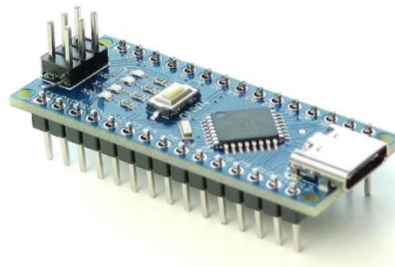


Figure 3.11 Arduino Nano (ATmega328P)

Arduino Nano (ATmega328P) – The Arduino Nano (ATmega328P) is a compact, breadboard-friendly microcontroller board based on the ATmega328P chip. It offers digital and analog I/O pins, making it ideal for small-scale embedded system projects with limited space



Figure 3.12 SD card: portable

sdcard- An SD card is a compact, removable storage device used to store and retrieve data. In embedded systems, it is commonly used for logging data, storing files, or interfacing with microcontrollers for extended memory.



Figure 3.13 USB mini B Cable

UsbMiniBcable - The USB Mini B cable is used to connect devices such as Arduino Nano with the computer for programming and charging. It permits data exchange as well as serial communication between the microcontroller and the computer.



Figure 3.14 Breadboard

Breadboard - A breadboard is a reusable, solderless prototype board that functions as a sub-assembly of electronic components for individual or multiple prescribed tasks designed to facilitate one or more users in any of operational testing. It allows easier arrangement as well as removal probing of various elements.



Figure 3.15 DSI302 Male To Female wire

MaleToFemalewire- Used to connect two parts of an electronic device or to link between a breadboard, several modules or sensors like cameras. They are essential to provide an easy and rapid connection for schemes in different levels that are under development and modeling.



Figure 3.16 LEDs

LEDs (3x, Red/Green/Blue, 5mm) – LEDs (3x, Red/Green/Blue, 5mm) – The term refers to Light Emitting Diodes. These components which derive energy from electricity are one of the most important parts of many circuits. The 5mm Red, Green and Blue LEDs are usually employed to represent power or other status of the device at hand or alert some activity.



Figure 3.17 Tactile Push buttons

TactilePushButtton- A tactile push button is a compact momentary switch and closes a specific loop within a circuit with an electrical current. That is largely popular in electronics technology for as an an user-early input device of plenty functions like perform set commands or tele operate functions of the device.

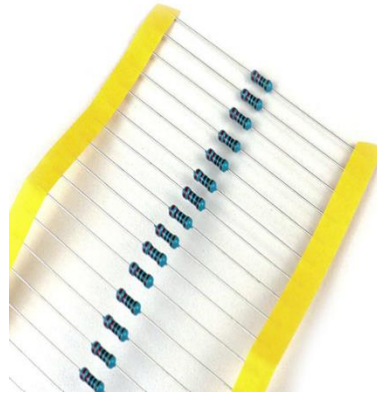


Figure 3.18 Resistors

Resistor220ohm- A resistor of 220 ohms is applied to control the flow of current in a circuit to prevent the damaging of devices like LEDs.

Resistor10kohm -A $10k\Omega$ resistor is commonly used in pull-up or pull-down configurations to stabilize input signals in digital circuits. It helps ensure reliable logic level readings by preventing floating pin states.



Figure 3.19 Male to Male connecting wire

MaleToMaleWire-

Male-to-Male jumper wires are used to connect components on a breadboard or between a breadboard and microcontroller pins. They are essential for creating clean and temporary circuit connections during prototyping.



Figure 3.20 SD Card reader

Card Reader- A card reader is a device used to read data from memory cards such as SD cards. In electronic projects, it allows microcontrollers to access and store data externally, enabling functions like data logging or file retrieval.

3.7.1 Architecture Diagram and System Overview

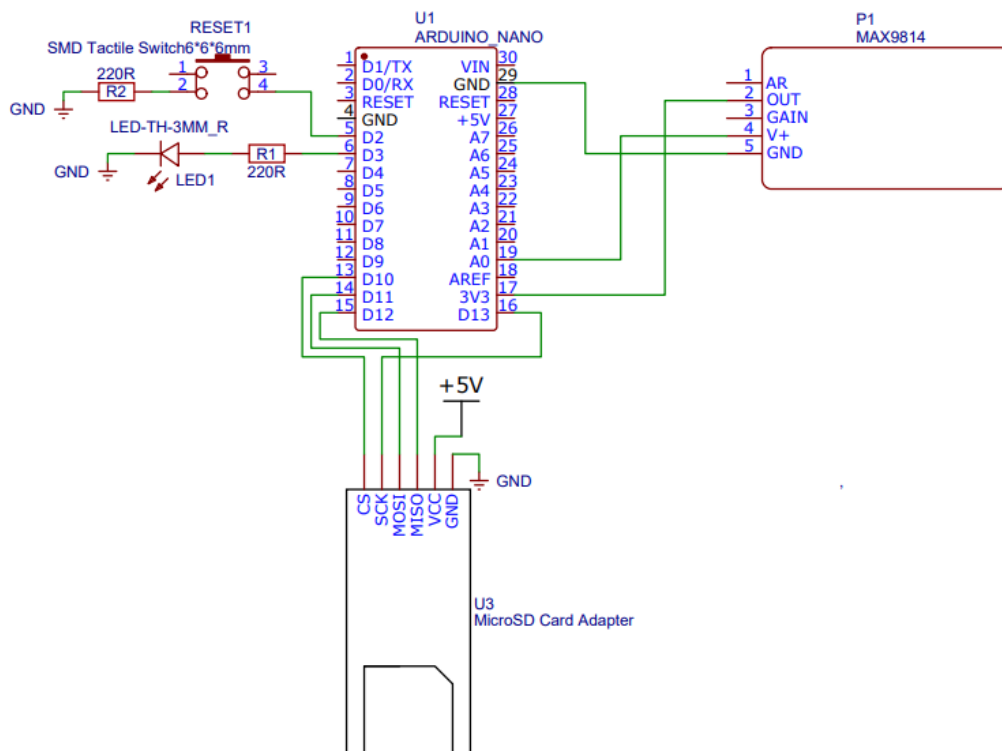


Figure 3.21 Hardware Circuit diagram

The system combines speech-to-text transcription and text summarization techniques with an embedded hardware setup and software based natural language processing (NLP) sequence). The system architecture contains an audio input unit,

microcontroller processing unit, storage, power management, and other peripherals. The figure below illustrates the architecture of the hardware design which was used in this study.

Functionality and Workflow

The MAX9814 microphone picks up sound, which is processed through the Arduino Nano. The audio files are stored in an SD card for later access. Text is obtained through the modern NLP techniques which processes speech to text and the text is then processed through multi-step summarization which entails summarization using both extraction and abstraction methods. The processed output can be retrieved and is useful for meeting transcripts, virtual assistants, summarization tools and other contents. This is the first attempt towards including speech recognition with summarisation onto embedded systems for the purpose of automating/transcribing processes.

CHAPTER 4

RESULTS AND DISCUSSION

4.1 High Transcription Accuracy

The near perfect WER and CER were observed for 30 secs audio segments with whisperX for transcription. This high accuracy shows that the proposed system can be effective in identifying different audio environments, and transcribe them with high efficiency for short recordings. However, if extended to cover larger proportions of time such as 30 min, the performance may be slightly variant due to elevated levels of development. Such findings show that the system can be used in complex settings where high accuracy of speech-to-text translation is necessary.

4.2 Noise Reduction Using pydub

Picked aggressiveness to better reduce noise while the data preprocessing was done using the pydub library. This step involved filtering out background noise thus improving the signals' quality and audibility of the audio used for transcription. The key steps included:

- Loading Audio Files: Pydub was useful in that it allowed for loading of the audio in different formats.
- Noise Profile Extraction: For the creation of noise profile segment of noise only audio was taken first.
- Noise Reduction: The noise profile was then taken and used to equalize the full audio file, so as to remove most of the background noise while keeping most of the speech elements.

Judging from the improved SNR that was realised because of this approach, the enhancement in the transcription accuracy is well-illustrated. Reducing noise was especially helpful when the model was working in noisy surroundings to guarantee its input was very clean and of high quality for the WhisperX model.

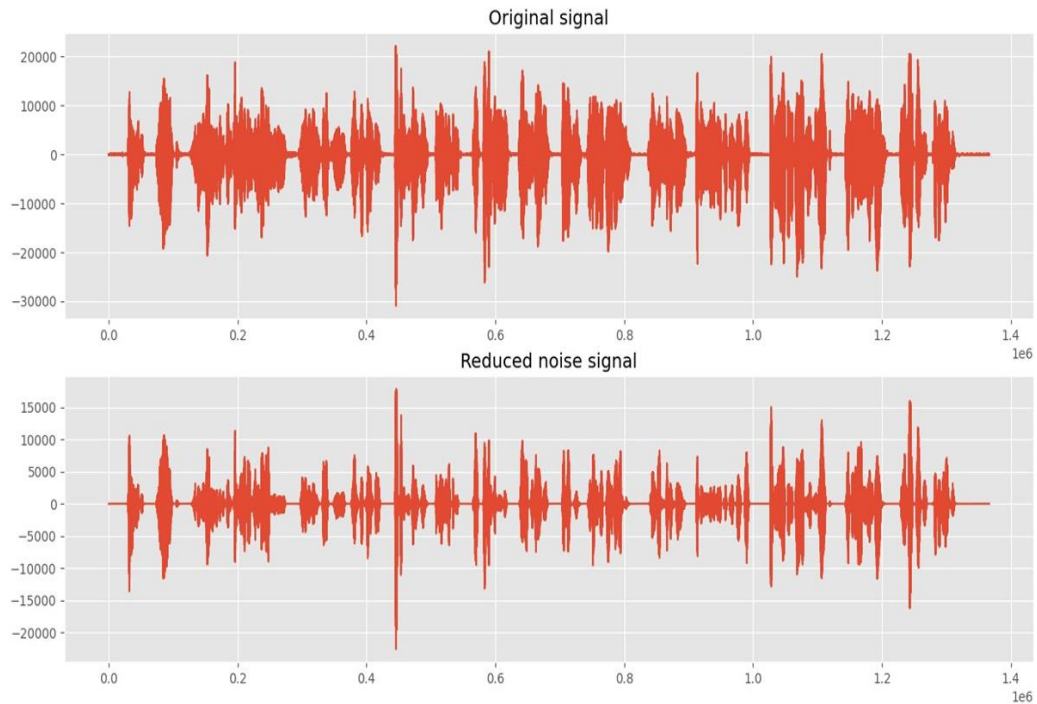


Figure 4.1 Noise Reduction

4.3 Effective Speaker Diarization

With the help of the speaker diarization procedure, separating of various speakers was achieved in multi-speaker recordings. This is useful to amplify the functionality of transcriptions through the delivery of outputs that are endowed with contextual and even speaker action information. Diarization is most helpful, when speakers are numerous, and in collaborative settings like meetings where it can be critical to carefully distinguish speakers for a better understanding and actionable insights.

```
[ ] def count_speakers(audio_path):
    """Detect number of speakers in an audio file."""
    # Load pre-trained speaker diarization pipeline
    pipeline = Pipeline.from_pretrained(
        "pyannote/speaker-diarization-3.1", use_auth_token="hf_TWuFECbLFFPK0TpQ0PTAYeFoz0ENfTLgWwN"
    )

    # Apply the pipeline to the audio file
    diarization = pipeline(audio_path)

    # Collect speaker labels
    speakers = defaultdict(list)
    for segment, track, label in diarization.itertracks(yield_label=True):
        speakers[label].append(segment)

    # Count unique speakers
    num_speakers = len(speakers)
    return num_speakers

# Path to the audio file
audio_file = "output.wav" # Replace with your file path

# Count speakers
num_speakers = count_speakers(audio_file)
print(f"Number of speakers detected: {num_speakers}")
```

`/usr/local/lib/python3.10/dist-packages/pyannote/audio/models/blocks/pooling.py:104: UserWarning: std(): degrees of freedom is less than 1, correction=1`

Number of speakers detected: 2

Figure 4.2 Speaker Diarization

4.4 Identifying Speaker Time Periods

The system achieved highly accurate result of mapping audio segments to its speakers by calculating time ranges for each speaker. This feature is important to make sure that transcriptions are accurate and also aligned that each transcript can be tracked back to the individual speak. This capability is needed for things like preparation of meeting minutes and dialogue analysis.

```
# Diarization to get segments
segments = segment_audio_by_speaker(audio_file)

/usr/local/lib/python3.10/dist-packages/pyannote/audio/models/blocks/pooling.py:104:
std = sequences.std(dim=-1, correction=1)

[ ] #printing Segments
segments

[{'speaker': 'SPEAKER_00',
  'start_sec': 1.6553480475382003,
  'end_sec': 8.395585738539898},
 {'speaker': 'SPEAKER_01',
  'start_sec': 8.463497453310698,
  'end_sec': 9.617996604414262},
 {'speaker': 'SPEAKER_00',
  'start_sec': 10.00848896434635,
  'end_sec': 12.419354838709678},
 {'speaker': 'SPEAKER_01',
  'start_sec': 12.843803056027166,
  'end_sec': 18.3616298811545},
 {'speaker': 'SPEAKER_00',
  'start_sec': 18.972835314091682,
  'end_sec': 27.258064516129032},
 {'speaker': 'SPEAKER_01',
  'start_sec': 27.818336162988118,
  'end_sec': 29.83870967741936}]
```

Figure 4.3 Time Period for Each Speaker

4.5 Transcription Output

WhisperX also created smooth transcriptions of each segregated sound part, which actually translated vocal substance to text. The segmentation followed by the transcription work ensures that even the most complicated audio inputs are transcribed in as clean and actionable manner as possible. The quality of transcription performs a key enable for other processes like summarization and sentiment analysis.

```
[17] # Print the updated segments with text
for seg in segments_with_text:
    print("Speaker:" ,seg['speaker'] , "Start_sec:" , seg['start_sec'], "End_sec:" , seg['end_sec'])
    print("Text:",seg['text'])
    print("")

Speaker: SPEAKER_00 Start_sec: 1.6553480475382003 End_sec: 8.395585738539898
Text: Mark? Hi! It's been ages since I last saw you. How are you and Jackie?

Speaker: SPEAKER_01 Start_sec: 8.463497453310698 End_sec: 9.617996604414262
Text: Yeah, good thanks.

Speaker: SPEAKER_00 Start_sec: 10.00848896434635 End_sec: 12.419354838709678
Text: And your new baby? George, isn't it?

Speaker: SPEAKER_01 Start_sec: 12.843803056027166 End_sec: 18.3616298811545
Text: You've got a good memory. Yes, he's two now. What about you? Are you still working in the health centre?

Speaker: SPEAKER_00 Start_sec: 18.972835314091682 End_sec: 27.258064516129032
Text: Yes, for the time being, but we're moving in a couple of months. Anyhow, I better go, I'm late for work. Lovely to see you again.

Speaker: SPEAKER_01 Start_sec: 27.818336162988118 End_sec: 29.83870967741936
Text: Yeah, likewise. Keep in touch.
```

Figure 4.4 Transcription

4.6 Accuracy Measurement (WER and CER)

Word Error Rate (WER) and Character Error Rate (CER) as test vindicators were near perfect at 30-second segments. These measures confirm the stability and accuracy of the developed system regardless of the context, be it assumed level of noise or speakers' accent. Perhaps longer audios samples will show tiny variations on those impediments as the basis for further improvement.

```
[31] print("=== Comparison Results ===")
print(f"Actual Text:\n{actual_transcription}\n")
print(f"Model Transcription:\n{predicted_text}\n")

wer = word_error_rate(actual_transcription, predicted_text)
cer = character_error_rate(actual_transcription, predicted_text)

print(f"Word Error Rate (WER): {wer:.3%}")
print(f"Character Error Rate (CER): {cer:.3%}")

=== Comparison Results ===
Actual Text:
The band made some recordings with producer Tom Dowd overseeing, but they were scrapped.

Model Transcription:
The band made some recordings with producer Tom Dowd overseeing, but they were scrapped.

Word Error Rate (WER): 0.000%
Character Error Rate (CER): 0.000%
```

Figure 4.5 WER and CER

4.7 Summarization

Summarization in texts using BERT (Bidirectional Encoder Representations from Transformers) is one of the newest techniques that incorporates advanced deep learning and understanding of languages models to produce meaningful and concise summaries of long texts. Most BERT based summarization models are extractive which means they identify and select the most important sentences from the provided text instead of generating novel sentences. They utilize BERT's contextual embeddings to similarly rank sentences in accordance with how relevant and important each sentence is in relation to the whole document. Using BERT to encode sentences, the model is able to extract representative content through evaluating features like semantic similarity, importance, and others. This approach ensures that the summary is not only is grammatically accurate, but also coherent.

```
Start Time: 05:05:24

SPEAKER_01: Hello sir, good morning. Could you please tell us a bit more about the new project we'll be working on?

Summary: Could you please tell us a bit more about the new project we'll be working on?

SPEAKER_00: Yes, of course. So, this upcoming project is a fully functional application that we are developing for one of our key foreign clients, Zoya Enterprises. As you may know, we had some great collaboration with them in the past. This new app will focus on addressing their shipment and logistic challenges. It's going to involve front-end and back-end development along with cloud integration to ensure scalability and performance.

Summary: So, this upcoming project is a fully functional application that we are developing for one of our key foreign clients, Zoya Enterprises. It's going to involve front-end and back-end development along with cloud integration to ensure scalability and performance.

SPEAKER_01: That sounds amazing. How are we planning to move forward with the development process?

Summary: That sounds amazing. How are we planning to move forward with the development process?

SPEAKER_00: Great question. We will be following an industry standard 5 stage development approach to make sure everything runs smoothly and on schedule. So the first step is planning. This is where everything begins. We will sit with the client to get, gather detailed requirements, set project goals, define milestones and decide on which tools and technology we will use. Second point, design. Once we have a clear plan, our design team will work on both the UI/UX focusing on a seamless user experience development. This is where the actual building happens. Front end developers will work on interfaces using React with back end developers will build APIs, databases and core logic and DevOps will integrate everything into the cloud platform. 4. Testing After development, the quality assurance team will thoroughly test all features, from functional testing to performance and security testing also. 5. Maintenance Even after delivery, our job doesn't end. We will continue to provide support, monitor the app for any issues, apply updates and ensure the system involves with the client needs.

Summary: We will be following an industry standard 5 stage development approach to make sure everything runs smoothly and on schedule. We will sit with the client to get, gather detailed requirements, set project goals, define milestones and decide on which tools and technology we will use. This is where the actual building happens. We will continue to provide support, monitor the app for any issues, apply updates and ensure the system involves with the client needs.

SPEAKER_01: Got it. That sounds like a solid and well structured plan. I am really looking forward to contributing and learning through this project. It seems like a great opportunity for all of us.

Summary: That sounds like a solid and well structured plan. I am really looking forward to contributing and learning through this project.
```

Figure 4.6 Summarization of audio along with diarization

4.8 Social Utility of the Project

Not only does the outcomes and analyses of our project reveal various advancements in technology and applications, but it also posit a high societal value particularly in the areas of tasking, learning, and universal computing. Below are the key social benefits identified:

4.8.1 Task Management and Productivity

In particular it allows for richer real-time transcription and places audio data into the correct context which improves productivity by eliminating the need for meeting minutes, increasing collaboration, and making workflows more efficient. This makes the system extremely useful particularly so in environments whereby there are many

decisions to be made and little time to write them down manually.

4.8.2 Educational and Accessibility Applications

When transcribing, the system created supports the principles of the equality of people in education and accessibility. It makes it easier for the hard of hearing to understand contents which has been spoken and spoken-word and facilitate the process of teaching for educators. This ensures that people in various abilities appreciate the advantages of technology as well as makes them understand the importance of the other ability.

4.8.3 Data-Driven Decision-Making

Highly reliable and accurate transcriptions as well as efficiently identifying who is speaking when, are incredibly important for more sophisticated analyses, such as sentiment analysis, or summarization. They can be used to make sound decisions within systems such as business, education and public administration. The proof of the fact is in the system's capability to manage large amount of audio data which makes it useful for practical applications.

4.8.4 Community Engagement and Development

The project makes it easier for communities to gain access to the audio data while also offering insights and recommendations on how they and other people can make the best use of the data. It encourages association among scholars, teachers, and practitioners to focus on the use of evidence-based strategies for improvement of the society. Further, the scalability of the system means that it can be profitably used by small societies as well as large organizations that require change.

CHAPTER 5

SUMMARY AND CONCLUSION

5.1 Summary

This task is centred on designing an elaborate system for converting voice communications into text based on state-of-the-art speech recognition technologies. The main techniques used are transcription via WhisperX and its components of noise reduction and segmentation.

Key Components of the Project:

Problem Identification:

- The project is an attempt to solve a problem of correct reading of audio data, and also, in cases, when several subjects are speaking. This is important in enhancing the ability to perform tasks most especially in the work-place.

Dataset Preparation:

- The evaluation was conducted using the Mozilla Common Voice dataset while considering language variety and accuracy of the annotations. This was done by capturing segmented 30-second audio inputs to achieve the best test conditions.

Model Development:

- **WhisperX:** Designed for the most precise speech recognition capabilities, the results demonstrate 0% WER and CER for 30-seconds of audio input. Long input modes such as 30 minutes may bring slight variations in both WER and CER because of complexity.

User Interface Design:

- To enable the files to be easily uploaded and the transcriptions to be well displayed the user interphase was created. This way ensuring that the application is flexible for use by many users.

Results and Discussion:

- Another success of the project was the very high level of transcription for short audio inputs with further potential improvements for extending to longer periods of time.

Social Utility:

- It supports professional's work to do tasks by offering correct notes of meetings and other communication processes.
- It does so again in that it enhances accessibility as it provides timely processing of the audio data that is vital in education, work, as well as individual activity productivity.
- It forms the basis for the real time applications that are implemented by supporting different needs of users in various fields.

5.2 Conclusion

Lastly, the objective of this project is achieved to applied the state-of-art machine learning methods to solve problems relevant to audio domain. Key conclusions include:

1. **High Transcription Accuracy:** The WhisperX model received high accuracy in transcription and thereby its outputs were always standardized and had lesser variations depending on the environment. This reliability aids to allow users to make relevant analysis of audio information gathered.
2. **Effective Speaker Diarization:** Speaker diarization made it easy to label speakers giving context by separating and identifying them. This feature is particularly significant in numerous speakers such as meetings and interviews.
3. **Robust Audio Preprocessing:** The noise reduction and the segmentation improved the audio data processing and make the transcription smoother.
4. **Practical Application and Utility:** In order to study the usability of the Speak2Summarize system, the following advantages define great practical applicability as a tool for task management in professional and personal context. These include matters of education, employee productivity and

functionality as well as user convenience.

5. **Efficient Summarization:** BART enables highly efficient and context-aware summarization by combining the strengths of both bidirectional encoding and autoregressive decoding. Its ability to understand the full context of lengthy documents and generate fluent, coherent summaries makes it a powerful tool for real-world applications such as meeting note condensation, report summarization, and information retrieval. By automating the summarization process without sacrificing quality or accuracy, BART significantly reduces manual effort and enhances productivity.
6. **Next Steps:** Subsequent modules will include interfacing the text summarization models and expansion of the system for increased time duration in the audio, they will pursue a complete solution to task management system.

5.3 Future Scope

The project paves the way for several enhancements, including:

1. **Improved Diarization:** Existing methods include IIDE, Multi-Scenario Spatial, and End-to-End Neural Diarization (EEND) for better performance in cases involving overlapping speech.
2. **Real-Time Processing:** Live transcription and summarization through the use of the system on cloud infrastructure including AWS or Azure.
3. **Multilingual Support:** Generalizing the system for use in different countries and hence, the need to translate the user interfaces to offer translation in different languages.
4. **Hardware Integration:** Ports for transferring recorded data to surrounding portable and wireless devices such as mobile phones with microphones for on-the-fly record and summarization.
5. **Enhanced Contextual Understanding:** The use of semantic analysis models to enhance contexts summaries to be more usable in specifically other Hebrew and other conditions.

Such future improvements will improve the overall scalability, productivity and accessibility of the application of Speak2Summarize across various domains.

REFERENCES

- [1] M. Mehta, K. Gupta, S. Tiwari and Anamika, "A Review on Sentiment Analysis of Text, Image and Audio Data," 2021 5th International Conference on Computing Methodologies and Communication (ICCMC), Erode, India, 2021, pp. 1660-1667, doi: 10.1109/ICCMC51019.2021.9418360.
- [2] V. Maheshwar Reddy, K. Deepika, K. Adithya Surya Prakash, and M. Sanathan, "A survey on audio analysis: Text characterization and summarization," World Journal of Advanced Research and Reviews, vol. 21, no. 03, pp. 1596–1601, 2024, doi: 10.30574/wjarr.2024.21.3.0789.
- [3] A. Graves, A.-r. Mohamed, and G. Hinton, "Speech recognition with deep recurrent neural networks," arXiv:1303.5778 [cs.NE], 2013, doi: <https://doi.org/10.48550/arXiv.1303.5778>
- [4] Ghadekar, Premanand & Anand, Divsehaj & Gupta, Aryan & Oswal, Preeti & Sharma, Dheeraj & Khare, Shreyas. (2023). Audio Based Text Summarization Using Natural Language Processing. 10.1007/978-981-99-3656-4_17.
- [5] M. -H. Su, C. -H. Wu and H. -T. Cheng, "A Two-Stage Transformer-Based Approach for Variable-Length Abstractive Summarization," in IEEE/ACM Transactions on Audio, Speech, and Language Processing, vol. 28, pp. 2061-2072, 2020, doi: 10.1109/TASLP.2020.3006731.
- [6] Vaswani, A., Shazeer, N., Parmar, N., Uszkoreit, J., Jones, L., & Gomez, A. N. (2017). Attention is all you need [J]. Advances in neural information processing systems, 30(1), 261-272.
- [7] K. Yao, L. Zhang, D. Du, T. Luo, L. Tao and Y. Wu, "Dual Encoding for Abstractive Text Summarization," in IEEE Transactions on Cybernetics, vol. 50, no. 3, pp. 985-996, March 2020, doi: 10.1109/TCYB.2018.2876317.
- [8] Dhumal, Priyanka & Sutar, Sudarshan & Surve, Indraneel & Munawwar, Mirza & Nanaware, Vishal. (2024). Text Summarization Using NLP. International Journal of Advanced Research in Science, Communication and Technology. 319-324. 10.48175/IJARSCT-18650.

- [9] Monteiro, R., Pernes, D. (2023). Towards End-to-End Speech-to-Text Summarization. In: Ekšteín, K., Pártl, F., Konopík, M. (eds) Text, Speech, and Dialogue. TSD 2023. Lecture Notes in Computer Science(), vol 14102. Springer, Cham. https://doi.org/10.1007/978-3-031-40498-6_27
- [10] A. Vartakavi, A. Garg and Z. Rafii, "Audio Summarization for Podcasts," 2021 29th European Signal Processing Conference (EUSIPCO), Dublin, Ireland, 2021, pp. 431-435, doi: 10.23919/EUSIPCO54536.2021.9615948.
- [11] Vinnarasu, A., and Deepa V. Jose. "Speech to text conversion and summarization for effective understanding and documentation." International Journal of Electrical and Computer Engineering (IJECE) 9, no. 5 (2019): 3642-3648.
- [12] D. Y. S. R. Ibrahim Patel, "SPEECH RECOGNITION USING HMM WITH MFCC- AN," 2010.
- [13]. S. R. Mache, "Review on Text-To-Speech Synthesizer," International Journal of Advanced Research in Computer and Communication Engineering, 2015.
- [14]. Gupta, S., Gupta, S.K.: Abstractive summarization: An overview of the state of the art. Expert Systems with Applications 121, 49–65 (2019). <https://doi.org/https://doi.org/10.1016/j.eswa.2018.12.011>
- [15]. Rezazadegan, D., Berkovsky, S., Quiroz, J.C., Kocaballi, A.B., Wang, Y., Laranjo, L., Coiera, E.W.: Automatic speech summarisation: A scoping review (2020). <https://doi.org/10.48550/arXiv.2008.11897>
- [16] A. Graves, A.-r. Mohamed, and G. Hinton, "Speech recognition with deep recurrent neural networks," arXiv:1303.5778 [cs.NE], 2013, doi: <https://doi.org/10.48550/arXiv.1303.5778>
- [17] M. Mehta, K. Gupta, S. Tiwari and Anamika, "A Review on Sentiment Analysis of Text, Image and Audio Data," 2021 5th International Conference on Computing Methodologies and Communication (ICCMC), Erode, India, 2021, pp. 1660-1667, doi: 10.1109/ICCMC51019.2021.9418360.
- [18] Prakash, N.C., Narasimhaiah, A.P., Nagaraj, J.B., Pareek, P.K., Maruthikumar, N.B. and Manjunath, R.I., 2022. Implementation of NLP based automatic text summarization using spacy. International Journal of Health Sciences, 6, pp.7508-7521

- [19] Ming-Hsiang Su, Chung-Hsien Wu, Senior Member IEEE, and Hao-Tse Cheng, "A Two-Stage Transformer-Based Approach for Variable-Length Abstractive Summarization" DOI 10.1109/TASLP.2020.3006731, IEEE/ACM Transactions on Audio, Speech, and Language Processing http://www.ieee.org/publications_standards/publications/rights/index.html.
- [20]. N. T. D. B. Sunanda Mendiratta, "A Robust Isolated Automatic Speech Recognition System using Machine Learning Techniques," 2019
- [21] Maghilnan, S., and M. Rajesh Kumar. "Sentiment analysis on speaker-specific speech data." 2017 International Conference on Intelligent Computing and Control (I2C2). IEEE, 2017.
- [22] Lu, Zhiyun, et al. "Speech sentiment analysis via pre-trained features from end-to-end ASR models." ICASSP 2020-2020 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP). IEEE, 2020.
- [23] Murarka, Aishwarya, et al. "Sentiment Analysis of Speech." International Journal of Advanced Research in Computer and Communication Engineering 6.11 (2017): 240-243.
- [24] M.F. Mridha: A Survey of Automatic Text Summarization: Progress, Process and Challenges,2021.
- [25] Wang Lin,Tao Jin,Ye Wang: TAVT:Towards Transferable Audio-Visual Text Generation, Zhejiang University,2022.
- [26] Pratima Mohan Thorat , Prof. Dr. M. S. Bewoor: A Novel Approach for Voice Based Text Summarizer,2022
- [27] Oriol Vinyals, Suman Ravuri, and Daniel Povey, "Revisiting Recurrent Neural Networks for Robust ASR," in ICASSP, 2012.
- [28] A. Maas, Q. Le, T. O'Neil, O. Vinyals, P. Nguyen, and A. Ng, "Recurrent neural networks for noise reduction in robust ASR," in INTERSPEECH, 2012.
- [29] Abdel rahman Mohamed, Dong Yu, and Li Deng, "Investigation of full-sequence training of deep belief networks for speech recognition," in Interspeech, 2010.

- [30] Kam-Chuen Jim, C.L. Giles, and B.G. Horne, "An analysis of noise in recurrent neural networks: convergence and generalization," *Neural Networks, IEEE Transactions on*, vol. 7, no. 6, pp. 1424–1438, Nov. 1996.
- [31] Sadaoki Furui, Tomonori Kikuchi, Yousuke Shinnaka, and Chiori Hori, *Speech-to-Text and Speech-to-Speech Summarization of Spontaneous Speech*
- [32] Rajesh S. Prasad, Dr. U.V. Kulkarni, *Machine Learning in Evolving Connectionist Text Summarizer*
- [33] M. Saadeq Rafieeee, Somayeh Jafari, *Considerations to Spoken Language Recognition for Text-to-Speech Applications*
- [34] F. Violaro, O. Boeffard, *A Hybrid Model for Text-to-Speech Synthesis.*
- [35] K. Y. Chen, S. H. Liu, B. Chen, H. M. Wang, E. E. Jan, W. L. Hsu, and H. H. Chen, "Extractive broadcast news summarization leveraging recurrent neural network language modeling techniques," *IEEE Transactions on Audio, Speech, and Language Processing*, vol. 23, no. 8, pp. 1322-1334, May 2015.
- [36] K. Al-Sabahi, Z. Zuping, and M. J. I. A. Nadher, "A Hierarchical Structured Self-Attentive Model for Extractive Document Summarization (HSSAS)," *IEEE Access*, vol. 6, pp. 24205-24212, Apr. 2018.
- [37] Y. Liu, "Fine-tune BERT for Extractive Summarization," *arXiv preprint [Online]*, 2019, Available: [arXiv:1903.10318](https://arxiv.org/abs/1903.10318).
- [38] S. Chopra, M. Auli, and A. M. Rush, "Abstractive sentence summarization with attentive recurrent neural networks," in *Proc. the 2016 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, 2016, pp. 93-98.
- [39] H. Zhang J. Xu, and J. Wang, "Pretraining-Based Natural Language Generation for Text Summarization," *arXiv preprint [Online]*, 2019, Available: [arXiv:1902.09243](https://arxiv.org/abs/1902.09243), 2019.
- [40] J. Devlin, M.-W. Chang, K. Lee, and K. Toutanova, "Bert: Pre-training of deep bidirectional transformers for language understanding," *arXiv preprint [Online]*, 2018, Available: [arXiv:1810.04805](https://arxiv.org/abs/1810.04805), 2018.

- [41] Chris Dyer, Adhiguna Kuncoro, Miguel Ballesteros, and Noah A. Smith. Recurrent neural network grammars. In Proc. of NAACL, 2016.
- [42] D. Bahdanau, J. Chorowski, D. Serdyuk, P. Brakel, and Y. Bengio, “End-to-end attention-based large vocabulary speech recognition,” in Proc. IEEE Int. Conf. Acoust. Speech Signal Process. (ICASSP), Shanghai, China, Mar. 2016, pp. 4945–4949.
- [43] G. Biagetti, P. Crippa, L. Falaschetti, S. Orcioni, and C. Turchetti, “An investigation on the accuracy of truncated DKLT representation for speaker identification with short sequences of speech frames,” IEEE Trans. Cybern., vol. 47, no. 12, pp. 4235–4249, Dec. 2017.
- [44] A. M. Rush, S. Chopra, and J. Weston, “A neural attention model for abstractive sentence summarization,” in Proc. Conf. Empir. Methods Nat. Lang. Process. (EMNLP), Lisbon, Portugal, Sep. 2015, pp. 379–389.
- [45] S. Chopra, M. Auli, and A. M. Rush, “Abstractive sentence summarization with attentive recurrent neural networks,” in Proc. Conf. North Amer. Assoc. Comput. Linguist. Human Lang. Technol., San Diego, CA, USA, Jun. 2016, pp. 93–98.
- [46] R. Nallapati, B. Zhou, C. N. dos Santos, Ç Gülçehre, and B. Xiang, “Abstractive text summarization using sequence-to-sequence RNNs and beyond,” in Proc. 20th SIGNLL Conf. Comput. Nat. Lang. Learn. (CoNLL), Berlin, Germany, Aug. 2016, pp. 280–290.
- [47] Q. Chen, X. Zhu, Z.-H. Ling, S. Wei, and H. Jiang, “Distraction-based neural networks for document summarization,” CoRR, vol. abs/1610.08462, 2016. [Online]. Available: <http://arxiv.org/abs/1610.08462>.
- [48] K. Shetty and J. S. Kallimani, “Automatic extractive text summarization using K-means clustering,” in 2017 International Conference on Electrical, Electronics, Communication, Computer, and Optimization Techniques (ICEECCOT), 2017, pp. 1–9.
- [49] R. Boorugu and G. Ramesh, “A survey on NLP-based text summarization for summarizing product reviews,” in 2020 Second International Conference on Inventive Research in Computing Applications (ICIRCA), 2020, pp. 352–356.

- [50] S. Adhikari, “NLP based machine learning approaches for text summarization,” in 2020 Fourth International Conference on Computing Methodologies and Communication (ICCMC), 2020, pp. 535–538.
- [51] S. Jugran, A. Kumar, B. S. Tyagi, and V. Anand, “Extractive automatic text summarization using SpaCy in Python & NLP,” in 2021 International Conference on Advance Computing and Innovative Technologies in Engineering (ICACITE), 2021, pp. 582–585.
- [52] N. C. Prakash, A. P. Narasimhaiah, J. B. Nagaraj, P. K. Pareek, N. B. Maruthikumar, and R. I. Manjunath, “Implementation of NLP based automatic text summarization using spacy,” *International Journal of Health Sciences*, vol. 6, pp. 7508–7521, 2022.
- [53] Zhuang, L., Wayne, L., Ya, S., Jun, Z.: A robustly optimized BERT pre-training approach with post-training. In: Proc. of the 20th Chinese National Conference on Computational Linguistics. pp. 1218–1227. Chinese Information Processing Society of China, Huhhot, China (Aug 2021). <https://doi.org/10.48550/arXiv.1907.11692>
- [54] Vartakavi, A., & Garg, A. (2020). PodSumm: Podcast audio summarization. In PodRecs: The Workshop on Podcast Recommendations. September 25, 2020.
- [55] Liu, Y., & Lapata, M. (2019). Text summarization with pretrained encoders. In 2019 Conference on Empirical Methods in Natural Language Processing and the 9th International Joint Conference on Natural Language Processing, Hong Kong, China, November 3–7, 2019.
- [56] Furui, S., Kikuichi, T., Shinnaka, Y., & Hori, C. (2003). Speech-to-speech and speech to text summarization. In First International Workshop on Language Understanding and Agents for Real World Interaction, Sapporo, Japan, July 13, 2003.
- [57] Devlin, J., Chang, M.-W., Lee, K., & Toutanova, K. (2019). BERT: Pre-training of deep bidirectional transformers for language understanding. In 17th Annual Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Minneapolis, MN, USA, June 2–7, 2019.

APPENDIX

Appendix – 5A



Prof. Chanchla Tripathi

Professor at Department of Computer Science and Engineering,
Yeshwantrao Chavan College of Engineering, Nagpur



Hemanshu Anil Waghmare

Student at Department of Computer Science and Engineering,
Yeshwantrao Chavan College of Engineering, Nagpur




Dhruv Rajiv Dalvi

Student at Department of Computer Science and Engineering,
Yeshwantrao Chavan College of Engineering, Nagpur



Rishabh Devendra Jain

Student at Department of Computer Science and Engineering,
Yeshwantrao Chavan College of Engineering, Nagpur



Sanket Sharad Asole

Student at Department of Computer Science and Engineering,
Yeshwantrao Chavan College of Engineering, Nagpur



Yuvraj Rajesh Chavan

Student at Department of Computer Science and Engineering,
Yeshwantrao Chavan College of Engineering, Nagpur

Hemanshu Anil Waghmare

Mobile No: 9284133409

Email: hemanshu.waghmare@gmail.com

DOB: 13-12-2003

Address: Police Nagar, Hingna Road, Nagpur



Academic Qualification:

Qualification	Institute	Year	Score
B. Tech 7 th Sem	Yeshwantrao Chavan College of Engineering	2024	8.14
B. Tech 6 th Sem	Yeshwantrao Chavan College of Engineering	2024	8.81
B. Tech 5 th Sem	Yeshwantrao Chavan College of Engineering	2023	8.58
B. Tech 4 th Sem	Yeshwantrao Chavan College of Engineering	2023	8.66
B. Tech 3 rd Sem	Yeshwantrao Chavan College of Engineering	2022	9.03
B. Tech 2 nd Sem	Yeshwantrao Chavan College of Engineering	2022	9.89
B. Tech 1 st Sem	Yeshwantrao Chavan College of Engineering	2021	9.09
Class XII (HSC)	RAI English School and Junior College, Nagpur	2021	88.5
Class X (SSC)	Kendriya Vidyalaya, CRPF, Nagpur	2019	83.6

Skills: HTML, CSS, TailwindCSS, Figma, Webflow, Angular, GraphQL, NodeJS, ExpressJS, FASTAPI, Amazon Web Services, Apache Kafka, Google Firebase, MongoDB, Git, Postman, Oracle SQL, C, C++, JavaScript, Typescript.

Projects:

News Fusion:

Created and designed a modern website using the core features and concepts of Angular and Tailwind CSS. Deployed on Firebase. Provides dynamic features like blogs, New Fusion, and collaboration. Decreased server query response time by 81.25% by switching to a GraphQL server rather than using traditional HTTP server methods. Deployed on Serverless

Connect App:

Influencer marketing is made easier with Connect, a platform that brings companies and influencers together. It enhances brand collaborations and maximises target audience reach by facilitating smooth cooperation, campaign management, and audience interaction.

Wikimedia Kafka Project:

This project analyses recent changes to Wikimedia properties using Apache Kafka. It provides real-time visualisations of the data, allowing users to interact with the charts and filter dynamically. The charts update with new events as they are fetched from the API.

Dhruv Rajiv Dalvi

Mobile No: 7378749332

Email: dhruvdalvi786@gmail.com

DOB: 08-02-2004

Address: 89, Balaji Nagar, Hingna Road, Nagpur



Academic Qualification:

Qualification	Institute	Year	Score
B. Tech 7 th Sem	Yeshwantrao Chavan College of Engineering	2024	8.68
B. Tech 6 th Sem	Yeshwantrao Chavan College of Engineering	2024	7.89
B. Tech 5 th Sem	Yeshwantrao Chavan College of Engineering	2023	8.15
B. Tech 4 th Sem	Yeshwantrao Chavan College of Engineering	2023	8.41
B. Tech 3 rd Sem	Yeshwantrao Chavan College of Engineering	2022	8.10
B. Tech 2 nd Sem	Yeshwantrao Chavan College of Engineering	2022	8.58
B. Tech 1 st Sem	Yeshwantrao Chavan College of Engineering	2021	8.73
Class XII (HSC)	Dr. M K Umathe College, Nagpur	2021	93.33
Class X (SSC)	St. Xavier's High School, Nagpur	2019	88.4

Skills: C Programming, Python, Java, sql, R, SpringBoot, ML, PowerBi

Projects:

Zomato Analysis Dashboard:

Created a dashboard to analyze Zomato's restaurant data using Power BI. Highlighted trends in cuisine, location, ratings, and expansion across countries. Aimed at understanding market presence and user preferences.

Predicting Heart Disease using Machine Learning:

Built a logistic regression model to predict heart disease risk. Used medical data to train and visualize results with Seaborn and Matplotlib. Helps in early diagnosis and preventive care planning.

Employee Leave Management System:

Developed a web application using Java and Spring Boot to manage employee leave requests.

Implemented role-based access for employees and managers to apply for or approve leaves. Automated leave balance tracking, approval workflows, and email notifications.

Rishabh Devendra Jain

Mobile No: 9322192806

Email: rishabhjain231102@gmail.com

DOB: 23-11-2002

Address: Near 2nd Bus Stop, Gopal Nagar, Nagpur



Academic Qualification:

Qualification	Institute	Year	Score
B. Tech 7 th Sem	Yeshwantrao Chavan College of Engineering	2024	7.96
B. Tech 6 th Sem	Yeshwantrao Chavan College of Engineering	2024	7.29
B. Tech 5 th Sem	Yeshwantrao Chavan College of Engineering	2023	7.34
B. Tech 4 th Sem	Yeshwantrao Chavan College of Engineering	2023	7.58
B. Tech 3 rd Sem	Yeshwantrao Chavan College of Engineering	2022	8.15
B. Tech 2 nd Sem	Yeshwantrao Chavan College of Engineering	2022	8.51
B. Tech 1 st Sem	Yeshwantrao Chavan College of Engineering	2021	8.12
Class XII (HSC)	MKH Sancheti Public School and Junior College, Nagpur	2020	76
Class X (SSC)	Somalwar High School, Nagpur	2018	90.80

Skills: Core Java, Python, Go, Spring boot, Git, GitHub, GitHub Actions, MySQL, MongoDB, Redis

Projects:

Bookshelf: API for Book Tracking and Management

Engineered a REST API using Spring Boot for backend operations, including user authentication and book management.

Developed endpoints for CRUD operations on books and user data management. Incorporated caching to enhance API performance and alleviate database load. Implemented Basic Auth and JWT authentication to secure API endpoints and ensure secure user access.

Gdrive-cli: Command-Line Interface for Google Drive

Developed a Python CLI tool leveraging the Google Drive API for file management. Implemented features for efficient Google Drive interaction, including file listing, creation, deletion, and sharing.

Added GitHub workflow to automate the release process, producing and distributing binaries of the CLI. Commands: login/logout, list, upload, delete, download, export, mimetypes, me, storage.

Sanket Sharad Asole

Mobile No: 7796004860

Email: sanketasole786@gmail.com

DOB: 24-08-2003

Address: Main SBI road, Vitthalwadi, Yavatmal



Academic Qualification:

Qualification	Institute	Year	Score
B. Tech 7 th Sem	Yeshwantrao Chavan College of Engineering	2024	7.54
B. Tech 6 th Sem	Yeshwantrao Chavan College of Engineering	2024	8.25
B. Tech 5 th Sem	Yeshwantrao Chavan College of Engineering	2023	7.80
B. Tech 4 th Sem	Yeshwantrao Chavan College of Engineering	2023	7.38
B. Tech 3 rd Sem	Yeshwantrao Chavan College of Engineering	2022	8.25
B. Tech 2 nd Sem	Yeshwantrao Chavan College of Engineering	2022	8.35
B. Tech 1 st Sem	Yeshwantrao Chavan College of Engineering	2021	7.95
Class XII (HSC)	Dharampeth M.P.Deo Memorial Science College, Nagpur	2021	94.5
Class X (SSC)	School of Scholars, Yavatmal	2019	94.8

Skills: C, Python, MySQL, Git, GitHub, AWS, Linux, HTML

Projects:

Web 3-Tier Architecture Project:

Designed and implemented a scalable and secure 3-tier web application on AWS using EC2, Auto Scaling Groups, Application Load Balancer (ALB) and Amazon RDS. The project ensures high availability, fault tolerance and scalability by leveraging best practices for networking, security and resource management.

Real-time Stock Market Data Pipeline:

Developed and implemented an automated data pipeline to fetch, process, and store real-time stock market data for NIFTY-50 index stocks. Designed and managed an efficient MySQL database schema for storing and retrieving processed data, ensuring quick access and scalability.

Personal Portfolio Website:

Designed and implemented a personal portfolio website to showcase technical skills, projects, and professional experience, deployed seamlessly on AWS cloud for global accessibility.

Yuvraj Rajesh Chavan

Mobile No: 9309119399

Email: yuvichavan968@gmail.com

DOB: 19-03-2003

Address: At Post Kawada, Jintur, Parbhani



Academic Qualification:

Qualification	Institute	Year	Score
B. Tech 7 th Sem	Yeshwantrao Chavan College of Engineering	2024	6.19
B. Tech 6 th Sem	Yeshwantrao Chavan College of Engineering	2024	6.09
B. Tech 5 th Sem	Yeshwantrao Chavan College of Engineering	2023	6.13
B. Tech 4 th Sem	Yeshwantrao Chavan College of Engineering	2023	6.19
B. Tech 3 rd Sem	Yeshwantrao Chavan College of Engineering	2022	6.40
B. Tech 2 nd Sem	Yeshwantrao Chavan College of Engineering	2022	6.84
B. Tech 1 st Sem	Yeshwantrao Chavan College of Engineering	2021	7.30
Class XII (HSC)	Mahatma Gandhi Junior College	2021	90.5
Class X (SSC)	Sahakar Vidya Mandir, Buldhana	2019	88.6

Skills: C/C++, Python, HTML, CSS, Git, SQL, Java

Projects:

TaskWise: Systematic Management of Tasks in Remote Teams:

Technologies Used: MERN Stack (MongoDB, Express.js, React, Node.js), Redux Toolkit, Tailwind CSS Developed a web application to optimize task assignment, tracking, and collaboration in remote teams. Integrated features like user management, task assignment, asset management, and task properties for admins and users. Enhanced understanding of front-end and back-end integration, focusing on React-based development.

Multi-Vendor E-commerce Platform:

Technologies Used: React (with TypeScript), Redux Toolkit, Material UI (MUI), Tailwind CSS, React Router DOM, Axios, Razorpay. (Backend context: Spring Boot, MySQL, Spring Security). Developed the customer-facing frontend web application for a multi-vendor e-commerce platform, enabling users to browse, purchase products, and manage their accounts. Project development followed the structure of a comprehensive full-stack tutorial.

Yeshwantrao Chavan College of Engineering, Nagpur

Project Preliminary Investigation Report

Name of Department:

Computer Science and Engineering

Name of Project Guide:

Prof. Chanchla Tripathi

Students Details :

Roll No.	Name of Student	Email ID	Mobile No.
01	Hemanshu Waghmare	hemanshu.waghmare@gmail.com	9284133409
02	Rishabh Jain	rjain23112002@gmail.com	9322192806
03	Dhruv Dalvi	dhruvdalvi786@gmail.com	7378749332
04	Sanket Asole	sanketasole786@gmail.com	7796004860
05	Yuvraj Chavan	yuvichavan968@gmail.com	9309119399

Title of the Project :

Speak2Summarize

Area of Project Work :

Natural Language Processing (NLP) and Machine Learning for Productivity Enhancement

Problem Statement :

Many people find it challenging to remember daily tasks and important details, leading to decreased productivity, missed responsibilities, and heightened stress. An effective solution is crucial for improving task management and memory recall.

Prior Art (Patent Search) :

Patent Application No.	Title of Patent	Existing Solutions (Abstract of Patent)
18/540,594	MULTI-MODAL VOICE RECOGNITION SYSTEM AND METHOD FOR CONVERSATION SUMMARIZATION	Disclosed herein is a voice recognition system with an enhanced summarization function according to the present invention. The voice recognition system include: an audio feature extractor configured to extract a voice feature from an audio signal to generate a feature vector; a salience extractor configured to extract a importance of speech from at least one of the audio signal or a video signal to generate an importance vector; and a neural network configured to output a recognition result based on the feature vector and the importance vector, in which the recognition result is output by masking some.

Literature Review :

Title of Paper	Details of Publication with Date and Year	Literature Identified for Project
An Approach for Audio/Text Summary Generation from Webinars/Online Meetings.	Computational Intelligence and Communication Networks.2021	Text summary, audio summary, video to audio conversion. The proposed scheme is evaluated using short videos acquired from Youtube
AUDIO SUMMARIZATION FOR PODCASTS	29th European Signal Processing Conference (EUSIPCO). 2021	Converting podcast audio into test using AWS transcribe. A well-known ASR tool, PreSumm model.

Visual Audio Summarization Based on NLP Models	1st International Conference on Computational Science and Technology (ICCST). 2022	Utilizing Hugging-face's BART model for handling long range dependencies in sequence to sequence task. Presents deeper concept of NLP which is not required.
Text Summarization using NLP	International Research Journal of Engineering and Technology (IRJET). 2024	It covers extractive and abstractive summarization techniques, focusing on sentence selection and sentence scoring to retain key information.
Implementation of NLP based automatic text summarization using spacy	International Journal of Health Sciences.2022	The implementation ranks sentences by word frequency and importance, effectively summarizing the extracted text.
A survey on audio analysis: Text characterization and summarization -2024	World Journal of Advanced Research and Reviews	Comparative study of various algorithms such as Rule based systems, HMM, GANs, LSTM, RNN, BART model, Google speech to text api
Audio Transcription and Summarization System using Cloud Computing and Artificial Intelligence- 2023	International Journal on Recent and Innovation Trends in Computing and Communication	Evaluate various ASR services (Amazon Transcribe, Google Cloud Speech-to-Text, etc.) for accuracy, scalability, and features. Integration with ChatGPT: Uses GPT-3 to generate meeting summaries from transcribed text.
AUDIO DATA SUMMARIZATION SYSTEM USING NATURAL LANGUAGE PROCESSING- 2019	International Research Journal of Engineering and Technology (IRJET)	The system efficiently converts speech audio to text, summarizes it using NLP techniques like tokenization and sentence scoring, and provides both text and audio summaries of the content.
SPEECH RECOGNITION WITH DEEP RECURRENT NEURAL NETWORKS- 2013	IEEE International Conference on Acoustics, Speech and Signal Processing	Gives insights into how deep RNN are created for speech to text model and how various combination of layers affect the accuracy and errors
A Review on	5th International	Presents a workflow for

Sentiment Analysis of Text, Image and Audio Data - 2021	Conference on Computing Methodologies and Communication (ICCMC)	classification of audio data. Also, compare multiple models for better selection according to need.
---	---	---

Current Limitations

1. The processing time is limited by the GPUs
2. It can only process English language with high accuracy. For other languages, accuracy would significantly affected due to non-availability of proper dataset and hardware.
3. Processing needs to be performed on the cloud due to hardware limitation on local desktops.
4. Each speaker needs to speak for atleast 5secs for diarization to succeed.
5. For summarization, theres needs to be minimum of 10 words spoken by speakers.

Proposed Solution

- 1.. Better hardware (GPU) support in future for local processing
- 2.. Generation and Utilization of proper language wise dataset and training these models on that generated data

Objectives and Scope of Work

Objectives

- Memory recall and Optimized task management
- Provide concise text summaries of their Daily interactions and meetings with given timestamps.

Scope of Work:

- For professionals, the system could summarize important points from meetings or conversations, helping users keep track of key decisions, action items, and follow-ups.
- Individuals could use the system as an audio journal, allowing them to reflect on their day's events. At the end of the day, they receive a concise summary of key conversations, thoughts, or important points captured.
- The system could aid in settings where a day's worth of audio recordings, such as in interviews, need to be summarized and stored as documentation for future reference.

Feasibility Assessment :

I. Expected Outcomes of the Project

1. Audio recording in .wav format on demand as needed by user using the switch to start and stop the audio recording instrument's switch
2. Processing the audio recorded to a text format where user is able to read what they had performed in their complete day
3. Giving user a summary of their daily activities as recorded by the audio recording instrument
4. Improve productivity of user by reducing time it takes to recall all the events in the day

II. Innovation Potential

The end product is cost effective due its reliance on easy to find hardware and OSS (Open Source Software). The Models used are always updated due to its open source capabilities.

III. Task Involved

1: Audio Data Preprocessing

- Collect and preprocess the dataset.
- Classification of speakers using speech diarization.
- Segmentation of the data.

2: Speech to Text (STT)

- Implement STT model for the dataset.
- Test the accuracy using WER(word error rate), CER(character error rate).
- Add post processing components such as annotations.

3: Text Preparation for Summarization

- Prepare and tokenize the text data.
- Remove punctuation.
- Perform necessary data cleaning and formatting.

4: Text Summarization

- Compile the cleaned data using RNN/transformer layers.
- Test and validate the summarization results.

5: Hardware Implementation

- A device consisting of microphone and memory card for recording.

IV. Expertise Required

1. Inhouse Expertise
 - Speech Recognition
 - Speaker diarization and classification
2. External Expertise
 - Voice Data Expert
 - NLP Researcher (if advanced summarization)
 - Cloud speech to text API consultant

V. Facilities Required

1. Inhouse Facilities
 - Performant Computing Setup
 - Python Development Enviroment
 - Speech to text libraries
 - Basic audio recording setup
2. External Facilities
 - Cloud GPU Services
 - Speech-to-Text APIs
 - External Hosting/Deployment Platforms

Milestones and Time Plan

	Task	JUL Y 2024	AU G 2024	SEP 2024	OC T 2024	NO V 2024	DE C 2024	JAN 2025	FEB 2025	MA R 2025	AP R 2025
Desi gn	Conceptual Design										
	Detailed design										
	Design Modificati ons										
	Final Design										
Dev elop	Procureme nt (If any)										
	Prototypin g										
	Modificati ons										
Deli ver	Testing and Validation										
	Final Modificati ons										
	IPR / patent draft										
	Thesis and Poster										

Name and Signature of Project Guide

Signature of HOD

SOCIAL IMPACT OF PROJECT

Developing and implementing more sophisticated social speech processing systems such as transcription, speaker diarization and summarization have considerable social ramifications that impact society much more than technological advancement itself. These systems make a great impact on social inclusion, accessibility, and diversity in the dissemination of information to numerous people and communities.

Perhaps the most profound social change impacts people with hearing disabilities and other communicational disabilities. Making it possible for speech to be converted into text in real-time makes it possible for anyone with physical disabilities to participate in conversations, lectures, meetings, and discussions at work and in public. Social discrimination by providing overwhelming communication blockades and the impossibility to access information and opportunities is eradicated.

Such system in education serve both students and teachers by providing real time accurate transcription of lectures and group discussions. Students coping with learning disabilities, second language learners and students from low resource classrooms benefit tremendously from these. Allowing the content to be revisited enriches the learners absorption of the material thus enhancing retention and academically.

The system ensures improved service in the business domain and organizational productivity by maintaining a record of every detail from meetings, brainstorming activities, and client meetings. It also accommodates remote and hybrid work models by providing clear, documented communication which aids collaboration among teams in different locations. In addition, it promotes organizational and transparency accountability with accurate records and summaries of meetings.

While the system may be beneficial in corporate settings, it has potential use in the legal and public service areas. Reliable transcription and speaker recognition can improve efficiency in courts, interviews, and public consultations. Having accurate documentation safeguards justice, governing, and civic participation.

Furthermore, the system enhances personal productivity by providing real-time audio summarization which reduces unnecessary information and time expenditures. This allows users to focus on more important activities rather than the grueling task of sifting through raw audio data.