Left Apply → flex, items-center, justify-between

left | right | vertically card

h6 class="text-lg"
h1 ___ "text-6xl" font-bold

Pizza-Grid →

left | Right

div class="w-1/2"

same width

div class="w-1/2"

Section hero → py-16 top

background app.scss → Section.hero { background: ... }

Fallon ... vs Fallon.jpg

Menu :-

Section class="menu contains mx-auto py-8"

All Pizz → <h1> All Pizza class="text-xl font-bold mb-8" </h1>

oneCard

<div class="h-40 mb-4 mx-auto" key database

<div ring sec="/left/Pizza.Piz>

</div

</div

 <h2> class="text-lg"

Add

Ada

class "add-to-cart

custom

border 2px

fixed

div: fixed

Charge ins

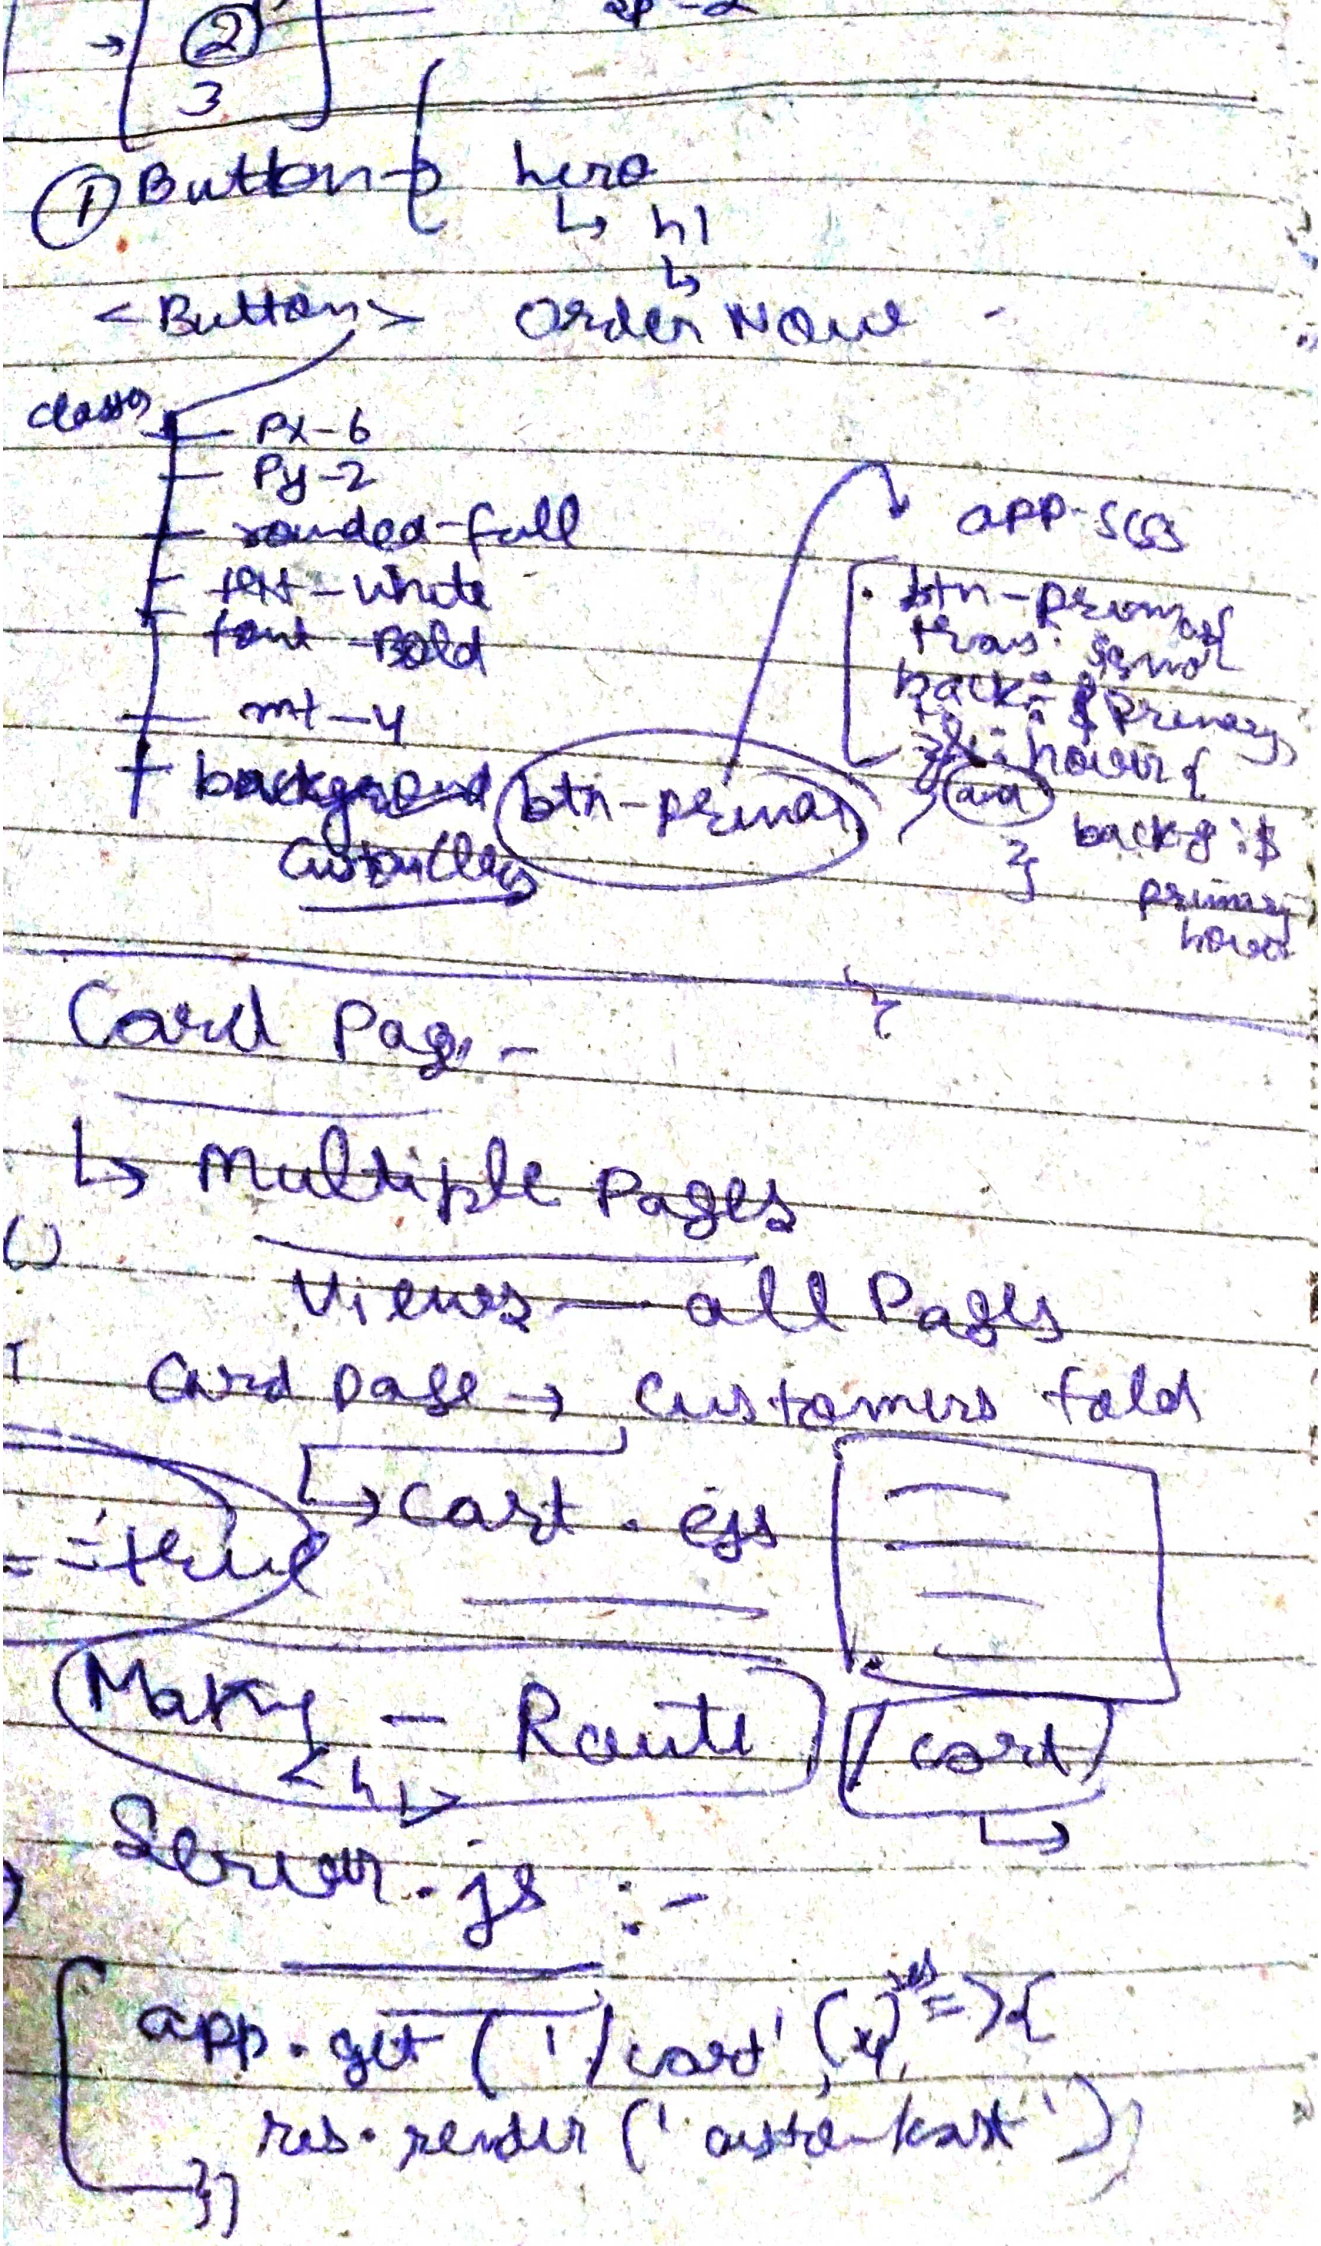
2
3
① Button → here
↳ h1
↳ Order Now
<Button>
class
px-6
py-2
rounded-full
text-white
font-bold
mt-4
background
customClass
btn-primary
app.scss
.btn-primary {
background: $primary;
&:hover {
background: $primary-hover;
}
}
Card Page -
↳ Multiple Pages
Views — all Pages
Card page → Customers fold
↳ cart.ejs
Make — Routes
<h1>
/cart
↳
Server.js :-
app.get('/cart', (req, res) => {
res.render('cart-cart')
});

Nav Bar

Nav Bar → Fixed

copy → paste Nav Bar

Better Soln

→ expressLayout

helps in repetition of nav bar

views

→ layout.ejs

code repeat
- NavBar
- footer

Copy all from home.ejs
- ~~not here~~ nav
- ~~return~~
- script, head → यहाँ से हटाएँ और layout में डालें
- head

in home.ejs
- hero
- menu

→ layout → Run करो

layout
- navbar
- → content embed → Show dynamic Page here

यहाँ ejs

<%- body %>

In Server.js :-

Router

layout

Layout

Routes → कहाँ

'cart Page → add footer

<%- body %>

<footer></footer>

<section>
- empty cart → py-16
-
  - <h1> Cart Empty 0 </h1>
  - text-3xl
  - font-bold
  - mb-2
  - copy
  - text-gray-500 mb-12
  - unique
  - <img src="/img/cupcake.png" alt="empty">
  - <a href="/"> Goto home Page
    - class="inline-block" bg-b
    - px-6
    - py-2 rounded-full
    - btn-primary
    - text-black
    - font-bold
    - mt-12
  - class="w-1/2 (40%) mx-auto

Why? Layout not work.

In app.css:

.section.card {

background: #2ecc71;

}

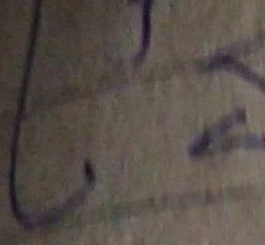
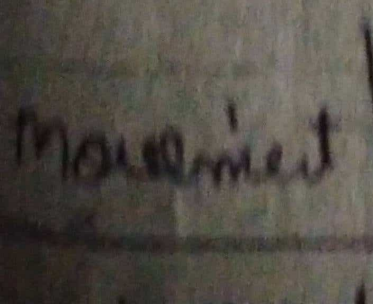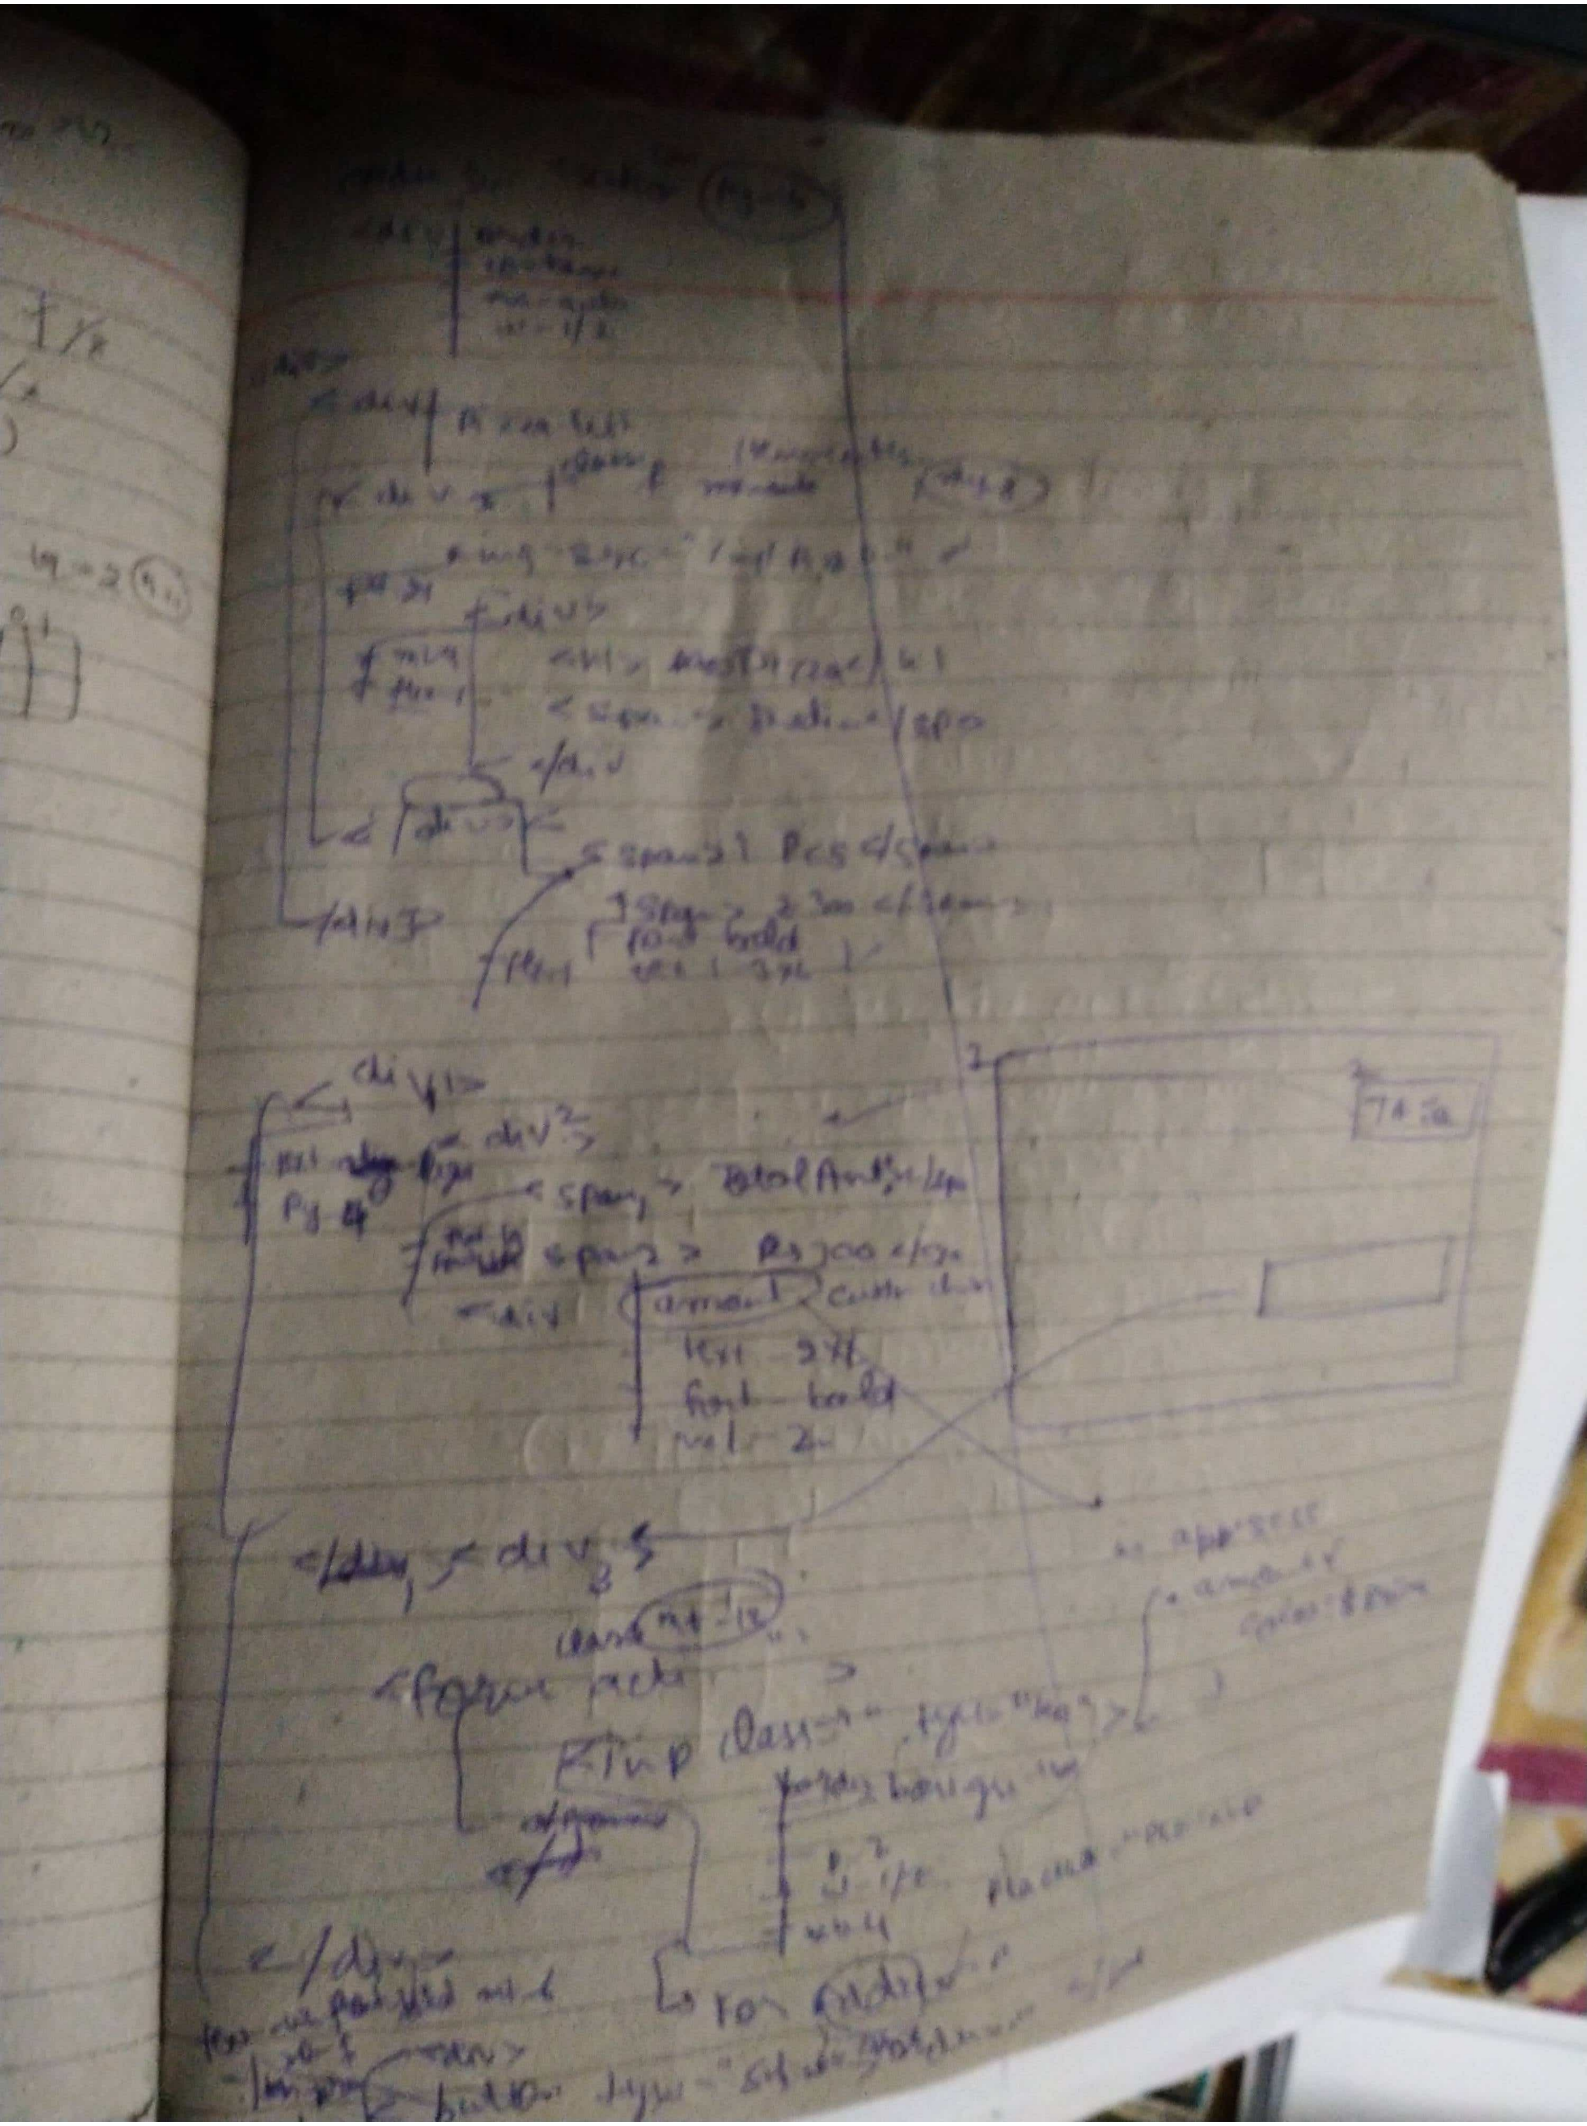
When it is added