

CRUD_Test

```
package CRUD;

import java.sql.Connection;
import java.sql.PreparedStatement;
import java.sql.ResultSet;

public class CRUD_Test {

    public static void main(String[] args) {

        CRUD_Test objTest=new CRUD_Test();

        //insert data

        objTest.create_data("1", "jinu", "jinu@gmail.com");
        objTest.create_data("2", "jawad", "jawad@gmail.com");

        //read data

        objTest.read_data("2");

        //update data

        objTest.update_data("2", "22", "jawad2", "jawad2@gmail");

        //delete data

        objTest.delete_data("1");

    }

    public void create_data(String sl_no,String name,String email){

        DB_Connection obj_DB_Connection=new DB_Connection();

        Connection connection=obj_DB_Connection.get_connection();

        PreparedStatement ps=null;

        try {

            String query="insert into user(sl_no,name,email) values (?,?,:)";

            ps=connection.prepareStatement(query);

            ps.setString(1, sl_no);

            ps.setString(2, name);

            ps.setString(3, email);

        } catch (Exception e) {

            e.printStackTrace();

        }

    }

}
```

```

        System.out.println(ps);
        ps.executeUpdate();
    } catch (Exception e) {
        System.out.println(e);
    }
}

```

```

public void read_data(String sl_no){
    DB_Connection obj_DB_Connection=new DB_Connection();
    Connection connection=obj_DB_Connection.get_connection();
    PreparedStatement ps=null;
    ResultSet rs=null;
    try {
        String query="select * from user";
        ps=connection.prepareStatement(query);
        //ps.setString(1, sl_no);
        System.out.println(ps);
        rs=ps.executeQuery();
        while(rs.next()){
            System.out.println("Sl no -"+rs.getString("sl_no"));
            System.out.println("name -"+rs.getString("name"));
            System.out.println("email -"+rs.getString("email"));
            System.out.println("-----");
        }
    } catch (Exception e) {
        System.out.println(e);
    }
}

```

```

public void update_data(String sl_no,String new_sl_no,String name,String email){
    DB_Connection obj_DB_Connection=new DB_Connection();

```

```

Connection connection=obj_DB_Connection.get_connection();
PreparedStatement ps=null;
try {
    String query="update user set sl_no=?,name=?,email=? where sl_no=?";
    ps=connection.prepareStatement(query);
    ps.setString(1, new_sl_no);
    ps.setString(2, name);
    ps.setString(3, email);
    ps.setString(4, sl_no);
    System.out.println(ps);
    ps.executeUpdate();
} catch (Exception e) {
    System.out.println(e);
}
}

```

```


public void delete_data(String sl_no){
    DB_Connection obj_DB_Connection=new DB_Connection();
    Connection connection=obj_DB_Connection.get_connection();
    PreparedStatement ps=null;
    try {
        String query="delete from user where sl_no=?";
        ps=connection.prepareStatement(query);
        ps.setString(1, sl_no);
        System.out.println(ps);
        ps.executeUpdate();
    } catch (Exception e) {
        System.out.println(e);
    }
}
}

```

```
}
```

```
---
```

output

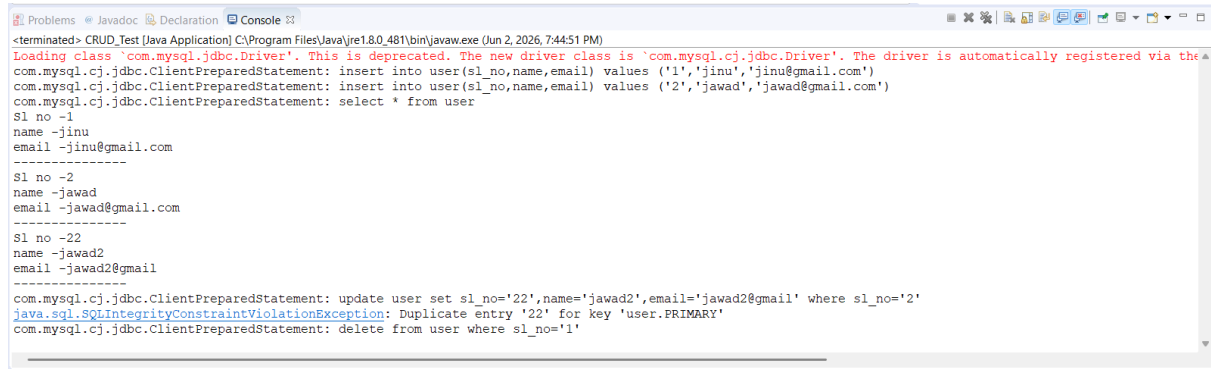

```
<terminated> CRUD_Test [Java Application] C:\Program Files\Java\jre1.8.0_481\bin\javaw.exe (Jun 2, 2026, 7:44:51 PM)
Loading class 'com.mysql.jdbc.Driver'. This is deprecated. The new driver class is 'com.mysql.cj.jdbc.Driver'. The driver is automatically registered via the
com.mysql.cj.jdbc.ClientPreparedStatement: insert into user(sl_no,name,email) values ('1','jinu','jinu@gmail.com')
com.mysql.cj.jdbc.ClientPreparedStatement: insert into user(sl_no,name,email) values ('2','jawad','jawad@gmail.com')
com.mysql.cj.jdbc.ClientPreparedStatement: select * from user
Sl no -1
name -jinu
email -jinu@gmail.com
-----
Sl no -2
name -jawad
email -jawad@gmail.com
-----
Sl no -22
name -jawad2
email -jawad2@gmail
-----
com.mysql.cj.jdbc.ClientPreparedStatement: update user set sl_no='22',name='jawad2',email='jawad2@gmail' where sl_no='2'
java.sql.SQLException: Duplicate entry '22' for key 'user.PRIMARY'
com.mysql.cj.jdbc.ClientPreparedStatement: delete from user where sl_no='1'
```

```
-----
```

DB_Connection

```
package CRUD;
```

```
import java.sql.Connection;
```

```
import java.sql.DriverManager;
```

```
public class DB_Connection {
```

```
public static void main(String[] args) {
```

```
    DB_Connection obj_DB_Connection=new DB_Connection();
```

```
    System.out.println(obj_DB_Connection.get_connection());
```

```
}
```

```
public Connection get_connection(){
```

```
    Connection connection=null;
```

```
try {
```

```
    Class.forName("com.mysql.jdbc.Driver");
```

```
    connection = DriverManager.getConnection("jdbc:mysql://localhost:3306/crud","root", "Anshul");
```

```
} catch (Exception e) {
```

```
    System.out.println(e);
```

```

}


return connection;

}

}

```

output



```

import java.sql.Connection;

import java.sql.PreparedStatement;

import java.sql.ResultSet;

public class CRUD_Test {

    public static void main(String[] args) {

        CRUD_Test objTest=new CRUD_Test();

        //insert data

        objTest.create_data(HTML CSS pages - tag values);

        objTest.create_data("201", "Arun", "arun@gmail.com");

        //read data

        //    objTest.read_data("201");

        //    //update data

        //    objTest.update_data("2", "22", "jawad2", "jawad2@gmail");

        //    //delete data

        //    objTest.delete_data("1");

    }
}

```

```

public void create_data(String sl_no,String name,String email){
    DB_Connection obj_DB_Connection=new DB_Connection();
    Connection connection=obj_DB_Connection.get_connection();
    PreparedStatement ps=null;
    try {

        ps=connection.prepareStatement("insert into user(sl_no,name,email) values
        (?, ?, ?)");

        ps.setString(1, sl_no);
        ps.setString(2, name);
        ps.setString(3, email);
        System.out.println(ps);
        ps.executeUpdate();
    } catch (Exception e) {
        System.out.println(e);
    }
}

```

```

public void read_data(String sl_no){
    DB_Connection obj_DB_Connection=new DB_Connection();
    Connection connection=obj_DB_Connection.get_connection();
    PreparedStatement ps=null;
    ResultSet rs=null;
    try {
        String query="select * from user where sl_no=?";
        ps=connection.prepareStatement(query);
        //ps.setString(1, sl_no);
        System.out.println(ps);
        rs=ps.executeQuery();
        while(rs.next()){
            System.out.println("Sl no -"+rs.getString("sl_no"));
        }
    }
}

```

```

        System.out.println("name -"+rs.getString("name"));

        System.out.println("email -"+rs.getString("email"));

        System.out.println("-----");
    }

    } catch (Exception e) {

        System.out.println(e);

    }

}

```

Mongo db

```

import com.mongodb.client.MongoClient;

import com.mongodb.client.MongoClients;

import com.mongodb.client.MongoDatabase;

public class MongoDBConnection {

    public static void main(String[] args) {

        String connectionString = "mongodb://localhost:27017";

        try (MongoClient mongoClient = MongoClients.create(connectionString)) {

            MongoDatabase database = mongoClient.getDatabase("testdb");

            System.out.println("Connected successfully to MongoDB!");

        }

    }

}

```

