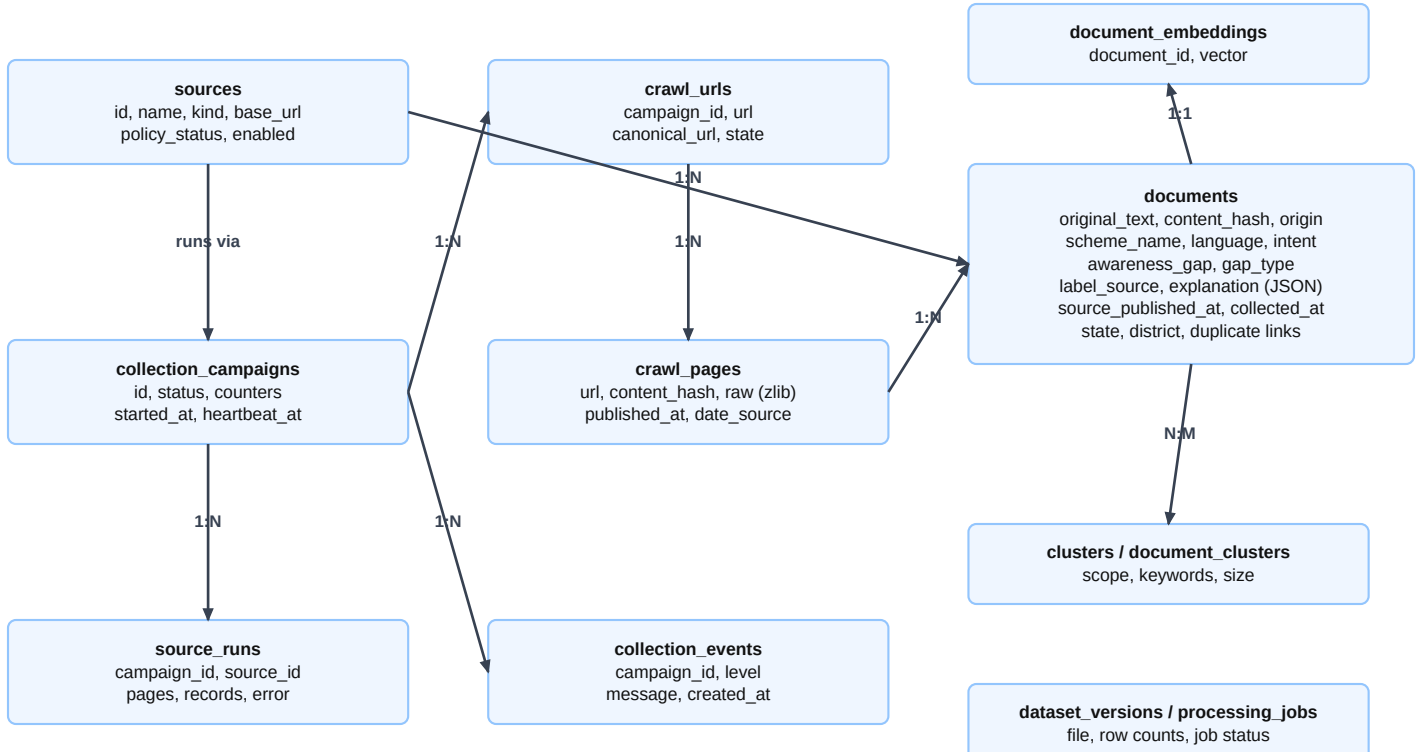
sources
id, name, kind, base_url
policy_status, enabled
crawl_urls
campaign_id, url
canonical_url, state
document_embeddings
document_id, vector
1:1
documents
original_text, content_hash, origin
scheme_name, language, intent
awareness_gap, gap_type
label_source, explanation (JSON)
source_published_at, collected_at
state, district, duplicate links
runs via
1:N
1:N
1:N
collection_campaigns
id, status, counters
started_at, heartbeat_at
crawl_pages
url, content_hash, raw (zlib)
published_at, date_source
N:M
1:N
1:N
clusters / document_clusters
scope, keywords, size
source_runs
campaign_id, source_id
pages, records, error
collection_events
campaign_id, level
message, created_at
dataset_versions / processing_jobs
file, row counts, job status