

```
#include <stdio.h>
```

```
#include <unistd.h>
```

```
#include <termios.h>
```

```
#include <string.h>
```

```
int main()
```

```
{
```

```
    struct termios oldt, newt;
```

```
    char buffer[100];
```

```
    int index = 0;
```

```
    char ch;
```

```
    tcgetattr(STDIN_FILENO, &oldt);
```

```
    newt = oldt;
```

```
    newt.c_lflag &= ~(ICANON | ECHO);
```

```
    tcsetattr(STDIN_FILENO, TCSANOW, &newt);
```

```
    while (1)
```

```
    {
```

```
        printf("ossh> ");
```

```
        fflush(stdout);
```

```
        index = 0;
```

```
        while (1)
```

```
        {
```

```
ch = getchar();

if (ch == '\n' || ch == '\r')
{
    buffer[index] = '\0';
    printf("\n");
    break;
}
else if (ch == 127 || ch == 8)
{
    if (index > 0)
    {
        index--;
        printf("\b \b");
        fflush(stdout);
    }
}
else if (index < 99)
{
    buffer[index++] = ch;
    putchar(ch);
    fflush(stdout);
}
}

if (strcmp(buffer, "exit") == 0)
{
```

```


        printf("Exiting shell...\n");
        break;
    }

    if (index > 0)
    {
        printf("You entered: %s\n", buffer);
    }
}

tcsetattr(STDIN_FILENO, TCSANOW, &oldt);

return 0;
}

```

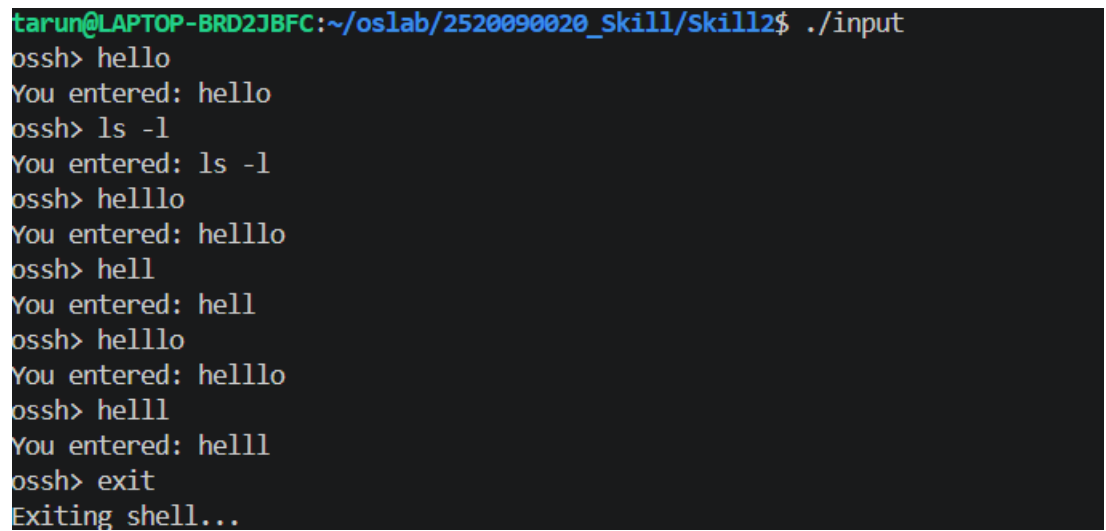

```

tarun@LAPTOP-BRD2JBFC:~/oslab/2520090020_skill/skill2$ ./input
ossh> hello
You entered: hello
ossh> ls -l
You entered: ls -l
ossh> helllo
You entered: helllo
ossh> hell
You entered: hell
ossh> helllo
You entered: helllo
ossh> helll
You entered: helll
ossh> exit
Exiting shell...

```

```

#include <stdio.h>
#include <stdlib.h>
#include <string.h>
#include <unistd.h>

```

```
#include <sys/wait.h>
```

```
int main()
```

```
{
```

```
    char command[100];
```

```
    while (1)
```

```
    {
```

```
        printf("MiniShell> ");
```

```
        scanf("%s", command);
```

```
        if (strcmp(command, "exit") == 0)
```

```
            break;
```

```
        pid_t pid = fork();
```

```
        if (pid == 0)
```

```
        {
```

```
            printf("Child PID : %d\n", getpid());
```

```
            execlp(command, command, NULL);
```

```
            printf("Command not found!\n");
```

```
            exit(1);
```

```
        }
```

```
        else
```

```
        {
```

```
            printf("Parent PID : %d\n", getpid());
```

```
        wait(NULL);  
    }  
}  
  
return 0;  
}
```

```
*** exited with 0 ***  
tarun@LAPTOP-BRD2JBFC:~$ cd oslab  
tarun@LAPTOP-BRD2JBFC:~/oslab$ mkdir minishell  
cd minishell  
tarun@LAPTOP-BRD2JBFC:~/oslab/minishell$ nano minishell.c  
tarun@LAPTOP-BRD2JBFC:~/oslab/minishell$ gcc minishell.c -o minishell  
tarun@LAPTOP-BRD2JBFC:~/oslab/minishell$ ./minishell  
MiniShell> pwd  
Parent PID : 12868  
Child PID : 12873  
/home/tarun/oslab/minishell  
MiniShell> ls  
Parent PID : 12868  
Child PID : 12874  
minishell minishell.c  
MiniShell> date  
Parent PID : 12868  
Child PID : 12875  
Sat Aug 1 04:06:42 UTC 2026  
MiniShell> exit  
tarun@LAPTOP-BRD2JBFC:~/oslab/minishell$ |
```