Approach

Netflix Business case study

Analyze the data and generate insights that could help Netflix decide which type of shows/movies to produce and how to grow the business.

Major Steps:

- Data Preprocessing
  - Solve nested data challenge for the following columns: Director, Cast, Listed In, Country
  - Treat Duration Column
  - Date Time Columns
  - Rating Column
- Data Cleaning
  - Multiple Level Imputation
- EDA
  - Univariate
  - Bivariate

Netflix Business case study

Movie Title	Actor
Scaler-A Data Scientist	Anshuman, Abhimanyu
Jhola	Ankit, Bhavish
Myjus	Ravee, Divya
Hamara Bajaj	Bajaj

Movie Title	Actor
Scaler-A Data Scientist	Anshuman
Scaler-A Data Scientist	Abhimanyu
Jhola	Ankit
Jhola	Bhavish
Myjus	Ravee
Myjus	Divya
Hamara Bajaj	Bajaj

Type	duration	mins	season
TV	1 season	NA	1
TV	3 season	NA	3
TV	2 season	NA	2
movie	190 mins	190	NA
movie	160 mins	160	NA
movie	120 mins	120	NA

mins → continuous variable


{ 190, 191, 191·1, 191·11 } → any possible value within a range


Seasons → categorical value

{ 1, 2, 3, 4, 5 . . . . } → discrete value only

1·2 ✗

2·2 ✗

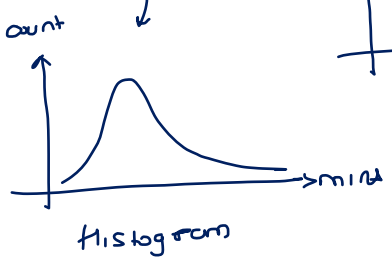

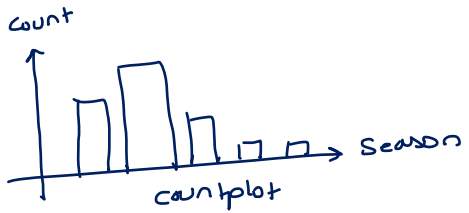

Imputation using mean / median / mode.

missing value imputation

process of replacing the null of the dataset with the closest possible approximated value.

cust·id	gender	Prod·cat	Price
01	M	mobile	10K
02	F	mobile	15K
03	M	Dress	2K
04	M	mobile	21K
05	F	NA	NA
06	M	mobile	23K
07	M	mobile	19K
08	F	dress	5K
09	F	dress	7K

① Data type column which comes with the missing value

→ categorical

→ mode / frequency imputation

Prod·cat — mobile – 5, Dress – 3 — Imputed with mode

→ continuous / numerical

→ mean / average imputation

avg(price) = 12.75K Imputed with mean

category wise imputation →

we look at grouped categories to better approximate the missing values.

	mobile	Dress
M	4	1
F	1	2

2 ← Imputed value

	avg (Price)
mobile	17.6K
Dress	4.6K

4.6K ← Imputed value

	Director	country
	A	IND
	B	US
	A	IND
	A	US
	B	US
	B	US
	A	NA

IND

country → categorical

mode

mode (country) = USA

	IND	US
A	2	1
B	0	3