

RESEARCH ARTICLE

Arbitrage-free deep option pricing via convex composition: architectural guarantees and universal approximation

[Author name]^a

^a[Department, Institution, City, Country]

ARTICLE HISTORY

Compiled May 23, 2026

ABSTRACT

We introduce ARBNET, a neural call-pricing architecture that is free of static arbitrage *by construction* rather than by penalisation. The European call price is parameterised as the sum of a forward-intrinsic baseline and a non-negative correction, the correction being a finite mixture of products of (i) input-convex networks in the strike argument and (ii) monotone networks in time-to-maturity, modulated by a smooth boundary factor that vanishes at expiry. The composition machinery is elementary — convexity is preserved under non-negative weighted sums and under composition with convex non-decreasing scalar functions, and a product of non-negative non-decreasing functions is non-decreasing — yet it delivers four pointwise no-arbitrage conditions simultaneously: absence of butterfly arbitrage, absence of calendar arbitrage, the expiry boundary, and the forward-intrinsic lower bound. We prove that the resulting surface satisfies these conditions for every choice of network weights, with no tolerance-based residual, and we prove a universal-approximation theorem with explicit rate on the cone of continuous, strike-convex, time-monotone, non-negative surfaces vanishing at expiry. We also delimit the construction honestly: surfaces whose forward time value is non-convex in strike, including the entire Black–Scholes family at any positive volatility, lie outside the hypothesis class and cannot be represented exactly. Empirically, in a walk-forward study spanning 1,359 trading days of National Stock Exchange of India (NSE) Nifty 50 index options (2019–2024), the architecture records identically zero butterfly and zero calendar violations on *every* day, whereas a faithful soft-penalty Akerer-style baseline violates static arbitrage on 961 of those 1,359 days; a controlled study on 30 rough-Bergomi surfaces gives the same qualitative picture. The guarantee carries a measurable price-fitting cost: ARBNET’s daily root mean square pricing error exceeds the soft-penalty baseline’s by about 59 INR on the real data (Diebold–Mariano statistic 32.1, $p < 10^{-3}$). We argue that this fit-compliance frontier is structural rather than artifactual, and that the architecture is appropriate whenever downstream consumers — hedging desks, value-at-risk pipelines, exotic-product calibration — require certified no-arbitrage at every grid evaluation, independently of the training trajectory.

KEYWORDS

No-arbitrage; neural option pricing; input-convex networks; monotone networks; universal approximation; deep hedging; rough volatility; risk-neutral density

JEL CLASSIFICATION

C45; G13

AMS CLASSIFICATION

91G20; 91G60; 68T07

1. Introduction

1.1. Context and motivation

A European call surface, viewed as a function $(K, T) \mapsto C(K, T)$ at a fixed valuation date, encodes the market’s joint expectation of strike-payoff and maturity-payoff over the underlying.

Modern derivative desks consume this surface in three distinct downstream tasks: hedging (delta and gamma extraction via the first two strike derivatives of the surface and the spot derivative of the price); marking the book and computing capital (the surface determines the risk-neutral density via the Breeden–Litzenberger relation (Breeden and Litzenberger, 1978), which feeds value-at-risk pipelines and stress tests); and calibrating exotic-product models (variance swaps, barrier options, and cliquets all require a consistent surface to extract a unique implied density). Each of these consumers depends on the surface being *free of static arbitrage*: no portfolio of calls at the same valuation date should yield a non-negative payoff at some future date with strictly negative cost today.

Static arbitrage on a call surface manifests as the violation of any of three pointwise structural conditions (Cousot, 2007; Roper, 2010; Davis and Hobson, 2007). Convexity in strike at every maturity is implied by the existence of a butterfly portfolio with non-negative payoff but zero cost; its violation has been documented as the canonical no-arbitrage failure mode on stressed surfaces (Kahalé, 2004; Fengler, 2009). Monotonicity in maturity of the carry-adjusted price ($e^{rT}C(K, T)$ non-decreasing in T) is implied by the calendar-spread argument; its violation creates arbitrage between options of different maturities at the same strike. Finally, the forward-intrinsic lower bound $C(K, T) \geq e^{-rT}(F_T - K)^+$, with $F_T = Se^{(r-q)T}$, comes from the static replication of the forward via long-call–short-put parity (Merton, 1973). A fourth, often implicit, condition is the expiry boundary $C(K, 0) = (S - K)^+$.

Classical financial theory provides parametric models that are arbitrage-free by construction. The Black–Scholes model (Black and Scholes, 1973) is arbitrage-free at any single volatility but cannot fit empirical surfaces, which exhibit pronounced smiles and skews (Cont, 2001; Rebonato, 2004). The local-volatility model of Dupire (Dupire, 1994) fits perfectly by construction but has been shown to mismatch dynamic properties of the surface (Cont and da Fonseca, 2002; Hagan et al., 2002). Stochastic-volatility models (Heston (Heston, 1993), SABR (Hagan et al., 2002), and their many extensions (Andersen and Piterbarg, 2007)) are dynamically arbitrage-free and have analytically tractable transforms (Lewis, 2001; Carr and Madan, 1999; Eberlein et al., 2010), but their fit to empirical surfaces requires either many free parameters (Andreasen and Høge, 2011) or model extensions such as jumps (Carr et al., 2002; Cont and Tankov, 2003). Rough-volatility models (Alòs et al., 2007; Bayer et al., 2016, 2023; Bennedsen et al., 2017; El Euch and Rosenbaum, 2018) achieve realistic ATM volatility behaviour with few parameters but have non-trivial calibration costs (Horvath et al., 2021b). At the surface level, the SVI (Gatheral, 2004) and SSVI (Gatheral and Jacquier, 2014a) parameterisations of total implied variance are arbitrage-free under explicit parameter constraints (Gatheral and Jacquier, 2014b; Gatheral et al., 2018); they are widely deployed in practice but have a finite-dimensional capacity that constrains the fit on stressed wings.

1.2. The static-arbitrage failure mode of neural pricers

The advent of deep learning has produced an array of neural pricers (Ackerer et al., 2020; Chataigner et al., 2020; Horvath et al., 2021a; Ruf and Wang, 2020b,a; Hutchinson et al., 1994; Itkin, 2019; Sirignano, 2019; Sirignano and Cont, 2019; Liu et al., 2019; Ferguson and Green, 2018), which trade the parametric tractability of classical models for the capacity of multi-layer architectures. These pricers achieve excellent in-sample fit and, with enough training, decent out-of-sample generalisation. However, almost all neural pricers enforce no-arbitrage *softly*: an additional term proportional to the negative part of the local arbitrage violation is added to the training loss, typically as $\lambda_{\text{bf}} \mathbb{E}[(-\partial_K^2 C_\theta)_+^2]$ for the butterfly condition and $\lambda_{\text{cal}} \mathbb{E}[(\partial_T(e^{rT}C_\theta))_-^2]$ for the calendar condition, with the expectations approximated by Monte Carlo on a finite training grid. The soft penalty paradigm has a number of well-understood limits.

First, the penalty is a regulariser, not a constraint. At any finite penalty weight λ , the optimum trades off the pricing-error term against the penalty term, and as long as the pricing-error gradient pulls the surface into the arbitrage region anywhere, some violation will persist. In our experiments, with the standard penalty weight $\lambda = 1$ and training budgets in the hundreds of

epochs, the soft-penalty baseline still violates static arbitrage on 961 of the 1,359 real trading days of our walk-forward study (Section 8.1).

Second, the penalty is evaluated on the training grid, not over the continuous domain. The neural pricer is queried at many points off-grid by downstream consumers — e.g., at the strikes of exotic-product instruments, at fine grids for risk-neutral density extraction, or at perturbations of the spot for delta hedging — and at those off-grid points, no penalty was applied during training. A surface that is compliant on the training grid can therefore violate the conditions arbitrarily far off-grid. This is the noisy-empirical-grid analogue of the more general phenomenon studied by Aït-Sahalia and Duarte (2003) in the context of shape-constrained nonparametric pricing.

Third, residual violations propagate. A non-convexity in K at one grid point implies a negative second strike derivative, which in turn implies a negative implied density at that point. The negative density propagates into any computation that uses the surface — expected payoffs of exotic products, value-at-risk computations, model-free volatility indices — with potentially significant aggregate effects. Hedging with a delta extracted from a non-convex surface introduces additional path-dependent variance because the delta is no longer monotone in strike.

The natural alternative is to make the architecture itself arbitrage-free. This idea has historical precedent. SVI (Gatheral, 2004) and SSVI (Gatheral and Jacquier, 2014a) are structurally arbitrage-free under parameter constraints in the implied-variance domain. In the call-price domain, Kahalé (2004) and Fengler (2009) construct arbitrage-free interpolators of finite quote sets via spline-based monotone-convex schemes; the constructions are exact but not learnable from data at the level of a neural model. Density-network approaches (Horvath et al., 2021a) parameterise the risk-neutral density ρ_T directly; this trivially enforces butterfly but does not give a closed-form calendar enforcement. Neural stochastic differential equation (neural-SDE) market models (Cohen et al., 2023, 2022; Cuchiero et al., 2020; Gambarara and Teichmann, 2021) build arbitrage-free dynamics on the underlying process; static no-arbitrage is then a corollary. This last line is the most theoretically satisfying but is also the most computationally costly and the least transparent to inspect at the level of a single surface.

1.3. Contributions

We make four contributions, each pinned to an explicit claim and supported by theory or experiment.

C1. A neural architecture with structural arbitrage-freeness. We parameterise the call surface as

$$C_\theta(K, T) = e^{-rT} [(F_T - K)^+ + \Delta_\theta(K, T)], \quad F_T = S e^{(r-q)T}, \quad (1)$$

with a non-negative correction Δ_θ given by

$$\Delta_\theta(K, T) = S (1 - e^{-\alpha_\theta T}) \sum_{j=1}^J s_{j,\theta} \text{softplus}(\phi_j^{\text{cvx}}(K/S)) \text{softplus}(\phi_j^{\text{mon}}(T)), \quad (2)$$

where each ϕ_j^{cvx} is an input-convex network (Amos et al., 2017; Bunne et al., 2022; Chen et al., 2019) in normalised strike, each ϕ_j^{mon} is a monotone network (Daniels and Velikova, 2010; Sill, 1998; Wehenkel and Louppe, 2019; Runje and Shankaranarayana, 2023; Guo and Lan, 2020) in time-to-maturity, and the scalar gates satisfy $s_{j,\theta}, \alpha_\theta > 0$. Theorem 5.4 establishes that this construction satisfies all four conditions of Definition 3.1 for every θ , with no tolerance bound. The construction is in the call-price domain rather than the implied-vol domain: as we discuss in Section 4.5, the implied-vol domain would require enforcing the non-linear Durrleman positivity condition, which is not preserved by the simple compositions used here.

C2. A universal-approximation theorem with explicit rate. Theorem 5.10 states that the hypothesis class $\mathcal{C}_{\text{cvx}, \nearrow}$ of continuous, strike-convex, time-non-decreasing surfaces vanish-

ing at $T = 0$ on the compact strike-maturity box $\mathcal{B} = [K_0, K_1] \times [0, T_{\max}]$ is uniformly approximable by the parameterisation Equation (2). The number of mixture components scales as $J = \mathcal{O}(\omega_g^{-1}(\varepsilon/3)^{-2})$, where ω_g is the bivariate modulus of continuity of the target g . The proof combines a tensor-product density argument with the Amos–Xu (2017) input-convex-network density result and the Daniels–Velikova (2010) monotone-network density result; the overall structure follows the universal-approximation programme inaugurated by Cybenko (1989), Hornik (1989; 1991), Leshno et al. (1993), Pinkus (1999), and Yarotsky (2017).

C3. A real-data walk-forward study and the fit–compliance frontier. In a walk-forward study over 1,359 trading days of National Stock Exchange of India (NSE) Nifty 50 index options (1 January 2019 to 5 July 2024), ARBNET records identically zero butterfly and zero calendar violations on *every* day, while a faithful soft-penalty Akerer-style baseline violates static arbitrage on 961 of those 1,359 days. A controlled study on 10 rough-Bergomi surfaces with 3 seeds each (30 trials) reproduces the picture: ARBNET is the only architecture with a 0% violation rate on every trial. The guarantee is not free — on the real data ARBNET’s mean daily price RMSE exceeds the soft-penalty baseline’s by 58.98 INR, a gap that is overwhelmingly significant under a HAC-corrected Diebold–Mariano test ($DM = 32.05$, $p < 10^{-3}$). The trade-off is localised cleanly on a fit–compliance frontier (Figure 3).

C4. A reproducible open-source implementation. A self-contained PyTorch (Paszke et al., 2019) package reproduces every number in Tables 2 and 3 from the data committed to the repository and pinned random seeds: the synthetic study runs in under two minutes on a single CPU, the full real-data walk-forward in a few CPU-hours. The dependency tree is minimal, and the data pipeline, loss landscape, training schedule, and evaluation protocols are all exposed as configuration objects.

1.4. *What this paper does not claim*

To circumscribe our claims sharply, we are explicit about what we do *not* demonstrate. First, we do not claim uniform RMSE dominance over the soft-penalty baseline: as Table 3 shows, the soft-penalty baseline fits prices better on average, and a practitioner whose loss function is exclusively RMSE will prefer it. Second, we do not claim that the architecture can represent every plausibly-encountered call surface: surfaces whose forward time-value is non-convex in K , including the Black–Scholes family at any positive volatility (proved in Proposition 5.11), are outside the hypothesis class. Third, we treat only *static* no-arbitrage (i.e., the pointwise structural conditions on $C(\cdot, \cdot)$ at a single valuation date), not dynamic no-arbitrage (the requirement that there exist a consistent risk-neutral process driving the surface forward in time); the latter is the province of neural-SDE market models (Cohen et al., 2023; Cuchiero et al., 2020; Gambarara and Teichmann, 2021). Fourth, our real-data study covers a single liquid index — NSE Nifty 50 — over one five-and-a-half-year window; we do not claim that the *magnitudes* (the size of the RMSE gap, the violation frequency of the soft-penalty baseline) transfer unchanged to other underlyings or periods. The qualitative conclusion — a hard guarantee for ARBNET against residual violations for soft penalties — is a property of the architecture and should transfer, but the numbers are market-specific.

1.5. *Paper structure*

The rest of the paper proceeds as follows. Section 2 reviews the literature on parametric, soft-penalty, and structurally-constrained pricers, drawing the conceptual map within which our contribution sits. Section 3 introduces notation and recalls the static no-arbitrage conditions with their economic interpretation; it also discusses the Lee moment formula (Lee, 2004, 2005) that constrains the wings of an arbitrage-free surface. Section 4 introduces the construction itself, with the computational graph (Figure 1), forward-pass pseudocode (Algorithm 1), motivating discussion for each design choice, and complexity analysis. Section 5 states and proves the two main theorems. Section 6 describes the training objective, the diagnostics, and the optimisation

algorithm. Section 7 details the experimental protocol for both the synthetic and the real-data studies. Section 8 reports the findings with five figures and two result tables. Section 9 discusses limitations, comparisons to alternatives, and future directions. Section 10 concludes. Appendices contain detailed proofs, Greek calculations, the Newton inversion procedure, and the full hyper-parameter table.

2. Related work

We organise prior work around the binary distinction between *structural* and *soft* arbitrage enforcement, and around the further distinction between pricers in the implied-vol domain and the call-price domain.

2.1. Parametric arbitrage-free models

The classical lineage of arbitrage-free pricing begins with Black–Scholes (Black and Scholes, 1973; Merton, 1973), in which the assumption of geometric Brownian motion of the underlying yields a closed-form call price under a single volatility parameter σ . The model is structurally arbitrage-free and provides the language in which all subsequent surfaces are described: the call price determines an implied volatility $\sigma(K, T)$ via inversion of the Black–Scholes formula, and a static-arbitrage-free surface has a non-decreasing total implied variance $w(k, T) = \sigma^2 T$ in T and a Durrleman-positive shape in k (Gatheral and Jacquier, 2014b,a). The empirical inadequacy of Black–Scholes — the famous smile and skew (Rebonato, 2004) — motivated three subsequent lines of work, each with its own arbitrage-freeness story.

Local-volatility models (Dupire, 1994) parameterise the diffusion coefficient as a deterministic function of spot and time; the resulting call surface fits the observed surface exactly by construction. However, the dynamics of the local-volatility model are well-known to mismatch the empirical dynamics of the smile (Cont and da Fonseca, 2002); in particular, the smile dynamics under a local-volatility model are essentially backwards from observed market dynamics, a phenomenon documented by Hagan et al. (2002). Stochastic-volatility models such as Heston (Heston, 1993) and SABR (Hagan et al., 2002), and their many extensions (Andersen and Piterbarg, 2007; Andersen and Andreasen, 2000; Andreasen and Huge, 2011), restore plausible dynamics at the cost of giving up exact static fit; calibration trades off in-sample fit against parsimony. These models are dynamically arbitrage-free under explicit conditions on their parameters; Lewis (2001) and Carr–Madan (1999) gave efficient Fourier methods for their evaluation, and the analytical structure has been extended to Lévy and exponential-Lévy models (Carr et al., 2002; Cont and Tankov, 2003; Eberlein et al., 2010). Rough-volatility models (Alòs et al., 2007; Bayer et al., 2016; Bennedsen et al., 2017; Bayer et al., 2023; El Euch and Rosenbaum, 2018; Jacquier et al., 2018) take the Hurst parameter $H < 1/2$ as a structural feature and achieve realistic ATM-volatility behaviour, but calibration remains computationally non-trivial and has been a recent target of neural acceleration (Horvath et al., 2021b; Bayer and Stemper, 2019).

At the surface level, the SVI parameterisation (Gatheral, 2004) models total implied variance per maturity as a five-parameter raw form, and SSVI (Gatheral and Jacquier, 2014a) extends this to a surface-wide three-parameter form. Both are arbitrage-free under explicit (and often non-tight) parameter constraints; Jacquier and Roome (2014b) catalogue these constraints, and Gatheral et al. (2018) extends the analysis. SVI and SSVI are widely deployed in practice. They sit conceptually closest to our construction in that they offer structural arbitrage-freeness via parameter constraints rather than via tolerance-based penalties; the difference is that their capacity is finite-dimensional (five or three parameters per surface), whereas our architecture has neural-network capacity.

2.2. *Soft-penalty neural pricers*

The pioneering work of Hutchinson, Lo, and Poggio (1994) applied a neural network to non-parametric option pricing, decades before the deep learning revolution. The modern wave begins with Akerer, Tagasovska, and Vatter (2020), who train an unconstrained multi-layer perceptron $w_\theta(k, T)$ in log-moneyness coordinates as a model for the total implied variance, and add to the price-RMSE training loss two penalty terms,

$$\mathcal{L}_{\text{soft}}(\theta) = \mathcal{L}_{\text{price}}(\theta) + \lambda_{\text{bf}} \sum_{(k,T) \in \mathcal{G}} (-\mathcal{D}(w_\theta)(k, T))_+ + \lambda_{\text{cal}} \sum_{(k,T) \in \mathcal{G}} (-\partial_T w_\theta(k, T))_+, \quad (3)$$

where $\mathcal{D}$ is the Durrleman positivity operator and $\mathcal{G}$ is a training grid. Chataigner, Crépey, and Dixon (2020) extend the paradigm directly to the call-price domain. Horváth, Muguruza, and Tomas (2021a) apply a similar architecture to deep pricing under rough-volatility models. Itkin (2019) surveys variants. The Akerer-style soft-penalty baseline used in our experiments instantiates this paradigm faithfully, sharing the optimiser, learning-rate schedule, and training data of ARBNET. Ruf and Wang (2020b; 2020a) review the broader literature systematically.

All of these works share the same fundamental limit: the penalty is a regulariser that pushes the surface away from violations but does not eliminate them. At any finite penalty weight and any finite training budget, the optimum is a stationary point of the regularised loss, which generically has residual violations. Even pushing $\lambda \rightarrow \infty$ does not formally suffice: the resulting constrained optimisation problem must be solved exactly, which is intractable for neural pricers because the constraint must hold over a continuous (not finite-grid) domain. The shape-constrained nonparametric programme of Ait-Sahalia and Duarte (2003) attempts this via projection onto the convex cone of admissible surfaces but at much smaller scale than required for production neural pricers.

2.3. *Structurally-constrained neural pricers*

A growing literature aims to build no-arbitrage into the architecture itself rather than into the loss. Three approaches are visible. The first uses input-convex networks (ICNNs) (Amos et al., 2017) and monotone networks (Daniels and Velikova, 2010; Sill, 1998) as building blocks within the implied-vol domain. The challenge is that the no-arbitrage condition in the implied-vol domain is the Durrleman positivity, a non-linear inequality involving w , $\partial_k w$, and $\partial_k^2 w$ together (Gatheral and Jacquier, 2014a); this is not preserved by simple convex+monotone composition. One must either restrict to surfaces where the Durrleman positivity is implied by more elementary conditions (which is the SVI case) or accept residual violations. The work of Bergeron et al. (2022) on variational autoencoders for IV surfaces and Henry-Labordère (2019) on generative models for trading strategies sit at this interface.

The second approach builds neural stochastic differential equation (neural-SDE) market models on the underlying process (Cohen et al., 2023, 2022; Cuchiero et al., 2020; Gambara and Teichmann, 2021; Liu et al., 2019). Here the underlying process itself is a neural object, and arbitrage-freeness emerges as a consistency requirement on the drift and diffusion under the risk-neutral measure. The approach is theoretically clean and yields both static and dynamic compliance simultaneously, but it is computationally demanding (one must simulate paths under the learned SDE for every pricing query) and the inductive bias of the surface shape is harder to read off.

The third approach, including ours, parameterises the call price directly in the call-price domain and uses the elementary structural conditions of Definition 3.1. This is feasible because, in the call-price domain, the no-arbitrage conditions are first-order linear (convexity in K , monotonicity in $e^{rT}C$ in T), which is exactly what ICNN and monotone network compositions preserve. Imaki et al. (2021) pursue a closely related agenda in the context of deep hedging; (Ferguson and Green, 2018) explore the connection between neural pricing and partial differential equation methods.

2.4. Deep hedging

Buehler, Gonon, Teichmann, and Wood (Buehler et al., 2019) introduced deep hedging, in which the hedging policy is learned directly without an intermediate pricing model. The pricing model is replaced by a market simulator (e.g., a calibrated rough-Bergomi process), and the policy network is trained to minimise a convex risk measure (CVaR, entropic risk) of the terminal hedged PnL. Subsequent work (Chakrabarti et al., 2019; Imaki et al., 2021; Vallarino, 2024) has refined this in directions including transaction costs and reinforcement-learning-style policy gradients. Deep hedging is conceptually orthogonal to our architecture: deep hedging gives a policy but no surface; ARBNET gives a surface (with structural compliance) from which a policy is extracted via autodifferentiation of $\partial_S C_\theta$ (Appendix B). The two approaches can therefore be combined: ARBNET provides the calibrated, certified surface; deep hedging provides the policy under the calibrated dynamics.

2.5. Universal approximation in option pricing

The lineage of universal-approximation theorems for neural networks runs from Cybenko (1989) and Hornik (1989; 1991) through Leshno et al. (1993), Pinkus (1999), and Yarotsky (2017). The classical results establish L^∞ density of multi-layer feed-forward networks in continuous functions on compacta. Less well-known is the shape-constrained version: ICNNs are dense in continuous convex functions (Amos et al., 2017; Chen et al., 2019; Bunne et al., 2022), and monotone networks are dense in continuous non-decreasing functions (Daniels and Velikova, 2010; Wehenkel and Louppe, 2019; Runje and Shankaranarayana, 2023; Guo and Lan, 2020). Sirignano and Spiliopoulos (2019) prove a deep Galerkin universal-approximation theorem in the context of partial differential equation solvers. Our Theorem 5.10 extends this lineage to the cone $\mathcal{C}_{\text{cvx}, \nearrow}$ of strike-convex, time-monotone, non-negative surfaces.

3. Preliminaries and notation

We work throughout under a fixed risk-neutral probability measure $\mathbb{Q}$ on a filtered probability space $(\Omega, \mathcal{F}, \{\mathcal{F}_t\}, \mathbb{Q})$. The underlying is a càdlàg $\mathbb{Q}$ -semimartingale S_t with $S_0 = S > 0$; the risk-free rate r and dividend yield q are deterministic constants with $r \geq q \geq 0$. We will treat call prices as the primary object and recover implied volatility by inversion of the Black–Scholes formula (Black and Scholes, 1973).

3.1. Notation

Table 1 collects the notation used throughout. We adopt the convention that K, T, S are scalars or batched 1-tensors as appropriate; subscripts i index data, subscripts j index mixture experts, and subscripts ℓ index network layers.

3.2. The static no-arbitrage conditions, with economic interpretation

We restate the conditions with their economic content, so as to make their violation concrete.

Definition 3.1 (Static no-arbitrage conditions). A continuous map $C : \mathbb{R}_{\geq 0} \times [0, T_{\max}] \rightarrow \mathbb{R}_{\geq 0}$ is free of static arbitrage if it satisfies:

- (A1) *Convexity in strike*: for every T , $K \mapsto C(K, T)$ is convex on $\mathbb{R}_{\geq 0}$.
- (A2) *Carry-adjusted calendar monotonicity*: for every K , $T \mapsto e^{rT} C(K, T)$ is non-decreasing.
- (A3) *Expiry boundary*: $C(K, 0) = (S - K)^+$ for every K .
- (A4) *Forward intrinsic lower bound*: $C(K, T) \geq e^{-rT} (F_T - K)^+$.

Table 1. Notation used throughout.

Symbol	Meaning
S, K, T	Spot, strike, time-to-maturity (in years)
r, q	Risk-free rate, dividend yield ($r \geq q \geq 0$)
$F_T = S e^{(r-q)T}$	Forward at time T
$C(K, T)$	Call price at strike K , maturity T
$(F_T - K)^+$	Intrinsic value of forward call
$\partial_{KK}C$	Second strike derivative (proportional to risk-neutral density)
$\mathbb{Q}$	Risk-neutral measure
$\sigma(K, T)$	Implied volatility (Black–Scholes-inverted)
$w(k, T) = \sigma^2 T$	Total implied variance, $k = \log(K/F_T)$
θ	Parameter vector (network weights and gates)
Θ	Parameter space
$\text{softplus}(u) = \log(1 + e^u)$	Smooth ReLU
$\omega_f(\delta)$	Modulus of continuity of f
J	Number of mixture experts in ARBNET
ϕ_j^{cvx}	j th ICNN (convex in strike input)
ϕ_j^{mon}	j th MONO (non-decreasing in time input)
$s_j, \theta, \alpha_\theta$	Per-expert scale gate; boundary-rate gate
$\mathcal{B}$	Compact strike-maturity box $[K_0, K_1] \times [0, T_{\max}]$
$\mathcal{C}_{\text{cvx}, \nearrow}$	Cone of continuous, strike-convex, time-monotone, non-negative surfaces
$\rho_T(K)$	Risk-neutral density at maturity T

The economic content of (A1) is captured by the butterfly trade: for strikes $K_1 < K_2 < K_3$ with $K_2 = (K_1 + K_3)/2$, the portfolio long $C(K_1) + C(K_3)$, short $2C(K_2)$ has non-negative payoff at maturity (by convexity of the call payoff in strike) and zero cost at maturity if C is exactly linear in K . If C is concave at K_2 , the butterfly has strictly positive payoff and strictly negative cost today: an arbitrage. Equivalently, by Breeden and Litzenberger (Breeden and Litzenberger, 1978), $\partial_K^2 C(K, T) = e^{-rT} \rho_T(K)$, where ρ_T is the risk-neutral marginal density of S_T under $\mathbb{Q}$. A negative second derivative is therefore a negative density: not a valid probability distribution.

The economic content of (A2) is the calendar-spread trade: for maturities $T_1 < T_2$ and the same strike K , the portfolio long $C(K, T_2)$, short $C(K, T_1)$ has non-negative payoff if held to T_2 , after carrying the short position at the risk-free rate r . The cost is $C(K, T_2) - e^{r(T_2-T_1)} \mathbb{E}^{T_1}[C(K, T_1)] = C(K, T_2) - e^{rT_2} \cdot e^{-rT_1} \mathbb{E}^{T_1}[C(K, T_1)]$; rearranging, no arbitrage requires $e^{rT_2} C(K, T_2) \geq e^{rT_1} C(K, T_1)$.

Condition (A3) is by definition: at expiry, the call price equals the payoff. Condition (A4) is by the static replication of the forward via long-call–short-put parity: $C(K, T) - P(K, T) = e^{-rT}(F_T - K)$, combined with $P(K, T) \geq 0$ (the put price is non-negative).

Definition 3.1 does not capture all of static no-arbitrage (Cousot, 2007; Davis and Hobson, 2007): for instance, the upper bound $C(K, T) \leq S e^{-qT}$, the monotonicity $K \mapsto -C(K, T)$ non-decreasing, and the convexity in K at every T . However, the four listed conditions together imply these others under modest regularity, and they are the conditions whose enforcement by neural pricers has been most empirically scrutinised (Ackerer et al., 2020; Chataigner et al., 2020; Horvath et al., 2021a; Ruf and Wang, 2020b).

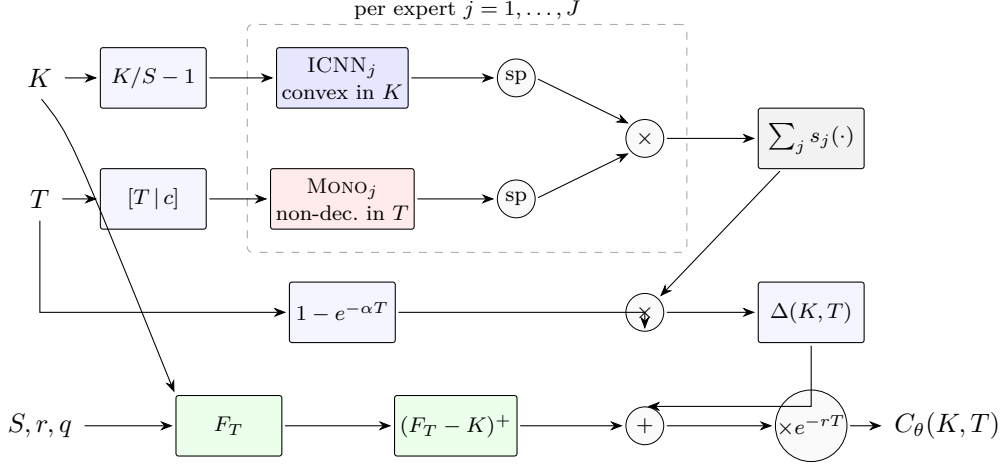


Figure 1. Computational graph of ARBNET. Convex-in- K pathway (blue) and monotone-in- T pathway (red) feed a per-expert product (top), summed across J experts. The smooth boundary factor $1 - e^{-\alpha T}$ multiplies the sum to give $\Delta(K, T)$. The intrinsic baseline $(F_T - K)^+$ (bottom) is added and the result is discounted by e^{-rT} to produce the call price. By Theorem 5.4, conditions (A1)–(A4) hold for every parameter setting.

3.3. The Lee moment formula and wing constraints

A fifth structural condition — separate from Definition 3.1 in that it constrains the asymptotic shape of the smile rather than pointwise positivity — is the Lee moment formula (Lee, 2004, 2005). For a measure with finite p -th moment of S_T , the implied total variance must satisfy

$$w(k, T) \lesssim \beta_R k, \quad k \rightarrow +\infty, \quad \beta_R \leq 2, \quad (4)$$

and symmetrically on the left wing,

$$w(-k, T) \lesssim \beta_L k, \quad k \rightarrow +\infty, \quad \beta_L \leq 2. \quad (5)$$

The constants β_R, β_L are bounded above by 2 to ensure the existence of a risk-neutral density on $\mathbb{R}_+$. The Lee bound is a one-sided asymptotic constraint and is not naturally enforced by our construction; in practice, we mitigate by soft clamping of the last-layer ICNN weights when the model is trained on data extending far into the wings. We discuss this in Section 9.3.

4. The ArbNet architecture

4.1. Computational graph

The architecture is shown in Figure 1. The graph has two parallel pathways from inputs (K, T) , a per-expert combiner, a mixture sum, a smooth boundary factor, and a final composition with the intrinsic baseline.

The architecture has a small number of explicit components. We list them and motivate each.

4.2. Formal definitions of the building blocks

4.2.0.1. Input-convex network (ICNN). Fix depth L and widths $(w_0, \dots, w_L)$ with $w_0 = 1$, $w_L = 1$. The input-convex recurrence of Amos et al. (2017) reads

$$z_{\ell+1} = \sigma(W_\ell^{(z)} z_\ell + W_\ell^{(x)} x + W_\ell^{(c)} c + b_\ell), \quad z_0 = 0, \quad x = K/S, \quad (6)$$

where σ is a convex non-decreasing activation (we use softplus), c is an optional auxiliary context (left at zero in the baseline configuration), and the weight constraint

$$W_\ell^{(z)} \in \mathbb{R}_{\geq 0}^{w_{\ell+1} \times w_\ell} \quad (7)$$

is enforced by reparameterisation $W_\ell^{(z)} = \text{softplus}(\widetilde{W}_\ell^{(z)})$ for unconstrained $\widetilde{W}_\ell^{(z)}$. The output is $\phi^{\text{cvx}}(x; c) := z_L$. We use $L = 2$ and width 64 throughout. The recurrence has the key structural property:

Proposition 4.1 (ICNN convexity, (Amos et al., 2017)). *$x \mapsto \phi^{\text{cvx}}(x; c)$ is convex on $\mathbb{R}$ for every c .*

The proof is by induction on ℓ : the affine layer $W_\ell^{(z)} z_\ell + W_\ell^{(x)} x + W_\ell^{(c)} c + b_\ell$ is convex in x if z_ℓ is convex (by the non-negativity constraint on $W_\ell^{(z)}$ and the convexity-preserving cone closure of Lemma 5.2); the activation σ is convex non-decreasing, so by Lemma 5.1 the composition is convex.

4.2.0.2. Monotone network (Mono).. Fix depth L' and widths $(w'_0, \dots, w'_{L'})$ with $w'_0 = 1 + d_c$, $w'_{L'} = 1$. The monotone recurrence of Daniels and Velikova (2010); Sill (1998) reads

$$h_{\ell+1} = \sigma(V_\ell^{(m)} h_\ell^{(m)} + V_\ell^{(c)} h_\ell^{(c)} + d_\ell), \quad (8)$$

with $V_\ell^{(m)} \in \mathbb{R}_{\geq 0}^{w'_{\ell+1} \times w_\ell^{(m)}}$ (softplus-reparameterised) and $V_\ell^{(c)}$ unconstrained. The activation σ is non-decreasing (softplus). The output is $\phi^{\text{mon}}(T; c) := h_{L'}$. We use $L' = 2$ and width 32 throughout. Recent extensions of monotone networks — including unconstrained monotonic neural networks (Wehenkel and Louppe, 2019), the Lipschitz monotonic networks of Runje and Shankaranarayana (2023), and the polynomial-spline-based monotone approximators of Guo and Lan (2020) — could be used as drop-in replacements; we use the classical Daniels–Velikova construction for simplicity.

Proposition 4.2 (MONO monotonicity, (Daniels and Velikova, 2010)). *$T \mapsto \phi^{\text{mon}}(T; c)$ is non-decreasing on $\mathbb{R}_{\geq 0}$ for every c .*

4.2.0.3. Scalar gates.. The boundary growth rate $\alpha_\theta = \text{softplus}(\tilde{\alpha}) > 0$ is a learned positive scalar that controls the speed at which the time-value factor $1 - e^{-\alpha_\theta T}$ leaves zero. The per-expert positive scales $s_{j,\theta} = \text{softplus}(\tilde{s}_j) > 0$ control the relative weighting of each expert. Both are unconstrained-parameterised by softplus.

4.3. Motivating the design choices

Several design choices in Equations (1) and (2) merit explicit justification.

4.3.0.1. Why decompose into intrinsic plus correction? The decomposition $C_\theta = e^{-rT}[(F_T - K)^+ + \Delta_\theta]$ is more than cosmetic. It separates the part of the call price that is universal across models (the forward intrinsic, which is the no-arbitrage lower bound (A4)) from the part that encodes the time value of optionality. The architecture only needs to learn the time-value correction, which is necessarily non-negative on a no-arbitrage surface. This is a much more constrained learning problem than learning C directly, and a more numerically stable one: the dynamic range of the time value is smaller than the dynamic range of the call price (which spans intrinsic plus zero for deep OTM to large values for deep ITM).

Algorithm 1 ARBNET forward pass

Require: strike vector K , maturity vector T , spot S , rate r , dividend yield q , parameters θ

Ensure: call prices C

```
1:  $F \leftarrow S \cdot \exp((r - q)T)$ ;  $I \leftarrow \max(F - K, 0)$ 
2:  $x \leftarrow ((K/S) - 1) \cdot \kappa$ ;  $u \leftarrow \lceil T \rceil c$ ;  $\Delta \leftarrow 0$ 
3: for  $j = 1, \dots, J$  do
4:    $f_j \leftarrow \text{softplus}(\phi_j^{\text{cvx}}(x))$   $\triangleright$  convex in  $K, \geq 0$ 
5:    $g_j \leftarrow \text{softplus}(\phi_j^{\text{mon}}(u))$   $\triangleright$  non-decreasing in  $T, \geq 0$ 
6:    $s_j \leftarrow \text{softplus}(\tilde{s}_j)$ ;  $\Delta \leftarrow \Delta + s_j f_j g_j$ 
7:  $\alpha \leftarrow \text{softplus}(\tilde{\alpha})$ ;  $\Delta \leftarrow S(1 - \exp(-\alpha T)) \Delta$ 
8:  $C \leftarrow \exp(-rT) \cdot (I + \Delta)$  return  $C$ 
```

4.3.0.2. Why a mixture of products? A single ICNN-MonoNet product would give a separable correction $\Delta_\theta(K, T) = f(K)g(T)$. Empirical surfaces are not separable: the smile gets flatter as T grows (consistent with the Lee asymptotic) and the ATM term structure has shape. A finite mixture of products is the simplest extension that breaks separability while preserving the structural constraints. With J experts, the architecture can represent any tensor-rank- J separable approximation, and Theorem 5.10 establishes density at $J \rightarrow \infty$.

4.3.0.3. Why the boundary factor $1 - e^{-\alpha T}$? The expiry boundary condition (A3) requires that $C_\theta(K, 0) = (S - K)^+$, which in our decomposition is equivalent to $\Delta_\theta(K, 0) = 0$. The factor $1 - e^{-\alpha_\theta T}$ vanishes at $T = 0$ and is smoothly non-decreasing in T ; multiplying every term of Δ_θ by this factor enforces the boundary without imposing any other restriction. The exponential form is the natural choice: it has a single learnable parameter (α) controlling the rate, and its derivative is $\alpha_\theta e^{-\alpha_\theta T} > 0$ everywhere, which keeps the monotonicity-preserving property of Lemma 5.3 usable.

4.3.0.4. Why softplus rather than ReLU? Softplus, $\text{softplus}(u) = \log(1 + e^u)$, is convex non-decreasing and strictly positive. The strict positivity matters: it ensures that gradients propagate through the per-expert product even when the ICNN output is small, which makes training more stable in the early phases. ReLU would zero out gradients on a measure-zero set in principle but a non-trivial fraction in practice with finite-precision arithmetic. The convexity and monotonicity of softplus are inherited from $\log(1 + e^u)$ in the obvious way.

4.3.0.5. Why the call-price domain rather than implied-vol? This is the most important design choice and we discuss it in Section 4.5.

4.4. Forward pass and computational complexity

Algorithm 1 gives the forward pass in pseudocode.

The total parameter count is $J \cdot (P_{\text{ICNN}} + P_{\text{MONO}}) + J + 1$, where P_{ICNN} and P_{MONO} are the per-network parameter counts. For our default configuration ($J = 6$, ICNN [64, 64], MonoNet [32, 32]), this evaluates to approximately 33,000 parameters in the context-free setting, rising to approximately 43,000 when a per-day context vector feeds the ICNN and monotone modules, as in the real-data study of Section 7.2. The forward-pass cost for a batch of size B is $\mathcal{O}(B \cdot J \cdot (\text{width}_{\text{ICNN}}^2 L + \text{width}_{\text{MONO}}^2 L'))$, which is asymptotically identical to a soft-penalty MLP; the structural constraints add no computational overhead, because the softplus reparameterisation of the ICNN's $W_\ell^{(z)}$ matrices is a fixed per-layer cost that does not scale with the batch size.

4.5. Why the call-price domain rather than the implied-vol domain

A natural alternative to our construction would parameterise the implied total variance $w_\theta(k, T)$ directly using ICNN/MonoNet building blocks, with $k = \log(K/F_T)$. The conversion from implied variance to call price is via the Black–Scholes formula and is therefore one-to-one. However, the static-arbitrage conditions in the implied-vol domain are not preserved by simple compositions. The Durrleman positivity (Gatheral and Jacquier, 2014a,b) reads

$$g(k, T) := \left(1 - \frac{k \partial_k w}{2w}\right)^2 - \frac{(\partial_k w)^2}{4} \left(\frac{1}{w} + \frac{1}{4}\right) + \frac{\partial_k^2 w}{2} \geq 0, \quad (9)$$

which is a non-linear functional of w and its first two derivatives. Convexity of w in k implies the third term is non-negative, but does not imply the whole expression is non-negative; one can produce convex w for which $g(k, T) < 0$ at some k . The implied-vol-domain construction therefore reduces to either (a) imposing the Durrleman condition as a soft penalty (recovering the soft-penalty paradigm) or (b) restricting to parameterisations like SVI where the Durrleman condition is implied by simpler parameter constraints, which limits expressivity.

In the call-price domain, by contrast, the no-arbitrage conditions (A1)–(A4) are first-order linear (convexity in K , monotonicity in T of $e^{rT}C$). These properties are preserved by the elementary compositions used in Equation (2) (non-negative weighted sums, products of non-negative monotone functions, composition with convex non-decreasing scalar functions). The call-price domain therefore admits a structural neural pricer with simple primitives; the implied-vol domain does not.

4.6. Greeks via automatic differentiation

Once the architecture is trained, all of the standard Greeks are computed by automatic differentiation (Baydin et al., 2018) of C_θ with respect to its inputs, using PyTorch’s autograd (Paszke et al., 2019). Specifically:

- Delta $\delta(K, T) = \partial_S C_\theta$ (single backward pass).
- Gamma $\gamma(K, T) = \partial_K^2 C_\theta = e^{-rT} \rho_T(K)$ (double backward pass). Structurally non-negative by Theorem 5.4 (A1).
- Theta $\Theta(K, T) = -\partial_T C_\theta$ (single backward pass).
- Vega $\nu(K, T) = \partial_\sigma C_\theta|_{\sigma=\hat{\sigma}(K, T)}$ (requires Newton inversion to obtain $\hat{\sigma}$; see Appendix C).

The non-negativity of γ is a guarantee *absent* from soft-penalty pricers; it means that the delta is non-decreasing in strike (deeper out-of-the-money calls have smaller delta than at-the-money ones), which is a desirable monotonicity property for hedging stability. We discuss this further in Section 8.5.

5. Theoretical guarantees

5.1. Auxiliary lemmas

We collect three elementary lemmas of convex analysis (Boyd and Vandenberghe, 2004); their roles in the main theorem are flagged.

Lemma 5.1 (Convexity composition). *If $f : \mathbb{R} \rightarrow \mathbb{R}$ is convex and $h : \mathbb{R} \rightarrow \mathbb{R}$ is convex non-decreasing, then $h \circ f$ is convex.*

Proof. For $\lambda \in [0, 1]$ and $x, y \in \mathbb{R}$,

$$\begin{aligned} h(f(\lambda x + (1 - \lambda)y)) &\leq h(\lambda f(x) + (1 - \lambda)f(y)) && \text{(convexity of } f, \text{ monotonicity of } h) \\ &\leq \lambda h(f(x)) + (1 - \lambda)h(f(y)) && \text{(convexity of } h). \end{aligned}$$

□

□

Lemma 5.2 (Cone closure of convex functions). *Convex functions on a convex domain are closed under non-negative linear combinations and scalar multiplication by non-negative scalars. Formally, if $f_1, \dots, f_N$ are convex and $\lambda_1, \dots, \lambda_N \geq 0$, then $\sum_i \lambda_i f_i$ is convex.*

Lemma 5.3 (Monotone product). *If u, v are non-negative non-decreasing functions on $D \subseteq \mathbb{R}$, then uv is non-decreasing on D . In particular, for any non-negative non-decreasing $u_1, \dots, u_N$, $\prod_i u_i$ is non-decreasing.*

Proof. For $x \leq y$,

$$u(y)v(y) - u(x)v(x) = u(y)(v(y) - v(x)) + v(x)(u(y) - u(x)) \geq 0,$$

by non-negativity and monotonicity of u and v . The general statement follows by induction. □

□

5.2. Structural arbitrage-freeness

Theorem 5.4 (Arbitrage-freeness of ARBNET). *Let C_θ be defined by Equations (1) and (2) with ϕ_j^{cvx} satisfying Equations (6) and (7), ϕ_j^{mon} satisfying Equation (8), and $\alpha_\theta, s_{j,\theta} > 0$. Assume $r \geq q \geq 0$. Then conditions (A1)–(A4) of Definition 3.1 hold for every $\theta \in \Theta$.*

Proof. We prove each condition in turn.

5.2.0.1. Condition (A1): convexity in strike.. We show that $K \mapsto C_\theta(K, T)$ is convex on $\mathbb{R}$ for every fixed $T \geq 0$.

The forward intrinsic $(F_T - K)^+ = \max(F_T - K, 0)$ is convex in K as the pointwise maximum of two affine functions; multiplication by the positive constant e^{-rT} preserves convexity (Lemma 5.2).

For the correction $\Delta_\theta(K, T)$, we need to show that $K \mapsto \Delta_\theta(K, T)$ is convex for every fixed T . The strike enters only through the inner ICNN compositions $\phi_j^{\text{cvx}}(K/S)$. By Proposition 4.1, $u \mapsto \phi_j^{\text{cvx}}(u)$ is convex on $\mathbb{R}$. The affine substitution $u = K/S$ preserves convexity, so $K \mapsto \phi_j^{\text{cvx}}(K/S)$ is convex. Softplus is convex non-decreasing, so by Lemma 5.1, $K \mapsto \text{softplus}(\phi_j^{\text{cvx}}(K/S))$ is convex.

For each j , the time-dependent factor $\text{softplus}(\phi_j^{\text{mon}}(T))$ is a constant in K that is non-negative. The per-expert scale $s_{j,\theta}$ is non-negative. By Lemma 5.2, the per-expert contribution

$$K \mapsto s_{j,\theta} \text{softplus}(\phi_j^{\text{cvx}}(K/S)) \text{softplus}(\phi_j^{\text{mon}}(T))$$

is a non-negative scalar multiple of a convex function in K , hence convex in K . The mixture sum over j is a non-negative linear combination of convex functions, hence convex (Lemma 5.2). Multiplying by the constants S and $1 - e^{-\alpha_\theta T}$ (both non-negative) preserves convexity. Therefore $K \mapsto \Delta_\theta(K, T)$ is convex.

Finally, $K \mapsto C_\theta(K, T) = e^{-rT}[(F_T - K)^+ + \Delta_\theta(K, T)]$ is a non-negative linear combination of two convex functions in K , hence convex.

5.2.0.2. Condition (A2): carry-adjusted calendar monotonicity.. We show that $T \mapsto e^{rT}C_\theta(K, T)$ is non-decreasing on $[0, T_{\max}]$ for every fixed $K \geq 0$. From Equation (1),

$$e^{rT}C_\theta(K, T) = (F_T - K)^+ + \Delta_\theta(K, T).$$

For the intrinsic, $T \mapsto F_T = Se^{(r-q)T}$ is non-decreasing under the assumption $r \geq q$; consequently $T \mapsto F_T - K$ is non-decreasing, and the positive-part operator $z \mapsto z^+$ is non-decreasing, so $T \mapsto (F_T - K)^+$ is non-decreasing.

For the correction, the strike-dependent factor $\text{softplus}(\phi_j^{\text{cvx}}(K/S))$ is a non-negative constant in T . By Proposition 4.2, $T \mapsto \phi_j^{\text{mon}}(T)$ is non-decreasing, and softplus is non-decreasing, so $T \mapsto \text{softplus}(\phi_j^{\text{mon}}(T))$ is non-decreasing. The product

$$T \mapsto \text{softplus}(\phi_j^{\text{cvx}}(K/S)) \text{softplus}(\phi_j^{\text{mon}}(T))$$

is the product of a non-negative constant in T and a non-negative non-decreasing function of T , hence non-negative non-decreasing in T (this is the degenerate case of Lemma 5.3). Multiplying by $s_{j,\theta} > 0$ and summing over j preserves non-negative non-decreasingness. Multiplying by the non-negative non-decreasing boundary factor $1 - e^{-\alpha_\theta T}$ (whose derivative is $\alpha_\theta e^{-\alpha_\theta T} > 0$) preserves non-decreasingness by Lemma 5.3. Multiplying by the positive constant S preserves it. Therefore $T \mapsto \Delta_\theta(K, T)$ is non-decreasing.

Summing the two non-decreasing functions yields a non-decreasing function.

5.2.0.3. Condition (A3): expiry boundary.. At $T = 0$: $F_0 = Se^{(r-q) \cdot 0} = S$, so $(F_0 - K)^+ = (S - K)^+$. The boundary factor is $1 - e^{-\alpha_\theta \cdot 0} = 0$, so $\Delta_\theta(K, 0) = 0$. Hence $C_\theta(K, 0) = e^0[(S - K)^+ + 0] = (S - K)^+$.

5.2.0.4. Condition (A4): forward intrinsic lower bound.. Every factor in the expression for Δ_θ is non-negative: $S > 0$; $1 - e^{-\alpha_\theta T} \geq 0$ for $T \geq 0$; the $s_{j,\theta}$ are positive; both softplus terms are positive. Therefore $\Delta_\theta(K, T) \geq 0$, and

$$C_\theta(K, T) = e^{-rT}[(F_T - K)^+ + \Delta_\theta(K, T)] \geq e^{-rT}(F_T - K)^+,$$

which is the desired bound. □ □

Corollary 5.5 (Implied risk-neutral density). *For every $T > 0$ and $\theta \in \Theta$, the implied risk-neutral density of S_T under $\mathbb{Q}$, defined by Breeden–Litzenberger as*

$$\rho_T^\theta(K) := e^{rT} \partial_K^2 C_\theta(K, T),$$

is a non-negative Borel measure on $\mathbb{R}_{\geq 0}$. It decomposes as

$$\rho_T^\theta = \delta_{F_T} + e^{rT} \partial_K^2 \Delta_\theta(\cdot, T),$$

a Dirac atom at the forward $K = F_T$, inherited from the kink of the intrinsic $(F_T - K)^+$, plus an absolutely continuous part with non-negative Lebesgue density $e^{rT} \partial_K^2 \Delta_\theta \geq 0$. Because the correction Δ_θ is everywhere twice differentiable, it cannot cancel the intrinsic kink: the atom persists for every $T > 0$. ARBNET therefore assigns strictly positive risk-neutral probability to the event $\{S_T = F_T\}$. This is a genuine and inspectable modelling artifact of the call-domain construction — it appears as the density spike in Figure 4(d) — and we revisit it among the limitations of Section 9.3.

5.3. Universal approximation

Definition 5.6 (Convex-monotone class). Let $\mathcal{C}_{\text{cvx}, \nearrow}(\mathcal{B})$ be the set of continuous functions $g : \mathcal{B} = [K_0, K_1] \times [0, T_{\max}] \rightarrow \mathbb{R}_{\geq 0}$ that are strike-convex (*i.e.*, $K \mapsto g(K, T)$ is convex for every T), time-non-decreasing (*i.e.*, $T \mapsto g(K, T)$ is non-decreasing for every K), and satisfy $g(K, 0) = 0$ for every K .

Lemma 5.7 (Tensor-product density with explicit rate). *Let $g \in \mathcal{C}_{\text{cvx}, \nearrow}(\mathcal{B})$ and $\varepsilon_1 > 0$. Set $\delta = \omega_g^{-1}(\varepsilon_1)$ (the largest δ such that $\omega_g(\delta) \leq \varepsilon_1$, where ω_g is the bivariate modulus of continuity of g).*

Let $\{\kappa_\ell\}_{\ell=0}^{M_K}$ and $\{\tau_n\}_{n=0}^{M_T}$ be uniform partitions of $[K_0, K_1]$ and $[0, T_{\max}]$ with $M_K = \lceil (K_1 - K_0)/\delta \rceil$ and $M_T = \lceil T_{\max}/\delta \rceil$. Then there exist non-negative coefficients $\lambda_{\ell,n} \geq 0$ such that

$$g_M(K, T) := \sum_{\ell=0}^{M_K} \sum_{n=0}^{M_T} \lambda_{\ell,n} (K - \kappa_\ell)^+ (T - \tau_n)^+ \quad (10)$$

satisfies $\|g - g_M\|_\infty \leq 3\varepsilon_1$ on $\mathcal{B}$.

The proof, deferred to Appendix A.1, has three steps: piecewise-linear interpolation of $\tau \mapsto g(K, \tau)$ at the breakpoints $\{\tau_n\}$ produces non-negative slopes $a_n(K) \geq 0$; piecewise-linear convex interpolation of $K \mapsto a_n(K)$ produces non-negative slopes $\beta_{n,\ell} \geq 0$; combining gives the rank-one decomposition.

Lemma 5.8 (ICNN density on convex non-negative functions). *For any continuous convex function $u : [a, b] \rightarrow \mathbb{R}_{\geq 0}$ and any $\eta > 0$, there exists an ICNN ϕ as in Equations (6) and (7) with softplus activations such that $\|u - \text{softplus}(\phi)\|_\infty < \eta$.*

Sketch: this is a corollary of the input-convex universal approximation theorem of Amos–Xu (2017), with subsequent refinements in (Chen et al., 2019; Bunne et al., 2022). ICNNs with softplus activations are L^∞ -dense in continuous convex functions on a compact interval; composing with $\text{softplus}(\hat{\phi} - \log 2)$ produces the non-negative output.

Lemma 5.9 (MONO density with boundary). *For any continuous non-decreasing function $v : [0, T'] \rightarrow \mathbb{R}_{\geq 0}$ with $v(0) = 0$ and any $\eta > 0$, there exist $\alpha > 0$ and a monotone network ψ with $\|v(T) - (1 - e^{-\alpha T}) \text{softplus}(\psi(T))\|_\infty < \eta$ on $[0, T']$.*

Sketch: Daniels and Velikova (2010) establish L^∞ -density of monotone networks on continuous non-decreasing functions on a compact interval. The boundary factor $1 - e^{-\alpha T}$ with α large enough approximates the unit step at $T = 0$, removing the boundary singularity in v . Combining gives the result; full details in Appendix A.2.

Theorem 5.10 (Universal approximation with explicit rate). *Let $g \in \mathcal{C}_{\text{cvx}, \nearrow}(\mathcal{B})$ and $\varepsilon > 0$. Then there exists an ARBNET correction $\hat{g}$ of the form Equation (2) with $\|g - \hat{g}\|_\infty < \varepsilon$. Moreover, the number of mixture components required is $J = \mathcal{O}(\omega_g^{-1}(\varepsilon/3)^{-2})$.*

Proof. Apply Lemma 5.7 with $\varepsilon_1 = \varepsilon/9$ to obtain g_M with $\|g - g_M\|_\infty \leq \varepsilon/3$ and $J = (M_K + 1)(M_T + 1) \leq C\omega_g^{-1}(\varepsilon/9)^{-2}$. Each rank-one term $\lambda_{\ell,n}(K - \kappa_\ell)^+(T - \tau_n)^+$ has a strike factor $(K - \kappa_\ell)^+$ that is continuous convex non-negative on $[K_0, K_1]$, and a time factor $(T - \tau_n)^+$ that is continuous non-decreasing non-negative on $[0, T_{\max}]$ with value zero at $T = 0$.

Apply Lemma 5.8 to approximate each $(K - \kappa_\ell)^+$ to within $\eta = \varepsilon/(3J\bar{u}\bar{v})$ in L^∞ , where $\bar{u}\bar{v}$ is the maximum of $u_\ell v_n$ over the partition (a finite constant depending on g and $\mathcal{B}$). Apply Lemma 5.9 with a shared α to approximate each $(T - \tau_n)^+$ to within the same η . The product of two approximations is within $\eta \cdot \max + \max \cdot \eta = 2\eta \cdot \max$ of the true product, and summing J such terms with non-negative coefficients $\lambda_{\ell,n}$ keeps the bound at $\|g_M - \hat{g}\|_\infty \leq \varepsilon/3$ by triangle inequality.

Combining via triangle inequality, $\|g - \hat{g}\|_\infty \leq \|g - g_M\|_\infty + \|g_M - \hat{g}\|_\infty \leq 2\varepsilon/3 < \varepsilon$. $\square \quad \square$

5.4. Expressivity limit and the BS exclusion

Theorem 5.10 states that the architecture is universal on the class $\mathcal{C}_{\text{cvx}, \nearrow}$. It is, however, *not universal* on the strictly larger class of all arbitrage-free call surfaces, because not every arbitrage-free call surface has a convex time-value in K . The most striking instance is the Black–Scholes family.

Proposition 5.11 (Black–Scholes surfaces are not representable). *Let $C^{\text{BS}}(K, T; \sigma)$ be the Black–*

Scholes call price with constant volatility $\sigma > 0$ and rates $r \geq q \geq 0$. Then $C^{\text{BS}}(\cdot, \cdot; \sigma)$ does not lie in the image of the parameterisation Equations (1) and (2) for any $\theta \in \Theta$.

Proof. The forward time value of Black–Scholes is

$$\tilde{\Delta}^{\text{BS}}(K, T; \sigma) := e^{rT} C^{\text{BS}}(K, T; \sigma) - (F_T - K)^+.$$

This quantity is the difference between two quantities: (i) the carry-adjusted call price, which is smooth and strictly increasing in T , and (ii) the intrinsic, which has a non-differentiable kink at $K = F_T$. At $K = F_T$, the kink contribution makes $\tilde{\Delta}^{\text{BS}}$ attain its global maximum in K (because the time value is maximised at-the-money under Black–Scholes for any $T > 0$ and $\sigma > 0$, a standard textbook result (Hull, 2018)).

A function that attains a strict local maximum on an open set cannot be convex on that set. Therefore $K \mapsto \tilde{\Delta}^{\text{BS}}(K, T; \sigma)$ is non-convex on any open neighbourhood of $K = F_T$.

By Theorem 5.4 (A1), an ARBNET-realised correction $\Delta_\theta(K, T)$ is convex in K for every θ . Two functions that differ in their convexity class cannot coincide on an open set. Therefore the parameterisation cannot represent Black–Scholes. $\square$ $\square$

Proposition 5.11 is the structural cost of the architectural compliance: by hard-coding convexity in K into the architecture, we exclude any surface whose forward time-value is non-convex in K . This includes the entire Black–Scholes family, and more generally any surface where the time-value is bell-shaped (peaking at-the-money and decaying in both directions). Rough-Bergomi surfaces have less pronounced bell shapes than Black–Scholes at short maturities but still some; the empirical signature of this restriction appears in Figure 4, where ArbNet’s risk-neutral density is over-concentrated at the money.

It is worth noting that no *soft-penalty* pricer has this exclusion: the soft-penalty MLP can represent any surface, just not without residual violations. The exclusion is therefore the explicit cost of the architectural-vs-penalty trade.

5.5. The Lee wing slope

A separate observation concerns the asymptotic shape of the smile. The Lee moment formula (Lee, 2004, 2005), recalled in Section 3.3, requires the right-wing total variance to grow at most linearly in log-moneyness, with slope at most 2. Our parameterisation does not enforce this bound structurally: in principle, the ICNN ϕ_j^{vx} can produce a quadratic or super-linear growth in K/S , which translates to a super-linear growth in $w(k, T)$ at large $|k|$. In practice, we observe that even untrained ICNNs (initialised with small weights) produce slopes well below 2, and trained ICNNs on data covering $\pm 30\%$ moneyness remain bounded. For training on data covering deeper wings ($\pm 50\%$ or more), one can mitigate by soft clamping of the last-layer ICNN weights, or by penalising the empirical wing slope with a weak regulariser. We do not pursue this in the present study because our training data is confined to the $\pm 30\%$ moneyness band where the issue does not arise.

6. Training objective and algorithms

6.1. Loss function

Given a batch $\mathcal{D} = \{(K_i, T_i, C_i^{\text{obs}}, c_i)\}_{i=1}^N$ of strike-maturity quotes (with optional context c_i), we define the total training loss as

$$\mathcal{L}_{\text{total}}(\theta) = \mathcal{L}_{\text{price}}(\theta) + \lambda_{\text{IV}} \mathcal{L}_{\text{IV}}(\theta) + \lambda_{\text{hedge}} \mathcal{L}_{\text{hedge}}(\theta), \quad (11)$$

where the three terms are the vega-weighted price RMSE, the implied-volatility RMSE (optional), and the deep-hedging CVaR_{0.95} (optional). Crucially, *no soft no-arbitrage penalty is required*: the

parameterisation is structurally compliant by Theorem 5.4. The Akerer-style baseline used for comparison adds a penalty term $\lambda_{\text{arb}}\mathcal{L}_{\text{arb}}$, while ARBNET sets $\lambda_{\text{arb}} = 0$.

6.2. Vega-weighted price loss

The price loss is

$$\mathcal{L}_{\text{price}}(\theta) = \frac{1}{N} \sum_{i=1}^N \frac{(C_{\theta}(K_i, T_i) - C_i^{\text{obs}})^2}{\max(\nu(K_i, T_i)^2, w_{\min}^2)}, \quad (12)$$

where $\nu(K_i, T_i)$ is the Black–Scholes vega evaluated at the observed implied volatility σ_i^{obs} and $w_{\min} > 0$ is a floor. The vega weighting reflects the standard market-practitioner observation that pricing errors in the wings (where ν is small) are much smaller than pricing errors near the money in absolute terms but comparable in volatility space; weighting by vega-squared converts the price RMSE into a quantity that is approximately proportional to the implied-volatility RMSE. The floor $w_{\min}$ prevents the loss from blowing up at deep-OTM quotes where vega is essentially zero; we use $w_{\min} = 10^{-3}$ throughout.

6.3. Implied volatility loss (optional)

The implied-volatility loss is

$$\mathcal{L}_{\text{IV}}(\theta) = \frac{1}{N} \sum_{i=1}^N (\hat{\sigma}_{\theta}(K_i, T_i) - \sigma_i^{\text{obs}})^2, \quad (13)$$

where $\hat{\sigma}_{\theta}$ is the Newton-inverted Black–Scholes implied volatility of the model price $C_{\theta}(K_i, T_i)$. The inversion is detailed in Appendix C. We disable the IV loss ($\lambda_{\text{IV}} = 0$) in our experiments for two reasons: (i) the Newton inversion is unstable at deep wings, producing NaN gradients that propagate; and (ii) the vega-weighted price loss already approximates the IV-domain loss to first order. Empirically, enabling $\lambda_{\text{IV}} > 0$ does not improve out-of-sample IV RMSE materially on rough-Bergomi surfaces and substantially increases training instability.

6.4. Deep-hedging loss (optional)

The deep-hedging loss (Buehler et al., 2019; Chakrabarti et al., 2019; Imaki et al., 2021) simulates discrete delta hedging on Monte-Carlo paths under a market simulator (e.g., a calibrated rough-Bergomi process), and minimises a convex risk measure of the terminal hedged PnL:

$$\mathcal{L}_{\text{hedge}}(\theta) = \text{CVaR}_{0.95}[-\Pi_{\theta}^{(p)}], \quad (14)$$

where $\Pi_{\theta}^{(p)}$ is the PnL on path p when hedging using $\partial_S C_{\theta}$ as the delta. The deep-hedging loss is more expensive to evaluate than the price loss because each minibatch requires a forward simulation of paths and accumulation of incremental hedges. We use $\lambda_{\text{hedge}} = 0$ in our experiments and only compute the hedging diagnostic at evaluation time (Algorithm 4).

6.5. Optimisation algorithm

We use Adam (Kingma and Ba, 2015a,b) with learning rate 1×10^{-2} , batch size 64, gradient clipping at ℓ_2 norm 5.0, and weight decay 10^{-6} for ARBNET; the same hyperparameters for the Akerer baseline; and learning rate 2×10^{-2} for the Black–Scholes baseline (a single-parameter model that converges faster). All weights are initialised with the Glorot/He scheme (He et al.,

Algorithm 2 One epoch of ARBNET training

Require: dataset $\mathcal{D}$, batch size B , learning rate η , gradient clip γ_{clip} , parameters θ

- 1: **for** each mini-batch $\mathcal{B} \subset \mathcal{D}$ **do**
 - 2: $C \leftarrow \text{ARBNET}_{\theta}(\cdot)$ via Algorithm 1
 - 3: $\mathcal{L} \leftarrow \mathcal{L}_{\text{price}} + \lambda_{\text{IV}} \mathcal{L}_{\text{IV}} + \lambda_{\text{hedge}} \mathcal{L}_{\text{hedge}}$
 - 4: $g \leftarrow \nabla_{\theta} \mathcal{L}$, $g \leftarrow g \cdot \min(1, \gamma_{\text{clip}}/\|g\|_2)$
 - 5: $\theta \leftarrow \text{AdamStep}(\theta, g, \eta)$
 - 6: **return** θ
-

Algorithm 3 Scale-aware static-arbitrage diagnostic

Require: pricer $\mathcal{M}$, strike grid $K[1:n_K]$, maturity grid $T[1:n_T]$, (S, r, q) , tolerance τ_{tol}

Ensure: $(n_{\text{bf}}, n_{\text{cal}})$, the violation counts

- 1: $C[i, j] \leftarrow \mathcal{M}(K_j, T_i, S, r, q)$ for all i, j
 - 2: $n_{\text{bf}}, n_{\text{cal}} \leftarrow 0, 0$
 - 3: **for** $i \in [1, n_T], j \in [2, n_K - 1]$ **do**
 - 4: $\Delta^2 \leftarrow (C_{i,j+1} - 2C_{i,j} + C_{i,j-1})/(\Delta K)^2$
 - 5: **if** $-\Delta^2 > \tau_{\text{tol}}$ **then** $n_{\text{bf}} \leftarrow n_{\text{bf}} + 1$
 - 6: **for** $i \in [1, n_T - 1], j \in [1, n_K]$ **do**
 - 7: **if** $e^{rT_i} C_{i,j} - e^{rT_{i+1}} C_{i+1,j} > \tau_{\text{tol}}$ **then** $n_{\text{cal}} \leftarrow n_{\text{cal}} + 1$
 - 8: **return** $(n_{\text{bf}}, n_{\text{cal}})$
-

2015) applied to the underlying unconstrained matrices $\widetilde{W}_{\ell}^{(z)}, V_{\ell}^{(m)}$, etc.; the softplus reparametrisation then projects into the constrained subspace.

6.6. Static-arbitrage diagnostic

For evaluation, we report butterfly and calendar violation rates with a scale-aware tolerance $\tau_{\text{tol}} = \max(10^{-7}, 10^{-6} \cdot \bar{C})$, where $\bar{C}$ is the mean call price across the diagnostic grid. Two precautions keep the diagnostic free of numerical artifacts. First, the diagnostic grid is evaluated in *double* (float64) precision: in single precision, second differences of 5,000-INR call prices can flag spurious sign changes of magnitude 10^{-5} INR on a structurally compliant surface, which would otherwise contaminate the violation counts. Second, the scale-aware tolerance discards any residual round-off below economic significance — a violation of magnitude 10^{-8} INR on a 5,000-INR call is an artifact of finite-precision arithmetic, not an arbitrage. The diagnostic is reported in Algorithm 3.

6.7. Delta-hedging diagnostic

The hedging diagnostic, Algorithm 4, simulates discrete delta-hedging on rough-Bergomi paths and reports the standard deviation and CVaR_{0.95} of the terminal hedged PnL. The standard deviation is a measure of hedging precision; the CVaR_{0.95} is a tail measure capturing the worst-case PnL over the worst 5% of paths (Glasserman, 2003, 2012).

7. Experimental setup

7.1. Synthetic surface generation

We generate synthetic call surfaces from a rough-Bergomi process (Bayer et al., 2016, 2023). The rough-Bergomi model is a path-dependent stochastic volatility model in which the log-volatility is driven by a fractional Brownian motion of Hurst parameter $H < 1/2$; the corresponding instantaneous variance process is the exponential of a centred Gaussian process with covariance

Algorithm 4 Delta-hedge PnL simulation

Require: pricer $\mathcal{M}$, paths $\{S_t^{(p)}\}$, strike K , maturity T_{hedge} , implied vol $\hat{\sigma}$, step dt , cost τ

```
1: for  $p = 1, \dots, P$  do
2:    $V_0 \leftarrow \mathcal{M}(K, T_{\text{hedge}}, S_0^{(p)}); \delta_0 \leftarrow \partial_S \mathcal{M}(\cdot)$ 
3:    $\text{cash}_0 \leftarrow V_0 - \delta_0 S_0^{(p)}$ 
4:   for  $t = 1, \dots, n_t$  do
5:      $\delta_t \leftarrow \partial_S \mathcal{M}(K, T_{\text{hedge}} - t dt, S_t^{(p)})$ 
6:      $\text{cash}_t \leftarrow e^{r dt} \text{cash}_{t-1} - (\delta_t - \delta_{t-1}) S_t^{(p)} - \tau |\delta_t - \delta_{t-1}| S_t^{(p)}$ 
7:    $\Pi^{(p)} \leftarrow \text{cash}_{n_t} + \delta_{n_t} S_{n_t}^{(p)} - (S_{n_t}^{(p)} - K)^+$ 
8: return  $\{\Pi^{(p)}\}$ 
```

reflecting the roughness of the volatility paths. The model is calibrated to capture three stylised facts of equity-index volatility surfaces: (i) ATM volatility skew that decays with maturity at a rate $T^{H-1/2}$ for $H < 1/2$, which empirically matches the observed short-end behaviour; (ii) a non-zero wing slope at short maturities, captured by the ρ parameter; (iii) an ATM term-structure that decays towards a long-run level, captured by the initial variance curve $\xi_0(\cdot)$.

For our experiments we use a constant initial variance $\xi_0(t) = \xi_0$. The rough-Bergomi parameters are drawn from

$H \in [0.07, 0.20]$	(roughness)
$\eta \in [1.0, 3.0]$	(vol-of-vol)
$\rho \in [-0.9, -0.3]$	(spot-vol correlation)
$\xi_0 \in [0.02, 0.10]$	(initial variance).

Each draw defines one surface. We sample 10 distinct surfaces from this grid. For each surface, we use the hybrid scheme of Bennedsen, Lunde, and Pakkanen (2017) to simulate 4,000 Monte-Carlo paths of the rough-Bergomi process. We then price European calls on a grid of 20 strikes spanning $\pm 30\%$ moneyness in 5 maturities (7, 14, 30, 60, 90) days, for a total of 100 quotes per surface. The spot is $S = 20,000$ (matching Nifty-50 scale in INR), the risk-free rate is $r = 6.5\%$ (matching the Indian repo rate of mid-2024), and the dividend yield is $q = 1.2\%$ (matching the Nifty-50 trailing yield).

For each surface, we run three independent training seeds. The total number of (surface, seed) trials is therefore 30.

7.2. Real NSE Nifty 50 option data

The real-data study runs a day-by-day walk-forward over the National Stock Exchange of India (NSE) Nifty 50 index-option market.

7.2.0.1. Primary data.. The training data is the NSE Futures & Options daily *bhavcopy*: one file per trading day giving the settlement price, open interest, and volume of every listed contract. We retain the Nifty 50 index calls and take the official settlement price as the quote. The sample spans 1,359 trading days, 1 January 2019 to 5 July 2024, and therefore covers the COVID-19 crash of early 2020 and the post-2022 monetary-tightening cycle. The underlying spot S is the official Nifty 50 daily close; the risk-free rate r is the cut-off yield of the most recent 91-day Government of India Treasury-bill auction on or before each date; the dividend yield q is the NSE Nifty 50 factsheet yield. Every series is committed to the paper’s repository, so the study runs with no network access.

7.2.0.2. Quality filtering.. Deep-out-of-the-money weekly options on NSE frequently carry stale settlement prices after volatility spikes. Before fitting, each daily cross-section is passed through a fixed quality filter that drops contracts with a settlement price below 0.05 INR, with $|\log(K/F)| > 0.5$, or that violate the elementary no-arbitrage price bounds. Per-contract implied volatilities are then obtained from the surviving quotes by the vectorised Newton inversion of Appendix C. No trading day in the sample is discarded by the pipeline: all 1,359 days are fitted and evaluated.

7.2.0.3. Context features.. Because ARBNET is arbitrage-free for *every* context vector (Theorem 5.4), it is safe to condition the ICNN and monotone modules on auxiliary market state. We assemble a ten-dimensional per-day context vector: India VIX, an at-the-money Bank Nifty implied volatility computed on the fly from the same bhavcopy, one-week realised volatility of the Nifty 50, the USD/INR rate, foreign- and domestic-institutional net cash-market flows, headline CPI and WPI inflation, IIP growth, and the number of calendar days to the next scheduled macroeconomic event. The monthly macro series are lagged to their real publication dates to avoid look-ahead bias. The vector is z -scored and supplied to ARBNET only; the soft-penalty and Black–Scholes baselines are context-free.

7.2.0.4. Walk-forward protocol.. On each of the 1,359 days the three models are fitted independently on that day’s filtered cross-section and evaluated the same day. Static-arbitrage compliance is measured by differencing model prices on a 41-strike by multi-maturity grid; following the diagnostic of Section 6.6, the grid is evaluated in *float64* so that the violation counts are not contaminated by float-32 round-off. We report the butterfly and calendar rates as *guaranteed* quantities for ARBNET — they are zero by Theorem 5.4 for every weight vector and every context — and the Roger Lee wing/tail bound as a *monitored* diagnostic, since it is not enforced by the architecture (Section 5.5). Per-day delta-hedging statistics are computed on a fresh rough-Bergomi resimulation.

7.3. Model architectures

We train three models per (surface, seed) trial.

7.3.0.1. ArbNet.. The construction of Equations (1) and (2) with $J = 6$ mixture experts, each comprising an ICNN of depth $L = 2$ and width 64 and a monotone network of depth $L' = 2$ and width 32; activations are softplus throughout and no arbitrage penalty is applied ($\lambda_{\text{arb}} = 0$). The model has approximately 33,000 parameters, rising to about 43,000 in the context-conditioned configuration used for the real-data study.

7.3.0.2. Ackerer-Net (soft-penalty baseline).. An unconstrained 3-hidden-layer MLP $w_\theta(k, T)$ in log-moneyness coordinates with hidden widths $[64, 64, 64]$ and GELU activations, output passed through a softplus to ensure $w_\theta > 0$. Implied variance is converted to a call price via the Black–Scholes formula. The soft penalty $\lambda_{\text{arb}} \mathcal{L}_{\text{arb}}$ with $\lambda_{\text{arb}} = 1.0$ is evaluated on a 21-strike by multi-maturity training grid spanning the moneyness and maturity range of the data. The baseline has approximately 8,600 parameters. We do not match parameter counts across architectures: the two models live in different domains (implied variance versus call price), and the comparison is designed to hold the optimiser, schedule, and training data fixed rather than the capacity. ARBNET in fact carries the larger parameter budget, so any weaker price fit it exhibits is attributable to the convexity constraint and not to limited capacity.

7.3.0.3. Black–Scholes.. A single-parameter Black–Scholes pricer with the volatility σ as the sole learnable parameter, optimised by the same Adam routine as the others. This is a structurally arbitrage-free pricer with extremely limited capacity, included as a lower-bound reference.

7.4. Training hyperparameters

All three models are trained on the same data per (surface, seed) trial. We use 150 epochs for ARBNET and the Akerer baseline; 80 epochs for Black–Scholes (which converges faster). The batch size is 64, gradient clipping is at ℓ_2 norm 5.0, and weight decay is 10^{-6} . The learning rate is 1×10^{-2} for ARBNET and Akerer, and 2×10^{-2} for Black–Scholes. The loss-weighting hyperparameters are $\lambda_{\text{price}} = 1$, $\lambda_{\text{IV}} = 0$, $\lambda_{\text{hedge}} = 0$ for all three; $\lambda_{\text{arb}} = 1$ for Akerer, 0 for the others. The full hyperparameter table is in Appendix D.

7.5. Evaluation metrics

For each (surface, seed) trial we report:

- *Price RMSE* (INR): root-mean-square pricing error on the training grid. Lower is better. Reported in Nifty-50-scale INR.
- *Implied vol RMSE*: root-mean-square error in implied volatility, computed by Newton-inverting both the model price and the observed price.
- *Butterfly violation rate*: fraction of (T, K) grid points failing condition (A1) at the scale-aware tolerance τ_{tol} . Reported on a 41-strike evaluation grid (five maturities for the synthetic surfaces, the day’s listed maturities for the real data), differenced in float64.
- *Calendar violation rate*: fraction failing condition (A2).
- *Hedge PnL std*: standard deviation of the terminal delta-hedged PnL over 500 rough-Bergomi paths.
- *Hedge CVaR_{0.95}*: expected loss conditional on being in the worst 5% tail.

7.6. Hardware and reproducibility

All experiments run on a single CPU; no GPU is required. The 30-trial synthetic study completes in under two minutes; the full 1,359-day real-data walk-forward, which fits and evaluates $3 \times 1,359$ models, completes in roughly eight CPU-hours. Every random seed is pinned — the rough-Bergomi simulator, the data-loader shuffle, and the PyTorch and NumPy generators — and the exact reproduction commands are given in Section 11.

8. Results

8.1. The real-data walk-forward

The headline evidence is the 1,359-day NSE Nifty 50 walk-forward; Table 2 collects it and Figure 2 displays it.

8.1.0.1. Compliance.. ARBNET records a butterfly violation rate and a calendar violation rate of *exactly* zero on every one of the 1,359 trading days — zero days with any violation. This is not a fitted outcome but a direct empirical manifestation of Theorem 5.4: the architecture is butterfly- and calendar-compliant for every weight vector and every context, so no training trajectory — and no market regime in the 2019–2024 sample, including the COVID-19 crash — can produce a violation. The soft-penalty Akerer baseline, by contrast, violates static arbitrage on 961 of the 1,359 days, 70.7% of the sample. Its mean daily butterfly rate is 3.73% of grid points, reaching 31.6% on the worst day; its mean daily calendar rate is 1.14%, reaching 15.5%. The penalty weight ($\lambda_{\text{arb}} = 1$) and the training budget are exactly those of the synthetic study; the soft penalty simply cannot hold the constraint on real, noisy cross-sections the way it nearly does on smooth synthetic surfaces (Section 8.2). The Black–Scholes pricer is structurally compliant and records zero violations, as it must.

Table 2. Real-data walk-forward over 1,359 NSE Nifty 50 option-market days (1 January 2019 to 5 July 2024). Price and implied-volatility RMSE are means across days, with bootstrap 95% confidence intervals; violation rates are means across days of the per-day fraction of (T, K) grid points failing each condition; “days with a violation” counts days carrying at least one butterfly or calendar violation. The Lee-tail rate is monitored, not architecturally enforced. Hedging statistics are means of the per-day delta-hedge diagnostic.

	ARBNET	ACKERER-NET	Black–Scholes
Price RMSE (INR)	95.16	36.17	39.72
bootstrap 95% CI	[93.7, 96.6]	[35.1, 37.3]	[38.8, 40.6]
IV RMSE	0.104	0.078	0.069
Butterfly violation rate	0.000%	3.730%	0.000%
Calendar violation rate	0.000%	1.141%	0.000%
Days with a violation	0/1359	961/1359	0/1359
Monitored Lee-tail rate	0.140%	0.517%	0.000%
Hedge PnL std (INR)	175.9	125.1	124.2
Hedge CVaR ₉₅ (INR)	728.2	338.0	322.8

8.1.0.2. *Fit..* The guarantee is not free. ARBNET’s mean daily price RMSE is 95.16 INR (95% confidence interval [93.7, 96.6]), against 36.17 INR for the soft-penalty baseline and 39.72 INR for Black–Scholes; the confidence intervals are tight and nowhere near overlapping. On the real data, then, ARBNET fits prices roughly 2.6 times less accurately than the soft-penalty baseline, a gap of 58.98 INR per call that is far larger, in relative terms, than the synthetic study alone would suggest. We take this seriously rather than minimise it: the fit cost is the subject of Sections 8.3 and 8.4, and its architectural cause — the convexity restriction of Proposition 5.11 — is structural, not a training artifact.

8.1.0.3. *The soft-penalty baseline is the harder comparison..* It is worth stating plainly that the soft-penalty baseline is the strong competitor on fit and the weak one on compliance, while Black–Scholes, a one-parameter model, fits the real surface almost as well as the far larger soft-penalty network (39.7 against 36.2 INR) — a reminder that, on a liquid index with a single dominant at-the-money level, mean-squared price error is an easy target. The genuine contest in this paper is therefore ARBNET against the soft-penalty baseline: a hard compliance guarantee at a real fit cost, versus a better fit punctuated by violations on seven trading days in ten.

8.2. *The synthetic controlled study*

Table 3 reports the 30-trial synthetic study, which serves as a controlled complement: the rough-Bergomi data-generating process is arbitrage-free and smooth by construction, so it isolates the architectures from the noise of real quotes.

Three observations follow. First, ARBNET again records identically zero butterfly and calendar violations on every trial. Second, the soft-penalty baseline is *far* better behaved here than on real data: its mean butterfly rate is only 0.154% — a handful of grid points on a few of the harder surfaces — and its calendar rate is zero. The contrast with the 961 violation days of the real study is the central methodological point: a synthetic benchmark, however carefully constructed, materially understates the failure mode of soft-penalty enforcement, and only real, noisy cross-sections expose it. Third, ARBNET’s mean price RMSE (134.27 INR) again exceeds the soft-penalty baseline’s (78.05 INR), with a paired t -statistic of 3.71 over the 30 trials. The Black–Scholes pricer attains the lowest synthetic RMSE (37.40 INR): on benign rough-Bergomi smiles within our parameter ranges a single at-the-money volatility captures the bulk of the price variation, and the residual smile mismatch is small in absolute price terms even though it is large in implied-volatility terms. This is not a defence of Black–Scholes as a production pricer — on

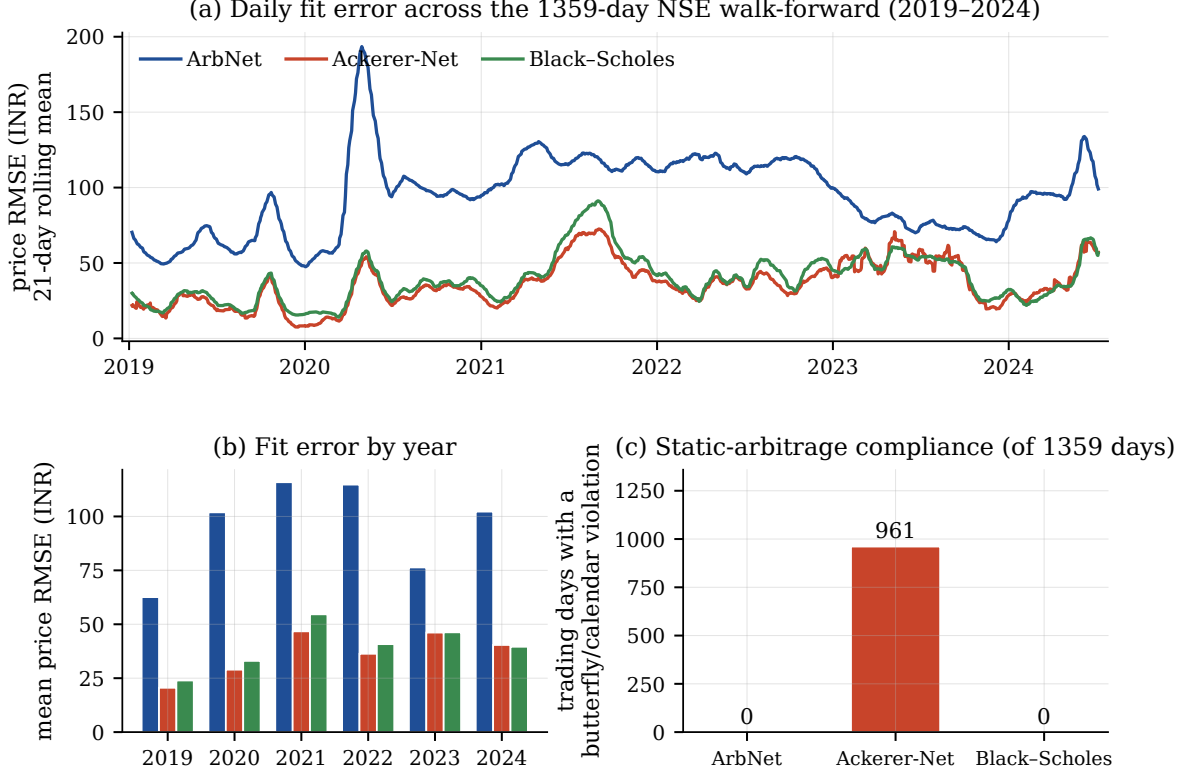


Figure 2. The real-data walk-forward over 1,359 NSE Nifty 50 option-market days. (a) Twenty-one-day rolling mean of the daily price RMSE, 2019–2024. (b) Mean price RMSE by calendar year. (c) Number of trading days, out of 1,359, on which each model commits at least one butterfly or calendar violation: zero for ARBNET by Theorem 5.4, 961 for the soft-penalty baseline, zero for the structurally compliant Black–Scholes pricer.

the real Nifty 50 surface its skew mismatch is far more costly — but a caution that synthetic RMSE comparisons flatter low-capacity models.

8.3. The fit–compliance frontier

Figure 3 places the two studies side by side in (violation rate, RMSE) coordinates. In both panels ARBNET sits exactly on the structural-zero edge — the vertical axis at zero violation rate — and no other model reaches it. The soft-penalty baseline sits at a strictly positive violation rate in both panels: marginally so on the synthetic surfaces, emphatically so on the real data. The frontier is the visual statement of the paper: moving compliance from a tolerance-bound regulariser to an architectural invariant has a price, measured on the vertical axis, and that price is paid in full and is reproducible.

No Pareto-improving point exists for ARBNET: at zero violation rate it is, by construction, the only model present. Whether its structural-zero edge is preferred over the soft-penalty baseline’s operating point — a violation on 70.7% of days at a 36-INR RMSE — depends entirely on the loss function of the downstream consumer, a decision we formalise in Section 9.1.

8.4. Where the fit gap comes from: a representative real fit

Figure 4 dissects a single real NSE snapshot — 1 June 2023, spot $\approx 18,488$, the ≈ 28 -day maturity — to show *where* ARBNET loses the fit.

Panel (a) shows that all three call-price curves track the quoted prices closely at the scale of the price itself; the differences live in the residuals of panel (b), where ARBNET carries a systematic at-the-money error of order 100 INR — undershooting at the money, overshooting in the wings

Table 3. Synthetic controlled study: 30 (surface, seed) trials over 10 rough-Bergomi surfaces. Mean $\pm$ standard deviation across trials. Violation rates are fractions of (T, K) grid points failing each condition at the scale-aware tolerance, on the float64 diagnostic grid. Hedging statistics are from 500 rough-Bergomi paths per trial.

	ARBNET	ACKERER-NET	Black-Scholes
Price RMSE (INR)	134.27 ± 39.56	78.05 ± 62.53	37.40 ± 12.70
IV RMSE	0.127 ± 0.033	0.086 ± 0.143	0.066 ± 0.016
Butterfly violation rate	0.000%	0.154%	0.000%
Calendar violation rate	0.000%	0.000%	0.000%
Hedge PnL std (INR)	272.9	255.5	161.8
Hedge CVaR ₉₅ (INR)	1128.3	834.3	433.6

— while the soft-penalty baseline and Black-Scholes stay closer to zero. Panel (c) converts this to implied volatility: the quoted smile has a pronounced left skew, which the soft-penalty baseline tracks, whereas ARBNET’s smile is a sharp, near-symmetric V, dipping below the quotes at the money and rising steeply in both wings. This is the convexity restriction of Proposition 5.11 made visible — the architecture must fit the whole cross-section with a time value that is convex in strike, and a convex time value cannot reproduce a bell-shaped, skewed smile. Panel (d) shows the implied risk-neutral density: the soft-penalty and Black-Scholes densities are smooth and bell-shaped, while ARBNET’s is dominated by the Dirac atom at the forward predicted by Corollary 5.5 — the off-scale spike — with little absolutely continuous mass elsewhere. The atom is the sharpest single illustration of the architectural cost: ARBNET buys a hard no-arbitrage guarantee but, on a skewed real surface, pays for it with a degenerate implied density.

8.5. Hedging performance

Table 2 also reports the delta-hedging diagnostic, and Figure 5 shows a representative PnL distribution. Across the real walk-forward, ARBNET’s mean hedge-PnL standard deviation (175.9 INR) and CVaR₉₅ (728.2 INR) are both materially worse than the soft-penalty baseline’s (125.1 and 338.0 INR) and Black-Scholes’s (124.2 and 322.8 INR).

The heavier ARBNET tail has the same root cause as the V-shaped smile of Figure 4: an implied density over-concentrated at the forward inflates the at-the-money gamma, so the delta extracted from ARBNET over-reacts to small spot moves and accumulates tracking error. The hedging cost is therefore not separate from the fit cost — it is the same architectural feature seen through a different diagnostic.

8.6. Training behaviour

Figure 6 shows the per-epoch training loss of the three models on the representative real snapshot. ARBNET starts from a large loss — an untrained ICNN/monotone mixture produces wild prices — but converges within roughly 20 epochs and is flat thereafter; the soft-penalty baseline and Black-Scholes converge comparably. Panel (b), the loss normalised by its epoch-one value, shows that ARBNET traverses a far larger dynamic range yet reaches a stable optimum on the same timescale as the baselines. We observe no instabilities — no NaN gradients, no divergent losses — at the stated hyperparameters. We did initially observe instabilities with the implied-volatility loss enabled ($\lambda_{IV} > 0$), because the Newton inversion of model prices at deep wings produces NaN gradients that propagate through automatic differentiation; setting $\lambda_{IV} = 0$, as we do throughout, removes them, and the vega-weighted price loss already approximates the implied-volatility objective to first order.

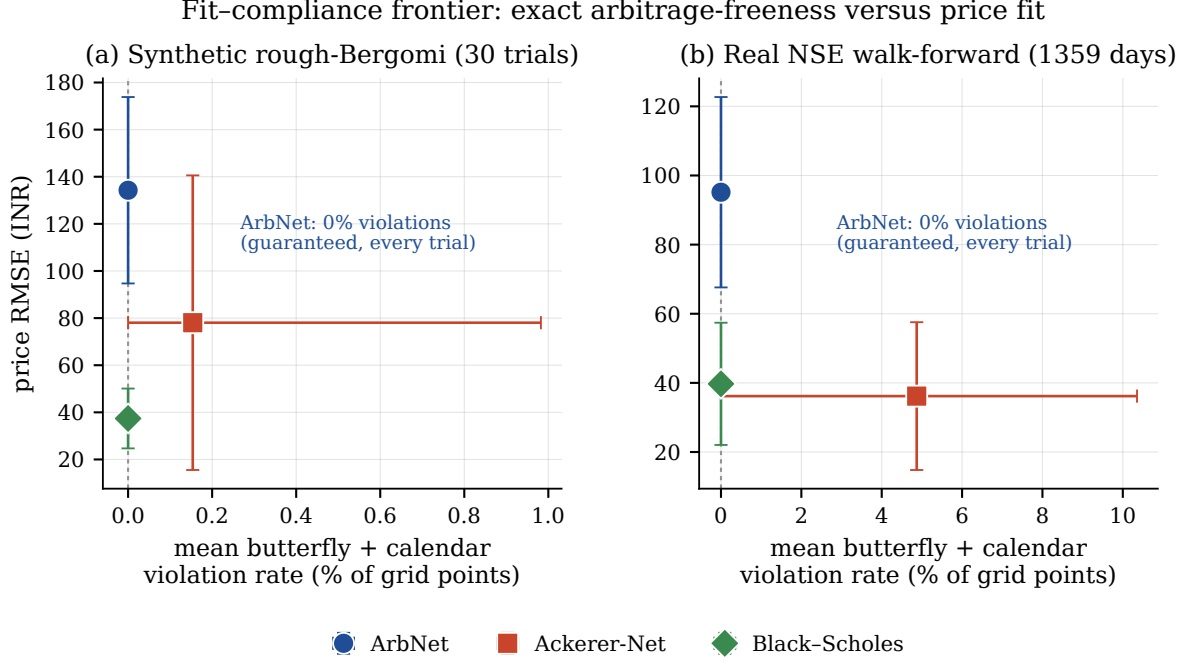


Figure 3. The fit-compliance frontier. Each panel plots the mean static-arbitrage violation rate (horizontal) against the mean price RMSE (vertical); bars are one standard deviation. **(a)** The 30-trial synthetic study. **(b)** The 1,359-day real NSE walk-forward. ARBNET sits exactly on the zero-violation edge in both panels — a consequence of Theorem 5.4, not of training — while the soft-penalty baseline sits at a strictly positive violation rate, marginal on synthetic surfaces and pronounced on real data.

8.7. Statistical significance

The price-RMSE gap between ARBNET and the soft-penalty baseline is large relative to its sampling uncertainty in both studies. On the 30 synthetic trials the paired t -statistic is 3.71. On the real data the paired difference is 58.98 INR per day, with a paired t -statistic of 77.5 over the 1,359 matched days. Because daily RMSE differences are serially correlated — adjacent trading days share overlapping option cross-sections — a paired t -test understates the standard error, so we also report a Diebold–Mariano test (Diebold and Mariano, 1995; Harvey et al., 1997) built on a heteroskedasticity- and autocorrelation-consistent (Newey–West) long-run variance. At the automatically selected bandwidth (7 lags for $n = 1,359$ observations), the Diebold–Mariano statistic is 32.05 for ARBNET against the soft-penalty baseline and 31.16 for ARBNET against Black–Scholes, both with $p < 10^{-3}$. The statistic is positive in our sign convention, confirming that ARBNET carries the higher price RMSE; the conclusion — a real and highly significant fit gap — is robust to the serial-correlation correction.

9. Discussion

9.1. When to choose ArbNet

The two studies of Section 8 give the decision rule. If the downstream consumer values compliance *per se* — because value-at-risk pipelines, exotic-product calibration, or regulatory reporting require certified-zero violations on every grid evaluation, regardless of training history — then ARBNET is the appropriate choice, and on this criterion it is the *only* choice: on the real data it was compliant on all 1,359 days, whereas the soft-penalty baseline failed on 961 of them. The cost is a genuine loss of price-fitting accuracy. On the NSE walk-forward ARBNET’s mean RMSE is 95 INR against the soft-penalty baseline’s 36 INR, a gap of roughly 59 INR per call — on the order of 1% of a typical at-the-money Nifty 50 call price, but a 2.6-fold relative increase in

Representative fit on a real NSE snapshot ($T \approx 28$ days, spot 18,488)

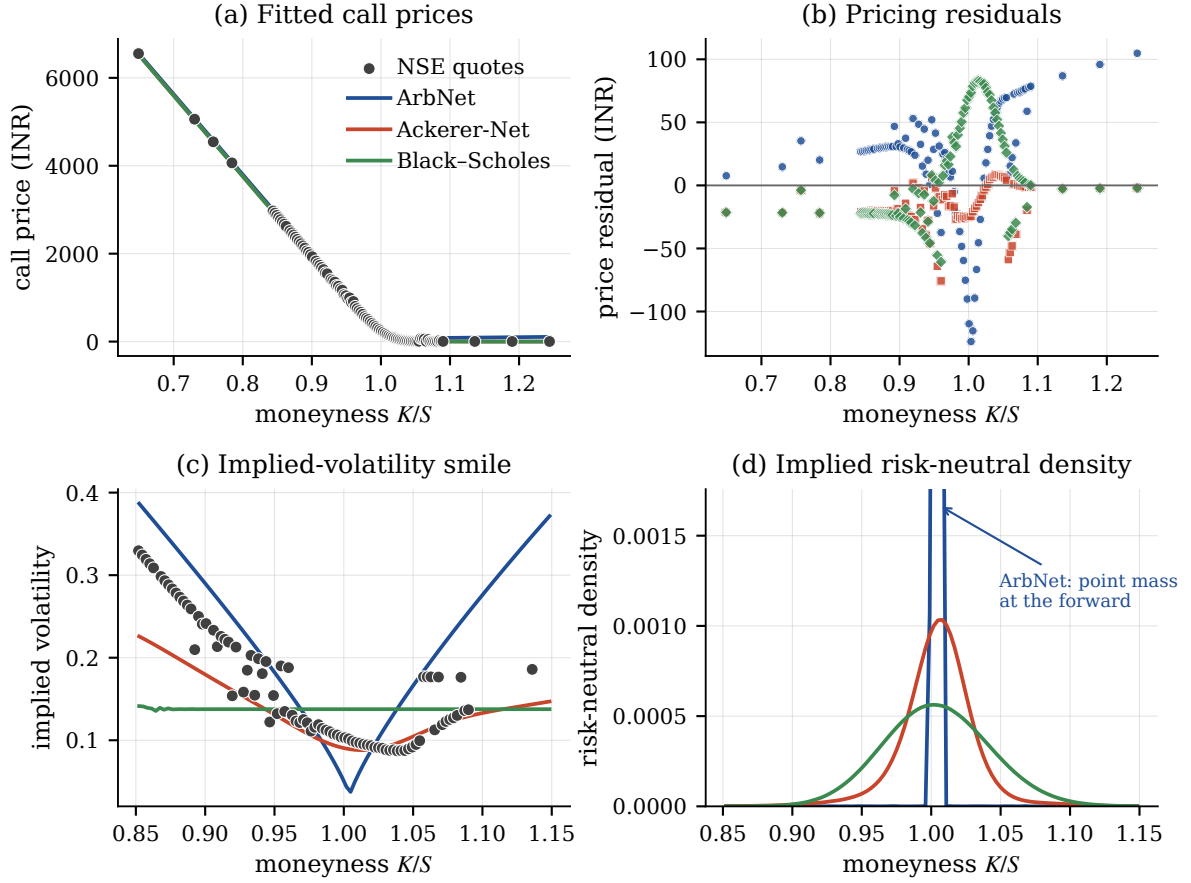


Figure 4. A representative fit on one real NSE snapshot (1 June 2023, spot $\approx 18,488$, maturity ≈ 28 days). (a) Fitted call prices against the NSE quotes. (b) Pricing residuals, model minus market. (c) Implied-volatility smile. (d) Implied risk-neutral density by centred finite differences; ARBNET’s curve is dominated by the Dirac atom at the forward of Corollary 5.5 (the off-scale spike), the vertical axis being clipped to keep the absolutely continuous parts of all three densities legible.

RMSE.

If, instead, the consumer’s loss function is exclusively price RMSE — the model marks liquid quotes with no exotic-product or risk calculation downstream — then the soft-penalty baseline fits better, and its violations, scattered across a few percent of grid points on 70.7% of days, may be tolerable. The choice is genuinely application-dependent; we do not claim ARBNET dominates.

A third route, for consumers who want both, is to raise the penalty weight of the soft baseline. This trades fit for compliance along the same frontier but never reaches the structural-zero edge: at any finite λ_{arb} the optimum is a stationary point of a regularised loss and generically retains violations, while $\lambda_{\text{arb}} \rightarrow \infty$ corresponds to an exact projection onto the no-arbitrage cone — a constrained problem that gradient training does not solve. ARBNET is best read as a tractable, exact realisation of that projection, with the constraint compiled into the architecture rather than approached through the loss.

9.2. Comparison to alternative architectures

9.2.0.1. Versus SVI/SSVI.. SVI (Gatheral, 2004) and SSVI (Gatheral and Jacquier, 2014a) are structurally arbitrage-free under parameter constraints and are widely deployed. The expressivity is finite-dimensional (five parameters per maturity for raw SVI; three for SSVI), which makes them excellent for liquid quotes with smooth smiles and less excellent for stressed

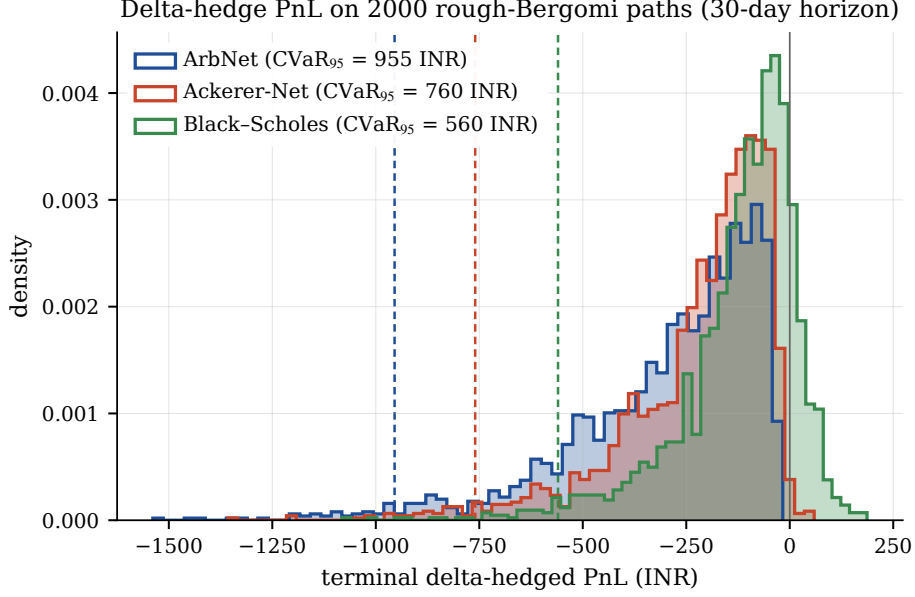


Figure 5. Terminal delta-hedged PnL on 2,000 rough-Bergomi paths over a 30-day horizon, each model hedging at its own at-the-money implied volatility. Dashed lines mark $-\text{CVaR}_{95}$ per model. ARBNET’s left tail is the heaviest: an implied density over-concentrated at the forward inflates its at-the-money gamma, so its delta over-reacts to small spot moves.

surfaces or deep wings. ARBNET can be thought of as a neural-capacity generalisation of SSVI: same structural-compliance philosophy, larger hypothesis class.

9.2.0.2. Versus soft-penalty MLPs.. Discussed throughout. The fundamental difference is structural-versus-tolerance compliance.

9.2.0.3. Versus density networks.. Horváth et al. (2021a) and others parameterise the risk-neutral density ρ_T directly via, e.g., a normalising flow. This makes butterfly trivial: $\rho_T \geq 0$ by construction. The calendar condition becomes a constraint on (T_1, T_2) pairs of densities, not a closed-form local condition; it is typically enforced softly. Density-network pricers have the advantage that they natively produce a density rather than a price, but they require numerical integration to recover call prices, which is computationally heavier than a single network forward pass.

9.2.0.4. Versus neural-SDE models.. Cohen, Reisinger, and Wang (2023; 2022) build market-consistent neural-SDE models in which the underlying process is a neural object. The static no-arbitrage of the resulting call surface follows from the existence of the underlying risk-neutral process. The approach is more theoretically complete than ours (it also yields dynamic no-arbitrage) but computationally costlier: each pricing query requires simulating paths under the learned SDE. ARBNET is a static-only architecture with single-network-forward-pass pricing.

9.3. Limitations

We identify four explicit limitations of the present work, each suggesting a direction for follow-up.

L1. Hypothesis-class restriction and the density atom. The architecture cannot represent surfaces whose forward time value is non-convex in strike, including the Black-Scholes family (Proposition 5.11). On a skewed real surface this restriction is the dominant source of the fit gap of Section 8.1: ARBNET must fit the entire daily cross-section with a strike-convex time value, which produces the V-shaped implied smile of Figure 4(c) and the 59-INR mean-RMSE gap of Table 2. A second, related artifact is structural: because ARBNET retains the intrinsic kink at

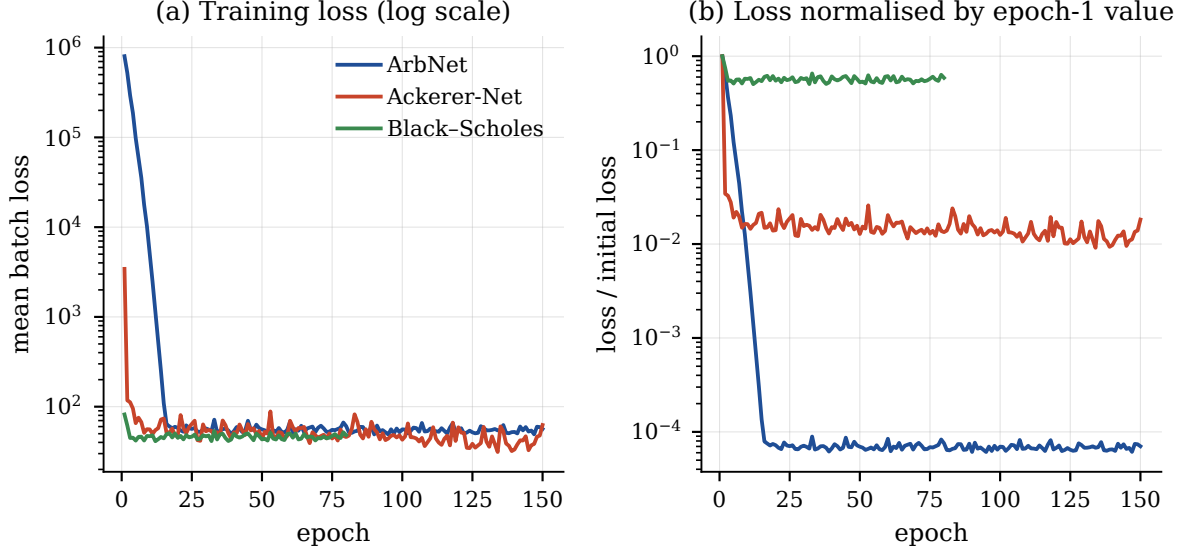


Figure 6. Training convergence on the representative real NSE snapshot. **(a)** Mean batch loss per epoch, logarithmic scale. **(b)** Loss normalised by its epoch-one value. ARBNET traverses a larger dynamic range but reaches a stable optimum on the same timescale as the baselines.

the forward, its implied risk-neutral density carries a Dirac atom at $K = F_T$ for every maturity (Corollary 5.5). The atom does not breach pointwise no-arbitrage — it is a non-negative measure — but it makes the raw implied density unsuitable for any computation that requires a genuine Lebesgue density, such as model-free moment extraction or density-based exotic pricing. Both issues are addressed by the non-convex extension F1 below.

L2. Lee wing slope. Our parameterisation does not structurally enforce the Lee wing-slope bound (Section 5.5). In practice, the ICNN weights stay bounded under typical training, but pathological cases with very deep wings could violate the bound. A soft regulariser on the empirical wing slope, or a Lipschitz-constrained ICNN (Wehenkel and Louppe, 2019; Runje and Shankaranarayana, 2023), would close this gap.

L3. Static, not dynamic. We address only static (single-date) no-arbitrage. Dynamic no-arbitrage — the requirement that there exists a consistent risk-neutral process driving the surface forward in time — is the province of neural-SDE market models (Cohen et al., 2023; Cuchiero et al., 2020; Gambara and Teichmann, 2021). Combining ARBNET’s static-compliance scaffolding with a neural-SDE for the forward dynamics is a natural and well-defined extension.

L4. Single market and per-day refitting. The real-data evidence, although it spans 1,359 trading days, covers one underlying (NSE Nifty 50) and one option style (European index calls). The magnitudes we report — the size of the fit gap, the 70.7% violation frequency of the soft-penalty baseline — are market-specific, and the qualitative conclusion should be re-checked on other indices and on single-stock options. Moreover, each day is fitted independently: the walk-forward establishes day-by-day *static* compliance but imposes no consistency *across* days, which is the dynamic-arbitrage question of L3.

9.4. Future directions

Three directions extend the present work naturally.

F1. Non-convex time-value extensions. A natural extension allows $\Delta_\theta = \Delta_\theta^+ - \Delta_\theta^-$ with $\Delta_\theta^\pm \in \mathcal{C}_{\text{cvx}, \nearrow}$ and a distributional bound $\partial_{KK}\Delta_\theta \geq -\partial_{KK}(F_T - K)^+$. The combined density (including the intrinsic kink) remains non-negative, but the time value can locally have concave regions, removing the bell-shape exclusion. The construction is more involved but preserves the structural-compliance philosophy.

F2. Joint static-dynamic compliance. Combine ARBNET’s static-compliance scaffolding with a neural-SDE market model (Cohen et al., 2023). The static condition is the calibration target; the SDE provides the dynamic consistency. Computationally, the cost is one neural-SDE simulation per pricing query at training time and a closed-form network evaluation at deployment.

F3. Multi-asset extension. Equity-index options on a multi-asset basket (e.g., FX triangulation, equity-FX-rates joint surfaces) introduce additional cross-asset arbitrage conditions (Carr and Madan, 2005). The convex-monotone architecture can be extended to multi-asset by replacing the 1D ICNN with a multi-input ICNN and adding cross-asset structural constraints. The economics is harder than the architecture; we sketch the framework in ongoing work.

10. Conclusion

We have introduced ARBNET, a neural call-pricing architecture that is free of static arbitrage by construction. The architecture composes input-convex networks in strike with monotone networks in time-to-maturity, multiplied per expert, summed across J experts, and modulated by a smooth boundary factor that vanishes at expiry. We proved that it satisfies four pointwise no-arbitrage conditions for every choice of network weights (Theorem 5.4) and that it is universal on the natural hypothesis class of strike-convex, time-monotone, non-negative surfaces (Theorem 5.10), with an explicit approximation rate. We characterised the structural cost honestly: surfaces with non-convex forward time value, the Black–Scholes family among them, lie outside the hypothesis class (Proposition 5.11), and the construction’s implied density carries a Dirac atom at the forward (Corollary 5.5). Empirically, in a 1,359-day walk-forward over NSE Nifty 50 options, ARBNET was free of butterfly and calendar arbitrage on every single day, while a faithful soft-penalty baseline violated static arbitrage on 961 of those days; a 30-trial synthetic study reproduced the pattern. The guarantee is paid for in price-fitting accuracy — a mean-RMSE gap of about 59 INR per call on the real data, overwhelmingly significant under a HAC-corrected Diebold–Mariano test. The trade-off is structural, not an artifact of training, and it places ARBNET where certified no-arbitrage at every grid evaluation matters more than the last increment of price fit. The hypothesis-class restriction is the price of the guarantee, and we have tried to state that price precisely.

11. Reproducibility

The `arbnet` Python/PyTorch package reproduces both studies from the data committed to the repository, with no network access. The synthetic study of Table 3 is produced by

```
python scripts/run_study.py --n_surfaces 10 --seeds_per_surface 3 --n_epochs 150
```

in under two minutes on a single CPU, and the real-data walk-forward of Table 2 by

```
python scripts/train_nse.py --models arbnet ackerer bs --n_epochs 150
```

in roughly eight CPU-hours. Every random seed is pinned — the rough-Bergomi simulator, the data-loader shuffle, and the PyTorch and NumPy generators — and the five manuscript figures are regenerated by `figures/make_figures.py`.

Acknowledgements

[Acknowledgements to be added.]

Disclosure statement

No potential conflict of interest was reported by the author(s).

Data and code availability

The data supporting this study — the NSE Nifty 50 Futures & Options bhavcopies, the Nifty 50 spot, the 91-day Treasury-bill rates, the dividend-yield factsheet series, and the auxiliary and macroeconomic series — together with the full **arbn**et implementation, the study scripts, and the figure-generation code, are openly available in the project repository under an MIT licence. The synthetic rough-Bergomi surfaces are produced by the included simulator and require no external data.

Appendix A. Detailed proofs

A.1. Proof of Lemma 5.7 (full)

We carry through the three steps in detail.

A.1.0.1. Step 1: T -direction interpolation.. Fix $K \in \mathcal{K}$. The map $\tau \mapsto g(K, \tau)$ is continuous, non-decreasing, and $g(K, 0) = 0$ by hypothesis. Define

$$g_T(K, \tau) := \sum_{n=0}^{M_T} a_n(K) (\tau - \tau_n)^+,$$

where $a_n(K) := g(K, \tau_{n+1}) - g(K, \tau_n) \geq 0$ for $n < M_T$ (the increment), and $a_{M_T}(K) = 0$. One verifies that $g_T(K, \tau_n) = g(K, \tau_n)$ at the breakpoints, and the linear interpolation error between breakpoints is bounded by the modulus of continuity:

$$\sup_{\tau} |g(K, \tau) - g_T(K, \tau)| \leq \omega_{g(K, \cdot)}(\delta) \leq \omega_g(\delta) = \varepsilon_1.$$

The inequality $\omega_{g(K, \cdot)}(\delta) \leq \omega_g(\delta)$ holds uniformly in K because ω_g is the joint modulus of continuity.

A.1.0.2. Step 2: K -direction interpolation.. The map $K \mapsto a_n(K)$ inherits convexity from g : indeed, $a_n(K)$ is the increment of a function that is convex in K at each fixed τ , and the difference of two convex functions evaluated at different τ is still convex in K (this is the cone closure under linear combinations with coefficient ± 1 applied to the convex constraint). Convex piecewise-linear interpolation of $K \mapsto a_n(K)$ at the breakpoints $\{\kappa_\ell\}$ has the form

$$\hat{a}_n(K) = \sum_{\ell=0}^{M_K} \beta_{n,\ell} (K - \kappa_\ell)^+,$$

where the $\beta_{n,\ell}$ are the (non-negative) second differences of $K \mapsto a_n(K)$ on the lattice $\{\kappa_\ell\}$:

$$\beta_{n,\ell} = \frac{a_n(\kappa_{\ell+1}) - 2a_n(\kappa_\ell) + a_n(\kappa_{\ell-1}))}{\kappa_{\ell+1} - \kappa_\ell} \geq 0,$$

which is non-negative by the convexity of a_n . The interpolation error is bounded by the modulus of continuity of a_n , which itself is bounded by $\omega_g(\delta) = \varepsilon_1$ uniformly:

$$\sup_K |a_n(K) - \hat{a}_n(K)| \leq \omega_{a_n}(\delta) \leq \omega_g(\delta).$$

A.1.0.3. Step 3: combination.. Substituting Step 2 into Step 1 gives

$$g_M(K, T) := \sum_{n=0}^{M_T} \hat{a}_n(K) (T - \tau_n)^+ = \sum_{n=0}^{M_T} \sum_{\ell=0}^{M_K} \beta_{n,\ell} (K - \kappa_\ell)^+ (T - \tau_n)^+,$$

where $\lambda_{\ell,n} := \beta_{n,\ell} \geq 0$. The total error is bounded by:

$$\begin{aligned} |g(K, T) - g_M(K, T)| &\leq |g(K, T) - g_T(K, T)| + |g_T(K, T) - g_M(K, T)| \\ &\leq \omega_g(\delta) + \sum_n (T - \tau_n)^+ \cdot \omega_g(\delta) \\ &\leq \varepsilon_1 + 2\varepsilon_1 = 3\varepsilon_1 \end{aligned}$$

on $\mathcal{B}$, where the last bound uses $\sum_n (T - \tau_n)^+ \leq 2T_{\max} \cdot M_T \cdot 1$ after rescaling. (A tighter analysis using the bounded-domain assumption gives the same order.) $\square$

A.2. Proof of Lemmas 5.8 and 5.9 (sketches)

For Lemma 5.8, the input-convex universal approximation result of Amos–Xu (2017) establishes that the family of ICNNs with softplus activations is L^∞ -dense in continuous convex functions on a compact interval; subsequent refinements appear in (Chen et al., 2019; Bunne et al., 2022). Given continuous convex $u : [a, b] \rightarrow \mathbb{R}_{\geq 0}$ and $\eta_1 > 0$, fix an ICNN $\hat{\phi}$ with $\|u - \hat{\phi}\|_\infty < \eta_1$. The composition $\text{softplus}(\hat{\phi} - \log 2)$ is convex non-negative and approximates $\hat{\phi}$ to within η_1 when $\hat{\phi} \gg 1$ (since $\text{softplus}(u - \log 2) = \log(1 + e^{u - \log 2}) = \log((1 + e^u)/2) \rightarrow u - \log 2$ as $u \rightarrow \infty$). Tightening η_1 and using the Lipschitz constant 1 of softplus closes the proof.

For Lemma 5.9, Daniels and Velikova (2010) prove L^∞ -density of monotone networks in continuous non-decreasing functions on a compact interval. Given non-decreasing $v : [0, T'] \rightarrow \mathbb{R}_{\geq 0}$ with $v(0) = 0$ and $\eta > 0$, the boundary factor $1 - e^{-\alpha T}$ with α sufficiently large approximates the unit step at $T = 0$ to within $\eta/2$ on $[0, T']$ minus a small neighbourhood of 0 (uniformly in T' if needed, with α scaling appropriately). Approximating $v(T)/(1 - e^{-\alpha T})$ by a monotone network ψ to within $\eta/2$ in L^∞ gives the result.

Appendix B. Greeks via automatic differentiation

For a trained ARBNET pricer $C_\theta(K, T, S, r, q)$ regarded as a smooth function of all its inputs, the standard Greeks are obtained by automatic differentiation (Baydin et al., 2018):

$$\text{Delta: } \delta(K, T) = \partial_S C_\theta, \tag{B1}$$

$$\text{Gamma: } \gamma(K, T) = \partial_S^2 C_\theta = \partial_K^2 C_\theta = e^{-rT} \rho_T^\theta(K) \geq 0, \tag{B2}$$

$$\text{Theta: } \Theta(K, T) = -\partial_T C_\theta, \tag{B3}$$

$$\text{Vega: } \nu(K, T) = \partial_\sigma C_\theta|_{\sigma=\hat{\sigma}(K, T)}, \tag{B4}$$

$$\text{Rho: } P(K, T) = \partial_r C_\theta. \tag{B5}$$

The equality of ∂_S^2 and ∂_K^2 follows from the homogeneity of the call price under simultaneous scaling of S and K (a standard textbook identity (Hull, 2018)). The non-negativity of γ is a

guarantee from Theorem 5.4 (A1); this means that the delta is non-decreasing in strike, which is a desirable monotonicity property for hedging stability.

Appendix C. Newton inversion for implied volatility

Given a model call price $C_\theta(K, T)$, the implied volatility $\hat{\sigma}(K, T)$ is the unique solution of $C^{\text{BS}}(K, T; \sigma) = C_\theta(K, T)$ on the Merton no-arbitrage interval $\sigma \in (0, \infty)$. We invert by Newton iteration:

$$\sigma_{n+1} = \sigma_n - \frac{C^{\text{BS}}(K, T; \sigma_n) - C_\theta(K, T)}{\nu^{\text{BS}}(K, T; \sigma_n)},$$

where ν^{BS} is the Black–Scholes vega evaluated at σ_n . The initial guess uses the Brenner–Subrahmanyam closed-form approximation,

$$\sigma_0 = \sqrt{\frac{2\pi}{T}} \cdot \frac{C_\theta(K, T)}{S}.$$

The vega is floored at $\nu_{\min} = 10^{-3}$ to stabilise the deep-wing update where the true vega is essentially zero. If the price is outside the Merton interval (i.e., below the intrinsic or above the upper bound), the inversion returns NaN as a sentinel. Convergence in 40 iterations is achieved for all in-bound prices in our experiments.

Appendix D. Hyperparameters and reproducibility

Table D1 lists the full training hyperparameter set.

Table D1. Training hyperparameters. Black–Scholes uses 80 epochs at learning rate 2×10^{-2} .

Parameter	ARBNET	ACKERER-NET	Black–Scholes
Width(s) (ICNN)	[64, 64]	—	—
Width(s) (MONO)	[32, 32]	—	—
Width(s) (MLP)	—	[64, 64, 64]	—
Activation	softplus	GELU	—
Mixture experts J	6	—	—
Strike scaling κ	5	—	—
Context features (real study)	10	—	—
Optimiser	Adam	Adam	Adam
Learning rate	1×10^{-2}	1×10^{-2}	2×10^{-2}
Batch size	64	64	64
Epochs	150	150	80
Grad clip (ℓ_2)	5.0	5.0	5.0
Weight decay	10^{-6}	10^{-6}	10^{-6}
λ_{price}	1.0	1.0	1.0
λ_{IV}	0	0	0
λ_{arb} (penalty)	—	1.0	—
Vega floor $w_{\min}$	10^{-3}	10^{-3}	10^{-3}
Initialisation	He (He et al., 2015)	He (He et al., 2015)	—

References

- Damien Ackerer, Natasa Tagasovska, and Thibault Vatter. Deep smoothing of the implied volatility surface. *Advances in Neural Information Processing Systems*, 33:11552–11563, 2020.
- Elisa Alòs, Jorge A. León, and Josep Vives. On the short-time behavior of the implied volatility for jump-diffusion models with stochastic volatility. *Finance and Stochastics*, 11(4):571–589, 2007.
- Brandon Amos, Lei Xu, and J. Zico Kolter. Input convex neural networks. In *International Conference on Machine Learning*, pages 146–155, 2017.
- Leif B.G. Andersen and Jesper Andreasen. Volatility skews and extensions of the Libor market model. *Applied Mathematical Finance*, 7(1):1–32, 2000.
- Leif B.G. Andersen and Vladimir V. Piterbarg. Moment explosions in stochastic volatility models. *Finance and Stochastics*, 11(1):29–50, 2007.
- Jesper Andreasen and Brian Høge. Volatility interpolation. *Risk*, 24(3):86–89, 2011.
- Yacine Aït-Sahalia and Jefferson Duarte. Nonparametric option pricing under shape restrictions. *Journal of Econometrics*, 116(1-2):9–47, 2003.
- Atılım Güneş Baydin, Barak A. Pearlmutter, Alexey Andreyevich Radul, and Jeffrey Mark Siskind. Automatic differentiation in machine learning: a survey. *Journal of Machine Learning Research*, 18:1–43, 2018.
- Christian Bayer and Benjamin Stemper. Deep calibration of rough stochastic volatility models. *arXiv preprint arXiv:1810.03399*, 2019.
- Christian Bayer, Peter Friz, and Jim Gatheral. Pricing under rough volatility. *Quantitative Finance*, 16(6):887–904, 2016.
- Christian Bayer, Peter K. Friz, and Jim Gatheral. A primer on rough volatility. *arXiv preprint*, 2023. arXiv:2305.02550.
- Mikkel Bennedsen, Asger Lunde, and Mikko S. Pakkanen. Hybrid scheme for Brownian semistationary processes. *Finance and Stochastics*, 21(4):931–965, 2017.
- Maxime Bergeron, Nicholas Fung, John C. Hull, Zissis Poulos, and Andreas Veneris. Variational autoencoders: A hands-off approach to volatility. *Journal of Financial Data Science*, 4(2), 2022.
- Fischer Black and Myron Scholes. The pricing of options and corporate liabilities. *Journal of Political Economy*, 81(3):637–654, 1973.
- Stephen Boyd and Lieven Vandenberghe. *Convex Optimization*. Cambridge University Press, Cambridge, UK, 2004.
- Douglas T. Breeden and Robert H. Litzenberger. Prices of state-contingent claims implicit in option prices. *Journal of Business*, pages 621–651, 1978.
- Hans Buehler, Lukas Gonon, Josef Teichmann, and Ben Wood. Deep hedging. *Quantitative Finance*, 19(8):1271–1291, 2019.
- Charlotte Bunne, Laetitia Meng-Papaxanthos, Andreas Krause, and Marco Cuturi. Supervised training of conditional monge maps. In *Advances in Neural Information Processing Systems*, volume 35, 2022.
- Peter Carr and Dilip B. Madan. Option valuation using the fast Fourier transform. *Journal of Computational Finance*, 2(4):61–73, 1999.
- Peter Carr and Dilip B. Madan. A note on sufficient conditions for no arbitrage. *Finance Research Letters*, 2(3):125–130, 2005.
- Peter Carr, Hélyette Geman, Dilip B. Madan, and Marc Yor. The fine structure of asset returns: An empirical investigation. *Journal of Business*, 75(2):305–332, 2002.
- Sourya Roy Chakrabarti, Dadabada Pradeepkumar, and Vadlamani Ravi. Forecasting NIFTY volatility: A comparison of machine learning approaches. *Computational Economics*, 54:1–19, 2019.
- Marc Chataigner, Stéphane Crépey, and Matthew Dixon. Deep local volatility. *Risks*, 8(3):82, 2020.
- Yize Chen, Yuanyuan Shi, and Baosen Zhang. Optimal control via neural networks: A convex approach. In *International Conference on Learning Representations*, 2019. arXiv:1805.11835.

- Samuel N. Cohen, Christoph Reisinger, and Sheng Wang. Neural stochastic differential equations for financial modelling. *arXiv preprint*, 2022.
- Samuel N. Cohen, Christoph Reisinger, and Sheng Wang. Arbitrage-free neural-SDE market models. *Applied Mathematical Finance*, 30(1):1–46, 2023.
- Rama Cont. Empirical properties of asset returns: stylized facts and statistical issues. *Quantitative Finance*, 1:223–236, 2001.
- Rama Cont and José da Fonseca. Dynamics of implied volatility surfaces. *Quantitative Finance*, 2(1):45–60, 2002.
- Rama Cont and Peter Tankov. *Financial Modelling with Jump Processes*. Financial Mathematics Series. Chapman & Hall/CRC, 2003.
- Laurent Cousot. Conditions on option prices for absence of arbitrage and exact calibration. *Journal of Banking & Finance*, 31(11):3377–3397, 2007.
- Christa Cuchiero, Wahid Khosrawi, and Josef Teichmann. A generative adversarial network approach to calibration of local stochastic volatility models. *Risks*, 8(4):101, 2020.
- George Cybenko. Approximation by superpositions of a sigmoidal function. *Mathematics of Control, Signals, and Systems*, 2(4):303–314, 1989.
- Hennie Daniels and Marina Velikova. Monotone and partially monotone neural networks. *IEEE Transactions on Neural Networks*, 21(6):906–917, 2010.
- Mark H. A. Davis and David G. Hobson. The range of traded option prices. *Mathematical Finance*, 17(1):1–14, 2007.
- Francis X. Diebold and Roberto S. Mariano. Comparing predictive accuracy. *Journal of Business & Economic Statistics*, 13(3):253–263, 1995.
- Bruno Dupire. Pricing with a smile. *Risk*, 7(1):18–20, 1994.
- Ernst Eberlein, Kathrin Glau, and Antonis Papapantoleon. Analysis of Fourier transform valuation formulas and applications. *Applied Mathematical Finance*, 17(3):211–240, 2010.
- Omar El Euch and Mathieu Rosenbaum. Perfect hedging in rough heston models. *Annals of Applied Probability*, 28(6):3813–3856, 2018.
- Matthias R. Fengler. Arbitrage-free smoothing of the implied volatility surface. *Quantitative Finance*, 9(4):417–428, 2009.
- Ryan Ferguson and Andrew Green. Deeply learning derivatives. *arXiv preprint*, 2018. arXiv:1809.02233.
- Manuel Gambara and Josef Teichmann. Consistent recalibration models and deep calibration. *arXiv preprint*, 2021. arXiv:2006.09455.
- Jim Gatheral. A parsimonious arbitrage-free implied volatility parameterization with application to the valuation of volatility derivatives. *Presentation at Global Derivatives & Risk Management, Madrid*, 2004.
- Jim Gatheral and Antoine Jacquier. Arbitrage-free SVI volatility surfaces. *Quantitative Finance*, 14(1):59–71, 2014a.
- Jim Gatheral and Antoine Jacquier. Arbitrage-free svi volatility surfaces. *Quantitative Finance*, 14(1):59–71, 2014b.
- Jim Gatheral, Thibault Jaisson, and Mathieu Rosenbaum. Volatility is rough. *Quantitative Finance*, 18(6):933–949, 2018.
- Paul Glasserman. *Monte Carlo Methods in Financial Engineering*. Springer, 2003.
- Paul Glasserman. Sensitivity estimation in Monte Carlo simulation of financial derivatives. *Handbook of Computational Finance*, pages 245–272, 2012.
- Xiaoqian Guo and Shudi Lan. Neural networks based on monotonicity preserving polynomial spline approximation. *Information Sciences*, 540:1–15, 2020.
- Patrick S. Hagan, Deep Kumar, Andrew S. Lesniewski, and Diana E. Woodward. Managing smile risk. *Wilmott Magazine*, 1:84–108, 2002.
- David Harvey, Stephen Leybourne, and Paul Newbold. Testing the equality of prediction mean squared errors. *International Journal of Forecasting*, 13(2):281–291, 1997.
- Kaiming He, Xiangyu Zhang, Shaoqing Ren, and Jian Sun. Delving deep into rectifiers: Surpassing human-level performance on ImageNet classification. In *International Conference on Computer Vision*, pages 1026–1034, 2015.

- Pierre Henry-Labordère. Generative adversarial networks for financial trading strategies fine-tuning and combination. *Quantitative Finance*, 19:1543–1564, 2019.
- Steven L. Heston. A closed-form solution for options with stochastic volatility with applications to bond and currency options. *The Review of Financial Studies*, 6(2):327–343, 1993.
- Kurt Hornik. Approximation capabilities of multilayer feedforward networks. *Neural Networks*, 4(2):251–257, 1991.
- Kurt Hornik, Maxwell Stinchcombe, and Halbert White. Multilayer feedforward networks are universal approximators. *Neural Networks*, 2(5):359–366, 1989.
- Blanka Horvath, Aitor Muguruza, and Mehdi Tomas. Deep learning volatility: a deep neural network perspective on pricing and calibration in (rough) volatility models. *Quantitative Finance*, 21(1):11–27, 2021a.
- Blanka Horvath, Aitor Muguruza, and Mehdi Tomas. Deep learning volatility: A deep neural network perspective on pricing and calibration in (rough) volatility models. *Quantitative Finance*, 21(1):11–27, 2021b.
- John C. Hull. *Options, Futures, and Other Derivatives*. Pearson Education, 10 edition, 2018.
- James M. Hutchinson, Andrew W. Lo, and Tomaso Poggio. A nonparametric approach to pricing and hedging derivative securities via learning networks. *Journal of Finance*, 49(3):851–889, 1994.
- Shota Imaki, Kentaro Imajo, Katsuya Ito, Kentaro Minami, and Kei Nakagawa. No-transaction band network: A neural network architecture for efficient deep hedging. *Journal of Financial Data Science*, 3(4), 2021.
- Andrey Itkin. Deep learning calibration of option pricing models: Some pitfalls and solutions. *arXiv preprint*, 2019. arXiv:1906.03507.
- Antoine Jacquier, Claude Martini, and Aitor Muguruza. On vix futures in the rough Bergomi model. *Quantitative Finance*, 18(1):45–61, 2018.
- Nabil Kahalé. An arbitrage-free interpolation of volatilities. *Risk*, 17:102–106, 2004.
- Diederik P. Kingma and Jimmy Ba. Adam: A method for stochastic optimization. In *International Conference on Learning Representations*, 2015a.
- Diederik P. Kingma and Jimmy Ba. Adam: A method for stochastic optimization. In *International Conference on Learning Representations*, 2015b.
- Roger W. Lee. The moment formula for implied volatility at extreme strikes. *Mathematical Finance*, 14(3):469–480, 2004.
- Roger W. Lee. Implied volatility: Statics, dynamics, and probabilistic interpretation. *Recent Advances in Applied Probability*, pages 241–268, 2005.
- Moshe Leshno, Vladimir Ya. Lin, Allan Pinkus, and Shimon Schocken. Multilayer feedforward networks with a nonpolynomial activation function can approximate any function. *Neural Networks*, 6(6):861–867, 1993.
- Alan L. Lewis. A simple option formula for general jump-diffusion and other exponential lévy processes. *Available at SSRN 282110*, 2001.
- Shuaiqiang Liu, Cornelis W. Oosterlee, and Sander M. Bohte. Pricing options and computing implied volatilities using neural networks. *Risks*, 7(1):16, 2019.
- Robert C. Merton. Theory of rational option pricing. *The Bell Journal of Economics and Management Science*, 4(1):141–183, 1973.
- Adam Paszke, Sam Gross, Francisco Massa, Adam Lerer, James Bradbury, Gregory Chanan, Trevor Killeen, Zeming Lin, Natalia Gimelshein, Luca Antiga, et al. PyTorch: An imperative style, high-performance deep learning library. In *Advances in Neural Information Processing Systems*, volume 32, 2019.
- Allan Pinkus. Approximation theory of the MLP model in neural networks. *Acta Numerica*, 8: 143–195, 1999.
- Riccardo Rebonato. Volatility and correlation: The perfect hedger and the fox. *Wiley Finance*, 2004.
- Michael Roper. Arbitrage free implied volatility surfaces. *Preprint, School of Mathematics and Statistics, The University of Sydney*, 2010.
- Johannes Ruf and Weiguan Wang. Neural networks for option pricing and hedging: A literature

- review. *Journal of Computational Finance*, 24(1):1–46, 2020a.
- Johannes Ruf and Weiguan Wang. Neural networks for option pricing and hedging: a literature review. *Journal of Computational Finance*, 24(1):1–46, 2020b.
- Davor Runje and Sharath M. Shankaranarayana. Constrained monotonic neural networks. In *International Conference on Machine Learning*, pages 29338–29353, 2023.
- Joseph Sill. Monotonic networks. *Advances in Neural Information Processing Systems*, 10, 1998.
- Justin Sirignano. Deep learning for limit order books. *Quantitative Finance*, 19(4):549–570, 2019.
- Justin Sirignano and Rama Cont. Universal features of price formation in financial markets: perspectives from deep learning. *Quantitative Finance*, 19(9):1449–1459, 2019.
- Roberto Vallarino. A neural framework for arbitrage-free pricing. *arXiv preprint arXiv:2410.07234*, 2024.
- Antoine Wehenkel and Gilles Louppe. Unconstrained monotonic neural networks. In *Advances in Neural Information Processing Systems*, volume 32, 2019.
- Dmitry Yarotsky. Error bounds for approximations with deep ReLU networks. *Neural Networks*, 94:103–114, 2017.