



## Reference Book

For Verovio version 3.13

Generated on 28 November 2022 from [8440a5d](#)

DOI: [10.5448/7em6-my23](#)

This book is licensed under a [Creative Commons Attribution-ShareAlike 4.0 International License](#).



# Introduction

## About this book

This book is intended to serve as a reference guide for how to work with Verovio, and is meant for users of all skill levels. The book is a collaborative work that brings together inputs from the many contributors to the Verovio projects under the editorial leadership of the RISM Digital Center team.

This initial chapter gives an introduction to Verovio and the history of the project as well as an overview on how to use it.

The following two chapters provides a number of [tutorials](#), starting at the very basic and ending at advanced topics in notation. By the end of these you should have a very good understanding of how to use Verovio in its different forms, and how you can start to integrate it into your own work.

The chapter on [advanced-topics](#) provides some more in-depths explanation of specifics of Verovio.

The last chapters provides a [reference](#) for the operations and options available. They also cover how to [build and install](#) Verovio, including from the source code, and how to [contribute](#) to the active development of Verovio.

### Reference

This book is identified with the DOI [10.5448/7em6-my23](#) which refers to the currently applicable version of the book documenting the latest release of Verovio.

### License

This book is licensed under a [Creative Commons Attribution-ShareAlike 4.0 International License](#), see also in the [README](#).

## Getting help

As you work through this book, from the most basic to the most advanced topics, you may find that you are struggling to understand something. The quickest and easiest way to get help is to reach out on the [#verovio](#) channel in the [MEI Community's Slack chat](#). If you are not already a member, [you can join](#).

## History of the project

Engraving music notation by computer is a notoriously complex task, and the most powerful music notation rendering engines are, for the most part, the result of long-term developments of commercial music notation editors in which considerable resources had to be invested. They each have their own internal structure and file formats. Furthermore, the music notation rendering engines of music notation editors are not very modular and cannot easily be used or integrated into other applications.

Besides music notation editors, some music notation rendering engines are also available as command-line tools. These are easier to integrate than desktop applications, however with occasionally quite significant dependencies and requirements that limit the contexts in which their use is possible. This is the case for [LilyPond](#), a very popular and powerful typesetting engine

Such tools have been used for many years within the [Music Encoding Initiative](#) (MEI) community for engraving scores encoded in MEI. Using them, however, meant converting the MEI to another encoding scheme that could be used as input format for the engraving tool. Whichever solution was used to do this, it remained clearly suboptimal. MEI users willing to benefit from all the strengths of MEI were facing the problem of not being able to render their data properly. Converting a music encoding format to another one is known to become quickly problematic. It is particularly true when converting from MEI markup that is rich and detailed, a feature that distinguishes MEI from other encoding schemes. With a conversion step, it is likely that not all the information will be preserved in the rendering, or at least only in cumbersome ways and with sometimes quite limited results.

At that time, by about thirty years after the initial development of music notation software applications, the digital domain had significantly changed with the advent of the online world. For music notation, this translated into new possibilities but also new challenges to be faced. While most music notation engraving tools target PDF, this format is clearly not the ideal one in web-based environments. It can be published online, but some web browsers still require a dedicated viewer plugin to be installed for this to be possible. They yield inconsistent viewing and document browsing experiences, which is far from ideal. To embed PDF files directly in web pages code, they need to be converted to images, which creates an overhead and additional complications in the publication process, with often poor results in the display quality.

## Early stages

In 2013, the [RISM Digital Center](#) launched the development of Verovio for rendering the music incipits or the [RISM project](#). The main idea behind the development of Verovio was to implement a tool that could render the RISM music incipits directly but also to support MEI natively. That is, without having MEI converted to another format, either explicitly or internally in the software application used for rendering. With Verovio, the MEI markup is parsed and rendered as notation with a single tool and in one step.

One of the reasons for choosing to implement a library from scratch rather than modifying an existing library was that it will allow to operate on a memory representation of MEI, which will make it significantly easier to render complex MEI features in the long run. Previous experience has indeed shown that modifying an existing solution can be very quick to develop at the beginning, but that the development curve eventually reaches a plateau.

Another idea behind the development of Verovio was to have a tool that would be easy to use in web environments. Instead of targeting PDF output, Verovio uses the [Scalable Vector Graphics](#) (SVG) format developed and maintained by the [W3C](#). The advantage of SVG over other output formats, and Postscript and PDF in particular, is that it can easily be used in a web-based environment because it is rendered natively in most modern web browsers with no plug-in required. In addition, since SVG is a vector format, the output can also be used for high-quality printing, which means that it offers the best of both digital and paper-based worlds.

With the same goal in mind, Verovio was designed to be light and fast and has no external dependencies, making it very flexible and easy to use or integrate into digital environments.

## Interacting with music encoding

Today, partly in response to the development of MIR applications, rendering of music notation can be necessary in very different contexts, for example within standalone desktop applications, in server-side web application scenarios, or directly in a web browser. Music notation might need to be rendered for displaying search results or for visualising analysis outputs. Another example is score-following applications, where the passage currently played needs to be displayed and possibly highlighted. These are different use-cases of interactive applications where music notation plays a key role, including many cases where the notation itself has to be an interactive component.

Several design features of the Verovio library make it highly suitable for interactive music notation applications. It is a software library that can run in a wide range of environments (and not a full software application) and it is light and fast. The JavaScript version of Verovio is particularly promising because it provides a fast in-browser music MEI typesetting engine that can easily be integrated into web-based applications. This setup makes it possible to design ground-breaking web applications where the MEI encoding is rendered on the fly. In such designs we can rethink the interface and avoid mimicking page output. We can instead adjust the layout dynamically to the screen of the device employed by the user. The layout can be calculated to fill the size of the screen, or interactively changed according to a zoom level adjusted by the user. This opens up new responsive web-interfaces to be designed and developed based on dynamic music notation reflow. This works particularly well with SVG, especially since it is now supported by all modern web browsers. However innovative the dynamic layout of music notation may be, it remains a very basic interaction. Verovio aims to go further and to produce a graphic output that can then be the foundation for more complex interactions.

Because SVG is XML, it has an advantage over raster image formats in that every graphical element is addressable. This feature makes it intrinsically well suited for interaction, and this is also true for music notation. In a web environment, the addressability can be used for highlighting graphical elements such as notes or any other music symbols. One additional characteristic of SVG is that its XML tree can be structured as desired, and an innovative design feature of Verovio was to go further in the structuring of the output by leveraging this characteristic. Since Verovio implements the MEI structure internally, this key feature of SVG made it possible to preserve the MEI structure in the design of the SVG output in Verovio. Preserving the MEI structure in the SVG output is a considerable overhead in the rendering process but makes it a unique feature of Verovio.

As a result, Verovio output in SVG is not the end of a unidirectional rendering process. Quite on the contrary, it should instead be seen as an intermediate layer standing between the MEI encoding and its rendering that can act as the cornerstone for a bi-directional interaction: from the encoding to the notation, but also from the notation to the encoding through the user interface.

## Design principles

The basis for interactivity offered by MEI coupled with Verovio follows some important design principles. First for all, the principle of *availability* and *discoverability*. That is, all the content (e.g., all the MEI editorial variants) is available. Alternative text can be made discoverable, for example with CSS highlighting. It also follows the design principle of *scalability*. Verovio is light and fast. It can run on small devices, but it also supports large files in higher resource environments.

They are also some technical principles that are followed as far as possible. They include *reusability* and *durability*. By providing only the interaction foundation and not making any assumption in interface design, especially with a software library that has no dependency, reusability is undeniably maximised. So is the durability, although durability is hard to predict in software development, particularly for digital humanities projects which have slow development cycles in comparison with the development of the technology itself. Reducing dependencies as much as possible is one way to increase durability. In the case of MEI rendering, keeping the rendering engine separate from larger applications that will use it is another way.

In terms of editions and interface design, there is much still to invent. This will need to be done hand in hand with the development of MEI. It is obvious that merely imitating printed output in a digital environment will not be satisfactory. Most effort should be spent on developing the added value that digital environments can offer. Parallel with the development of the online world is the appearance of new devices, such as tablets with wireless network access. They offer new possibilities in terms of digital access and change the manner and location in which digital content can be read. Developing these possibilities will not preclude the co-existence of printed editions, which have and will continue to retain their own added value. The challenge now is neither to replicate nor to supplant existing media or applications, but to expand horizons by exploring new ways of conceiving the information to which we have access, and MEI and Verovio are a decisive and exciting step in this direction.

## Use-case scenarios


### Architecture possibilities

Verovio is a C++ codebase that can be compiled and wrapped into different programming languages and integrated into various environments and several use-cases can be imagined for the Verovio toolkit.

First of all, it can be built and used as a standalone command-line tool. This option is well suited to scripting environments and applications. The command-line tool can be used to render music notation files into SVG or into MIDI files. These files can be embedded in HTML files with everything happening on the server side. Verovio can also be used to convert data (e.g., MusicXML or Humdrum) to MEI. Typical use cases would be :

- generate SVG and MIDI from MEI documents or other supported formats,
- generate MEI documents from other supported formats (e.g., convert files).

Resulting SVG or MEI documents can then be embedded in a HTML page or used as such.

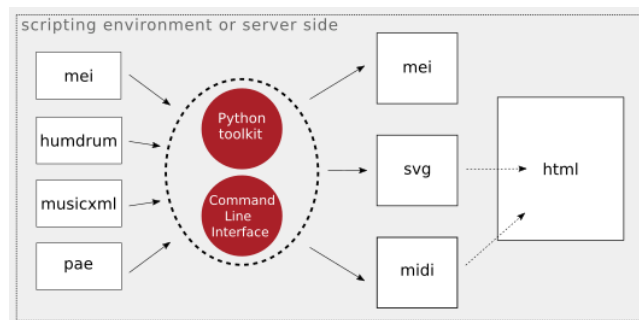

The JavaScript toolkit makes it possible to generate SVG and MIDI directly in the browser. It is easy to set up and platform independent. Interaction with the user can then be handled with basic JavaScript or CSS. An example of how to handle events is given in the tutorial. It is also possible to process the MEI via XSLT in the browser before loading it into Verovio.



Both approaches can be combined: one may choose to process the MEI and to generate the SVG server side for better performance, and then handle interactions client side with JavaScript and CSS.



## Application examples

Interactive applications in which the MEI and Verovio pair is being used are very diverse. In this section, we list some example application uses-cases based on this pair and where interaction is an important component. Most of the projects selected are research projects or research tools, but not only.

### Critical editions


The Digital Interactive Mozart Edition (DIME) is a joint project of the Salzburg Mozarteum Foundation and the Packard Humanities Institute in California. It is one example project in the field of digital critical editions that takes advantage of very rich and powerful markup possibilities offered by the MEI schema. In this context, interaction capabilities open completely new and welcome perspectives in interface design. Critical editions traditionally encompass extremely dense information networks that have to be laid out on paper with all the associated bi-dimensional constraints. Variant display is notoriously cumbersome and the information often has to be scattered between various part of the books (e.g., the critical notes referring to the music scores listed at the end of a volume).



### Genetic editing

Genetic editing is still an exploratory field in music. In this context, MEI is in active development under the lead of the Beethovens Werkstatt project. In genetic editing, time is a key dimension to be taken into account in the representation of differences. The differences in genetic editing represent different stages of writing for which it is not always possible to determine clearly their scope, their order in time or even their content because it is not always readable. This yields potentially very complex and large datasets for which

Thanks to the overall simple structure of its notation (e.g., monophony for chant), early music has often been at the forefront of development of digital projects. Nonetheless, most of the time they remained isolated because of the need to develop dedicated encoding schemes and tools. The [Measuring Polyphony](#) project, a repository of digital encoding of late medieval polyphony at Brandeis University, is a good example of a change. The same ecosystem as for CWMN is used here. The MEI modularity allows for precise representation of the mensural notation, and the development of MEI and Verovio allow, for the first time, early music notation to be properly encoded accurately regarding the ternary and binary durations in the music. Interaction perspectives can be seen for linking original notation and modern transcriptions, which remains desirable for non-expert audiences.


[measuringpolyphony.org](https://measuringpolyphony.org)
[display.html?source=measuringpolyphony&source\\_MANSURUL\\_ME](https://display.html?source=measuringpolyphony&source_MANSURUL_ME)


**MEASURING POLYPHONY**  
 DIGITAL EXPLORATION OF LATE MEDIEVAL MUSIC


[HOME](#)
[ABOUT](#)

**ORBIS ORBATUS OCVLIS / VOS PASTORES ADVLTERI / FVR NON VENIT NISI VT FVRETVR ET MACTETVR ET PERDIT**

Anonymous

0:00 0:00
 Switch score to modern notation





SEE IMAGE ONLINE

**Source**

Fauv, fol(s) 7v

[Click this link for more information on this MS \(DIAMM\)](#)

**Downloads**

MEI

MENSURUL

PDF

**Commentary**

Scanned file corrected from PMPC. Rhythmic durations augmented following our project's transcription conventions. Pitches, rhythms and mensural notation features checked and corrected against Fauv. Text follows Fauv.

Alignment of scores with audio recordings, also known as score following, is a typical music information retrieval task. The main challenge is to generate the alignment data taking into account the fact that performances vary in tempo and that sections of the score can be repeated in some performances. The [Freischütz Digital](#) is an example project where the alignment data is stored in MEI with synchronisation information at the measure level generated for multiple recordings. The playback is synchronised with Verovio using `measure xml:id` for following the score or jumping anywhere in it. Clicking anywhere on the score can conversely be used to jump to the corresponding place in the recording. In the case of this project, because the MEI data also contains mapping of the measures with their corresponding zone in the facsimile image of the handwritten manuscript, the same synchronisation can be realized with it.



## Music notation editing

Interaction with music notation can take the form of data editing, either in a WYSIWYG manner or by allowing music encoding text editing. The Neon.js project for neume notation is an example of the former approach. It is currently going in-depth refactoring for switching from a previous ad-hoc rendering solution to Verovio rendering. The later editing approach is implemented in the [Verovio Humdrum Viewer](#) (VHV) project where editing of the encoding (Humdrum or MEI) is updated on the fly. The same setup has recently been integrated into Atom as a plugin package, MEI-tools-atom. In both the VHV and the Atom package, the rendered notation can be clicked to navigate in the encoding.



## Music addressability

In music literature or in music practice, addressing music notation generally relies on movement names and measure numbers, and additionally voice or instrument names and beat numbers when necessary. However, there is no formalised concept behind this practical approach. Addressing music notation in the digital world has been recently the focus of the [Enhancing Music Notation Addressability](#) (EMA) project at the University of Maryland. The goal of the project is to develop a generic system for expressing addresses in music notation documents. In order to evaluate it, the project developed a web service with an API for addressing MEI documents, the Open MEI Addressability Service (OMAS). The Verovio rendering is used to display a selection. Conversely, the rendered music notation can serve as the basis for selecting interactively a zone to be transformed into an address in the music notation data.







## Performance

Interaction with music notation is quite common in the domain of performance. However, a significant breakthrough came on stage with the [Music Encoding and Linked Data](#) (MELD) framework and [Climb!](#), a music composition that mixes the idea of classical virtuoso piece and computer game. The major innovation of the project is that the dataset is stored as Linked Data using MELD. [Climb!](#) is a non-linear composition also made from a set of fragments moving from the bottom to the top of a graph representing a mountain. The path of a performance is not pre-determined and changes at each performance. At some stages, the performer has to play some excerpts, whose accuracy is dynamically verified in order to decide if the performer can proceed to the next stage. Feedback to the performer can be provided by the highlighting of score fragments.



## Education

In the field of music education, interactive applications are more and more common and increasingly sophisticated. They typically link music notation with recordings, but also with user feedback (measure tempo, tuning, etc.). They are often built as mobile device applications, such as the [NomadPlay](#) application. [NomadPlay](#) features a catalogue of recordings of a wide range of pieces from which the user can select his instrument. He can then rehearse the piece with the score of his instrument being displayed and synchronized with the recording but with the sound of his instrument removed. It is also possible to loop a difficult passage, or to change the tempo of the recording interactively.



## Verovio licensing

Verovio is licensed under the [OSI-approved GNU Lesser General Public License \(LGPLv3\)](#). This means that Verovio can be used in any contexts that are compliant with the requirements of that license. In this section, we explain more concretely what you can do with it in your project, but also what is required or not allowed for you to do, and what we additionally recommend.

### What is allowed

The LGPLv3 license allows you to use the Verovio library as-is in open-source projects that are compliant with this license. It can also be used in commercial products that are open-source or not. It can be a web application, a desktop application or a mobile one. The Verovio library can be embedded in the product and shipped with it without having your product itself to be open-source as long as the Verovio library **is not modified** and is dynamically linked to your product.

### What is required

Whichever use you make of the library, you have to give **visible credit** to the Verovio library. For a web application, it has to be through a prominent notice on your web-site. For a mobile application, it has to be given in the metadata of the application (e.g., iOS App Store or the Google Play store).

Here are some minimal examples to follow:

- Enote in the App Store
- Trala in Google Play
- NomadPlay web application

Using Verovio in a product without giving credit is a clear **license violation**. However, it is also important to understand that, by giving the appropriate credits, you are not only fulfilling the very basic and free-of-charge requirements of the license but also supporting the community by recognizing its work. This will help us make Verovio better and more sustainable and will be beneficial to all users - including you - in the long-run.

### What is not allowed

You are not allowed to make any modifications to the Verovio library without making all of your **changes publicly available** and under the original LGPLv3 license. For example, if you improve the layout algorithm, or add support for additional music notation elements, these improvements must be made open-source under LGPLv3. Not doing it is also a **license violation** and is un-supportive of the community.

### What is recommended

Providing credit if you use Verovio, and making the source code of your modifications to the Verovio library available to the community, are the only minimal legal requirements. However, we strongly encourage you to go one step further and to ask for your changes to be integrated into the original code-base of Verovio with a **pull-request** to the [rism-digital/verovio](#) repository. Before your changes can be integrated into the repository, we will need you to accept the Verovio [Contributor License Agreement \(CLA\)](#). This is a standard procedure for open-source projects and will allow for the community to benefit directly from your work.

We would also be happy to hear about your use of Verovio in your applications. Please get in touch if you are using Verovio, and let us know where we can learn more about your project!

# Tutorial 1: First Steps

## Introduction

The first tutorial will look at how you can use Verovio to render music notation on a web page, using the pre-built JavaScript library. In this tutorial you will be building a small HTML page, with a minimal amount of JavaScript, to create an SVG rendering of an MEI file. In-depth technical expertise is not necessary, but you should be familiar with the basic principles of HTML to get the most out of this tutorial, and have access to a plain-text editor, preferably with facilities for automatically highlighting HTML and JavaScript code. (The [Atom](#) editor is a good choice if you need a recommendation.)

By the end of this tutorial, you should understand the following:

1. How to load the Verovio JavaScript library using the `<script>` tag;
2. How to initialize Verovio, and how to set some basic rendering options;
3. How to load an MEI file from a URL and pass it to Verovio to render;
4. How to navigate between pages a multi-page score.

Later tutorials will cover more in-depth topics, such as how to have more control over rendering options, how to interact with the rendered notation, and how to play the notation back using MIDI.

## Basic browser skills

A good skill to have in working through these tutorials is how to access and use the JavaScript error console in your browser. Every modern browser comes with this facility. This feature is useful to see what might be causing problems since these problems may not be otherwise noticeable; your page just may not work, or it may not do what you expect.

Accessing the JavaScript console is slightly different in each browser.

Chrome

Keyboard shortcut:

- Ctrl + Shift + J (Windows/Linux)
- Command + Option + J (Mac)

Menu location:

- Menu > More Tools > Developer Tools > Console tab

[Chrome documentation](#)

Firefox

Keyboard shortcut:

- Ctrl + Shift + K (Windows/Linux)
- Command + Option + K (Mac)

Menu location:

- Menu > Developer > Web Console

[Firefox documentation](#)

Internet Explorer / Edge

Keyboard shortcut: F12

Menu location: Menu “three dots” icon > F12 Developer Tools > Console tab

[Edge documentation](#)

Safari

Keyboard shortcut:

- Command + Option + C

Menu location:

The Safari developer tools must be enabled before use.

1. Safari > Preferences > Advanced > enable “Show Develop menu in menu bar”
2. Develop > Show Error Console

[Safari documentation](#)

[Source](#)

## Getting started

To get started with Verovio, you need to load the JavaScript library in a web page. If you were building your own website, you may choose to host this on your own servers, but in this tutorial we will use a version that is hosted on the Verovio website.

You can start with the following HTML page:

```
HTML /  
JAVASCRIPT  
<html>  
  <head>  
    <script src="http://www.verovio.org/javascript/latest/verovio-toolkit-wasm.js" defer></script>  
  </head>  
  <body>  
    <h1>Hello Verovio!</h1>  
    <div id="notation"></div>  
  </body>  
</html>
```

Save this in a plain text file somewhere on your hard-drive, and then open it with your browser. (The name does not matter, but it should end in .html ; verovio.html is a good choice.) You should text in a large font that says "Hello Verovio!" but not much else. If you have your browser console open (discussed in the introduction), you should see no errors.

To start Verovio, you should add the following to your page in the head, after the <script> tag that loads the Verovio toolkit:

```
HTML /  
JAVASCRIPT  
<script>  
  document.addEventListener("DOMContentLoaded", (event) => {  
    verovio.module.onRuntimeInitialized = () => {  
      let tk = new verovio.toolkit();  
    }  
  });  
</script>
```

(If you are unsure, scroll to the bottom of this page; the full example is given below.)

When you refresh your page, you should still see nothing, and there should be no errors in the browser console. To help you understand what this is doing, let's start from the inside out.

The line `tk = new verovio.toolkit();` creates a new instance of the Verovio toolkit. This is what we will eventually use to render the notation. However, we first need to wait until the Verovio library is fully downloaded and ready to use by your browser. The `verovio.module.onRuntimeInitialized` line, and the `document.addEventListener` lines do just that – they tell your browser to wait until other things have happened before trying to work with Verovio. This is a good, safe way to ensure all the requirements are met before we try to start working with Verovio.

## Logging to the Console

While you are developing, it can be useful to write little notes to yourself to let you know what types of data you have, or to see what is happening at any given point in your code. As you proceed to more advanced uses you may wish to explore the browser's built-in debugger, but until then a quick and easy way to do this is to use your browser's error console.

In your page, just after the line where you instantiate a new Verovio toolkit, insert the following:

```
console.log("Verovio has loaded!");
```

When you refresh your page, you can see this note to yourself appear in the browser console. If no other errors appear, this gives you a critical pieces of information: Your browser has reached that point in execution, which means it has successfully loaded and initialized Verovio. If you do not see this, go back

through the examples to see where you may have gone wrong. If you still cannot find this, you can find the full example for this stage of the tutorial below.

You may notice that Verovio prints some warnings to your browser console. We can ignore these options for this tutorial, but if you are working with your own encoded scores and see these warnings it may help you track down problems or unexpected behaviours when rendering your scores.

## End of Section 1

At the end of this first section you should have a working web page, with a message printed to your browser console, and no other errors showing up. In the next section we will look at how to load and render some basic music notation in this page.

Full example

```
HTML /  
JAVASCRIPT  
<html>  
  <head>  
    <script src="http://www.verovio.org/javascript/latest/verovio-toolkit-wasm.js" defer></script>  
    <script>  
      document.addEventListener("DOMContentLoaded", (event) => {  
        verovio.module.onRuntimeInitialized = () => {  
          let tk = new verovio.toolkit();  
          console.log("Verovio has loaded!");  
        }  
      });  
    </script>  
  </head>  
  <body>  
    <h1>Hello Verovio!</h1>  
    <div id="notation"></div>  
  </body>  
</html>
```

## Basic rendering

At the end of part 1, we finished with a page that was successfully loading the Verovio library, but with nothing to display. In this part of the tutorial We will write some JavaScript that will fetch an MEI file from a URL, and then pass that MEI file to Verovio. This will turn the MEI file into an Scalable Vector Graphics (SVG) file that we can then embed in our page.

*Scalable Vector Graphics* (SVG) is an image format that can be directly embedded into web pages. Vector graphics can be made larger or smaller with no pixellation, unlike other image formats you may be familiar with such as JPEG or PNG.

## Fetching MEI with JavaScript

The first step is to fetch an MEI file from a URL. To do this, you can write the following in your HTML file, immediately after the `console.log` statement:

```
JAVASCRIPT  
  
fetch("https://www.verovio.org/examples/downloads/Schubert_Lindenbaum.mei")  
  .then( (response) => response.text() )  
  .then( (meiXML) => {  
    let svg = tk.renderData(meXML, {});  
    document.getElementById("notation").innerHTML = svg;  
  });
```

To break this down a bit, we start with a `fetch` statement with a URL; this tells your browser to try and load the file available at this address from a remote server. If it's successful, then it should extract the XML data from the server: `then( (response) => response.text() )`.

Finally, we take this MEI response and pass it off to our Verovio instance. Remember that we ‘started’ Verovio by creating a new Toolkit and assigning it to the variable `tk`? Well, now we are using this toolkit to render the MEI file. The result, as you might guess by the variable name (`let svg = ...`), will be some SVG.

Once we have this SVG, we look through the page for HTML element with the id of “notation”. You should see a `<div id="notation"></div>` line already in your HTML file. We set the content of this element (the `innerHTML`) to the SVG output of Verovio.

If you refresh your HTML page now, you should see a rendered version of a Schubert lied, “Der Lindenbaum”. Congratulations! If you do not see this, go back and double-check that you do not have any errors in your browser console.

## End of Section 2

At the end of this section, you should have a page with some rendered music notation on it. It’s probably a bit too big, though, to read comfortably on your screen. You may also be wondering how Verovio handles larger scores, with lots of pages. We will answer these two questions in the next sections by looking at how we can control the layout options, and how we can use JavaScript to navigate the score dynamically.

Full example

```
HTML /
JAVASCRIPT
<html>
  <head>
    <script src="http://www.verovio.org/javascript/latest/verovio-toolkit-wasm.js" defer></script>
    <script>
      document.addEventListener("DOMContentLoaded", (event) => {
        verovio.module.onRuntimeInitialized = async _ => {
          let tk = new verovio.toolkit();
          console.log("Verovio has loaded!");

          fetch("https://www.verovio.org/examples/downloads/Schubert_Lindenbaum.mei")
            .then( (response) => response.text() )
            .then( (meiXML) => {
              let svg = tk.renderData(meiXML, {});
              document.getElementById("notation").innerHTML = svg;
            });
        }
      });
    </script>
  </head>
  <body>
    <h1>Hello Verovio!</h1>
    <div id="notation"></div>
  </body>
</html>
```

## Layout options

Now that we have successfully rendered an MEI file to a web page, we can start to explore how to customize the SVG output. There are [many possible options](#), most of which you will never need.

To start, we will first try and reduce the size of the image output, to demonstrate how we can scale the music notation to fit the screen.

## Passing options to Verovio

Passing options to Verovio is as easy as creating a set of key and value pairs, and using the `setOptions` method on the toolkit. To scale the output we will use the `scale` option given as percentage of the normal (100) output. Add the following to your page, after we have instantiated the toolkit but before we render the data:

```
JAVASCRIPT
```

```
tk.setOptions({
  scale: 30
});
```

When you refresh your page, you should see your score scaled to 30% of its original size. Try experimenting with other values to see their effects! (Hint: you can use sizes above 100%.)

## Defaults

All of the options have default values. You can use the `getOptions` method to view the list of all the options and their default values. We will use the browser console to explore these defaults. Add the following line:

### JAVASCRIPT

```
console.log("Verovio options:", tk.getOptions());
```

When you refresh your page and open your browser's console you should see the text "Verovio options:" followed by a small disclosure triangle. Clicking this triangle will produce a long list of options that you can pass to `setOptions`. Let's try a few more.

## Change the page orientation

You may have noticed that, by default, Verovio renders the score in "portrait" orientation; that is, the width of the score is shorter than the length. To change this, we can use the `landscape` and `adjustPageWidth` options:

### JAVASCRIPT

```
tk.setOptions({
  scale: 30,
  landscape: true,
  adjustPageWidth: true
});
```

When you refresh the page you should notice that your SVG has changed orientation! But wait... the score is now cut off! Where did the rest of it go?

It turns out that Verovio has the ability to split scores into "pages" automatically. When it calculates the notation cannot fit on the current page, Verovio will automatically push it to the next page. Adjusting the different options will have an effect on this calculation, so it is worth looking through the options that we printed out, and trying some on your own. You may wish to change the `pageWidth` option, for example, to a bigger or smaller value and see what the result is.

## End of Section 3

In this section we have explored Verovio's default options, and looked at how to adjust them to change the rendering output. In the next section we will look at how we can adjust these options dynamically, using on-screen controls to provide a user interface for building interactive music notation displays.

Full example

### HTML /

### JAVASCRIPT

```

<html>
<head>
<script src="http://www.verovio.org/javascript/latest/verovio-toolkit-wasm.js" defer></script>
<script>
document.addEventListener("DOMContentLoaded", (event) => {
  verovio.module.onRuntimeInitialized = async _ => {
    let tk = new verovio.toolkit();
    console.log("Verovio has loaded!");
    tk.setOptions({
      scale: 30,
      landscape: true,
      adjustPageWidth: true
    });
    console.log("Verovio options:", tk.getOptions());

    fetch("https://www.verovio.org/examples/downloads/Schubert_Lindenbaum.mei")
      .then( (response) => response.text() )
      .then( (meiXML) => {
        let svg = tk.renderData(meiXML, {});
        document.getElementById("notation").innerHTML = svg;
      });
  }
});
</script>
</head>
<body>
<h1>Hello Verovio!</h1>
<div id="notation"></div>
</body>
</html>

```

## Score navigation

In this final part of the introductory tutorial, we will take what we have learned about Verovio and produce an interactive score, where your users can adjust the behaviour of Verovio and see the display updated.

### Creating the controls

Before we start we will need to create some HTML form controls. These controls will do the following:

- A slider to adjust the scaling factor;
- “Next page” and “Previous page” buttons for navigating the score;
- A checkbox for adjusting the orientation (portrait or landscape)

If you are not familiar with how HTML form controls are created, you may wish to consult the [Basic form controls](#) and the [HTML5 input types](#) documentation.



# Tutorial 2: Interactive notation

## Introduction

[in preparation]

## Working with CSS and SVG

[in preparation]

## XPath queries

[in preparation]

## Working with MIDI

[in preparation]

# Beyond tutorials: Advanced topics

## Introduction

This chapter covers several advanced topics that require more in-depth documentation.

## Internal structure

Verovio provides a self-contained typesetting engine that is directly capable of rendering MEI to a graphical representation in high quality. Its main goal is to develop a library with an internal structure identical to MEI as far as possible.

For practical reasons, however, the Verovio library uses a page-based customization of MEI internally. Since the modifications introduced by the customization are very limited, the Verovio library can also be used to render un-customized MEI files. With the page-based customization, the content of the music is encoded in `<page>` elements that are themselves contained in a `<pages>` element within `<mdiv>`.

A `<page>` element contains `<system>` elements. From there, the encoding is identical to standard MEI. That is, a `<system>` element will contain `<measure>` elements or `<staff>` elements that are both un-customized, depending on whether the music is measured or un-measured.

## Layout and positioning

The idea of a page-based customization is also to make it possible to encode the positioning of elements directly in the content tree. This can be useful where the encoding represents one single source with one image per page. This is typically the case with optical music recognition applications. Verovio supports both positioned elements and automatic layout, which is the default when un-customized MEI files are rendered.

The page-based organization is modeled by a MEI customization that defines the structure described above. The ODD file of the customization and the corresponding RNG schema are available from the [MEI Incubator](#). This is still work-in-progress.

## SVG structure

One advantage of SVG rendering over other formats (e.g., images or PDF) is that SVG is rendered natively in all modern web-browsers. Because it is in XML, it also has the advantage that it is well suited to interaction in the browser, since every graphic is an XML element that is easy addressable in the DOM. With Verovio, we also have the advantage that the SVG is organized in such a way that the MEI structure is preserved as much as possible.

To give an example, a `<note>` element with an `xml:id` attribute in the MEI file will have a corresponding `<g>` element in the SVG with a `class` attribute with a value of "note" and an `id` attribute corresponding to the `xml:id`. This makes interaction with the SVG using JavaScript very easy. The hierarchy of the element is also preserved as shown below.

### XML

```
<tuplet xml:id="t1" num="3" numbase="2">
  <beam xml:id="b1">
    <note xml:id="n1" pname="d" oct="5" dur="8" />
    <note xml:id="n2" pname="e" oct="5" dur="16" dots="1"/>
    <note xml:id="n3" pname="d" oct="5" dur="32" />
    <note xml:id="n4" pname="c" oct="5" dur="8" accid="s"/>
  </beam>
</tuplet>
<beam xml:id="b2">
  <tuplet xml:id="t2" num="3" numbase="2">
    <note xml:id="n5" pname="d" oct="5" dur="8" />
    <note xml:id="n6" pname="e" oct="5" dur="16" dots="1"/>
    <note xml:id="n7" pname="f" oct="5" dur="32" accid="s"/>
    <note xml:id="n8" pname="e" oct="5" dur="8"/>
  </tuplet>
</beam>
```



#### XML

```
<g class="tuplet" id="t1">
  <g class="beam" id="b1">
    <g class="note" id="n1"></g>
    <g class="note" id="n2"></g>
    <g class="note" id="n3"></g>
    <g class="note" id="n4"></g>
  </g>
</g>
<g class="beam" id="b2">
  <g class="tuplet" id="t2">
    <g class="note" id="n5"></g>
    <g class="note" id="n6"></g>
    <g class="note" id="n7"></g>
    <g class="note" id="n8"></g>
  </g>
</g>
```

## Transposition

Transposition in Verovio uses the base-40 system that allows for an arbitrary maximum sharp/flat count (where base-40 can handle up to double sharps/flats). The option `--transpose` can be given two types of data: (1) a chromatic interval, or (2) a tonic pitch in the new key with optional direction and octave of transposition added.

### Transposition by chromatic interval

For transposition by chromatic intervals, the format is an optional sign, followed by a chromatic quality followed by a diatonic number of steps. Examples: `+M2` = up major second, `-d5` = down diminished fifth

The direction of the interval, with `-` indicating down and no sign or a `+` means up. A special cases is `P1` which is a perfect unison, so `+P1` and `-P1` are equivalent since there is no movement up or down.

For the chromatic quality of the interval, `P` means perfect, `M` means major, `m` means minor, `d` means diminished, `A` means augmented, `dd` means doubly diminished (and so on), `AA` means doubly augmented (and so on). For `[PdA]` the case of the letter does not matter so `[pDa]` should be interpreted as equivalent. `M` and `m` are case-sensitive (major and minor).

The diatonic interval is any (reasonable) positive integer. A unison is `1`, a second is `2`, and so on. Compound intervals an octave and above can also be represented, such as `8` for an octave, a `9` for a ninth (octave plus a second), `10` for a tenth (octave plus a third), `15` is two octaves, and `16` is two octaves plus a second.

Verovio will print an error message if the string option is not formatted correctly, and it will return an error interval which is a very large interval going down.

Example interval names:

name	meaning
P1	perfect unison
M2	major second up
+M2	major second up
-M2	major second down
m2	minor second up
d2	diminished second up
dd2	doubly diminished second up
A2	augmented second up
AA2	doubly augmented second up
M3	major third up
P4	perfect fourth up
d4	diminished fourth up
A4	augmented fourth up
P8	perfect octave up
P15	two perfect octaves up
m10	perfect octave plus minor third up

## Transposition by tonic pitch

For transposition by tonic pitch names, the format is made up of an optional direction, a pname and an accid .

If no direction is given, then the smallest interval will be chosen. For example if starting from C major and transposing to G major, the calculated interval will be down a perfect fourth, since the G below C is closer than the G above C.

When the direction is + , the next higher pitch that matches the new tonic will define the interval. For C major to G major, this is a perfect fifth up. When the direction is - , the next lowest pitch that matches the new tonic will define the interval. For C major to G major, this is a perfect fourth down.

The + or - direction can be doubled/tripled/etc. to indicate additional octave transpositions. For example --g from C major means to transpose down an octave and a fourth: The fourth to the G below, and then the octave to the next lower G. Likewise, +++g from C major means to transpose up two octaves and a fifth: A fifth to the G above, then ++ means two octaves above that G.

When using a case-insensitive @pname for the tonic of the new key, use ([A-Ga-g]) followed by an optional accid for the new key tonic. This is also case-insensitive: ([Ss]\*|[Ff]\*) .

Examples:

tonic parameter	meaning
g	transpose current tonic to closest G tonic note (up or down a fourth from current tonic)
+g	transpose to the next higher G tonic
-g	transpose down to next lower G tonic
++g	transpose to second next higher G tonic
--g	transpose to second next lower G tonic
ff	transpose to nearest F-flat
-cs	transpose to next lower C-sharp
++BF	transpose up to second next higher B-flat

## Illustrated examples

Here is a test example music to transpose - note the @key.sig is expected for transposition to work properly:



#### XML

```
<score>
  <scoreDef>
    <staffGrp>
      <staffDef n="1" lines="5" clef.shape="G" clef.line="2" meter.sym="common" key.sig="0"/>
    </staffGrp>
  </scoreDef>
  <section>
    <measure right="end" n="1">
      <staff n="1">
        <layer n="1">
          <chord dur="1">
            <note oct="4" pname="c"/>
            <note oct="4" pname="e"/>
            <note oct="4" pname="g"/>
          </chord>
        </layer>
      </staff>
    </measure>
  </section>
</score>
```

Setting transpose: "M2" will transpose the music up a major second from C to D:



Setting transpose: "-m2" To go down a minor second from C to B:



Common intervals: m3 = minor third, M3 = major 3rd, P4 = perfect fourth, P5 = perfect fifth, d5 = diminished fifth, A4 = augmented fourth.

It is also possible to give semitone steps, with 1 being one semitone, 2 being two semitones, etc. This method is less precise, and the computer will make an automatic calculating to minimize the number of accidentals in the target key signature.

For example transpose: "1" will display in D-flat major:



This is equivalent to going up a minor second with transpose: "-m2" :



If you need to transpose to C-sharp major, then you cannot use integers, but must use the full musical interval, which in this case is transpose: "A1" for an augmented unison:



(a1 and A1 are the same, but m2 and M2 are not equivalent).

It is also possible to give the tonic note of the new key. For example transpose: "E" means to transpose to E major (or minor, since the mode will not be changed). This feature requires that the music contain key information which is not always present in MusicXML data. It can also be incorrect, which may cause problems, so use this option with care in an automatic situation.



F-sharp major with transpose: "F#" , which is equivalent to a transposition of A4 :




G-flat major with transpose: "Gb" , which is equivalent to d5 :



Notice that this method moves to the closest tonic. To force G-flat major above, add a + with transpose: "+Gb" :



To go another octave above, add two ++ with transpose: "++Gb" :



## Algorithm for transposition by tonic

The algorithm for transposition by tonic proceeds as follow:

- Find the key information at the start of the music in each part. If all parts have the same transposition (or no parts have transposition), then use the @pname and @accid as the reference pitch for which an interval will be calculated for the input transposition target tonic.
- If all parts do not have the same transposition, then choose a part that does not have a transposition from which to extract the key information. If all parts have transpositions, but the transpositions are different, then apply transposition to the key information to get it to sounding pitch for one of those instruments and use this transposed pitch as the basis for the key transposition.
- The key information may be stored in one of two main locations: staffDef@key.pname / staffDef@key.accid (the most common currently) or keySig@pname / keySig@accid . The staffDef@key.mode / keySig@mode is not needed. This key

information must come before the first notes on the staff. `keySig` may be found as a child of `staffDef`, or may be found outside of the `staffDef` (at the start layer) or in `scoreDef` if it applies to all staves in the score (or the majority of staves in the score?).

- If there is no key information found before the first notes of the music, print an error warning and do not transpose.
- Once the original key is known, then the interval necessary for transposition can be calculated. The next step is to identify the closest new tonic's octave. For extra + or - in the tonic string, add an octave to the interval to calculate the final interval for transposition.

At this point the key transposition process becomes equivalent to the interval transposition process.

## SMuFL fonts

Most music notation software applications use music fonts for rendering music symbols or parts of music symbols. These may include clefs, note heads, time signatures or articulation signs. However, these fonts often have incompatible code points – the internal location within the font that points to a symbol. They are most of the time developed with no common agreement on which code point represents which character. The code point for the G clef symbol in one font may be the code point used for a quarter rest in another, or may be simply undefined. Furthermore, they usually have their own metric and positioning system for specifying what the size of the glyph is and where its baseline is. Because of this, music fonts are difficult to use interchangeably.

To address this, the Standard Music Font Layout (SMuFL) specification has been developed to attempt to harmonize code points across music fonts by specifying code points and symbol sizes for music fonts. SMuFL gives users the ability to reference specific Unicode code points with the understanding that it would represent the same, or similar, symbol across fonts. This presents new opportunities for exploring visual representations of music within a music encoding system without necessarily tying them to a particular font. While previous music encoding systems could not reference font code points without becoming tied to that font for representation, the introduction of SMuFL to music encoding can provide a reference to a particular graphical symbol that should be used to render a given encoding.

Verovio follows the SMuFL specification. It means that it is possible to easily change the music font used in Verovio for personalised output. Verovio includes the Leipzig font, its own SMuFL-compliant music font. Leipzig was initially developed by Etienne Darbellay and Jean-François Marti as part of the Wolfgang music notation software. It is SMuFL compliant since version 5.0 and distributed under the SIL Open Font License.

Verovio also supports and includes the Bravura font designed by Daniel Spreadbury, and the Gootville and Leland fonts designed by the MuseScore community.

Fonts included can be selected by setting the `--font` option. For example, the Bravura font can be selected with the `--font Bravura` option on the command-line tool or by adding `{ font: "Bravura" }` in the JavaScript toolkit options.

Examples

*Leipzig*



*Bravura*

Die zwei blau-en Au- gen von mei- nem

pp p

pp p

4/4

Key signature: one sharp (F#). The score is in 4/4 time. The vocal line starts with a piano (p) dynamic, followed by a piano-piano (pp) dynamic. The piano accompaniment starts with a piano-piano (pp) dynamic, followed by a piano (p) dynamic. The lyrics are: 'Die zwei blau-en Au- gen von mei- nem'.

Gootville

Die zwei blau-en Au- gen von mei- nem

pp p

pp p

4/4

Key signature: one sharp (F#). The score is in 4/4 time. The vocal line starts with a piano (p) dynamic, followed by a piano-piano (pp) dynamic. The piano accompaniment starts with a piano-piano (pp) dynamic, followed by a piano (p) dynamic. The lyrics are: 'Die zwei blau-en Au- gen von mei- nem'.

Leland

Die zwei blau-en Au- gen von mei- nem

pp p

pp p

4/4

Key signature: one sharp (F#). The score is in 4/4 time. The vocal line starts with a piano (p) dynamic, followed by a piano-piano (pp) dynamic. The piano accompaniment starts with a piano-piano (pp) dynamic, followed by a piano (p) dynamic. The lyrics are: 'Die zwei blau-en Au- gen von mei- nem'.

Leipzig

^ V o o + O +

> <

4/4

Key signature: one sharp (F#). The score is in 4/4 time. The vocal line starts with a piano (p) dynamic, followed by a piano-piano (pp) dynamic. The piano accompaniment starts with a piano-piano (pp) dynamic, followed by a piano (p) dynamic. The lyrics are: 'Die zwei blau-en Au- gen von mei- nem'.

Bravura

^ V o o + O +

> <

4/4

Key signature: one sharp (F#). The score is in 4/4 time. The vocal line starts with a piano (p) dynamic, followed by a piano-piano (pp) dynamic. The piano accompaniment starts with a piano-piano (pp) dynamic, followed by a piano (p) dynamic. The lyrics are: 'Die zwei blau-en Au- gen von mei- nem'.

## Music symbols in text

For cases when music symbols are displayed within text, Verovio uses a textWOFF2 version of the selected music font. The font is included in the SVG as CSS.

The `--smufl-text-font` allows to change how the font is included. By default, it is simply embedded as a base64 string. This means that the SVG is fully self-contained and does not require network access for the font glyphs to be displayed. The include of the font can also be ignored with `none`, which can be useful



when the font is included separately in the environment.

With `linked`, the text font will be included in the SVG but with the following CSS import:

#### XML

```
<style type="text/css">
  @import url("https://www.verovio.org/javascript/3.13.0/data/Leipzig.css");
</style>
```

The version of the font path is based on the Verovio version release number, or is develop for the develop version of the toolkit.

When a music glyph is displayed within text and the music font selected is not Leipzig or Bravura, Verovio will also check if the music glyph exists in the selected music font. If not, it will fallback to the Leipzig font. If other text elements include music glyphs that do exist in the selected font, then both Leipzig and the selected font will be included. In other words, the fallback to Leipzig will be enabled only for the text elements displaying a missing music glyphs but not for the others.

Examples



#### XML

```
<verse n="1">
  <syl con="b">a</syl>
  <syl con="b">b</syl>
  <syl>c</syl>
</verse>
```




#### XML

```
<tempo midi.bpm="70" staff="1" tstamp="1.000000">Andante con moto <rend fontfam="smufl">♩</rend>
= 70</tempo>
```

Characters in tempo indications can be encoded as Unicode characters or as entities (e.g., `&#xE1D3;`). See the section on MEI in [Output formats](#) for more information on how to control them.

Dynamics

For dynamics, Verovio automatically detects dynamic symbols within text and displays them appropriately. In some cases, it might be desirable to disable the automatic detection of dynamic symbols and the use of the music font. This can be achieved by setting a text font explicitly, as illustrated with the `<rend fontfam="Times">` in the second dynamic in this example:

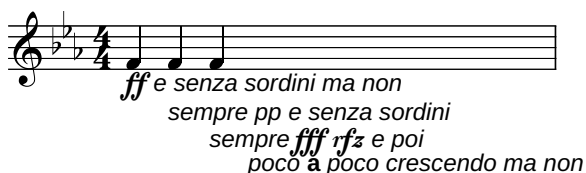

#### XML

```
<dynam staff="1" tstamp="1.000000">ff e senza sordini ma non sfz</dynam>
<dynam staff="1" tstamp="2.000000">
  <rend fontfam="Times">sempre pp e senza sordini</rend>
</dynam>
<dynam staff="1" tstamp="3.000000">sempre fff rfz e poi<lb/>poco <rend fontstyle="normal" fontweight="
bold">a</rend> poco crescendo ma non ffff<lb/>troppo</dynam>
```

## Controlling the SVG output

[in preparation]

### HTML5

### Towards SVG 2.0

### Converting to PDF

## Mensural notation

[in preparation]

### Duration alignment

### Layout

### Ligatures

# Toolkit Reference

## Input formats

When data is loaded into Verovio with no input format specifies, it tries to detect it based on the initial content of the data. MEI is assume to be the default format if auto detection fails. In such cases, the format can be given explicitly with the option `--input-from` (or `-f`).

### MEI

The native input format for Verovio is MEI. Verovio supports MEI as input format from MEI 2013 onwards. From Verovio 2.x.x, the plan is to have even version numbers for Verovio releases using a stable version of MEI, and odd version numbers for releases using a development version of MEI. It means that once MEI 5.0 will be released, Verovio will move to version 4.x.x. Older versions of MEI are still supported by newer versions of Verovio.

When loading MEI data into Verovio and outputting MEI, elements that are not supported by Verovio will be ignored. This means that they are not loaded into memory and will not be preserved in the MEI output. This includes the element themselves, but also any descendant they might have. A warning will be given in the console. For example:

```
[Warning] Unsupported '<ossia>' within <measure>
```

#### Support for previous version of MEI

When an MEI file is loaded into Verovio and is not of the latest version for that version of Verovio, it performs upgrade steps for the features that were supported by Verovio for that older version of MEI.

#### MEI 2013 files

Various attributes in `<page>` and `<measure>` for the page-based version of MEI are upgraded (experimental work).

#### MEI 3.0 files

The following elements / attributes are upgraded:

- `beatRpt`
- `fTrem@slash`
- `instrDef@midi.volume`
- `mordent@form`
- `turn@form`
- `staffDef@barthru`
- `staffDef@label`
- `staffDef@label.abbr`
- `staffGrp@label`
- `staffGrp@label.abbr`
- `@dur.ges`

#### Original data

##### XML

```
<beatRpt rend="4"/>
<beatRpt rend="8"/>
<beatRpt rend="16"/>
<beatRpt form="4"/>
```

#### Upgraded data

##### XML

```
<beatRpt slash="1"/>
<beatRpt slash="1"/>
<beatRpt slash="2"/>
<beatRpt slash="1"/>
```

#### Original data

**XML**

```
<fTrem slash="2"/>
```

*Upgraded data*

**XML**

```
<fTrem beams="2"/>
```

*Original data*

**XML**

```
<instrDef midi.volume="111"/>
```

*Upgraded data*

**XML**

```
<instrDef midi.volume="87.40%"/>
```

*Original data*

**XML**

```
<mordent form="inv"/>  
<mordent form="norm"/>
```

*Upgraded data*

**XML**

```
<mordent form="upper"/>  
<mordent form="lower"/>
```

*Original data*

**XML**

```
<turn form="inv"/>  
<turn form="norm"/>
```

*Upgraded data*

**XML**

```
<turn form="lower"/>  
<turn form="upper"/>
```

*Original data*

**XML**

```
<staff barthru="true"/>
```

*Upgraded data*

**XML**

```
<staff bar.thru="true"/>
```

*Original data*

**XML**

```
<staffDef label="violin I" label.abbr="vl I"/>
```

*Upgraded data*

**XML**

```
<staffDef>
  <label>Violin I</label>
  <labelAbbr>VI I</labelAbbr>
</staffDef>
```

*Original data*

#### XML

```
<note dur.ges="8p"/>
<note dur.ges="32r"/>
<note dur.ges="32s"/>
```

*Upgraded data*

#### XML

```
<note dur.ppq="8"/>
<note dur.recip="32"/>
<note dur.real="32"/>
```

### MEI 4.0 files

The following elements / attributes are upgraded:

- mensur@tempus
- mensur@prolatio

*Original data*

#### XML

```
<mensur tempus="3"/>
<mensur tempus="2"/>
```

*Upgraded data*

#### XML

```
<mensur tempus="3" sign="0"/>
<mensur tempus="2" sign="C"/>
```

*Original data*

#### XML

```
<mensur prolatio="3"/>
<mensur prolatio="2"/>
```

*Upgraded data*

#### XML

```
<mensur prolatio="3" dot="true"/>
<mensur prolatio="2" dot="false"/>
```

### Page-based MEI

The MEI page-based model is not part of MEI. It was put in place for the development of Verovio and can still change in the future. It will be documented as input format once it is stabilized.

## Humdrum


Humdrum data is an analytic music code for transcribing fully polyphonic textures. Humdrum syntax presents notes of the score in strict time sequence. Each data row represents all notes sounding or events occurring at the same time, and each column traces the melodic line of the individual parts. More information about the syntax is available on the [Humdrum](#) website.

### Examples

The following example from Mozart's piano sonata in F major, K1 280 (K6 189e), mvmt. 1, is generated dynamically within this page using the JavaScript form of Verovio, inputting the Humdrum data that follows.

## Piano Sonata No. 2 in F major

Wolfgang Amadeus Mozart

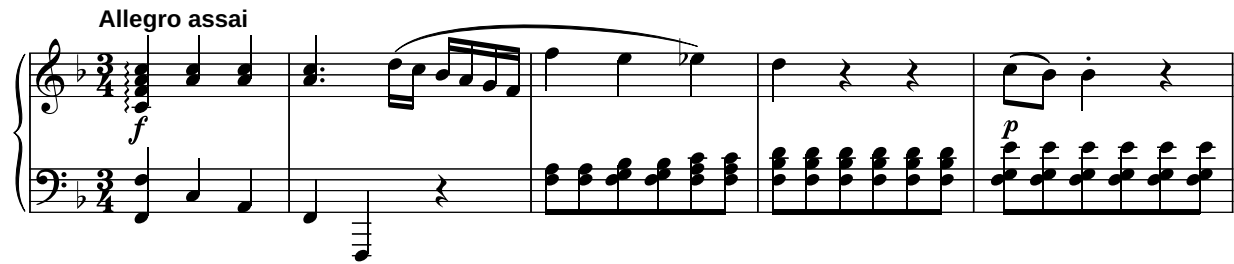

The data consists of three separate streams of information, called spines that usually consist of one column, but sometime more due to spine splits into subspines. The first column represents music on the bottom staff, the second column represents the top staff, and the third column contains the dynamics, which in this case apply to both staves.

```

!!!COM: Mozart, Wolfgang Amadeus
!!!OTL: Piano Sonata No. 2 in F major
!!!OMV: 1
!!!SCT1: K1 280
!!!SCT2: K6 189e
!!!OMD: Allegro assai
**kern **kern **dynam
*staff2 *staff1 *staff1/2
*clefF4 *clefG2 *
*k[b-] *k[b-] *
*F: *F: *
*M3/4 *M3/4 *
*MM152 *MM152 *
=1- =1- =1-
4FF 4F 4c: 4f: 4a: 4cc: f
4C 4a/ 4cc/ .
4AA 4a/ 4cc/ .
=2 =2 =2
4FF 4.a/ 4.cc/ .
4FFF . .
. (16ddLL .
. 16ccJJ .
4r 16b-LL .
. 16a .
. 16g .
. 16fJJ .
=3 =3 =3
8F 8AL 4ff .
8F 8A . .
8F 8G 8B- 4ee .
8F 8G 8B- . .
8F 8A 8c 4ee-) .
8F 8A 8cJ . .
=4 =4 =4
8F 8B- 8dL 4dd .
8F 8B- 8d . .
8F 8B- 8d 4r .
8F 8B- 8d . .
8F 8B- 8d 4r .
8F 8B- 8dJ . .
=5 =5 =5
8F 8G 8eL (8ccL p
8F 8G 8e 8b-J) .
8F 8G 8e 4b-' .
8F 8G 8e . .
8F 8G 8e 4r .
8F 8G 8eJ . .
=6 =6 =6
*_ *_ *_

```

#### Verovio Humdrum Viewer

The [Verovio Humdrum Viewer](http://verovio.org) (VHV) is a special-purpose interactive website for viewing and editing Humdrum files with the Verovio notation egraving library. You can view the full score for the above Mozart example in VHV from this link: [verovio.humdrum.org/?file=mozart/sonatas/sonata02-1.krn](http://verovio.humdrum.org/?file=mozart/sonatas/sonata02-1.krn).

When on a VHV notation page, try pressing the key “**p**” to view the scan of the original print from which the musical data was encoded. Also try pressing “**m**” to view the internal conversion to MEI data. Vi users can try pressing “**v**” to toggle between the basic and vim modes for the text editor. Use the left/right arrow keys or PageUp/PageDown to navigate to different pages. Press shift-left/right arrows to go to the next/previous work/movement in the repertory.

Sample repertoires of Humdrum data displayed in the Verovio Humdrum Viewer:

- J.S. Bach chorales (When viewing a chorale, type the “o” letter key to toggle view of the original historic clefs.)
- Mozart piano sonatas
- Beethoven piano sonatas
- Beethoven string quartets
- Chopin mazurkas
- Works of Scott Joplin
- Works of Josquin des Prez
- Works of Johannes Ockeghem
- Works of Pierre de la Rue
- Works of Mabrianus de Orto
- Deutscher Liederschatz, Band I (Edited by Ludwig Erk.)

Command-line interface usage

To typeset music in the Humdrum format on the command-line:

**TERMINAL**

```
$ verovio -f humdrum input.krn -o output.svg
```

You can usually use the auto-detection feature of verovio by omitting the option.

**TERMINAL**

```
$ verovio input.krn -o output.svg
```

The output filename will have the same basename as the input if the option is not given, so in this case the output will be called .

**TERMINAL**

```
$ verovio file.krn
```

Standard input/output can be used with the verovio command by giving a dash for standard input and to send the output to standard output.

**TERMINAL**

```
$ cat input.krn | verovio - -o - > output.svg
```

To convert to MEI data:

**TERMINAL**

```
$ verovio file.krn --no-layout --all-pages -t mei
```

A more complicated example

Below is a song for voice and piano accompaniment. Each verse is listed in a separate spine of **\*\*text** in addition to the three staves of music in **\*\*kern** spines and one dynamics (**\*\*dynam**) spine.



# Liebes-A-B-C

Wilhelm Gerhard (1826)

August Pohlenz  
1790-1843

**Allegretto**

A B C D, wenn ich dich seh', dich, mei - ne sü - sse Lust, klopft die em -  
E F G H, wärs't du doch da! Drück - te mein treu - er Arm, Hol - de, dich  
I K und L, Aeug - lein so hell glänz - ten in Lie - bes - pracht mir aus der  
M N O P, gleich ei - ner Fee fes - selst du Herz und Sinn, Grüb - chen in  
Q R S T, Schei - den thut weh. Hal - te mit Herz und Mund treu an dem  
U V W X, mach' ei - nen Knix, drückt dir ein jun - ger Fant zärt - lich die  
Yp - si - lon Z, nun geh' zu Bett! Bricht doch die Nacht schon ein, kann ja nicht

8

-pör - te Brust, wird mir so wohl und weh, wenn ich dich seh'!  
lie - be - warm! Schätz - chen, ach wärs't du da! wärs't du mir nah!  
Wim - pern Nacht, tra - fen wie bli - tzes - schnell, Aeug - lein so hell.  
Wang' und Kinn, Ro - sen - glut, Li - lien - schnee, rei - zen - de Fee!  
Lie - bes - bund, sa - ge mir nie A - de! Schei - den thut weh.  
Schwan - en - hand, a - ber nur ern - sten Blicks mach' ihm den Knix!  
bei dir sein, wenn ich auch Flü - gel hätt! Geh' nur zu Bett!

!!!OTL@@DE: Liebes-A-B-C

!!!COM: Pohlenz, August

!!!CDT: 1790/07/03/-1843/03/09/

!!!ODT: 1827

!!!OMD: Allegretto

!!!LYR: Gerhard, Wilhelm

!!!LDT: 1826

!!!OCL: Erk, Ludwig

!!!GCO: Deutscher Liederschatz, Band 1

\*\*kern \*\*kern \*\*kern \*\*text \*\*text \*\*text \*\*text \*\*text \*\*text \*\*text

\*staff3 \*staff2 \*staff1 \*staff1 \*staff1 \*staff1 \*staff1 \*staff1 \*staff1

\*lpiano \*lpiano \*lvox \*\*\*\*\*

\*clefF4 \*clefG2 \*clefG2 \*\*\*\*\*

\*k[b-] \*k[b-] \*k[b-] \*\*\*\*\*

\*F: \*F: \*\*\*\*\*

\*M3/8 \*M3/8 \*M3/8 \*\*\*\*\*

\*MM100 \*MM100 \*MM100 \*\*\*\*\*

=1- =1- =1- =1- =1- =1- =1- =1- =1-

\*\*^ \*^ \*\*\*\*\*

8AL 4F 8fL 4c 8f A E I M Q U Yp-

8G . 8e . 8e B F K N R V -si-

8AJ 8F 8fJ 8c 8f C G und O S W -lon

\*v \*v \*\*\*\*\*

\*v \*v \*\*\*\*\*

=2 =2 =2 =2 =2 =2 =2 =2 =2

4C 4c 4e 4g 4g D, H, L, P, T, X, Z,

8r 8r 8r . . . . .

```

=3 =3 =3 =3 =3 =3 =3 =3 =3 =3
4C 4c 8e 8gL 8g wenn wärs Aeug- gleich Schei- mach' nun
. 8d 8f 8f ich du -lein ei- -den ei- geh'
8C 8c 8e 8gJ 8g dich doch so -ner thut -nen zu
=4 =4 =4 =4 =4 =4 =4 =4 =4 =4
4F 4c 4f 4a 4a seh', da! hell Fee weh. Knix, Bett!
8r 8r 8r . . . . .
=5 =5 =5 =5 =5 =5 =5 =5 =5 =5
4DD 4D 8r 8a dich, Drück- glänz- fes- Hal- drückt Bricht
. 8c 8d 8f#L 8a mei- -te -ten -selst -te dir doch
8r 8c 8d 8f#J 8dd -ne mein in du mit ein die
=6 =6 =6 =6 =6 =6 =6 =6 =6 =6
4GG 8r 8.cc sü- treu- Lie- Herz Herz jun- Nacht
. 8B- 8d 8gL . . . . .
. . 16b- -sse -er -bes- und und -ger schon
8r 8B- 8d 8gJ 8b- Lust, Arm, -pracht Sinn, Mund Fant ein,
=7 =7 =7 =7 =7 =7 =7 =7 =7 =7
4CC 4C 8r 8g klopft Hol- mir Grüb- treu zärt- kann
. 8B- 8c 8eL 8g die -de, aus -chen an -lich ja
8r 8B- 8c 8eJ 8cc em- dich der in dem die nicht
=8 =8 =8 =8 =8 =8 =8 =8 =8 =8
4FF 8r 8.b- -pör- lie- Wim- Wang' Lie- Schwa- bei
. 8A 8c 8fL . . . . .
. . 16a -te -be- -pern und -bes- -nen- dir
8r 8A 8c 8fJ 8a Brust, warm! Nacht, Kinn, -bund, -hand, sein,
=9 =9 =9 =9 =9 =9 =9 =9 =9 =9
8FFL 8A 8fL 8f wird Schätz- tra- Ro- sa- a- wenn
8GG 8B- 8e 8e mir -chen, -fen -sen- -ge -ber ich
8AAJ 8c 8fJ 8f so ach wie -glut, mir nur auch
=10 =10 =10 =10 =10 =10 =10 =10 =10 =10
4BB- 8r 8.ee wohl wärs bli- Li- nie ern- Flü-
. 8B- 8d 8gL . . . . .
. . 16dd und du -tzes- -lien- A- -sten -gel
8r 8B- 8d 8gJ 8dd weh, da! -schnell, schnee, de! Blicks hätt'!
=11 =11 =11 =11 =11 =11 =11 =11 =11 =11
4C 8r 8cc wenn wärs Aeug- rei- Schei- mach' Geh'
. 8B- 8c 8eL 8g ich du -lein -zen- -den ihm nur
8r 8B- 8c 8eJ 8a dich mir so -de thut den zu
=12 =12 =12 =12 =12 =12 =12 =12 =12 =12
4FF 4F 4A 4c 4f 4f seh'! nah'! hell. Fee! weh. Knix! Bett!
8r 8r 8r . . . . .
== == == == == == == == == ==
*_ *_ *_ *_ *_ *_ *_ *_
!!!SMS: Deutscher Liederschatz, Band 1, Ludwig Erk, ed.
!!!ENC: Craig Stuart Sapp
!!!END: 2004/05/16/
!!!EED: 2011/02/05/
!!!EFL: 001/651
!!muse2ps: s^().{().}^z21jv200,114,144
!!CharacterEncoding: UTF-8

```

Additional input format via Humdrum

Verovio with Humdrum enabled supports some additional input formats that can be used with --input-from:

- **MuseData** with option `md`, `musedata`, or `musedata-hum`
- **EsAC** with `esac`

For more information about these input formats, see the Verovio Humdrum Viewer [documentation](#).

## MusicXML

Verovio has two converters for importing MusicXML data. The first one directly converts MusicXML into MEI. The second one first converts to Humdrum and then converts the Humdrum to MEI. By default, the first importer is used. It is also the one triggered when the value `xml` is passed to the `--input-from` option.

#### Compressed MusicXML files

Verovio supports MusicXML compressed (MXL) files. It only loads basic single-file MusicXML MXL files containing the index file ( `META-INF/container.xml` ) and the MusicXML file, with the extension `.xml` . The input process searches for the `META-INF/container.xml` file from which the filename of the MusicXML file is extracted. The filename extracted is the first `.rootfile@full-path` listed in `/container/rootfiles` .

Input of MXL files is auto detected and the `xml` value does not have to be passed to `--input-format` . However, when using the JavaScript toolkit, you need to make sure your data is an `ArrayBuffer` or a base64 string, and use `loadZipDataBuffer()` or `loadZipDataBase64()` respectively to load it instead `loadData()` . Here is an example using the JavaScript Fetch API, loading the file as an `ArrayBuffer` :

#### JAVASCRIPT

```
fetch( mxlUrl )
  .then( response => response.arrayBuffer() )
  .then( data =>
    {
      vrvToolkit.loadZipDataBuffer( data )
      // Do anything else you want with the file here
    }).catch( e =>
    {
      console.log( e );
    }
  );
```

#### Importing MusicXML via Humdrum

The MusicXML import via Humdrum is available only for Verovio builds where Humdrum support has been enabled specifically at build time. For the JavaScript toolkit, this is not the default and it is important to make sure that the appropriate build is being used. See the related [section](#) for more information about this. With the command-line tool and the Python toolkit, Humdrum support is enabled by default.

With Verovio builds that support Humdrum, the MusicXML import via Humdrum can be triggered by setting the `--input-from` option to `musicxml-hum` . For example:

#### TERMINAL

```
verovio -f musicxml-hum -t hum file.xml
```

The MusicXML import via Humdrum can itself be made the default MusicXML importer with the build option `MUSICXML_DEFAULT_HUMDRUM` . See the [command-line](#) section for more information on how to change build options. With this, MusicXML files will be loaded via the Humdrum importer without having to specify `musicxml-hum` for the option `--input-from` . The direct importer can still be used by passing the value `xml` to `--input-from` .

## Plaine and Easie

The Plaine & Easie Code is a library standard that enables entering music incipits in modern or mensural notation. It is mostly used by the [Répertoire International des Sources Musicales](#) (RISM) for inventorying the music incipits of the manuscripts. More information about the syntax is available on the [IAML](#) website.

Plaine and Easie input in Verovio is a text file (or string) with a list of the following `@key:value` lines:

- `@clef` – the initial clef
- `@keysig` – the initial key signature
- `@timesig` – the initial time signature
- `@data` – the incipit content

From version 3.7, the content can be structured as a JSON object with a `clef` , `keysig` , `timesig` and `data` key. Verovio will auto detect both as Plaine & Easie format. Internally, text files with `@key:value` lines are converted into a JSON object.

The structure of this input format is not part of the PAE specification but only a convention put in place for Verovio

## Examples

### Beams and triplets

Text file input

```
@clef:G-2
@keysig:xFCGD
@timesig:3/8
@data:'6B/{8B+(6B"E'B)}({AFD})/{6.E3G},8B-/({6'EGF})({FAG})({GEB})/4F6-
```

JSON input

#### JSON

```
{
  "clef": "G-2",
  "keysig": "xFCGD",
  "timesig": "3/8",
  "data": "'6B/{8B+(6B\"E'B)}({AFD})/{6.E3G},8B-/({6'EGF})({FAG})({GEB})/4F6-"
}
```



### Measure rests and key and time signature changes

```
@clef:G-2
@keysig:xF
@timesig:3/8
@data:=25//=5//$xFCG @c 2-4.-'8E/{6AGFE}{8A"C}'B"4D{6C'B}/{ "DC'BA}{ "8EA}
```



### Clef changes

```
@clef:F-4
@keysig:bB
@timesig:c
@data:.,6{FA'CF}%G-2 {"6CEA"C}%F-4 {.,6FB'DF}%G-2 {"6DFA"D}/
```



### Trills and fermata

```
@clef:C-4
@keysig:xFC
@timesig:c/
@data:.{8.A6A}/4.Dt8D4.Ct8D/{8.E6C},8(A)'E4DtE/{8.Ft3GE}8(D)-2-/
```



## Ties

```
@clef:G-2
@keysig:xFCG
@timesig:3/8
@data:"8-{CD+}/{DC'B}/{xAB"F+}/{FED}/{CGB+}/{BAG+}/{GFE}/
```



## Grace notes (acciaccaturas)

```
@clef:G-2
@keysig:bBE
@timesig:2/4
@data:{"8.F6D'8B}6-"F/{8.F6E8C}6-E/{8DC}{'8B"gC'gBgAgB"6FE}/2D
```



## Grace notes (appoggiaturas)

```
@clef:F-4
@keysig:xF
@timesig:c
@data:qq,3{DnF'D}r/2Fqq,3{DnF'D}r2Aqq3,{DF'D}r/1bB,qq3{EG'C}r/1A//
```



## Rhythmic patterns

```
@clef:C-1
@keysig:xFCGD
@timesig:c
@data:"2-4.-8D/{EG}6.3{BA}{GF}{ED}{EF}{GA}{GF}/4E
```



## Abbreviated writing

```
@clef:G-2
@keysig:
@timesig:3/4
@data:"6!{GGCC}!f{GCGC}/i/i/
```



## PAE Validation

The toolkit can be used to validate Plaine & Easie input data with the `ValidatePAE` or `ValidatePAEFile` methods. The methods load the PAE data passed as a string or from a file respectively. They both return a stringified JSON object with validation error or warning messages.

The JSON object can contain one or more validation messages. When a global input error is encountered (e.g. `data` is missing in the input), a single object is returned. Otherwise, the object is structured with keys corresponding to the JSON input keys (`clef`, `keysig`, `timesig` and `data`). Each key can have one single validation message, except for `data` that contains an array of one or more messages. Only keys for which a validation message is given will exist in the validation object. In non-pendantic mode, syntax problems are marked as `warning` as long as parsing can continue.

Each validation message is structured as follow:

### JSON

```
{
  "column": 0,
  "row": 0,
  "code": 1,
  "text": "A description of the validation problem",
  "type": "error"
}
```

Description of the values:

- The `column` indicates the position where the problem occurs in the input string. It is always 0 for `clef`, `keysig` and `timesig`. It can be -1 in `data` when no position can be indicated.
- The `row` is always 0.
- The `type` can be `error` or `warning`.
- The `code` corresponds to a numeric error code that can be used to map the errors into another system and (for example) to translate the messages.

Whenever the error message contains a string interpolation `%s`, then the json message also contains a `value` key with the value to be used for the interpolation.

Here is an example of invalid input data and the object returned by the validation call:

### JSON

```
{
  "clef": "GG2",
  "keysig": "bB",
  "data": "=1/4-"DC'tB/"tCC"
}
```

### JSON

```
{
  "clef": {
    "column": 0,
    "row": 0,
    "code": 43,
    "text": "Unexpected second character in clef sign",
    "type": "warning"
  },
  "data": [
    {
      "column": 10,
      "row": 0,
      "code": 17,
      "text": "Invalid t not after a note",
      "type": "warning"
    },
    {
      "column": 15,
      "row": 0,
      "code": 17,
      "text": "Invalid t not after a note",
      "type": "warning"
    }
  ]
}
```

ABC

Abc is a text-based music notation system originally designed for use with folk and traditional tunes and used throughout the web. You can find the documentation on the [ABC notation](#) website.

## Examples

Let's start with a simple little tune.

X: 99  
T: Short tune  
C: K. Rettinghaus  
M: 4/4  
L: 1/4  
K: G  
D|G>ABG|A>BAD|G>ABA|G3||

## Short tune

K. Rettinghaus



Verovio takes several information fields into account, e.g. the reference number X , the tune title T , the meter M , the unit note length L , the key K . As you can see, Verovio prints the header as expected by default. You may suppress this behaviour with the `--header none` option.

Now let's add a literal tempo as well as some grace notes and chord symbols. Dynamics are also very important! Note that chord symbols are put above the melody.

X: 99  
T: Short tune  
C: K. Rettinghaus  
M: 4/4  
L: 1/4  
Q: "Andante"  
K: G  
"D"!mf!D|"G"G>A "Em"B {/A}G|"Am"A>B "D7"A{/E}D|"G"G>A "C"B "D"A|"G"G3||

# Short tune

K. Rettinghaus



With the option --breaks: 'encoded' Verovio keeps the encoded layout, as you can see on this page. The default value is 'auto', which lets Verovio to decide where to put a line-break.

X:1  
T:Dusty Miller, The  
T:Binny's Jig  
C:Trad.  
R:DH  
M:3/4  
K:G  
B>cd BAG|FA Ac BA|B>cd BAG|DG GB AG:|  
Bdd gfg|aA Ac BA|Bdd gfa|gG GB AG:|  
BG G/2G/2G BG|FA Ac BA|BG G/2G/2G BG|DG GB AG:|

# Dusty Miller, The Binny's Jig

Trad.



Alternatively it is always possible to suppress score line-breaks. Meter changes are also supported.



X:2  
 T:Old Sir Simon the King  
 C:Trad.  
 S:Offord MSS      % from Offord manuscript  
 N:see also Playford   % reference note  
 M:9/8  
 R:SJ                  % slip jig  
 N:originally in C    % transcription note  
 K:G  
 D|GFG GAG G2D|GFG GAG F2D|EFE EFE EFG|A2G F2E D2:|  
 D|GAG GAB d2D|GAG GAB c2D|[1 EFE EFE EFG|A2G F2E D2:|\ \ \ % no line-break in score  
 M:12/8                  % change of meter  
 [2 E2E EFE E2E EFG|\ \ \ % no line-break in score  
 M:9/8                  % change of meter  
 A2G F2E D2:]

### Old Sir Simon the King

Trad.



### Broken rhythm markers

X:1  
 T:Broken rhythm markers  
 M:C  
 K:C  
 A>A A2>A2 A>>A A2>>>A2:]



### Ties and slurs

Verovio correctly differentiates between ties and slurs.

X:1  
 T:Ties and Slurs  
 M:C  
 K:C  
 (AA) (A(A)A) ((AA)A) (A|A) A-A A-A-A A2-[A4]]



### Accidentals

```
X:1
T:Accidentals
M:C
K:C
__A _A =A ^A ^^A]]
```



## Chords

```
X:1
T:Chords
M:2/4
K:C
[CEGc] [C2G2] [CE][DF][D2F2][EG][FA] [A4d4]]
```



Known limitations:

- Verovio imports only the first tune in a collection
- Tuplets are not supported
- User defined symbols are not supported
- Multi-voice music is not supported
- Lyrics are not supported yet

## Output formats

### SVG

For more information about the SVG output in Verovio, see the [Internal structure](#) and the [Controlling the SVG output](#) sections in the previous chapter.

Font limitation

Firefox on Linux (Ubuntu), uses “DejaVu Serif” as default font, which can cause some text layout problems when displaying the SVG files generated with Verovio.

### MEI

With its MEI output, Verovio can serve as a converter to MEI. This can be useful for converting data from another input format supported by Verovio (e.g., MusicXML, ABC) to MEI. It can also be used to upgrade files encoded in an older version of MEI to the one supported by the version of Verovio that being used. Another typical use-case where outputting MEI from Verovio can be desirable is for [transposing](#) content.

When converting other formats to MEI, it is important to keep in mind that the output produced by Verovio will only include the MEI features (elements and attributes) currently supported by the Verovio version being used. It is also important to remember that the MEI produced by Verovio is only one way to express things in MEI and that MEI will often offer other valid and recommendable ways to represent the same things. Choosing between them depends on the goal being pursued. It is possible that Verovio is the appropriate solution but not necessary.

When converting from an older version of MEI, it is important to remember that Verovio will not perform any upgrade of the data encoded in the MEI header, with the exception of the MEI version. This means that using Verovio for upgrading MEI data is probably appropriate only for encodings that feature a very basic header and is not recommended with rich ones. It is recommended to check what has changed in MEI for the header between the versions. In any case, it is strongly recommended to check the header by validating

the output files produced by Verovio. Regarding the content, Verovio will upgrade only the features that used to be supported in the previous version. See the section on MEI in the [Input formats](#) in the previous section for more detail about what is upgraded.

#### Unsupported elements and attributes

When loading MEI data into Verovio and outputting MEI, the following is to expect regarding MEI elements and attributes that are currently not supported by Verovio. Because elements that are not supported by Verovio are ignored and are not loaded into memory, they will not be preserved in the MEI output. This includes the element themselves, but also any descendant they might have. As described in the section about the [Input formats](#), a warning will appear in the console about these. There is one exception with the `<annot>` elements for which all the content will be preserved, including MEI element descendants that are not supported elsewhere in Verovio. Regarding attributes, Verovio will preserve in the output all attributes, including the one that are not supported or that have not relevance for the rendering.

#### Analytical markup

When loading MEI data into Verovio, some analytical markup is converted into standard markup.

The attributes that are converted are:

- `@fermata`
- `@tie`

For example:

#### Original data

##### XML

```
<note t="i" xml:id="n1"/>
<note t="t" xml:id="n2"/>
```

#### Output data

##### XML

```
<tie startid="#n1" endid="#n2"/>
```

#### Original data

##### XML

```
<mRest fermata="above" xml:id="mr1"/>
```

#### Output data

##### XML

```
<fermata startid="#mr1" place="above"/>
```

By default, the analytical markup is not preserve in the MEI output. It can be with the option `--preserve-analytical-markup`.

#### Articulations

Articulations in MEI can be encoded with multiple values within a `@artic` attribute. Verovio implementation is based on single valued `@artic` attributes. When loading MEI data, multiple valued attributes are transformed into corresponding single valued ones by duplicating the `<artic>` element. This remain as such in the MEI output. For example:

#### Original data

##### XML

```
<artic artic="marc ten" place="above"/>
```

#### Output data

##### XML

```
<artic artic="marc" place="above"/>
<artic artic="ten" place="above"/>
```

#### Page-based MEI

The MEI page-based model is not part of MEI. It was put in place for the development of Verovio and can still change in the future. It will be documented as input format once it is stabilized.

## MIDI

Verovio provides a basic MIDI output feature that can be used from the command-line tool or from the JavaScript toolkit. The MIDI output can be written to a file for further processing or for building application with MIDI playback, including in online environments. However, since MIDI is not supported in web-browsers in a standard way, an additional player will be required in such cases.

The MIDI output takes into account:

- Tempo indication ( `@midi.bpm` ) provided in the first `scoreDef` and in `tempo` elements.
- The sounding accidental values provided by `@accid.ges` on notes and `accid` .
- The sounding octave values provided by `@oct.ges` on note .
- Transposing instrument information provided by `@trans.semi` on `staffDef` .
- Tie elements referring to notes with `@startid` and `@endid` .

Verovio uses the [Midifile library](#) for generating the MIDI output.

### Usage

With the command-line tool, for generating a MIDI file with the default options, you need to do:

#### TERMINAL

```
verovio -t midi -o output.midi input-file.mei
```

With the JavaScript toolkit, the MIDI output is available through the `renderToMIDI()` method. This returns a base64-coded MIDI file as string, which can be passed to a player or made available for download.

## Timemap

The timemap is an array of JSON objects, with each entry having these keys:

- `tstamp`: this is the time in millisecond from the start of the music to the start of the current event (real time)
- `qstamp`: the time in quarter notes from the start of the music to the start of the current event entry (score time)
- `tempo`: when the tempo changes the new tempo will be given for the current event. Also the tempo changes are only allowed to occur at the starts of measures in the current code for creating MIDI files, and this is the same limitation for the timemap file. The tempo and `qstamp` values can be used to re-calculate a new set of `tstamp` values if the tempo changes.
- `on`: This is an array of note ids that start at the current event time. This list will not be given if there are no note ons at the current event.
- `off`: This is an array of note ids that end at the current event time. This list will not be given if there are no note offs at the current event.

### Examples



#### XML

```

<measure type="upbeat">
  <staff n="1">
    <layer n="1">
      <beam>
        <note xml:id="m0_s2_e1" dur="8" oct="5" pname="e"/>
        <note xml:id="m0_s2_e2" dur="8" oct="5" pname="f"/>
      </beam>
    </layer>
  </staff>
  <tempo midi.bpm="70" staff="1" tstamp="1.000000">Andante con moto <rend fontfam="smufl">♪</rend>
= 70</tempo>
  <slur startid="#m0_s2_e1" endid="#m0_s2_e2"/>
</measure>
<measure n="1">
  <staff n="1">
    <layer n="1">
      <note dots="1" dur="4" oct="5" pname="g"/>
      <note dur="8" oct="5" pname="g"/>
      <note dur="4" oct="5" pname="g"/>
      <beam>
        <note xml:id="m1_s2_e4" dur="8" oct="5" pname="g"/>
        <note xml:id="m1_s2_e5" dur="8" oct="6" pname="c"/>
      </beam>
    </layer>
  </staff>
  <slur startid="#m1_s2_e4" endid="#m1_s2_e5"/>
</measure>

```

## JSON

```

[
  {
    "tstamp": 0,
    "qstamp": 0,
    "tempo": 70,
    "on": [
      "m0_s2_e1"
    ]
  },
  {
    "tstamp": 428.571429,
    "qstamp": 0.5,
    "on": [
      "m0_s2_e2"
    ],
    "off": [
      "m0_s2_e1"
    ]
  },
  {
    "tstamp": 857.142857,
    "qstamp": 1,
    "on": [
      "note-0000001938389898"
    ],
    "off": [
      "m0_s2_e2"
    ]
  },
  {

```

```

    "tstamp": 2142.857143,
    "qstamp": 2.5,
    "on": [
      "note-0000001651747389"
    ],
    "off": [
      "note-0000001938389898"
    ]
  },
  {
    "tstamp": 2571.428571,
    "qstamp": 3,
    "on": [
      "note-0000001917733971"
    ],
    "off": [
      "note-0000001651747389"
    ]
  },
  {
    "tstamp": 3428.571429,
    "qstamp": 4,
    "on": [
      "m1_s2_e4"
    ],
    "off": [
      "note-0000001917733971"
    ]
  },
  {
    "tstamp": 3857.142857,
    "qstamp": 4.5,
    "on": [
      "m1_s2_e5"
    ],
    "off": [
      "m1_s2_e4"
    ]
  },
  {
    "tstamp": 4285.714286,
    "qstamp": 5,
    "off": [
      "m1_s2_e5"
    ]
  }
]

```



JSON

```
[
  {
    "tstamp": 0,
    "qstamp": 0,
    "tempo": 120,
    "on": [
      "note-0000002010789077"
    ]
  },
  {
    "tstamp": 666.666667,
    "qstamp": 1.333333,
    "on": [
      "note-0000001595005340"
    ],
    "off": [
      "note-0000002010789077"
    ]
  },
  {
    "tstamp": 1333.333333,
    "qstamp": 2.666667,
    "on": [
      "note-0000000084354770"
    ],
    "off": [
      "note-0000001595005340"
    ]
  },
  {
    "tstamp": 2000,
    "qstamp": 4,
    "off": [
      "note-0000000084354770"
    ]
  }
]
```

# Plaine and Easie

The output format for the Plaine and Easie output in Verovio uses the same file structure with key:value lines as described in the section in the [Input formats](#). See also there for the features supported.

Note that:

- duration is given explicitly for every note
- no abbreviated writing is used in the Plaine and Easie output

For example, let's consider the following example passed as input to Verovio:

```
@clef:G-2
@keysig:
@timesig:3/4
@data:'6!{GGCC}!f{GCGC}/i/i/
```



Verovio will produce the following Plaine and Easie output:

```
@keysig:b
@timesig:3/4
@clef:G-2
@data:{6'G6G6C6C}{6G6G6C6C}{6G6C6G6C}/{6G6G6C6C}{6G6G6C6C}{6G6C6G6C}/{6G6G6C6C}{6G6G6C6C}/
```

## Humdrum

The Humdrum output format for Verovio is available only from MusicXML input and only if the Humdrum importer is used when loading the data into Verovio. See [this section](#) for more information about the MusicXML import via Humdrum.

With this in hand, you can convert MusicXML to Humdrum from the command-line with:

### TERMINAL

```
verovio -f musicxml-hum -t hum file.xml
```

If the MusicXML importer via Humdrum is the default, you can simply do:

### TERMINAL

```
verovio -t hum file.xml
```

## Toolkit methods

This section documents the methods available from the Verovio toolkit. The methods are public methods of the C++ `vrw::Toolkit` class. They are all available in the Python and JavaScript bindings, unless specified otherwise. For examples, all the methods reading a file or writing to a file are not available in the JavaScript version of the toolkit.

The names of the methods is also identical across the different versions of the toolkit except for the capitalisation. The original C++ method names are UpperCamelCased in C++ but lowerCamelCased in the Python and JavaScript bindings. This is only to make the bindings follow more idiomatic capitalisation.

For the methods taking parameters as stringified JSON objects (or returning one), the objects are not stringified in the JavaScript version of the toolkit. That is, a JSON object is passed or returned as is. The same applied for the Python toolkit where the object is passed or returned as a Python dictionary.

## ConvertHumdrumToHumdrum

Filter Humdrum data.

### Returns

`std::string` – The Humdrum data as a string

### Parameters

Name	Type	Default	Description
<code>humdrumData</code>	<code>const std::string &amp;</code>	<code>Ø</code>	

### Original header

#### C++

```
std::string vrw::Toolkit::ConvertHumdrumToHumdrum(const std::string &humdrumData)
```

### Example call

#### PYTHON

```
result = toolkit.convertHumdrumToHumdrum(humdrumData)
```

## ConvertHumdrumToMIDI

Convert Humdrum data to MIDI.

### Returns



std::string – The MIDI file as a base64-encoded string

#### Parameters

Name	Type	Default	Description
humdrumData	const std::string &	Ø	

#### Original header

##### C++

```
std::string vrv::Toolkit::ConvertHumdrumToMIDI(const std::string &humdrumData)
```

#### Example call

##### PYTHON

```
result = toolkit.convertHumdrumToMIDI(humdrumData)
```

## ConvertMEIToHumdrum

Convert MEI data into Humdrum data.

#### Returns

std::string – The Humdrum data as a string

#### Parameters

Name	Type	Default	Description
meiData	const std::string &	Ø	

#### Original header

##### C++

```
std::string vrv::Toolkit::ConvertMEIToHumdrum(const std::string &meiData)
```

#### Example call

##### PYTHON

```
result = toolkit.convertMEIToHumdrum(meidata)
```

## Edit

Edit the MEI data.

#### Returns

bool – True if the edit action was successfully applied

#### Parameters

Name	Type	Default	Description
editorAction	const std::string &	Ø	The editor actions as a stringified JSON object

#### Original header

##### C++

```
bool vrv::Toolkit::Edit(const std::string &editorAction)
```

#### Example call

##### PYTHON

```
result = toolkit.edit(editorAction)
```

## EditInfo

Return the editor status.

### Returns

std::string – The editor status as a string

### Original header

**C++**

```
std::string vrv::Toolkit::EditInfo()
```

### Example call

**PYTHON**

```
result = toolkit.editInfo()
```

## GetAvailableOptions

Return all available options grouped by category.

For each option, returns the type, the default value, and the minimum and maximum value (when available)

### Returns

std::string – A stringified JSON object

### Original header

**C++**

```
std::string vrv::Toolkit::GetAvailableOptions() const
```

### Example call

**PYTHON**

```
result = toolkit.getAvailableOptions()
```

More info here

Example how to extended the documentation for a method

## GetDefaultOptions

Return a dictionary of all the options with their default value.

### Returns

std::string – A stringified JSON object

### Original header

**C++**

```
std::string vrv::Toolkit::GetDefaultOptions() const
```

### Example call

**PYTHON**

```
result = toolkit.getDefaultOptions()
```

## GetDescriptiveFeatures

Return descriptive features as a JSON string.

The features are tailored for implementing incipit search

### Returns

std::string – A stringified JSON object with the requested features

### Parameters

Name	Type	Default	Description
options	const std::string &	∅	A stringified JSON object with the feature extraction options

### Original header

**C++**

```
std::string vrv::Toolkit::GetDescriptiveFeatures(const std::string &options)
```

### Example call

**PYTHON**

```
result = toolkit.getDescriptiveFeatures(options)
```

## GetElementAttr

Return element attributes as a JSON string.

The attributes returned include the ones not supported by Verovio

### Returns

std::string – A stringified JSON object with all attributes

### Parameters

Name	Type	Default	Description
xmlId	const std::string &	Ø	the ID (xml:id) of the element being looked for

### Original header

**C++**

```
std::string vrv::Toolkit::GetElementAttr(const std::string &xmlId)
```

### Example call

**PYTHON**

```
result = toolkit.getElementAttr(xmlId)
```

The method performs a lookup in the loaded MEI tree and will return all attributes for the retrieved element. This includes attributes currently not supported by Verovio. Looking in the MEI tree means that looking for elements added dynamically for the rendering by Verovio will no be found. This is the case for system elements when loading score-based MEI, or meterSig or clef elements displayed at the beginning of a system.

## GetElementsAtTime

Returns array of IDs of elements being currently played.

### Returns

std::string – A stringified JSON object with the page and notes being played

### Parameters

Name	Type	Default	Description
millisec	int	Ø	The time in milliseconds

### Original header

**C++**

```
std::string vrv::Toolkit::GetElementsAtTime(int millisec)
```

### Example call

**PYTHON**

```
result = toolkit.getElementsAtTime(millisec)
```

## GetExpansionIdsForElement

Returns a vector of ID strings of all elements (the notated and the expanded) for a given element.

### Returns

std::string – A stringified JSON object with all IDs

### Parameters

Name	Type	Default	Description
xmlId	const std::string &	Ø	the ID (xml:id) of the element being looked for

### Original header

#### C++

```
std::string vrv::Toolkit::GetExpansionIdsForElement(const std::string &xmlId)
```

### Example call

#### PYTHON

```
result = toolkit.getExpansionIdsForElement(xmlId)
```

## GetHumdrum

Get the humdrum buffer.

### Returns

std::string – The humdrum buffer as a string

### Original header

#### C++

```
std::string vrv::Toolkit::GetHumdrum()
```

### Example call

#### PYTHON

```
result = toolkit.getHumdrum()
```

## GetHumdrumFile

Write the humdrum buffer to the file.

This method is not available in the JavaScript distributed version of the toolkit

### Returns

bool

### Parameters

Name	Type	Default	Description
filename	const std::string &	Ø	

### Original header

#### C++

```
bool vrv::Toolkit::GetHumdrumFile(const std::string &filename)
```

### Example call

#### PYTHON

```
result = toolkit.getHumdrumFile(filename)
```

## GetID

Return the ID of the Toolkit instance.

This method is not available in the JavaScript distributed version of the toolkit

### Returns

std::string – The ID as a string

### Original header

#### C++

```
std::string vrv::Toolkit::GetID()
```

### Example call

#### PYTHON

```
result = toolkit.getID()
```

## GetLog

Get the log content for the latest operation.

### Returns

std::string – The log content as a string

### Original header

#### C++

```
std::string vrv::Toolkit::GetLog()
```

### Example call

#### PYTHON

```
result = toolkit.getLog()
```

## GetMEI

Get the MEI as a string.

### Returns

std::string

### Parameters

Name	Type	Default	Description
jsonOptions	const std::string &	""	A stringified JSON object with the output options pageNo: integer; (1-based), all pages if none (or 0) specified; scoreBased: true or false; true by default; removeIds: true or false; false by default - remove all @xml:id not used in the data;

### Original header

#### C++

```
std::string vrv::Toolkit::GetMEI(const std::string &jsonOptions="")
```

### Example call

#### PYTHON

```
result = toolkit.getMEI(jsonOptions)
```

## GetMIDIValuesForElement

Return MIDI values of the element with the ID (xml:id)

RenderToMIDI() must be called prior to using this method

### Returns

std::string – A stringified JSON object with the MIDI values

#### Parameters

Name	Type	Default	Description
xmlId	const std::string &	Ø	the ID (xml:id) of the element being looked for

#### Original header

##### C++

```
std::string vrv::Toolkit::GetMIDIValuesForElement(const std::string &xmlId)
```

#### Example call

##### PYTHON

```
result = toolkit.getMIDIValuesForElement(xmlId)
```

## GetNotatedIdForElement

Returns the ID string of the notated (the original) element.

#### Returns

std::string – A stringified JSON object with all IDs

#### Parameters

Name	Type	Default	Description
xmlId	const std::string &	Ø	the ID (xml:id) of the element being looked for

#### Original header

##### C++

```
std::string vrv::Toolkit::GetNotatedIdForElement(const std::string &xmlId)
```

#### Example call

##### PYTHON

```
result = toolkit.getNotatedIdForElement(xmlId)
```

## GetOption

Get the value for an option.

This method is not available in the JavaScript distributed version of the toolkit

#### Returns

std::string – The option value as a string

#### Parameters

Name	Type	Default	Description
option	const std::string &	Ø	The name of the option
defaultValue	bool	false	True to get the default value of the option

#### Original header

##### C++

```
std::string vrv::Toolkit::GetOption(const std::string &option, bool defaultValue=false) const
```

#### Example call

##### PYTHON

```
result = toolkit.getOption(option, defaultValue)
```

## GetOptions

Return a dictionary of all the options with their current value.

### Returns

std::string – A stringified JSON object

### Original header

#### C++

```
std::string vrv::Toolkit::GetOptions() const
```

### Example call

#### PYTHON

```
result = toolkit.getOptions()
```

## GetPageCount

Return the number of pages in the loaded document.

The number of pages depends on the page size and if encoded layout was taken into account or not.

### Returns

int – The number of pages

### Original header

#### C++

```
int vrv::Toolkit::GetPageCount()
```

### Example call

#### PYTHON

```
result = toolkit.getPageCount()
```

## GetPageWithElement

Return the page on which the element with the ID (xml:id) is rendered.

This takes into account the current layout options.

### Returns

int – the page number (1-based) where the element is (0 if not found)

### Parameters

Name	Type	Default	Description
xmlId	const std::string &	Ø	the ID (xml:id) of the element being looked for

### Original header

#### C++

```
int vrv::Toolkit::GetPageWithElement(const std::string &xmlId)
```

### Example call

#### PYTHON

```
result = toolkit.getPageWithElement(xmlId)
```

## GetResourcePath

Get the resource path for the Toolkit instance.

This method is not available in the JavaScript distributed version of the toolkit

### Returns

std::string – A string with the resource path

### Original header

#### C++

```
std::string vrv::Toolkit::GetResourcePath() const
```

### Example call

#### PYTHON

```
result = toolkit.getResourcePath()
```

## GetScale

Get the scale option.

This method is not available in the JavaScript distributed version of the toolkit

### Returns

int – the scale option as integer

### Original header

#### C++

```
int vrv::Toolkit::GetScale()
```

### Example call

#### PYTHON

```
result = toolkit.getScale()
```

## GetTimeForElement

Return the time at which the element is the ID (xml:id) is played.

RenderToMIDI() must be called prior to using this method.

### Returns

int – The time in milliseconds

### Parameters

Name	Type	Default	Description
xmlId	const std::string &	Ø	the ID (xml:id) of the element being looked for

### Original header

#### C++

```
int vrv::Toolkit::GetTimeForElement(const std::string &xmlId)
```

### Example call

#### PYTHON

```
result = toolkit.getTimeForElement(xmlId)
```

## GetTimesForElement

Return a JSON object string with the following key values for a given note.

Return scoreTimeOnset, scoreTimeOffset, scoreTimeTiedDuration, realTimeOnsetMilliseconds, realTimeOffsetMilliseconds, realTimeTiedDurationMilliseconds.



### Returns

std::string – A stringified JSON object with the values

### Parameters

Name	Type	Default	Description
xmlId	const std::string &	Ø	the ID (xml:id) of the element being looked for

### Original header

#### C++

```
std::string vrv::Toolkit::GetTimesForElement(const std::string &xmlId)
```

### Example call

#### PYTHON

```
result = toolkit.getTimesForElement(xmlId)
```

## GetVersion

Return the version number.

### Returns

std::string – the version number as a string

### Original header

#### C++

```
std::string vrv::Toolkit::GetVersion()
```

### Example call

#### PYTHON

```
result = toolkit.getVersion()
```

## LoadData

Load a string data with the type previously specified in the options.

By default, the methods try to auto-detect the type.

### Returns

bool – True if the data was successfully loaded

### Parameters

Name	Type	Default	Description
data	const std::string &	Ø	A string with the data (e.g., MEI data) to be loaded

### Original header

#### C++

```
bool vrv::Toolkit::LoadData(const std::string &data)
```

### Example call

#### PYTHON

```
result = toolkit.loadData(data)
```

## LoadFile

Load a file from the file system.

Previously convert UTF16 files to UTF8 or extract files from MusicXML compressed files.

This method is not available in the JavaScript distributed version of the toolkit

### Returns

bool – True if the file was successfully loaded

### Parameters

Name	Type	Default	Description
filename	const std::string &	Ø	The filename to be loaded

### Original header

#### C++

```
bool vrv::Toolkit::LoadFile(const std::string &filename)
```

### Example call

#### PYTHON

```
result = toolkit.loadFile(filename)
```

## LoadZipDataBase64

Load a MusicXML compressed file passed as base64 encoded string.

### Returns

bool – True if the data was successfully loaded

### Parameters

Name	Type	Default	Description
data	const std::string &	Ø	A ZIP file as a base64 encoded string

### Original header

#### C++

```
bool vrv::Toolkit::LoadZipDataBase64(const std::string &data)
```

### Example call

#### PYTHON

```
result = toolkit.loadZipDataBase64(data)
```

## LoadZipDataBuffer

Load a MusicXML compressed file passed as a buffer of bytes.

### Returns

bool – True if the data was successfully loaded

### Parameters

Name	Type	Default	Description
data	const unsigned char *	Ø	A ZIP file as a buffer of bytes
length	int	Ø	The size of the data buffer

### Original header

#### C++

```
bool vrv::Toolkit::LoadZipDataBuffer(const unsigned char *data, int length)
```

### Example call

#### PYTHON

```
result = toolkit.loadZipDataBuffer(data, length)
```

## RedoLayout

Redo the layout of the loaded data.

This can be called once the rendering option were changed, for example with a new page (screen) height or a new zoom level.

### Returns

void

### Parameters

Name	Type	Default	Description
jsonOptions	const std::string &	""	A stringified JSON object with the action options resetCache: true or false; true by default;

### Original header

#### C++

```
void vrv::Toolkit::RedoLayout(const std::string &jsonOptions="")
```

### Example call

#### PYTHON

```
toolkit.redoLayout(jsonOptions)
```

## RedoPagePitchPosLayout

Redo the layout of the pitch positions of the current drawing page.

Only the note vertical positions are recalculated with this method. RedoLayout() needs to be called for a full recalculation.

### Returns

void

### Original header

#### C++

```
void vrv::Toolkit::RedoPagePitchPosLayout()
```

### Example call

#### PYTHON

```
toolkit.redoPagePitchPosLayout()
```

## RenderData

Render the first page of the data to SVG.

This method is a wrapper for setting options, loading data and rendering the first page. It will return an empty string if the options cannot be set or the data cannot be loaded.

### Returns

std::string – The SVG first page as a string

### Parameters

Name	Type	Default	Description
data	const std::string &	Ø	A string with the data (e.g., MEI data) to be loaded
jsonOptions	const std::string &	Ø	A stringified JSON objects with the output options

### Original header

**C++**

```
std::string vrv::Toolkit::RenderData(const std::string &data, const std::string &jsonOptions)
```

### Example call

**PYTHON**

```
result = toolkit.renderData(data, jsonOptions)
```

## RenderToMIDI

Render the document to MIDI.

### Returns

std::string – A MIDI file as a base64 encoded string

### Original header

**C++**

```
std::string vrv::Toolkit::RenderToMIDI()
```

### Example call

**PYTHON**

```
result = toolkit.renderToMIDI()
```

## RenderToMIDIFile

Render a document to MIDI and save it to the file.

This method is not available in the JavaScript distributed version of the toolkit

### Returns

bool

### Parameters

Name	Type	Default	Description
filename	const std::string &	Ø	

### Original header

**C++**

```
bool vrv::Toolkit::RenderToMIDIFile(const std::string &filename)
```

### Example call

**PYTHON**

```
result = toolkit.renderToMIDIFile(filename)
```

## RenderToPAE

Render a document to Plaine and Easie.

Only the top staff / layer is exported.

### Returns

std::string – The PAE as a string

### Original header

**C++**

```
std::string vrv::Toolkit::RenderToPAE()
```

#### Example call

##### PYTHON

```
result = toolkit.renderToPAE()
```

## RenderToPAEFile

Render a document to Plaine and Easie and save it to the file.

Only the top staff / layer is exported.

This method is not available in the JavaScript distributed version of the toolkit

#### Returns

bool

#### Parameters

Name	Type	Default	Description
filename	const std::string &	Ø	

#### Original header

##### C++

```
bool vrv::Toolkit::RenderToPAEFile(const std::string &filename)
```

#### Example call

##### PYTHON

```
result = toolkit.renderToPAEFile(filename)
```

## RenderToSVG

Render a page to SVG.

#### Returns

std::string – The SVG page as a string

#### Parameters

Name	Type	Default	Description
pageNo	int	1	The page to render (1-based)
xmlDeclaration	bool	false	True for including the xml declaration in the SVG output

#### Original header

##### C++

```
std::string vrv::Toolkit::RenderToSVG(int pageNo=1, bool xmlDeclaration=false)
```

#### Example call

##### PYTHON

```
result = toolkit.renderToSVG(pageNo, xmlDeclaration)
```

## RenderToSVGFile

Render a page to SVG and save it to the file.

This method is not available in the JavaScript distributed version of the toolkit

#### Returns

bool

### Parameters

Name	Type	Default	Description
filename	const std::string &	Ø	
pageNo	int	1	

### Original header

#### C++

```
bool vrv::Toolkit::RenderToSVGFile(const std::string &filename, int pageNo=1)
```

### Example call

#### PYTHON

```
result = toolkit.renderToSVGFile(filename, pageNo)
```

## RenderToTimemap

Render a document to a timemap.

### Returns

std::string

### Parameters

Name	Type	Default	Description
jsonOptions	const std::string &	""	

### Original header

#### C++

```
std::string vrv::Toolkit::RenderToTimemap(const std::string &jsonOptions="")
```

### Example call

#### PYTHON

```
result = toolkit.renderToTimemap(jsonOptions)
```

## RenderToTimemapFile

Render a document to timemap and save it to the file.

This method is not available in the JavaScript distributed version of the toolkit

### Returns

bool

### Parameters

Name	Type	Default	Description
filename	const std::string &	Ø	
jsonOptions	const std::string &	""	

### Original header

#### C++

```
bool vrv::Toolkit::RenderToTimemapFile(const std::string &filename, const std::string &jsonOptions="")
```

### Example call

#### PYTHON

```
result = toolkit.renderToTimemapFile(filename, jsonOptions)
```

## ResetOptions

Reset all options to default values.

### Returns

void

### Original header

#### C++

```
void vrv::Toolkit::ResetOptions()
```

### Example call

#### PYTHON

```
toolkit.resetOptions()
```

## ResetXmlIdSeed

Reset the seed used to generate MEI xml:id attribute values.

Passing 0 will seed the xml:id generator with a random (time-based) seed value. This method will have no effect if the xml-id-checksum option is set.

### Returns

void

### Parameters

Name	Type	Default	Description
seed	int	0	The seed value for generating the xml:id values (0 for a time-based random seed)

### Original header

#### C++

```
void vrv::Toolkit::ResetXmlIdSeed(int seed)
```

### Example call

#### PYTHON

```
toolkit.resetXmlIdSeed(seed)
```

## SaveFile

Get the MEI and save it to the file.

This method is not available in the JavaScript distributed version of the toolkit

### Returns

bool – True if the file was successfully written

### Parameters

Name	Type	Default	Description
filename	const std::string &	0	The output filename
jsonOptions	const std::string &	""	A stringified JSON object with the output options

### Original header

#### C++

```
bool vrv::Toolkit::SaveFile(const std::string &filename, const std::string &jsonOptions="")
```

#### Example call

##### PYTHON

```
result = toolkit.saveFile(filename, jsonOptions)
```

## Select

Set the value for a selection.

The selection will be applied only when some data is loaded or the layout is redone. The selection can be reset (cancelled) by passing an empty string or an empty JSON object. A selection across multiple mdivs is not possible.

#### Returns

bool – True if the selection was successfully parsed or reset

#### Parameters

Name	Type	Default	Description
selection	const std::string &	∅	The selection as a stringified JSON object

#### Original header

##### C++

```
bool vrv::Toolkit::Select(const std::string &selection)
```

#### Example call

##### PYTHON

```
result = toolkit.select(selection)
```

#### Examples for selection parameter

##### JSON

```
{ "measureRange": "2-3" }
{ "measureRange": "82-end" }
{ "measureRange": "38" }
{ "start": "measure-L337", "end": "measure-L355" }
{ }
```

## SetInputFrom

Set the input from option.

This method is not available in the JavaScript distributed version of the toolkit

#### Returns

bool – True if the option was successfully set

#### Parameters

Name	Type	Default	Description
inputFrom	std::string const &	∅	the input from value as string

#### Original header

##### C++

```
bool vrv::Toolkit::SetInputFrom(std::string const &inputFrom)
```

#### Example call



## PYTHON

```
result = toolkit.setInputFrom(inputFrom)
```

## SetOption

Set the value for an option.

This method is not available in the JavaScript distributed version of the toolkit

### Returns

bool – True if the option was successfully set

### Parameters

Name	Type	Default	Description
option	const std::string &	Ø	The name of the option
value	const std::string &	Ø	The option value as string

### Original header

#### C++

```
bool vrv::Toolkit::SetOption(const std::string &option, const std::string &value)
```

### Example call

#### PYTHON

```
result = toolkit.setOption(option, value)
```

## SetOptions

Set option values.

The name of each option to be set is to be given as JSON key.

### Returns

bool – True if the options were successfully set

### Parameters

Name	Type	Default	Description
jsonOptions	const std::string &	Ø	A stringified JSON objects with the output options

### Original header

#### C++

```
bool vrv::Toolkit::SetOptions(const std::string &jsonOptions)
```

### Example call

#### PYTHON

```
result = toolkit.setOptions(jsonOptions)
```

## SetOutputTo

Set the output to option.

This method is not available in the JavaScript distributed version of the toolkit

### Returns

bool – True if the option was successfully set

### Parameters

Name	Type	Default	Description
outputTo	std::string const &	Ø	the output to value as string

#### Original header

##### C++

```
bool vrv::Toolkit::SetOutputTo(std::string const &outputTo)
```

#### Example call

##### PYTHON

```
result = toolkit.setOutputTo(outputTo)
```

## SetResourcePath

Set the resource path for the Toolkit instance.

This method needs to be called if the constructor had initFont=false or if the resource path needs to be changed.

This method is not available in the JavaScript distributed version of the toolkit

#### Returns

bool – True if the resources was successfully loaded

#### Parameters

Name	Type	Default	Description
path	const std::string &	Ø	The path to the resource directory

#### Original header

##### C++

```
bool vrv::Toolkit::SetResourcePath(const std::string &path)
```

#### Example call

##### PYTHON

```
result = toolkit.setResourcePath(path)
```

## SetScale

Set the scale option.

This method is not available in the JavaScript distributed version of the toolkit

#### Returns

bool – True if the option was successfully set

#### Parameters

Name	Type	Default	Description
scale	int	Ø	the scale value as integer

#### Original header

##### C++

```
bool vrv::Toolkit::SetScale(int scale)
```

#### Example call

##### PYTHON

```
result = toolkit.setScale(scale)
```

## Toolkit

Constructor.

### Parameters

Name	Type	Default	Description
initFont	bool	true	If set to false, resource path is not initialized and SetResourcePath will have to be called explicitly

### Original header

#### C++

```
vrw::Toolkit::Toolkit(bool initFont=true)
```

### Example call

#### PYTHON

```
result = toolkit.toolkit(initFont)
```

## ValidatePAE

Validate the Plaine and Easie code passed in the string data.

A single JSON object is returned when there is a global input error. When reading the input succeeds, validation is grouped by input keys. The methods always returns errors in PAE pedantic mode. No data remains loaded after the validation.

### Returns

std::string – A stringified JSON object with the validation warnings or errors

### Parameters

Name	Type	Default	Description
data	const std::string &	Ø	A string with the data in JSON or with PAE @ keys

### Original header

#### C++

```
std::string vrw::Toolkit::ValidatePAE(const std::string &data)
```

### Example call

#### PYTHON

```
result = toolkit.validatePAE(data)
```

## ValidatePAEFile

Validate the Plaine and Easie file from the file system.

The method calls Toolkit::ValidatePAE.

This method is not available in the JavaScript distributed version of the toolkit

### Returns

std::string – A stringified JSON object with the validation warnings or errors

### Parameters

Name	Type	Default	Description
filename	const std::string &	Ø	The filename to be validated

## Original header

### C++

```
std::string vrv::Toolkit::ValidatePAEFile(const std::string &filename)
```

## Example call

### PYTHON

```
result = toolkit.validatePAEFile(filename)
```

## Toolkit options

For the Python toolkit, options have to be passed as stringified JSON objects. For the JavaScript toolkit, they have to be passed as JSON objects directly.

### Base short options

All of the base options are short options in the command-line version of the toolkit. Most of them are command-line only and are not used in the JavaScript or Python toolkits.

**-a, --all-pages**

Output all pages

---

**-h, --help**

Display this message

---

**-f, --input-from <string>**

Select input format from: "abc", "darms", "humdrum", "mei", "pae", "xml" (musicxml)  
(default: "mei")

See also: [Input formats](#)

---

**-l, --log-level <string>**

Set the log level: "off", "error", "warning", "info", or "debug"  
(default: "warning")

---

**-o, --outfile <string>**

Output file name (use "-" as file name for standard output)  
(default: "svg")

---

**-t, --output-to <string>**

Select output format to: "mei", "mei-pb", "mei-basic", "svg", or "midi"  
(default: "svg")

See also: [Output formats](#)

---

**-p, --page <integer>**

Select the page to engrave (default is 1)

---

**-r, --resource-path <string>**

Path to the directory with Verovio resources  
(default: "/usr/local/share/verovio")

See also: [SetResourcePath](#) | [Building the toolkit](#)

---

**-s, --scale <integer>**

Scale of the output in percent (100 is normal size)  
(default: 100; min: 1; max: 1000)

---

**- , --stdin**

Use "-" as input file or set the "--stdin" option for reading from the standard input

---

**-v, --version**

Display the version number

The version number includes major, minor and revision numbers and the last number of the git commit.

---

-x, --xml-id-seed <integer>

Seed the random number generator for XML IDs (default is random)

---

## Input and page layout options

--adjust-page-height

Adjust the page height to the height of the content

---

--adjust-page-width

Adjust the page width to the width of the content

The option functions in a similar manner to --adjust--page-height . It shrinks the width of the music in the case where there is only a single system of music, and the music does not completely fill the full width specified by --page-width .

---

--breaks <string>

Define page and system breaks layout

(default: "auto"; other values: ['none', 'auto', 'line', 'smart', 'encoded'])

---

--breaks-smart-sb <decimal>

In smart breaks mode, the portion of system width usage at which an encoded sb will be used (default: 0.66; min: 0.0; max: 1.0)

---

--condense <string>

Control condensed score layout

(default: "auto"; other values: ['none', 'auto', 'encoded'])

---

--condense-first-page

When condensing a score also condense the first page

---

--condense-not-last-system

When condensing a score never condense the last system

---

--condense-tempo-pages

When condensing a score also condense pages with a tempo change

---

--even-note-spacing

Specify the linear spacing factor

---

--expand <string>

Expand all referenced elements in the expansion <xml:id> (default: "")

---

--footer <string>

Control footer layout

(default: "auto"; other values: ['none', 'auto', 'encoded', 'always'])

---

--header <string>

Control header layout

(default: "auto"; other values: ['none', 'auto', 'encoded'])

---

--hum-type

Include type attributes when importing from Humdrum

---

--justify-vertically

Justify spacing vertically to fill the page

---

--landscape

The landscape paper orientation flag

---

--ligature-as-bracket

Render ligatures as bracket instead of original notation

---

--mensural-to-measure

Convert mensural sections to measure-based MEI

See also: [Ligatures](#) | [Layout](#)

---

--min-last-justification <decimal>

The last system is only justified if the unjustified width is greater than this percent (default: 0.8; min: 0.0; max: 1.0)

---

--mm-output

Specify that the output in the SVG is given in mm (default is px)

---

--move-score-definition-to-staff

Move score definition (clef, keySig, meterSig, etc.) from scoreDef to staffDef

---

--no-justification

Do not justify the system

---

--open-control-events

Render open control events

---

--output-format-raw

Writes MEI out with no line indenting or non-content newlines.

---

--output-indent <integer>

Output indentation value for MEI and SVG (default: 3; min: 1; max: 10)

---

--output-indent-tab

Output indentation with tabulation for MEI and SVG

---

--output-smufl-xml-entities

Output SMuFL characters as XML entities instead of hex byte codes

---

--page-height <integer>

The page height (default: 2970; min: 100; max: 60000)

---

--page-margin-bottom <integer>

The page bottom margin (default: 50; min: 0; max: 500)

---

--page-margin-left <integer>

The page left margin (default: 50; min: 0; max: 500)

---

--page-margin-right <integer>

The page right margin (default: 50; min: 0; max: 500)

---

--page-margin-top <integer>

The page top margin (default: 50; min: 0; max: 500)

---

--page-width <integer>

The page width  
(default: 2100; min: 100; max: 60000)

---

--pedal-style <string>

The global pedal style  
(default: "auto"; other values: ['auto', 'line', 'pedstar', 'altpedstar'])

---

--preserve-analytical-markup

Preserves the analytical markup in MEI

---

--remove-ids

Remove XML IDs in the MEI output that are not referenced

---

--scale-to-page-size

Scale the content within the page instead of scaling the page itself

---

--show-runtime

Display the total runtime on command-line

---

--shrink-to-fit

Scale down page content to fit the page height if needed

---

--smufl-text-font <string>

Specify if the smufl text font is embedded, linked, or ignored  
(default: "embedded"; other values: ['embedded', 'linked', 'none'])

---

--staccato-center

Align staccato and staccatissimo articulations with center of the note

---

--svg-additional-attribute <string> \*

Add additional attribute for graphical elements in SVG as "data-\*", for example, "note@pname" would add a "data-pname" to all note elements

---

--svg-bounding-boxes

Include bounding boxes in SVG output

---

--svg-css <string>

CSS (as a string) to be added to the SVG output  
(default: "")

---

--svg-format-raw

Writes SVG out with no line indenting or non-content newlines

---

--svg-html5

Write data-id and data-class attributes for JS usage and id clash avoidance

---

--svg-remove-xlink

Removes the xlink: prefix on href attributes for compatibility with some newer browsers

---

--svg-view-box

Use viewBox on svg root element for easy scaling of document

---

--unit <integer>

The MEI unit (1/2 of the distance between the staff lines)  
(default: 9; min: 6; max: 20)

---

--use-brace-glyph

Use brace glyph from current font

---

--use-facsimile

Use information in the <facsimile> element to control the layout

---

--use-pg-footer-for-all

Use the pgFooter for all pages

---

--use-pg-header-for-all

Use the pgHeader for all pages

---

--xml-id-checksum

Seed the generator for XML IDs using the checksum of the input data

---

## General layout options

--bar-line-separation <decimal>

The default distance between multiple barlines when locked together  
(default: 0.8; min: 0.5; max: 2.0)

---

--bar-line-width <decimal>

The barline width  
(default: 0.3; min: 0.1; max: 0.8)

---

--beam-french-style

For notes in beams, stems will stop at first outermost sub-beam without crossing it

---

--beam-max-slope <integer>

The maximum beam slope  
(default: 10; min: 0; max: 20)

---

--beam-min-slope <integer>

The minimum beam slope

---

--beam-mixed-preserve

Mixed beams will be drawn even if there is not enough space

---

--beam-mixed-stem-min <decimal>

The minimal stem length in MEI units used to draw mixed beams  
(default: 3.5; min: 1.0; max: 8.0)

---

--bracket-thickness <decimal>

The thickness of the system bracket  
(default: 1.0; min: 0.5; max: 2.0)

---

--breaks-no-widow

Prevent single measures on the last page by fitting it into previous system

---

--dashed-bar-line-dash-length <decimal>

The dash length of dashed barlines  
(default: 1.14; min: 0.1; max: 5.0)

---

--dashed-bar-line-gap-length <decimal>

The gap length of dashed barlines  
(default: 1.14; min: 0.1; max: 5.0)

---

--dynam-dist <decimal>

The default distance from the staff for dynamic marks  
(default: 1.0; min: 0.5; max: 16.0)

---

--dynam-single-glyphs

Don't use SMuFL's predefined dynamics glyph combinations

---



--engraving-defaults <string>

Json describing defaults for engraving SMuFL elements

---

--extender-line-min-space <decimal>

Minimum space required for extender line to be drawn  
(default: 1.5; min: 1.5; max: 10.0)

---

--fingering-scale <decimal>

The scale of fingering font compared to default font size  
(default: 0.75; min: 0.25; max: 1.0)

---

--font <string>

Set the music font  
(default: "Leipzig")

See also: [SMuFL fonts](#)

---

--grace-factor <decimal>

The grace size ratio numerator  
(default: 0.75; min: 0.5; max: 1.0)

---

--grace-rhythm-align

Align grace notes rhythmically with all staves

---

--grace-right-align

Align the right position of a grace group with all staves

---

--hairpin-size <decimal>

The haripin size in MEI units  
(default: 3.0; min: 1.0; max: 8.0)

---

--hairpin-thickness <decimal>

The thickness of the hairpin  
(default: 0.2; min: 0.1; max: 0.8)

---

--handwritten-font <string> \*

Fonts that emulate hand writing and require special handling

---

--harm-dist <decimal>

The default distance from the staff of harmonic indications  
(default: 1.0; min: 0.5; max: 16.0)

---

--justification-brace-group <decimal>

Space between staves inside a braced group justification  
(default: 1.0; min: 0.0; max: 10.0)

---

--justification-bracket-group <decimal>

Space between staves inside a bracketed group justification  
(default: 1.0; min: 0.0; max: 10.0)

---

--justification-max-vertical <decimal>

Maximum ratio of justifiable height to page height that can be used for the vertical justification  
(default: 0.3; min: 0.0; max: 1.0)

---

--justification-staff <decimal>

The staff justification  
(default: 1.0; min: 0.0; max: 10.0)

---

--justification-system <decimal>

The system spacing justification  
(default: 1.0; min: 0.0; max: 10.0)

---

--ledger-line-extension <decimal>

The amount by which a ledger line should extend either side of a notehead  
(default: 0.54; min: 0.2; max: 1.0)

---

--ledger-line-thickness <decimal>

The thickness of the ledger lines  
(default: 0.25; min: 0.1; max: 0.5)

---

--lyric-elision <string>

The lyric elision width  
(default: "regular"; other values: ['unicode', 'narrow', 'regular', 'wide'])

---

--lyric-hyphen-length <decimal>

The lyric hyphen and dash length  
(default: 1.2; min: 0.5; max: 3.0)

---

--lyric-line-thickness <decimal>

The lyric extender line thickness  
(default: 0.25; min: 0.1; max: 0.5)

---

--lyric-no-start-hyphen

Do not show hyphens at the beginning of a system

---

--lyric-size <decimal>

The lyrics size in MEI units  
(default: 4.5; min: 2.0; max: 8.0)

---

--lyric-top-min-margin <decimal>

The minimal margin above the lyrics in MEI units  
(default: 2.0; min: 0.0; max: 8.0)

---

--lyric-verse-collapse

Collapse empty verse lines in lyrics

---

--lyric-word-space <decimal>

The lyric word space length  
(default: 1.2; min: 0.5; max: 3.0)

---

--measure-min-width <integer>

The minimal measure width in MEI units  
(default: 15; min: 1; max: 30)

---

--mnum-interval <integer>

How frequently to place measure numbers

---

--multi-rest-style <string>

Rendering style of multiple measure rests  
(default: "auto"; other values: ['auto', 'default', 'block', 'symbols'])

Description of the values:

- auto : changes to block style if the number of measures exceeds four. It takes the block attribute into account.
- default : same as auto, but ignoring the block attribute
- block : always displays block style except for single measure rests
- symbols : always display symbols except for large numbers of measures (>30)

---

--multi-rest-thickness <decimal>

The thickness of the multi rest in unit  
(default: 2.0; min: 0.5; max: 6.0)

---

--octave-alternative-symbols

Use alternative symbols for displaying octaves

---

--octave-line-thickness <decimal>

The thickness of the line used for an octave line  
(default: 0.2; min: 0.1; max: 1.0)

---

--pedal-line-thickness <decimal>

The thickness of the line used for piano pedaling  
(default: 0.2; min: 0.1; max: 1.0)

---

--repeat-bar-line-dot-separation <decimal>

The default horizontal distance between the dots and the inner barline of a repeat barline  
(default: 0.36; min: 0.1; max: 1.0)

---

--repeat-ending-line-thickness <decimal>

Repeat and ending line thickness  
(default: 0.15; min: 0.1; max: 2.0)

---

--slur-curve-factor <decimal>

Slur curve factor - high value means rounder slurs  
(default: 1.0; min: 0.2; max: 5.0)

---

--slur-endpoint-flexibility <decimal>

Slur endpoint flexibility - allow more endpoint movement during adjustment  
(default: 0.0; min: 0.0; max: 1.0)

---

--slur-endpoint-thickness <decimal>

The endpoint slur thickness in MEI units  
(default: 0.1; min: 0.05; max: 0.25)

---

--slur-margin <decimal>

Slur safety distance in MEI units to obstacles  
(default: 1.0; min: 0.1; max: 4.0)

---

--slur-max-slope <integer>

The maximum slur slope in degrees  
(default: 60; min: 30; max: 85)

---

--slur-midpoint-thickness <decimal>

The midpoint slur thickness in MEI units  
(default: 0.6; min: 0.2; max: 1.2)

---

--slur-symmetry <decimal>

Slur symmetry - high value means more symmetric slurs  
(default: 0.0; min: 0.0; max: 1.0)

---

--spacing-brace-group <integer>

Minimum space between staves inside a braced group in MEI units  
(default: 12; min: 0; max: 48)

---

--spacing-bracket-group <integer>

Minimum space between staves inside a bracketed group in MEI units  
(default: 12; min: 0; max: 48)

---

--spacing-dur-detection

Detect long duration for adjusting spacing

<code>--spacing-linear &lt;decimal&gt;</code>
Specify the linear spacing factor (default: 0.25; min: 0.0; max: 1.0)
<code>--spacing-non-linear &lt;decimal&gt;</code>
Specify the non-linear spacing factor (default: 0.6; min: 0.0; max: 1.0)
<code>--spacing-staff &lt;integer&gt;</code>
The staff minimal spacing in MEI units (default: 12; min: 0; max: 48)
<code>--spacing-system &lt;integer&gt;</code>
The system minimal spacing in MEI units (default: 12; min: 0; max: 48)
<code>--staff-line-width &lt;decimal&gt;</code>
The staff line width in unit (default: 0.15; min: 0.1; max: 0.3)
<code>--stem-width &lt;decimal&gt;</code>
The stem width (default: 0.2; min: 0.1; max: 0.5)
<code>--sub-bracket-thickness &lt;decimal&gt;</code>
The thickness of system sub-bracket (default: 0.2; min: 0.1; max: 2.0)
<code>--system-divider &lt;string&gt;</code>
The display of system dividers (default: "auto"; other values: ['none', 'auto', 'left', 'left-right'])
<code>--system-max-per-page &lt;integer&gt;</code>
Maximun number of systems per page
<code>--text-enclosure-thickness &lt;decimal&gt;</code>
The thickness of the line text enclosing box (default: 0.2; min: 0.1; max: 0.8)
<code>--thick-barline-thickness &lt;decimal&gt;</code>
The thickness of the thick barline (default: 1.0; min: 0.5; max: 2.0)
<code>--tie-endpoint-thickness &lt;decimal&gt;</code>
The Endpoint tie thickness in MEI units (default: 0.1; min: 0.05; max: 0.25)
<code>--tie-midpoint-thickness &lt;decimal&gt;</code>
The midpoint tie thickness in MEI units (default: 0.5; min: 0.2; max: 1.0)
<code>--tie-min-length &lt;decimal&gt;</code>
The minimum length of tie in MEI units (default: 2.0; min: 0.0; max: 10.0)
<code>--tuplet-bracket-thickness &lt;decimal&gt;</code>
The thickness of the tuplet bracket (default: 0.2; min: 0.1; max: 0.8)
<code>--tuplet-num-head</code>

## Element selectors and processing

--app-x-path-query <string> \*

Set the XPath query for selecting <app> child elements, for example: `"/rdg[contains(@source, 'source-id')]"`; by default the <lem> or the first <rdg> is selected

---

--choice-x-path-query <string> \*

Set the XPath query for selecting <choice> child elements, for example: `"/orig"`; by default the first child is selected

---

--mdiv-all

Load and render all <mdiv> elements in the MEI files

---

--mdiv-x-path-query <string>

Set the XPath query for selecting the <mdiv> to be rendered; only one <mdiv> can be rendered (default: `""`)

---

--subst-x-path-query <string> \*

Set the XPath query for selecting <subst> child elements, for example: `"/del"`; by default the first child is selected

---

--transpose <string>

Transpose the entire content  
(default: `""`)

See also: [Transposition](#)

---

--transpose-mdiv <string>

Json mapping the mdiv ids to the corresponding transposition

---

--transpose-selected-only

Transpose only the selected content and ignore unselected editorial content

By default, Verovio loads a single mdiv. However, transposition applies to the entire file loaded, i.e., to all mdiv elements. By setting `--transpose-selected-only`, only the selected mdiv will be transposed.

---

--transpose-to-sounding-pitch

Transpose to sounding pitch by evaluating `@trans.semi`

---

## Element margins

--bottom-margin-artic <decimal>

The margin for artic in MEI units  
(default: 0.75; min: 0.0; max: 10.0)

---

--bottom-margin-harm <decimal>

The margin for harm in MEI units  
(default: 1.0; min: 0.0; max: 10.0)

---

--bottom-margin-header <decimal>

The margin for header in MEI units  
(default: 2.0; min: 0.0; max: 24.0)

---

--default-bottom-margin <decimal>

The default bottom margin  
(default: 0.5; min: 0.0; max: 5.0)

---

--default-left-margin <decimal>

The default left margin  
(default: 0.0; min: 0.0; max: 2.0)

---

--default-right-margin <decimal>

The default right margin  
(default: 0.0; min: 0.0; max: 2.0)

---

--default-top-margin <decimal>

The default top margin  
(default: 0.5; min: 0.0; max: 6.0)

---

--left-margin-accid <decimal>

The margin for accid in MEI units  
(default: 1.0; min: 0.0; max: 2.0)

---

--left-margin-bar-line <decimal>

The margin for barLine in MEI units  
(default: 0.0; min: 0.0; max: 2.0)

---

--left-margin-beat-rpt <decimal>

The margin for beatRpt in MEI units  
(default: 2.0; min: 0.0; max: 2.0)

---

--left-margin-chord <decimal>

The margin for chord in MEI units  
(default: 1.0; min: 0.0; max: 2.0)

---

--left-margin-clef <decimal>

The margin for clef in MEI units  
(default: 1.0; min: 0.0; max: 2.0)

---

--left-margin-key-sig <decimal>

The margin for keySig in MEI units  
(default: 1.0; min: 0.0; max: 2.0)

---

--left-margin-left-bar-line <decimal>

The margin for left barLine in MEI units  
(default: 1.0; min: 0.0; max: 2.0)

---

--left-margin-m-rest <decimal>

The margin for mRest in MEI units  
(default: 0.0; min: 0.0; max: 2.0)

---

--left-margin-m-rpt2 <decimal>

The margin for mRpt2 in MEI units  
(default: 0.0; min: 0.0; max: 2.0)

---

--left-margin-mensur <decimal>

The margin for mensur in MEI units  
(default: 1.0; min: 0.0; max: 2.0)

---

--left-margin-meter-sig <decimal>

The margin for meterSig in MEI units  
(default: 1.0; min: 0.0; max: 2.0)

---

--left-margin-multi-rest <decimal>

The margin for multiRest in MEI units  
(default: 0.0; min: 0.0; max: 2.0)

---

--left-margin-multi-rpt <decimal>

The margin for multiRpt in MEI units  
(default: 0.0; min: 0.0; max: 2.0)

---

--left-margin-note <decimal>

The margin for note in MEI units  
(default: 1.0; min: 0.0; max: 2.0)

---

--left-margin-rest <decimal>

The margin for rest in MEI units  
(default: 1.0; min: 0.0; max: 2.0)

---

--left-margin-right-bar-line <decimal>

The margin for right barLine in MEI units  
(default: 1.0; min: 0.0; max: 2.0)

---

--left-margin-tab-dur-sym <decimal>

The margin for tabDurSym in MEI units  
(default: 1.0; min: 0.0; max: 2.0)

---

--right-margin-accid <decimal>

The right margin for accid in MEI units  
(default: 0.5; min: 0.0; max: 2.0)

---

--right-margin-bar-line <decimal>

The right margin for barLine in MEI units  
(default: 0.0; min: 0.0; max: 2.0)

---

--right-margin-beat-rpt <decimal>

The right margin for beatRpt in MEI units  
(default: 0.0; min: 0.0; max: 2.0)

---

--right-margin-chord <decimal>

The right margin for chord in MEI units  
(default: 0.0; min: 0.0; max: 2.0)

---

--right-margin-clef <decimal>

The right margin for clef in MEI units  
(default: 1.0; min: 0.0; max: 2.0)

---

--right-margin-key-sig <decimal>

The right margin for keySig in MEI units  
(default: 1.0; min: 0.0; max: 2.0)

---

--right-margin-left-bar-line <decimal>

The right margin for left barLine in MEI units  
(default: 1.0; min: 0.0; max: 2.0)

---

--right-margin-m-rest <decimal>

The right margin for mRest in MEI units  
(default: 0.0; min: 0.0; max: 2.0)

---

--right-margin-m-rpt2 <decimal>

The right margin for mRpt2 in MEI units  
(default: 0.0; min: 0.0; max: 2.0)

---

--right-margin-mensur <decimal>

The right margin for mensur in MEI units  
(default: 1.0; min: 0.0; max: 2.0)

---

--right-margin-meter-sig <decimal>

The right margin for meterSig in MEI units  
(default: 1.0; min: 0.0; max: 2.0)

---

--right-margin-multi-rest <decimal>

The right margin for multiRest in MEI units  
(default: 0.0; min: 0.0; max: 2.0)

---

--right-margin-multi-rpt <decimal>

The right margin for multiRpt in MEI units  
(default: 0.0; min: 0.0; max: 2.0)

---

--right-margin-note <decimal>

The right margin for note in MEI units  
(default: 0.0; min: 0.0; max: 2.0)

---

--right-margin-rest <decimal>

The right margin for rest in MEI units  
(default: 0.0; min: 0.0; max: 2.0)

---

--right-margin-right-bar-line <decimal>

The right margin for right barLine in MEI units  
(default: 0.0; min: 0.0; max: 2.0)

---

--right-margin-tab-dur-sym <decimal>

The right margin for tabDurSym in MEI units  
(default: 0.0; min: 0.0; max: 2.0)

---

--top-margin-artic <decimal>

The margin for artic in MEI units  
(default: 0.75; min: 0.0; max: 10.0)

---

--top-margin-harm <decimal>

The margin for harm in MEI units  
(default: 1.0; min: 0.0; max: 10.0)

---

--top-margin-pg-footer <decimal>

The margin for footer in MEI units  
(default: 2.0; min: 0.0; max: 24.0)

---

## MEI supported elements

Note that, for the MEI attribute classes listed here, some attributes may not be implemented and that not all possible attribute values are supported.

<abbr>

att.labelled, att.source, att.typed

<accid>

att.accid.log, att.accidental, att.accidental.ges, att.color, att.coord, att.enclosingChars, att.extSym,  
att.facsimile, att.labelled, att.linking, att.placementOnStaff, att.placementRelEvent, att.staffLoc,  
att.staffLoc.pitched, att.typed

<add>

att.labelled, att.source, att.typed

<anchoredText>

att.labelled, att.linking, att.placementRelStaff, att.typed

<annot>

att.labelled, att.plist, att.source, att.typed



<app>

att.labelled, att.typed

<arpeg>

att.arpeg.log, att.arpeg.vis, att.color, att.enclosingChars, att.labelled, att.linking, att.plist, att.staffIdent, att.startId, att.timestamp.log, att.typed

<artic>

att.articulation, att.articulation.ges, att.color, att.coord, att.enclosingChars, att.extSym, att.facsimile, att.labelled, att.linking, att.placementRelEvent, att.typed

<bTrem>

att.bTrem.log, att.coord, att.facsimile, att.labelled, att.linking, att.numberPlacement, att.numbered, att.tremMeasured, att.typed

<barLine>

att.barLine.log, att.color, att.coord, att.facsimile, att.labelled, att.linking, att.nNumberLike, att.typed, att.visibility

<beam>

att.beamRend, att.beamedWith, att.color, att.coord, att.cue, att.facsimile, att.labelled, att.linking, att.typed

<beamSpan>

att.beamRend, att.beamedWith, att.color, att.labelled, att.linking, att.plist, att.staffIdent, att.startEndId, att.startId, att.timestamp.log, att.timestamp.log, att.typed

<beatRpt>

att.beatRpt.log, att.beatRpt.vis, att.color, att.coord, att.facsimile, att.labelled, att.linking, att.typed

<bracketSpan>

att.bracketSpan.log, att.color, att.labelled, att.lineRend, att.lineRend.base, att.linking, att.staffIdent, att.startEndId, att.startId, att.timestamp.log, att.timestamp.log, att.typed

<breath>

att.color, att.labelled, att.linking, att.placementRelStaff, att.staffIdent, att.startId, att.timestamp.log, att.typed

<caesura>

att.color, att.extSym, att.labelled, att.linking, att.placementRelStaff, att.staffIdent, att.startId, att.timestamp.log, att.typed

<choice>

att.labelled, att.typed

<chord>

att.augmentDots, att.beamSecondary, att.color, att.coord, att.cue, att.duration.ges, att.duration.log, att.duration.quality, att.durationRatio, att.facsimile, att.fermataPresent, att.graced, att.labelled, att.linking, att.staffIdent, att.stems, att.stems.cmn, att.tiePresent, att.typed, att.visibility

<clef>

att.clefShape, att.color, att.coord, att.enclosingChars, att.extSym, att.facsimile, att.labelled, att.lineLoc, att.linking, att.octaveDisplacement, att.staffIdent, att.typed, att.visibility

<corr>

att.labelled, att.source, att.typed

<course>

att.accidental, att.nNumberLike, att.octave, att.pitch

<custos>

att.color, att.coord, att.extSym, att.facsimile, att.labelled, att.linking, att.note.ges, att.octave, att.pitch, att.staffLoc, att.staffLoc.pitched, att.typed

<damage>

att.labelled, att.source, att.typed

<del>

att.labelled, att.source, att.typed

<dir>

att.extender, att.labelled, att.lang, att.lineRend.base, att.linking, att.placementRelStaff, att.staffIdent,  
att.startEndId, att.startId, att.timestamp.log, att.timestamp.log, att.typed, att.verticalGroup

<dot>

att.color, att.coord, att.dot.log, att.facsimile, att.labelled, att.linking, att.staffLoc, att.staffLoc.pitched, att.typed

<dynam>

att.enclosingChars, att.extender, att.labelled, att.lineRend.base, att.linking, att.midiValue, att.midiValue,  
att.placementRelStaff, att.staffIdent, att.startEndId, att.startId, att.timestamp.log, att.timestamp.log, att.typed,  
att.verticalGroup

<ending>

att.lineRend, att.nNumberLike, att.typed

<expan>

att.labelled, att.source, att.typed

<expansion>

att.plist, att.typed

<f>

att.extender, att.labelled, att.staffIdent, att.startEndId, att.startId, att.timestamp.log, att.timestamp.log,  
att.typed

<fTrem>

att.coord, att.fTrem.vis, att.facsimile, att.labelled, att.linking, att.tremMeasured, att.typed

<facsimile>

att.typed

<fb>

<fermata>

att.color, att.enclosingChars, att.extSym, att.fermata.vis, att.labelled, att.linking, att.placementRelStaff,  
att.staffIdent, att.startId, att.timestamp.log, att.typed

<fig>

att.horizontalAlign, att.labelled, att.typed, att.verticalAlign

<fing>

att.labelled, att.linking, att.nNumberLike, att.placementRelStaff, att.staffIdent, att.startId, att.timestamp.log,  
att.typed

<gliss>

att.color, att.labelled, att.lineRend, att.lineRend.base, att.linking, att.nNumberLike, att.staffIdent,  
att.startEndId, att.startId, att.timestamp.log, att.timestamp.log, att.typed

<graceGrp>

att.color, att.coord, att.facsimile, att.graceGrp.log, att.graced, att.labelled, att.linking, att.typed

<grpSym>

att.color, att.grpSym.log, att.staffGroupingSym, att.startEndId, att.startId

<hairpin>

att.color, att.hairpin.log, att.hairpin.vis, att.labelled, att.linking, att.placementRelStaff, att.staffIdent,  
att.startEndId, att.startId, att.timestamp.log, att.timestamp.log, att.typed, att.verticalGroup

<halfmRpt>

att.color, att.coord, att.facsimile, att.labelled, att.linking, att.typed

<harm>

att.labelled, att.lang, att.linking, att.nNumberLike, att.placementRelStaff, att.staffIdent, att.startEndId,  
att.startId, att.timestamp.log, att.timestamp.log, att.typed

<instrDef>

att.channelized, att.labelled, att.midiInstrument, att.nNumberLike

<keyAccid>

att.accidental, att.color, att.coord, att.enclosingChars, att.extSym, att.facsimile, att.labelled, att.linking,  
att.note.ges, att.octave, att.pitch, att.staffLoc, att.staffLoc.pitched, att.typed

<keySig>

att.accidental, att.coord, att.facsimile, att.keySig.anl, att.keySig.log, att.keySig.vis, att.labelled, att.linking,  
att.pitch, att.typed, att.visibility

<label>

<labelAbbr>

<layer>

att.cue, att.nInteger, att.typed, att.visibility

<layerDef>

att.labelled, att.nInteger, att.typed

<lb>

att.labelled, att.typed

<lem>

att.labelled, att.source, att.typed

<ligature>

att.coord, att.facsimile, att.labelled, att.ligature.vis, att.linking, att.typed

<lv>

att.color, att.curvature, att.curveRend, att.labelled, att.linking, att.staffIdent, att.startEndId, att.startId,  
att.timestamp.log, att.timestamp.log, att.typed

<mNum>

att.color, att.labelled, att.lang, att.linking, att.placementRelStaff, att.staffIdent, att.startId, att.timestamp.log,  
att.typed, att.typography

<mRest>

att.color, att.coord, att.cue, att.facsimile, att.fermataPresent, att.labelled, att.linking, att.staffLoc,  
att.staffLoc.pitched, att.typed, att.visibility

<mRpt>

att.color, att.coord, att.facsimile, att.labelled, att.linking, att.numberPlacement, att.numbered, att.typed

<mRpt2>

att.color, att.coord, att.facsimile, att.labelled, att.linking, att.typed

<mSpace>

att.coord, att.facsimile, att.labelled, att.linking, att.typed

<mdiv>

att.labelled, att.nNumberLike, att.typed

<measure>

att.barring, att.coord, att.coord, att.measure.log, att.meterConformanceBar, att.nNumberLike, att.pointing,  
att.typed

<mensur>

att.color, att.coord, att.cue, att.durationRatio, att.facsimile, att.labelled, att.linking, att.mensur.vis,  
att.mensuralShared, att.slashCount, att.staffLoc, att.typed

<meterSig>

att.coord, att.enclosingChars, att.facsimile, att.labelled, att.linking, att.meterSig.log, att.meterSig.vis, att.typed

<meterSigGrp>

att.basic, att.labelled, att.linking, att.meterSigGrp.log, att.typed

<mordent>

att.color, att.extSym, att.labelled, att.linking, att.mordent.log, att.ornamentAccid, att.placementRelStaff,  
att.staffIdent, att.startId, att.timestamp.log, att.typed

<multiRest>

att.color, att.coord, att.facsimile, att.labelled, att.linking, att.multiRest.vis, att.numberPlacement, att.numbered,  
att.staffLoc, att.staffLoc.pitched, att.typed, att.width

<multiRpt>

att.coord, att.facsimile, att.labelled, att.linking, att.numbered, att.typed

<nc>

att.augmentDots, att.beamSecondary, att.color, att.coord, att.duration.ges, att.duration.log,  
att.duration.quality, att.durationRatio, att.facsimile, att.fermataPresent, att.intervalMelodic, att.labelled,  
att.linking, att.ncForm, att.note.ges, att.octave, att.pitch, att.staffIdent, att.staffLoc, att.staffLoc.pitched,  
att.typed

<neume>

att.color, att.coord, att.facsimile, att.labelled, att.linking, att.typed

<note>

att.augmentDots, att.beamSecondary, att.color, att.coloration, att.coord, att.cue, att.duration.ges,  
att.duration.log, att.duration.quality, att.durationRatio, att.extSym, att.facsimile, att.fermataPresent, att.graced,  
att.labelled, att.linking, att.midiVelocity, att.note.ges, att.noteGesTab, att.noteHeads, att.noteVisMensural,  
att.octave, att.pitch, att.staffIdent, att.staffLoc, att.staffLoc.pitched, att.stems, att.stems.cmn, att.tiePresent,  
att.typed, att.visibility

<num>

att.labelled, att.typed

<octave>

att.color, att.extender, att.labelled, att.lineRend, att.lineRend.base, att.linking, att.nNumberLike,  
att.octaveDisplacement, att.staffIdent, att.startEndId, att.startId, att.timestamp.log, att.timestamp.log,  
att.typed

<orig>

att.labelled, att.source, att.typed

<pageMilestoneEnd>

att.typed

<pb>

att.nNumberLike, att.typed

<pedal>

att.color, att.extSym, att.labelled, att.linking, att.pedal.log, att.pedal.vis, att.placementRelStaff, att.staffIdent,  
att.startEndId, att.startId, att.timestamp.log, att.timestamp.log, att.typed, att.verticalGroup

<pgFoot>

att.horizontalAlign, att.typed

<pgFoot2>

att.horizontalAlign, att.typed

<pgHead>

att.horizontalAlign, att.typed

<pgHead2>

att.horizontalAlign, att.typed

<phrase>

att.color, att.curvature, att.curveRend, att.labelled, att.layerIdent, att.linking, att.staffIdent, att.startEndId, att.startId, att.timestamp.log, att.timestamp.log, att.typed

<pitchInflection>

att.labelled, att.linking, att.staffIdent, att.startEndId, att.startId, att.timestamp.log, att.timestamp.log, att.typed

<plica>

att.coord, att.facsimile, att.labelled, att.linking, att.plica.vis, att.typed

<proport>

att.coord, att.durationRatio, att.facsimile, att.labelled, att.linking, att.typed

<rdg>

att.labelled, att.source, att.typed

<ref>

att.labelled, att.typed

<reg>

att.labelled, att.source, att.typed

<reh>

att.color, att.labelled, att.lang, att.linking, att.placementRelStaff, att.staffIdent, att.startId, att.timestamp.log, att.typed, att.verticalGroup

<rend>

att.color, att.horizontalAlign, att.labelled, att.lang, att.textRendition, att.typed, att.typography, att.verticalAlign, att.whitespace

<rest>

att.augmentDots, att.beamSecondary, att.color, att.coord, att.cue, att.duration.ges, att.duration.log, att.duration.quality, att.durationRatio, att.extSym, att.facsimile, att.fermataPresent, att.labelled, att.linking, att.restVisMensural, att.staffIdent, att.staffLoc, att.staffLoc.pitched, att.typed

<restore>

att.labelled, att.source, att.typed

<sb>

att.nNumberLike, att.typed

<score>

att.labelled, att.nNumberLike, att.typed

<scoreDef>

att.barring, att.distances, att.durationDefault, att.endings, att.lyricStyle, att.measureNumbers, att.midiTempo, att.multinumMeasures, att.optimization, att.pianoPedals, att.spacing, att.systems, att.timeBase, att.tuning, att.typed

<section>

att.nNumberLike, att.section.vis, att.typed

<sic>

att.labelled, att.source, att.typed

<slur>

att.color, att.curvature, att.curveRend, att.labelled, att.layerIdent, att.linking, att.staffIdent, att.startEndId, att.startId, att.timestamp.log, att.timestamp.log, att.typed

<space>

att.augmentDots, att.beamSecondary, att.coord, att.duration.ges, att.duration.log, att.duration.quality, att.durationRatio, att.facsimile, att.fermataPresent, att.labelled, att.linking, att.staffIdent, att.typed

<staff>

att.coord, att.facsimile, att.nInteger, att.typed, att.visibility

<staffDef>

att.barring, att.distances, att.durationDefault, att.labelled, att.lyricStyle, att.measureNumbers, att.midiTempo,  
att.multinumMeasures, att.nInteger, attnotationType, att.pianoPedals, att.scalable, att.spacing,  
att.staffDef.log, att.staffDef.vis, att.systems, att.timeBase, att.transposition, att.typed

<staffGrp>

att.barring, att.basic, att.labelled, att.nNumberLike, att.staffGroupingSym, att.staffGrp.vis, att.typed

<subst>

att.labelled, att.typed

<supplied>

att.labelled, att.source, att.typed

<svg>

<syl>

att.coord, att.facsimile, att.labelled, att.lang, att.linking, att.staffIdent, att.startEndId, att.startId, att.syl.log,  
att.timestamp.log, att.timestamp.log, att.typed, att.typography

<syllable>

att.color, att.coord, att.facsimile, att.labelled, att.linking, att.slashCount, att.typed

<symbol>

att.color, att.extSym, att.labelled, att.typed, att.typography

<systemMilestoneEnd>

att.typed

<tabDurSym>

att.coord, att.facsimile, att.labelled, att.linking, att.nNumberLike, att.typed

<tabGrp>

att.augmentDots, att.beamSecondary, att.coord, att.duration.ges, att.duration.log, att.duration.quality,  
att.durationRatio, att.facsimile, att.fermataPresent, att.labelled, att.linking, att.staffIdent, att.typed

<tempo>

att.labelled, att.lang, att.linking, att.midiTempo, att.mmTempo, att.placementRelStaff, att.staffIdent, att.startId,  
att.timestamp.log, att.typed

<tie>

att.color, att.curvature, att.curveRend, att.labelled, att.linking, att.staffIdent, att.startEndId, att.startId,  
att.timestamp.log, att.timestamp.log, att.typed

<trill>

att.color, att.extSym, att.extender, att.labelled, att.lineRend, att.linking, att.nNumberLike, att.ornamentAccid,  
att.placementRelStaff, att.staffIdent, att.startEndId, att.startId, att.timestamp.log, att.timestamp.log, att.typed

<tuning>

att.course.log

<tuplet>

att.color, att.coord, att.durationRatio, att.facsimile, att.labelled, att.linking, att.numberPlacement, att.tuplet.vis,  
att.typed

<turn>

att.color, att.extSym, att.labelled, att.linking, att.ornamentAccid, att.placementRelStaff, att.staffIdent,  
att.startId, att.timestamp.log, att.turn.log, att.typed

<unclear>

att.labelled, att.source, att.typed

[<verse>](#)

[att.color](#), [att.coord](#), [att.facsimile](#), [att.labelled](#), [att.lang](#), [att.linking](#), [att.nInteger](#), [att.typed](#), [att.typography](#)

## Environment functions

Verovio includes a few environment-level functions for configuring the global setup in which the toolkit runs. They are namespace-level functions in the C++ codebase. For the Python and JavaScript bindings, they are module-level functions.

### SetDefaultResourcePath

Specify the path where the resources are located.

This method is not available in the JavaScript distributed version of the toolkit

#### Returns

void

#### Parameters

Name	Type	Default	Description
path	const std::string &	Ø	

#### Original header

##### C++

```
void vrv::SetDefaultResourcePath(const std::string &path)
```

#### Example call

##### PYTHON

```
verovio.setDefaultResourcePath(path)
```

## EnableLog

#### Returns

void

#### Parameters

Name	Type	Default	Description
level	LogLevel	Ø	

#### Original header

##### C++

```
void vrv::EnableLog(LogLevel level);
```

#### Example call

##### PYTHON

```
verovio.enableLog(level)
```

### LogLevel

The LogLevel enum includes the following values:

- LOG\_OFF : no log
- LOG\_DEBUG : log all messages, including debug ones
- LOG\_INFO : log all messages
- LOG\_WARNING : log error and warning messages (default)
- LOG\_ERROR : log error messages only

For both the Python and the JavaScript bindings, the values are available in the modules. This means that the log level can be changed with:

#### **PYTHON**

```
import verovio
verovio.enableLog(verovio.LOG_ERROR)
```

#### **HTML /**

#### **JAVASCRIPT**

```
<script>
  document.addEventListener("DOMContentLoaded", (event) => {
    verovio.module.onRuntimeInitialized = () => {
      verovio.enableLog(verovio.LOG_ERROR);
    }
  });
</script>
```

## **EnableLogToBuffer**

Redirect the log messages to a buffer instead of the `std::err` or the console. The messages can be accessed from the toolkit instance via the `GetLog()` method.

### **Returns**

void

### **Parameters**

Name	Type	Default	Description
value	bool	Ø	

### **Original header**

#### **C++**

```
void vrv::EnableLogToBuffer(bool value);
```

### **Example call**

#### **PYTHON**

```
verovio.enableLogToBuffer(value)
```



# Installing or building from sources

## Command-line version

The Verovio codebase is C++17 compliant and is cross-platform. It has been tested on several operating systems and architectures. This section describes how to build and install the command-line version of the toolkit from the command-line or using some of the most popular IDEs. There are currently no pre-built binaries of the command-line toolkit available except for Homebrew on macOS. However, building it is very straight-forward.

### Homebrew on macOS

For macOS users using [Homebrew](#), the command-line version can be installed with:

#### TERMINAL

```
brew install verovio
```

This also installs the resources and you will be ready to go.

You can also install the latest development source with:

#### TERMINAL

```
brew install verovio --HEAD
```

### Building on macOS or Linux

To build the the command-line tool, you need [CMake](#) to be installed on your machine as well as a compiler supporting C++17. The commands to build are the following:

#### TERMINAL

```
cd tools
cmake ../cmake
make
```

You can increase the building speed by using the `-j` option when running `make` that specifies the number of jobs to be run in parallel:

#### TERMINAL

```
make -j 8
```

This generates a `verovio` binary within `./tools`. You can run Verovio from there or install it. Installing it means copying the executable and the resource files to directories which paths are globally accessible. You simply need to run:

#### TERMINAL

```
sudo make install
```

If you do not install it and run it from `./tools` or from another directory, you need to use the `-r` option to set the appropriate resource directory. The parameter of the `-r` option has to be a path to the `./data` folder of the codebase.

To see the current default resource path, look for the “resource path” section in the full help output. You should see something like this:

#### TERMINAL

```
verovio -h full
...
-r, --resource-path <s>    Path to the directory with Verovio resources (default: "/usr/local/share/verovio")
)
```

Keep in mind that if you have installed, you should not run another version without re-installing it or using the `-r` options to point to a non-default path, because otherwise the resources installed can be invalid. A typical problem is missing font glyphs that a newer version needs but that are not in the older version of the

resources.

(Until version 2.6.0, the cmake command was `cmake .` and not `cmake ../cmake .`)

#### Basic usage

To seeing the basic command-line options, run:

**TERMINAL**

```
verovio --help
```

To see all command-line options, run:

**TERMINAL**

```
verovio -h full
```

For typesetting an MEI file with the default options, you need to do:

**TERMINAL**

```
verovio -o output.svg Hummel_Concerto_for_trumpet.mei
```

If you use a version locally that is not installed, do not forget to add the `-r` parameter:

**TERMINAL**

```
./verovio -r ../data -o output.svg Hummel_Concerto_for_trumpet.mei
```

#### Additional building options

By default the executable is not stripped. To strip it during the installation do

**TERMINAL**

```
sudo make install/strip
```

To build Verovio without Plaine and Easy support, run:

**TERMINAL**

```
cmake ../cmake -DNO_PAE_SUPPORT=ON
```

To allow PAE support again, you must run the command

**TERMINAL**

```
cmake ../cmake -DNO_PAE_SUPPORT=OFF
```

since running `cmake ../cmake` will not clear the state of the define variable.

The other building options are:

- `NO_ABC_SUPPORT` for the ABC importer to be turned on/off
- `NO_MXL_SUPPORT` for the compressed MusicXML importer to be turned on/off
- `NO_HUMDRUM_SUPPORT` for the Humdrum importer to be turned on/off
- `MUSICXML_DEFAULT_HUMDRUM` to use the MusicXML Humdrum importer by default instead of the direct MusicXML importer
- `BUILD_AS_LIBRARY` for Verovio to be built as dynamic shared library instead of a command-line executable

#### Uninstall a previous version

If you have installed Verovio with Homebrew, run:

**TERMINAL**

```
brew uninstall verovio
```

To uninstall a previously installed version of Verovio from the system, run:

**TERMINAL**

```
rm -f /usr/local/bin/verovio  
rm -rf /usr/local/share/verovio
```

Occasionally there are problems with updates necessary to the Makefile when compiling a new version of Verovio with make. It may be necessary to clear out the automatically generated cmake files and regenerate them. To do that, run:

#### TERMINAL

```
rm -rf CMakeFiles CMakeCache.txt Makefile cmake_install.cmake
```

## Windows 10

To build Verovio on Windows 10 from the command-line, you will need to have [Microsoft C++ Build Tools](#) and [make](#) installed on your computer.

Run the following commands from the *x86 Native Tools Command Prompt for VS* (with administrator privileges):

#### TERMINAL

```
cd <sourceCode>/tools
cmake ../cmake -G "NMake Makefiles"
nmake
nmake install
```

After the installation, add <sourceCode>/tools to the [PATH](#) of your system.

When running the commands, the resource path should be provided explicitly with the following option:

#### TERMINAL

```
-r "C:/Program Files (x86)/Verovio/share/verovio"
```

## Xcode

For macOS users, there is also an Xcode project in the Verovio root directory.

By default, humdrum support is turned off in Xcode. To turn it on, you need to use the Verovio-Humdrum building scheme.

## Visual Studio

- Install CMake
- Go into the tools folder of Verovio
- Execute `cmake ../cmake -DNO_PAE_SUPPORT=ON` (add `-DCMAKE_GENERATOR_PLATFORM=x64` for a x64 solution)
- Open the resulting Verovio.sln with Visual Studio and build it from there

## JavaScript and WebAssembly

### Pre-build versions

The [verovio.org GitHub repository](#) provides compiled versions of the JavaScript toolkit. The toolkit is available in three options. The recommended version is one built as [WebAssembly](#) because it is the fastest and supported by [all recent browsers](#). To use it, the file you need to include is:

**verovio-toolkit-wasm.js**

If you need Humdrum support, the file to include is:

**verovio-toolkit-hum.js**

If you need to have support for old browsers, there is an [asm.js](#) version available. This version is obsolete and is not recommended for new. The file to include is:

**verovio-toolkit.js**

A build for the development version is available through CI, as well as for each [release](#) for the Humdrum and the legacy `asm.js` version.

The latest release is always available from:

```
https://www.verovio.org/javascript/latest/verovio-toolkit-wasm.js
```

The latest development version is available from:

```
https://www.verovio.org/javascript/develop/verovio-toolkit-wasm.js
```

Previous releases are available from their corresponding directory, e.g.:

```
https://www.verovio.org/javascript/2.7.1/verovio-toolkit-wasm.js
```

For instructions on a basic usage of the JavaScript version of the toolkit, see the [Getting started](#) section of the [Tutorial 1: First steps](#) chapter.

## NPM

The latest stable version is available via [NPM](#) registry. The version distributed via NPM is the WebAssembly build. It can be installed with:

### TERMINAL

```
npm install verovio
```

The homepage of the Verovio package includes [documentation](#) on how to use it.

Basic usage with NPM

### JAVASCRIPT

```
const verovio = require('verovio');
const fs = require('fs');

/* Wait for verovio to load */
verovio.module.onRuntimeInitialized = function ()
{
  // create the toolkit instance
  const vrvToolkit = new verovio.toolkit();
  // read the MEI file
  mei = fs.readFileSync('hello.mei');
  // load the MEI data as string into the toolkit
  vrvToolkit.loadData(mei.toString());
  // render the first page as SVG
  svg = vrvToolkit.renderToSVG(1, {});
  // save the SVG into a file
  fs.writeFileSync('hello.svg', svg);
}
```

Usage with ESM

Since version 3.11.0 there is an ESM compatible version of the *npm* package with a modularized build of the Verovio module. This is because we need to wait for the asynchronous module to be ready for usage, and this is now [Promise](#) based instead of using the `onRuntimeInitialized` callback function.

Use `.mjs` as file extension when using this directly in Node.js or set `"type": "module"` in your `package.json`.

### JAVASCRIPT

```
import createVerovioModule from 'verovio/wasm';
import { VerovioToolkit } from 'verovio/esm';
import fs from 'node:fs';

createVerovioModule().then(VerovioModule => {
  const verovioToolkit = new VerovioToolkit(VerovioModule);
  const score = fs.readFileSync('hello.mei').toString();
  verovioToolkit.loadData(score);
  const data = verovioToolkit.renderToSVG(1, {});
  console.log(data);
});
```

This is the recommended way to use Verovio when creating a website or web app with bundlers like webpack or Vite or when using JavaScript frameworks like React or Vue.js.

Usage with CommonJS

Alternatively this package also exports a version compatible with CommonJS

#### JAVASCRIPT

```
const createVerovioModule = require('verovio/wasm');
const { VerovioToolkit } = require('verovio/esm');
```

Humdrum support

Since version 3.11.0 the NPM package provides an additional module with Humdrum support:

#### JAVASCRIPT

```
import createVerovioModule from 'verovio/wasm-hum';
```

## Building the toolkit

To build the JavaScript toolkit you need to have the [Emscripten](#) compiler installed on your machine. You also need [CMake](#). You need to run:

#### TERMINAL

```
cd emscripten
./buildToolkit -H
```

The toolkit will be written to:

#### TERMINAL

```
./emscripten/build/verovio-toolkit.js
```

Building without `-H` will include the Humdrum support, which increases the size of the toolkit by about one third. In that case, the output will be written to `verovio-toolkit-hum.js`.

If you are building with another option set than previously, or if you want to regenerate the makefiles, add the option `-M`.

## Python

### Pre-build versions

Pre-build versions of the Python version of the toolkit are available through [PyPi](#) for every release since version 3.1.0.

The Python versions for which a pre-build is provided are 3.6, 3.7, 3.8 and 3.9. The platforms supported are macOS 10.9, Linux with [manylinux](#) for x86-64, Win-32 and Win-amd64.

The latest release can be installed with:

#### TERMINAL

```
pip install verovio
```

A previous version can be installed with:

#### TERMINAL

```
pip install verovio==3.2.0
```

For all platforms or architectures for which a pre-build version is not available in the PyPi repository, a source distribution is available. It can be installed with the same command as above. This will automatically trigger the compilation of the package.

### Basic usage of the toolkit

Once installed, the Verovio toolkit module can be imported with

#### PYTHON

```
import verovio
```

You can then create an instance of the toolkit and load data. For example:

#### **PYTHON**

```
tk = verovio.toolkit()
tk.loadFile("path-to-mei-file")
tk.getPageCount()
```

Once loaded, the data can be rendered to a string:

#### **PYTHON**

```
svg_string = tk.renderToSVG(1)
```

It can also be rendered to a file:

#### **PYTHON**

```
tk.renderToSVGFile( "page.svg", 1 )
```

#### Setting options

The options are set on the toolkit instance. For the Python version of the toolkit, the options (and all other parameters or values return by a function that are a JSON string in the C++ version) are a Python Dictionary. For example, the following code will change the dimensions of the page and redo the layout for the previously loaded data:

#### **PYTHON**

```
options = { "pageHeight": 2100, "pageWidth": 2950, "scale": 25 }
tk.setOptions(options)
tk.redoLayout()
tk.renderToSVGFile( "page-scaled.svg", 1 )
```

#### Building the toolkit

To build the Python toolkit you need to have swig and swig-python installed on your machine (see [SWIG](#)) and the Python distutils package. Version 4.0 or newer of SWIG is recommended but older versions should work too. To install SWIG in macOS using [Homebrew](#), type the command `brew install swig`.

The Python toolkit can be built with [CMake](#). You need at least version 3.13 of CMake because it uses the option `-B` introduced in that version of CMake. The steps are:

#### **TERMINAL**

```
cd bindings
cmake ../cmake -B python -DBUILD_AS_PYTHON=ON
cd python
make -j8
```

If you want to enable or disable other specific options, you can do:

#### **TERMINAL**

```
cmake ../cmake -B python -DBUILD_AS_PYTHON=ON -DNO_PAE_SUPPORT=ON
```

By default, Python 3 is used. If you want to use a specific version of Python, you can do:

#### **TERMINAL**

```
cmake ../cmake -B python -DBUILD_AS_PYTHON=ON -DPYTHON_VERSION=3.9
```

*Installation with CMake has not be tested yet*

## Building the toolkit without CMake

The toolkit can be build without CMake. However, SWIG is still needed. It needs to be built from from the root directory of the repository content. To build it in-place, run:

#### **TERMINAL**

```
python setup.py build_ext --inplace
```

If you want to install it, run:

#### TERMINAL

```
python setup.py build_ext
sudo python setup.py install
```

For building it with one or more specific options (e.g., without Plain and Easy support), run:

#### TERMINAL

```
python setup.py build_ext --inplace --define NO_PAE_SUPPORT
```

Building a Python wheel locally

You can build a Python wheel locally with:

#### TERMINAL

```
python setup.py bdist
```

For a source distribution, do:

#### TERMINAL

```
python setup.py sdist
```

In both cases, the wheel will be written to the `./dist` directory.

Resources for versions built locally

When using a version built locally, you usually have to specify the path to the Verovio resources. To do so, you can do

#### PYTHON

```
import verovio
tk = verovio.toolkit(False)
tk.setResourcePath("path-to-resource-dir")
```

Alternatively, you can set it before you create the instance of the toolkit

#### PYTHON

```
import verovio
verovio.setDefaultResourcePath("path-to-resource-dir")
tk = verovio.toolkit()
```

## Other bindings

### Java

To build the Java toolkit you need to have `swig` and `swig-java` installed on your machine (see [SWIG](#)) as well as [Maven](#). You need to run:

#### TERMINAL

```
cd bindings/java
mvn package
mvn package
```

Note the `mvn package` command needs to be run twice. You can test it with the MEI and PAE examples. For example – replace `X.X.X` with the appropriate version number:

#### TERMINAL

```
cd example-mei
javac -cp ../target/VerovioToolkit-X.X.X.jar main.java
java -cp ../target/VerovioToolkit-X.X.X.jar main
```

This should write an `output.svg` file in the current directory. The PAE example will write the SVG to the standard output.

See [this](#) issue for SVG output problems on non US Ubuntu installations.

## CocoaPods

You can use [CocoaPods](#) to install Verovio by adding it to your Podfile :

```
platform :ios, '12.0'
use_frameworks!
target 'MyApp' do
  pod 'Verovio', :git => 'https://github.com/rism-digital/verovio.git', :branch => 'develop'
end
```

Then, run the following command:

### TERMINAL

```
pod install
```

To use Verovio in your iOS project import

### C++

```
#import <Verovio/Verovio-umbrella.h>
```

See <https://github.com/Noroxs/VerovioExample> for an example how to use it. To build and run the example, you need to:

- Navigate in the Terminal to the cloned directory
- Execute pod update
- Open the VerovioExample.xcworkspace and NOT the VerovioExample.xcodeproj
- Build and Run on any simulator or device



# Contributing

## Coding guidelines

This document describes the coding style for the Verovio project for the C++ part of the codebase.

### Formatting

Verovio uses a [ClangFormat \(14.0\)](#) coding style based on the [WebKit](#) style, with a few minor modifications.

The modifications include:

```
AllowShortIfStatementsOnASingleLine: true
AllowShortLoopsOnASingleLine: true
ColumnLimit: 120
ConstructorInitializerAllOnOneLineOrOnePerLine: true
PointerAlignment: Right
```

The simplest way to fulfill the Verovio coding style is to use a clang-format tool and to apply the style defined in the `.clang-format` file available in the project root directory.

How to install clang-format on macOS

An easy way to install clang-format on macOS computers is to use [Hombrew](#). Type this command in the terminal to install:

#### TERMINAL

```
brew install clang-format
```

How to install clang-format on Ubuntu

On Ubuntu clang-format is available in the universe repository. You can install it easily with the command:

#### TERMINAL

```
sudo apt install clang-format
```

Running clang-format

*Please make sure you use at least version 10.0*

To use clang-format to adjust a single file:

#### TERMINAL

```
clang-format -style=file -i some-directory/some-file.cpp
```

The `-style=file` option instructs clang-format to search for the `.clang-format` configuration file (recursively in some parent directory). The `-i` option is used to alter the file “in-place”. If you don't give the `-i` option, a formatted copy of the file will be sent to standard output.

### Includes and forward declarations

Includes in the header files must list first the system includes followed by the Verovio includes, if any, and then the includes for the libraries included in Verovio. All includes have to be ordered alphabetically:

#### C++

```
#include <string>
#include <utility>
#include <vector>
```

```
//-----
```

```
#include "attclasses.h"
#include "atttypes.h"
```

```
//-----
```

```
#include "pugixml.hpp"
#include "utf8.h"
```

In the header files, always use forward declarations (and not includes) whenever possible. Forward declaration have to be ordered alphabetically:

**C++**

```
class DeviceContext;
class Layer;
class StaffAlignment;
class Syl;
class TimeSpanningInterface;
```

In the implementation files, the first include is always the include of the corresponding header file, followed by the system includes and then the other Verovio includes with libraries at the end too, if any, also ordered alphabetically:

**C++**

```
#include "att.h"
```

```
//-----
```

```
#include <sstream>
#include <stdlib.h>
```

```
//-----
```

```
#include "object.h"
#include "vrv.h"
```

```
//-----
```

```
#include "pugixml.hpp"
```

## Null and boolean

The null pointer value should be written as `NULL` . Boolean values should be written as `true` and `false` .

## Integer data types

Integer numbers should be `int` , or `char` but only when this is clearly appropriate. The use of `short` is to be avoided unless there are some particular reasons to use it. Variables and class members should not be `unsigned` numbers unless strictly necessary.

## Class, method and member names

All class names must be in upper CamelCase. The internal capitalization follows the MEI one:

**C++**

```
class Measure;
class ScoreDef;
class StaffDef;
```

All method names must also be in upper CamelCase:

**C++**

```
void Measure::AddStaff(Staff *staff) {}
```

All member names must be in lower camelCase. Instance members must be prefixed with `m_` and class (static) members with `s_` :

**C++**

```
class Glyph {
public:

    /** An instance member */
    int m_unitsPerEm;

    /** A static member */
    static std::string s_systemPath;
};
```

In the class declaration, the methods are declared first, and then the member variables. For both, the declaration order is `public` , `protected` , and `private` .

Use of `this`

The convention for the pointer `this` is to use it for method calls and not to use it for member access because these are prefixed with `m_` .

*As it stands, the codebase is not consistently following this convention*

## Comments

Comments for describing methods can be grouped using `///@{` and `///@}` delimiters together with the `@name` indication:

**C++**

```
/**
 * @name Add children to an editorial element.
 */
///@{
void AddFloatingElement(FloatingElement *child);
void AddLayerElement(LayerElement *child);
void AddTextElement(TextElement *child);
///@}
```

## LibMEI

The code for the attribute classes of Verovio are generated from the MEI schema using a modified version of LibMEI available [here](#). See the section [Generate code with LibMEI](#) for detailed information on how to modify and generate this code.

The attribute classes generated from the MEI schema provide all the members for the element classes of Verovio. They are implemented via multiple inheritance in element classes. The element classes corresponding to the MEI elements are not generated by LibMEI but are implemented explicitly in Verovio. They all inherit from the `Object` class (of the `vrw` namespace) or from a `Object` child class. They can inherit from various interfaces used for the rendering. All the MEI member are defined through the inheritance of generated attribute classes, either grouped as interfaces or individually.

For example, the MEI `<note>` is implemented as a `Note` class that inherit from `Object` through `LayerElement` . It also inherit from the `StemmedDrawingInterface` that holds data used for the rendering.

Its MEI members are defined through the `DurationInterface` and `PitchInterface` that regroup common functionalities for durational and pitched MEI elements respectively plus some additional individual attribute classes.

The inheritance should always list `Object` (or the `Object` child class) first, followed by the rendering interfaces, followed by the attribute class interfaces, followed by the individual attribute classes, each of them ordered alphabetically:

**C++**

```
class Note : public LayerElement,
            public StemmedDrawingInterface,
            public DurationInterface,
            public PitchInterface,
            public AttColoration,
            public AttGraced,
            public AttStems,
            public AttTiepresent
```

In the implementation, the same order must be followed, for the constructor calls and for the registration of the interfaces and individual attribute classes:

**C++**

```
Note::Note()
: LayerElement("note-")
, StemmedDrawingInterface()
, DurationInterface()
, PitchInterface()
, AttColoration()
, AttGraced()
, AttStems()
, AttTiepresent()
{
    RegisterInterface(DurationInterface::GetAttClasses(), DurationInterface::IsInterface());
    RegisterInterface(PitchInterface::GetAttClasses(), PitchInterface::IsInterface());
    RegisterAttClass(ATT_COLORATION);
    RegisterAttClass(ATT_GRACED);
    RegisterAttClass(ATT_STEMS);
    RegisterAttClass(ATT_TIEPRESENT);

    Reset();
}
```

Resetting the attributes is required and follows the same order

**C++**

```
void Note::Reset()
{
    LayerElement::Reset();
    StemmedDrawingInterface::Reset();
    DurationInterface::Reset();
    PitchInterface::Reset();
    ResetColoration();
    ResetGraced();
    ResetStems();
    ResetTiepresent();

    // ...
}
```

## Contributing workflow

When contributing to Verovio there are a few steps you can take to help make your contribution easy to understand and evaluate. Verovio uses the GitHub issue tracker and pull requests mechanism to organize these contributions.

These steps are:

1. Provide an short example MEI encoding that demonstrates a bug or a new feature that can be included in our test suite. You can use the Verovio Editor to create your example. This is described in more detail below.
2. Open an issue describing the problem or the new feature, and attach your short example. This provides our developer community with an opportunity to provide feedback on the problem, and determine the appropriate course of action.
3. If you can also provide the solution to the problem by modifying the Verovio source code, then that will speed up the process of getting your issue fixed! If you are a first-time contributor, then please make sure you have read the contributing guidelines. When you are ready, open a Pull Request, making sure to reference the open issue that it solves.

## Adding examples to the test-suite

When adding examples to the test-suite, you should keep in mind the following points:

- The example should be as minimal as possible, ideally one or two measures and without un-related MEI / notation features
- The example has to be valid MEI (4.0 or 5.0-dev)
- The header should follow the test-suite style
- The XML should be indented with 3-spaces
- It is not mandatory to have an @xml:id on all MEI elements
- The file name should follow the test-suite style

Example header

Example MEI header for a test-suite example:

### XML

```
<meiHead>
  <fileDesc>
    <titleStmt>
      <title>Slur position with cross-staff</title>
    <respStmt>
      <persName role="editor">Laurent Pugin</persName>
      <persName role="encoder">Craig Sapp</persName>
    </respStmt>
    </titleStmt>
    <pubStmt>
      <date isodate="2021-01-06">2021-01-06</date>
      <pubPlace>
        <ref target="https://github.com/rism-digital/verovio/issues/1898" />
      </pubPlace>
    </pubStmt>
    <notesStmt>
      <annot>Slurs with cross-staff should be place identically as in normal situations.</annot>
    </notesStmt>
  </fileDesc>
  <encodingDesc>
    <applInfo>
      <application version="3.1.0" label="2">
        <name>Verovio</name>
      </application>
    </applInfo>
  </encodingDesc>
</meiHead>
```

File names

The test suite examples are grouped by element name, with a very few exceptions. There is a corresponding folder name in the [test suite folder](#). A test-suite example should be saved in the folder corresponding to the MEI element it targets. File names also use the element name and are numbered using the three digits ( -001.mei ) pattern.

#### Additional options

In some cases, a test suite example can require specific Verovio options to be set for it to make sense. For instance, it can require a specific layout or spacing parameter, or a specific font. The options can be set in the header of the MEI file as JSON object encoded as CDATA in the <extMeta> tag.

For example, setting the Bravura font can be triggered by including the following tag in the header of the test suite example:

#### XML

```
<extMeta><![CDATA[{ "font": "Bravura" }]]></extMeta>
```

The additional options set in the MEI header are taken into account in both the test-suite page and the test-suite evaluation performed by the GitHub Actions. However, they currently remain ignored in the Verovio Editor.

## What to expect with an open issue

When opening an issue, you should be prepared to help shepherd it through the process of getting fixed. If it is a problem with the software itself and you do not know how to fix it, you can still help with testing any potential fixes. You can also help by improving documentation about the new feature by contributing to the Verovio book, as appropriate. **Please do not open an issue unless you are willing to help, in some way, solve it.**

If you open an issue and someone provides a fix that requires no further changes, please respond! A “thank-you” and a note to say that it fixed the problem is always appreciated. You can also close the issue so that we know it has been addressed.

Sometimes an issue may be open for several years. These issues may be particularly complex, or may have been partially but not fully fixed. They usually have a discussion attached with sample encodings.

Sometimes these issues have actually been fixed later, but as part of a separate issue. If you open an issue that happens to be fixed later, you can help us by leaving a note on your issue and closing it yourself.

If you are a software developer and can provide a solution, you should mention this in your issue. **For new contributors it is useful to open issues prior to opening pull requests.** Sometimes a change cannot be accepted, so opening an issue first gives an opportunity for the more experienced members of the community to provide feedback before you invest a lot of time in it. The quickest and easiest way to get help is to reach out on the #verovio channel in the [MEI Community's Slack chat](#). If you are not already a member, [you can join](#).

**Issues that have a code contribution attached, and which have active participation from the reporter, are typically addressed first and fixed sooner.** This is largely due to the community-driven nature of the project, recognizing that the more experienced developers have their own set of priorities. If you can provide a fix, even if it is not 100% correct, then it is easier to review your contribution and provide feedback than it is for someone else to code something from the ground up.

If Verovio is a critically important part of your project, and you need dedicated help to make changes and contributions, the Verovio project accepts some sponsorship arrangements. Please [get in touch](#) to find out more about this.

## Generate code with libMEI

Verovio uses a [forked version](#) of [LibMEI](#), a library that generates code directly from the MEI schema. It can be adapted to generate code in any language. For Verovio, it is used to generate C++ code. The code generated with LibMEI is included in the Verovio repository in the `./libmei` directory and the LibMEI repository does not need to be cloned for building Verovio.

Whenever the MEI schema is modified, this code needs to be re-generated in order to integrate these changes. However, since Verovio implements only a small subset of the MEI schema, this really needs to be done only for the changes in the schema that touch features supported by Verovio. This means that the

code within the `./libmei` directory should never be edited by hand because any change will be overwritten by the LibMEI output when the code generated from the schema needs to be updated and LibMEI is run again.

## Running LibMEI

In order to update to code generated with LibMEI, you need to clone the [forked version](#) of LibMEI.

LibMEI takes a compiled ODD as input. You need to run, from the LibMEI directory:

```
TERMINAL

python tools/parseschema2.py -l vrv -o /path/to/the/verovio/directory -i tools/includes/vrv mei/develop/mei-verovio_compiled.odd
```

You need to set to option `-o` to point to the Verovio directory where the `./libmei` files will be written.

## Customization

Verovio currently uses an MEI customization that added or modified a few elements. It is defined in the `./mei/develop/mei-verovio.xml` file. If you want to make changes to it, you can make them there. You will need to re-generate the `./mei/develop/mei-verovio_compiled.odd` ODD file. This can be done using the Edirom [MEI Garage](#). Alternatively, you can also use the MEI command-line script. To do so, you will need to a clone of the [MEI](#) repository, copy your customization file (e.g., `mei-verovio.xml`) into it and do:

```
TERMINAL

ant init
ant -lib lib/saxon/saxon9he.jar -Dcustomization.path=mei-verovio.xml
```

The ODD file will be written to `./dist/schemata/mei-verovio_compiled.odd`, which you can use as new input file for LibMEI.

## Adding SMuFL glyphs

All SMuFL glyphs used by Verovio have to be available in the [Leipzig](#) font. For adding support for a new SMuFL glyph, the steps are:

1. Add the glyph to the Leipzig font file
2. Generate the Leipzig in various format and the metadata with the script available in Leipzig repository
3. Add the glyph to the list of supported glyph in the XML list and re-generate the fonts.

Make sure you always add glyphs **only** in the [Leipzig](#) font. Because conflict solving is quickly very when adding a glyph (in particular with the binary font files), make sure you always pull the latest version of the font file branch before starting your work and do not wait too long before making a PR. If changes have been made in between, you will need to add your glyphs again.

When making a PR, always add an image (e.g., screenshot of FontForge) showing the glyphs.

Adding the glyph to the Leipzig font file

The file to modify is `./Leipzig.sfd` and should be edited with [FontForge](#). Very often it is possible to copy another existing glyph as basis for the new glyph. Leipzig is visually lighter and thinner than Bravura and new glyphs have to follow this design choice. **Do not simply copy glyphs from Bravura.** Make sure the font is valid by running “Element => “Find Problems...”.

Once the new glyph(s) has/have been added, you also need to change the version number in the font info (menu “Element” => “Font Info” and then tab “PS Names” in fields “Version” and “Copyright” and tab “FONTLOG” where you also need to add a comment together with the version number. The file can be saved.

Generate other font formats and the metadata

Once the `./Leipzig.sfd` has been modify and saved, you have to run the `./generate_font.py` script that will generate different font formats and the metadata. You are now ready to make a PR to the [Leipzig](#) repository.

Add the glyph to the list of supported glyph in the XML list and re-generate the fonts

Once the PR to the [Leipzig](#) repository has been approved and merged, the new glyphs have to be added to the Verovio codebase. The first thing to do is to add them to the list of glyphs supported by Verovio.

Open the file `./fonts/supported.xml` and uncomment the glyph(s) you added to Leipzig. The XML file is then used to extract the glyphs supported by Verovio.

To do so, you need to copy to `./fonts/Leipzig` the new Leipzig files:

- `Leipzig.woff2`
- `Leipzig.ttf`
- `Leipzig.svg`
- `leipzig_metadata.json`

The glyphs will be extracted from the SVG font by running the script `./fonts/generate_all.sh` (from `./fonts/`). This will extract all the glyphs from the SVG font file and calculate the their bounding boxes. When this is done you will see your glyphs in `./data/` and in `./include/vrv/smuf.h`. The CSS font files will also be updated.



# Table of Contents

Reference Book	1
For Verovio version 3.13	1
Introduction	2
About this book	2
Reference	2
License	2
Getting help	2
History of the project	2
Early stages	3
Interacting with music encoding	3
Design principles	3
Use-case scenarios	4
Architecture possibilities	4
Application examples	5
Critical editions	5
Genetic editing	5
Early music	6
Audio alignment	6
Music notation editing	7
Music addressability	7
Visualisation	8
Composition	8
Performance	9
Education	9
Verovio licensing	10
What is allowed	10
What is required	10
What is not allowed	10
What is recommended	10
Tutorial 1: First Steps	11
Introduction	11
Basic browser skills	11
Chrome	11
Firefox	11
Internet Explorer / Edge	11
Safari	11
Getting started	12
Logging to the Console	12
End of Section 1	13
Full example	13
Basic rendering	13
Fetching MEI with JavaScript	13
End of Section 2	14
Full example	14

Layout options	14
Passing options to Verovio	14
Defaults	15
Change the page orientation	15
End of Section 3	15
Full example	15
Score navigation	16
Creating the controls	16
Tutorial 2: Interactive notation	17
Introduction	17
Working with CSS and SVG	17
XPath queries	17
Working with MIDI	17
Beyond tutorials: Advanced topics	18
Introduction	18
Internal structure	18
Layout and positioning	18
SVG structure	18
Transposition	19
Transposition by chromatic interval	19
Transposition by tonic pitch	20
Illustrated examples	20
Algorithm for transposition by tonic	22
SMuFL fonts	23
Examples	23
Music symbols in text	24
Examples	25
Dynamics	25
Controlling the SVG output	26
HTML5	26
Towards SVG 2.0	26
Converting to PDF	26
Mensural notation	26
Duration alignment	26
Layout	26
Ligatures	26
Toolkit Reference	27
Input formats	27
MEI	27
Support for previous version of MEI	27
Page-based MEI	29
Humdrum	29
Examples	29
Verovio Humdrum Viewer	31
Command-line interface usage	32
A more complicated example	32

Additional input format via Humdrum	34
MusicXML	34
Compressed MusicXML files	35
Importing MusicXML via Humdrum	35
Plaine and Easie	35
Examples	36
PAE Validation	38
ABC	39
Examples	39
Known limitations:	42
Output formats	42
SVG	42
Font limitation	42
MEI	42
Unsupported elements and attributes	43
Analytical markup	43
Articulations	43
Page-based MEI	43
MIDI	44
The MIDI output takes into account:	44
Usage	44
Timemap	44
Examples	44
Plaine and Easie	47
Humdrum	48
Toolkit methods	48
ConvertHumdrumToHumdrum	48
ConvertHumdrumToMIDI	48
ConvertMEItoHumdrum	49
Edit	49
EditInfo	49
GetAvailableOptions	50
More info here	50
GetDefaultOptions	50
GetDescriptiveFeatures	50
GetElementAttr	51
GetElementsAtTime	51
GetExpansionIdsForElement	51
GetHumdrum	52
GetHumdrumFile	52
GetID	52
GetLog	53
GetMEI	53
GetMIDIValuesForElement	53
GetNotatedIdForElement	54
GetOption	54

GetOptions	55
GetPageCount	55
GetPageWithElement	55
GetResourcePath	55
GetScale	56
GetTimeForElement	56
GetTimesForElement	56
GetVersion	57
LoadData	57
LoadFile	57
LoadZipDataBase64	58
LoadZipDataBuffer	58
RedoLayout	59
RedoPagePitchPosLayout	59
RenderData	59
RenderToMIDI	60
RenderToMIDIFile	60
RenderToPAE	60
RenderToPAEFile	61
RenderToSVG	61
RenderToSVGFile	61
RenderToTimemap	62
RenderToTimemapFile	62
ResetOptions	63
ResetXmlIdSeed	63
SaveFile	63
Select	64
SetInputFrom	64
SetOption	65
SetOptions	65
SetOutputTo	65
SetResourcePath	66
SetScale	66
Toolkit	67
ValidatePAE	67
ValidatePAEFile	67
Toolkit options	68
Base short options	68
Input and page layout options	69
General layout options	72
Element selectors and processing	77
Element margins	77
MEI supported elements	80
Environment functions	87
SetDefaultResourcePath	87
EnableLog	87

EnableLogToBuffer	88
Installing or building from sources	89
Command-line version	89
Homebrew on macOS	89
Building on macOS or Linux	89
Basic usage	90
Additional building options	90
Uninstall a previous version	90
Windows 10	91
Xcode	91
Visual Studio	91
JavaScript and WebAssembly	91
Pre-build versions	91
NPM	92
Basic usage with NPM	92
Usage with ESM	92
Usage with CommonJS	93
Humdrum support	93
Building the toolkit	93
Python	93
Pre-build versions	93
Basic usage of the toolkit	93
Setting options	94
Building the toolkit	94
Building the toolkit without CMake	94
Building a Python wheel locally	95
Resources for versions built locally	95
Other bindings	95
Java	95
CocoaPods	96
Contributing	97
Coding guidelines	97
Formatting	97
How to install clang-format on macOS	97
How to install clang-format on Ubuntu	97
Running clang-format	97
Includes and forward declarations	97
Null and boolean	98
Integer data types	98
Class, method and member names	98
Use of this	99
Comments	99
LibMEI	99
Contributing workflow	100
Adding examples to the test-suite	101
Example header	101

File names	101
Additional options	102
What to expect with an open issue	102
Generate code with libMEI	102
Running LibMEI	103
Customization	103
Adding SMuFL glyphs	103
Adding the glyph to the Leipzig font file	103
Generate other font formats and the metadata	103
Add the glyph to the list of supported glyph in the XML list and re-generate the fonts	103
Table of Contents	105