

Building a Tekton Pipeline



Estimated time needed: 40 minutes

Welcome to the hands-on lab for **Building a Tekton Pipeline**. In this lab, you will create a simple Tekton pipeline with one task in Step 1 and then add a parameter to it in Step 4. You will learn best practices for structuring a Tekton pipeline project and how to author Tekton pipelines and tasks so that they are easy to use and parameterize. You will see that Tekton allows you to reuse your pipeline-as-code artifacts, and you will look at practical approaches to publishing your pipeline and task definitions to a Git repository.

Learning Objectives

After completing this lab, you will be able to:

- Create a base pipeline and task to echo a message.
- Apply parameters to the task and pipeline.
- Apply additional parameters to a pipeline to clone a Git repository.

Prerequisites

You will need the following to complete the exercises in this lab:


- A basic understanding of YAML
- A GitHub account
- An intermediate-level knowledge of CLIs

Set Up the Lab Environment

You have a little preparation to do before you can start the lab.

Open a Terminal

Open a terminal window by using the menu in the editor: Terminal > New Terminal.

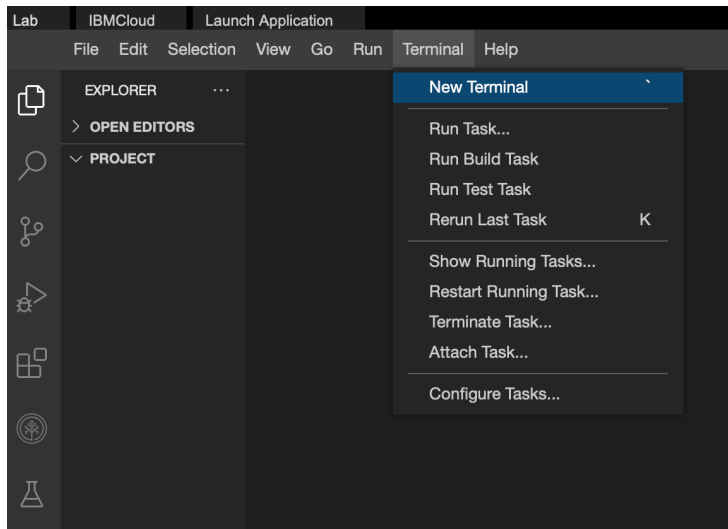

In the terminal, if you are not already in the `/home/project` folder, change to your project folder now.

```
1. 1
1. cd /home/project
```

Copied Executed

Clone the Code Repo

Now, get the code that you need to test. To do this, use the `git clone` command to clone the Git repository:

```
1. 1
1. git clone https://github.com/ibm-developer-skills-network/wtecc-CICD_PracticeCode.git
```

Copied Executed

Your output should look similar to the image below:

```
theia@theiaopenshift-rofrano:/home/project$ git clone https://github.com/ibm-developer-skills-network/wtecc-CICD_PracticeCode.git
Cloning into 'wtecc-CICD_PracticeCode'...
remote: Enumerating objects: 37, done.
remote: Counting objects: 100% (7/7), done.
remote: Compressing objects: 100% (6/6), done.
remote: Total 37 (delta 1), reused 4 (delta 0), pack-reused 30
Unpacking objects: 100% (37/37), done.
theia@theiaopenshift-rofrano:/home/project$
```

Change to the Labs Directory


Once you have cloned the repository, change to the labs directory.

```
1. 1
1. cd wtecc-CICD_PracticeCode/labs/01_base_pipeline/
```

Copied Executed

Navigate to the Labs Folder

Navigate to the `labs/01_base_pipeline` folder in left explorer panel. All of your work will be completed with the files in this folder.

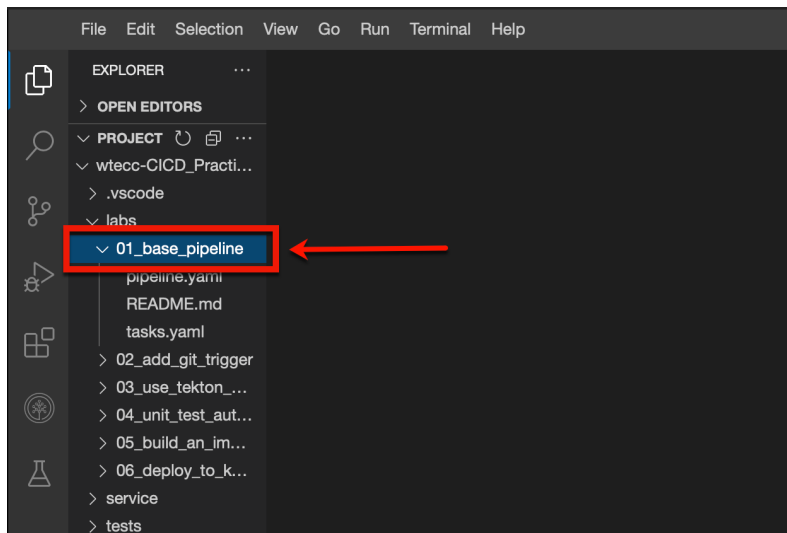

You are now ready to start the lab.

Optional

If working in the terminal becomes difficult because the command prompt is very long, you can shorten the prompt using the following command:

```
1. 1
1. export PS1=~\[ \[033[01;32m\]\u\[\[033[00m\]: \[ \[033[01;34m\]\V\[\[033[00m\]\]\$ "
```

[Copied!](#) [Executed!](#)

Step 1: Create an echo Task

In true computer programming tradition, the first task you create will echo "Hello World!" to the console.

There is starter code in the `labs/01_base_pipeline` folder for a task and a pipeline. Navigate to this folder in left explorer panel, and open the `tasks.yaml` file to edit it:

[Open tasks.yaml in IDE](#)

It should look like this:

```
1. 1
2. 2
3. 3
4. 4
5. 5
6. 6

1. apiVersion: tekton.dev/v1beta1
2. kind: Task
3. metadata:
4.   name: <place-name-here>
5. spec:
6.   steps:
```

[Copied!](#)

You will now create a **hello-world** task.

Your Task

1. The first thing you want to do is give the task a good name. Change `<place-name-here>` to `hello-world`.
2. The next thing is to add a step that run a single command to include `name`, `image`, `command`, and `args`. Make the name `echo`, use the image `alpine:3`, have the command be `/bin/echo` and the args be `["Hello World"]`.

Hint

► [Click here for a hint.](#)

Double-check that your work matches the solution below.

Solution

▼ [Click here for the answer.](#)

```
1. 1
2. 2
3. 3
4. 4
5. 5
6. 6
7. 7
8. 8
9. 9
10. 10

1. apiVersion: tekton.dev/v1beta1
2. kind: Task
3. metadata:
4.   name: hello-world
5. spec:
6.   steps:
7.     - name: echo
8.       image: alpine:3
9.       command: ["/bin/echo"]
10.      args: ["Hello World!"]
```

[Copied!](#)

Apply it to the cluster:

```
1. 1
1. kubectl apply -f tasks.yaml
```

[Copied!](#) [Executed!](#)

Step 2: Create a hello-pipeline Pipeline

Next, you will create a very simple pipeline that only calls the `hello-world` task that you just created. Navigate to this folder in left explorer panel, and open the `pipeline.yaml` file to edit it:

[Open pipeline.yaml in IDE](#)

It should look like this:

```
1. 1
2. 2
3. 3
4. 4
5. 5
6. 6

1. apiVersion: tekton.dev/v1beta1
2. kind: Pipeline
3. metadata:
4.   name: <place-name-here>
5. spec:
6.   tasks:
```

[Copied!](#)

You will now create a **hello-pipeline** pipeline.

Your Task

1. The first thing you want to do is give the pipeline a good name. Change `<place-name-here>` to `hello-pipeline`.
2. The next thing is to add a reference to the `hello-world` task you just created which needs a `name:` for the pipeline task, and a `taskRef:`, with a `name:` tag under it set to the name of the task you are referencing. Set the name of the pipeline task to `hello` and the name of the task you are referencing as `hello-world`.

Hint

► [Click here for a hint.](#)

Double-check that your work matches the solution below.

Solution

▼ [Click here for the answer.](#)

```
1. 1
```

```
2. 2
3. 3
4. 4
5. 5
6. 6
7. 7
8. 8
9. 9

1. apiVersion: tekton.dev/v1beta1
2. kind: Pipeline
3. metadata:
4.   name: hello-pipeline
5. spec:
6.   tasks:
7.     - name: hello
8.       taskRef:
9.         name: hello-world
```

Copied

Apply it to the cluster:

```
1. 1
1. kubectl apply -f pipeline.yaml
```

Copied Executed

You are now ready to run your pipeline and see if it works.

Step 3: Run the hello-pipeline

Run the pipeline using the Tekton CLI:

```
1. 1
1. tkn pipeline start --showlog hello-pipeline
```

Copied Executed

You should see the output:

```
1. 1
2. 2
3. 3

1. PipelineRun started: hello-pipeline-run-9vkkb
2. Waiting for logs to be available...
3. [hello : echo] Hello World!
```

Copied

Congratulations! You just ran your first pipeline from a pipeline and task that you created.

Step 4: Add a parameter to the task

Hopefully the hello-world task has given you a sense for how pipelines call tasks. Now it is time to make that task a little more useful by making it print any message that you want, not just "Hello World".

To do this, you will add a parameter called `message` to the task and use that parameter as the message that it echoes. You will also rename the task to `echo`.

Edit the `tasks.yaml` file to add the parameter to both the input and the echo command:

Open tasks.yaml in IDE

Your Task

1. Change the name of the task from `hello-world` to `echo` to more accurately reflect its new functionality, by changing the `name` in the `metadata` section.
2. Add a `params` section to the task with a parameter that has a `name` of "message", a `type` of "string", and a `description` of "The message to echo".
3. Change the name of the step from `echo` to `echo-message` to better describe its new functionality.
4. Modify the `args` tag to use the message parameter you just created.

Hint

► Click here for a hint.

Double-check that your work matches the solution below.

Solution

▼ Click here for the answer.

```
1. 1
2. 2
3. 3
4. 4
5. 5
6. 6
7. 7
8. 8
9. 9
10. 10
11. 11
12. 12
13. 13
14. 14

1. apiVersion: tekton.dev/v1beta1
2. kind: Task
3. metadata:
4.   name: echo
5. spec:
6.   params:
7.     - name: message
8.       description: The message to echo
9.       type: string
10.  steps:
11.    - name: echo-message
12.      image: alpine:3
13.      command: [sh,-c,echo]
14.      args: ["$(params.message)"]
```

Copied

Apply the new task definition to the cluster:

```
1. 1
1. kubectl apply -f tasks.yaml
```

Copied Executed

Step 5: Update the hello-pipeline

You now need to update the pipeline to pass the message that you want to send to the `echo` task so that it can echo the message to the console.

Edit the `pipeline.yaml` file to add the parameter:

Open pipeline.yaml in IDE

Your Task

1. Add a `params` section to the pipeline under `spec`, with a parameter that has a `name` of "message".
2. Change the `name` of the `taskRef`: from `hello-world` to the new `echo` task.
3. Add a `params` section to the task, with a parameter that has a `name` of "message" and a `value`: that is a reference to the pipeline parameter for `params.message`.

Hint

► Click here for a hint.

Double-check that your work matches the solution below.

Solution

▼ Click here for the answer.

```
1. 1
2. 2
3. 3
4. 4
5. 5
6. 6
7. 7
8. 8
9. 9
10. 10
11. 11
12. 12
13. 13
14. 14

1. apiVersion: tekton.dev/v1beta1
2. kind: Pipeline
3. metadata:
4.   name: hello-pipeline
5. spec:
6.   params:
7.     - name: message
8.   tasks:
9.     - name: hello
10.      taskRef:
11.        name: echo
12.      params:
13.        - name: message
14.          value: "$(params.message)"
```

Copied

Apply it to the cluster:

```
1. 1
1. kubectl apply -f pipeline.yaml
```

Copied! Executed!

Step 6: Run the message-pipeline

Run the pipeline using the Tekton CLI:

```
1. 1
2. 2
3. 3

1. tkn pipeline start hello-pipeline \
2.   --showlog \
3.   -p message="Hello Tekton!"
```

Copied! Executed!

You should see the output:

```
1. 1
2. 2
3. 3

1. PipelineRun started: hello-pipeline-run-9qf42
2. Waiting for logs to be available...
3. [hello : echo-message] Hello Tekton!
```

Copied!

Congratulations! You just created and ran a pipeline that requires a parameter.

Step 7: Create a checkout Task

In this step, you will combine your knowledge of running a command in a container with your knowledge of passing parameters, to create a task that checks out your code from GitHub as the first step in a CD pipeline.

Create checkout task

You can have multiple definitions in a single yaml file by separating them with three dashes --- on a single line. In this step, you will add a new task to tasks.yaml that uses the bitnami/git:latest image to run the git command passing in the branch name and URL of the repo you want to clone.

Open the tasks.yaml file to create a new task:

Open tasks.yaml in IDE

Add three dashes on a separate line:

```
1. 1
1. ---
```

Copied!

You are now ready to add your new task.

Your Task

Your new task will create a Tekton task that accepts a repository URL and a branch name and calls git clone to clone your source code.

1. Create a new task and name it checkout.
2. Add a parameter named repo-url with a type: of string and a description: of "The URL of the git repo to clone".
3. Add a second parameter named branch with a type: of string and a description: of "The branch to clone".
4. Add a step with the name: "checkout" that uses the bitnami/git:latest image to run the git command by specifying clone and --branch parameters and passing both the params created in spec as the arguments.

Hint

► Click here for a hint.

Double-check that your work matches the solution below.

Solution

▼ Click here for the answer.

```
1. 1
2. 2
3. 3
4. 4
5. 5
6. 6
7. 7
8. 8
9. 9
10. 10
11. 11
12. 12
13. 13
14. 14
15. 15
16. 16
17. 17
18. 18

1. ---
2. apiVersion: tekton.dev/v1beta1
3. kind: Task
4. metadata:
5.   name: checkout
6. spec:
7.   params:
8.     - name: repo-url
9.       description: The URL of the git repo to clone
10.      type: string
11.     - name: branch
12.       description: The branch to clone
13.      type: string
14.   steps:
15.     - name: checkout
16.       image: bitnami/git:latest
17.       command: [git]
18.       args: ["clone", "--branch", "${params.branch}", "${params.repo-url}"]
```

Copied!

Apply it to the cluster:

```
1. 1

1. kubectl apply -f tasks.yaml
```

Copied! Executed!

Your output should look like this:

```
1. 1
2. 2

1. task.tekton.dev/echo configured
2. task.tekton.dev/checkout created
```

Copied!

The echo task was unchanged and the checkout task has been created.

Step 8: Create the cd-pipeline Pipeline

Finally, you will create a pipeline called cd-pipeline to be the starting point of your Continuous Delivery pipeline.

Open the pipeline.yaml file to create a new pipeline called cd-pipeline:

Open pipeline.yaml in IDE

You can use --- on a separate line to separate your new pipeline, or you can modify the existing pipeline to look like the new one.

Your Task

1. Create a new pipeline and name it cd-pipeline.
2. Add two parameters named repo-url and branch.
3. Set the default: for branch to "master".
4. Add a task with the name: "clone" that has a taskRef: to the checkout task that you just created.
5. Add the two parameters repo-url and branch to the task, mapping them back to the pipeline parameters of the same name.

Hint

► Click here for a hint.

Double-check that your work matches the solution below.

Solution

▼ Click here for the answer.

```
1. 1
2. 2
3. 3
4. 4
5. 5
6. 6
7. 7
```

```
8. 8
9. 9
10. 10
11. 11
12. 12
13. 13
14. 14
15. 15
16. 16
17. 17
18. 18
19. 19

1. ---
2. apiVersion: tekton.dev/v1beta1
3. kind: Pipeline
4. metadata:
5.   name: cd-pipeline
6. spec:
7.   params:
8.     - name: repo-url
9.     - name: branch
10.    default: "master"
11.   tasks:
12.     - name: clone
13.     taskRef:
14.       name: checkout
15.     params:
16.       - name: repo-url
17.       value: "${params.repo-url}"
18.       - name: branch
19.       value: "${params.branch}"
```

Copied

Apply it to the cluster:

```
1. 1
1. kubectl apply -f pipeline.yaml
```

Copied Executed

Step 9: Run the cd-pipeline

Run the pipeline using the Tekton CLI:

```
1. 1
2. 2
3. 3
4. 4

1. tkn pipeline start cd-pipeline \
2.   --showlog \
3.   -p repo-url="https://github.com/ibm-developer-skills-network/wtecc-CICD_PracticeCode.git" \
4.   -p branch="main"
```

Copied Executed

The output should look like this:

```
1. 1
2. 2
3. 3

1. PipelineRun started: cd-pipeline-run-rt6zp
2. Waiting for logs to be available...
3. [clone : checkout] Cloning into 'wtecc-CICD_PracticeCode'...
```

Copied

Step 10: Fill Out cd-pipeline with Placeholders

In this final step, you will fill out the rest of the pipeline with calls to the `echo` task to simply display a message for now. You will replace these "placeholder" tasks with real ones in future labs.

Update the pipeline.yaml file to include four placeholder tasks.

Open pipeline.yaml in IDE

Now you will add four tasks to the pipeline to lint, unit test, build, and deploy. All of these pipeline tasks will reference the `echo` task for now.

Your Task

Create a pipeline task for each of these:

Task Name	Build After	Message
lint	clone	Calling Flake8 linter...
tests	lint	Running unit tests with PyUnit...
build	tests	Building image for \$(params.repo-url) ...
deploy	build	Deploying \$(params.branch) branch of \$(params.repo-url) ...

Hint

► Click here for a hint.

You now have a base pipeline to build the rest of your tasks into.

Double-check that your work matches the solution below.

Solution

▼ Click here for the answer.

```
1. 1
2. 2
3. 3
4. 4
5. 5
6. 6
7. 7
8. 8
9. 9
10. 10
11. 11
12. 12
13. 13
14. 14
15. 15
16. 16
17. 17
18. 18
19. 19
20. 20
21. 21
22. 22
23. 23
24. 24
25. 25
26. 26
27. 27
28. 28
29. 29
30. 30
31. 31
32. 32
33. 33
34. 34
35. 35
36. 36
37. 37
38. 38
39. 39
40. 40
41. 41
42. 42
43. 43
44. 44
45. 45
46. 46
47. 47
48. 48
49. 49
50. 50
51. 51
52. 52
53. 53
54. 54
55. 55

1. ---
2. apiVersion: tekton.dev/v1beta1
3. kind: Pipeline
4. metadata:
5.   name: cd-pipeline
6. spec:
7.   params:
8.     - name: repo-url
9.     - name: branch
10.    default: "master"
11.   tasks:
12.     - name: clone
13.     taskRef:
14.       name: checkout
15.     params:
16.       - name: repo-url
17.       value: "${params.repo-url}"
18.       - name: branch
19.       value: "${params.branch}"
20.
21.     - name: lint
22.     taskRef:
23.       name: echo
24.     params:
25.       - name: message
26.       value: "Calling Flake8 linter..."
27.     runAfter:
28.       - clone
29.
30.     - name: tests
31.     taskRef:
32.       name: echo
33.     params:
34.       - name: message
35.       value: "Running unit tests with PyUnit..."
36.     runAfter:
37.       - lint
38.
39.     - name: build
```

```
40. taskRef:
41.   name: echo
42.   params:
43.     - name: message
44.       value: "Building image for $(params.repo-url) ..."
45.   runAfter:
46.     - tests
47. - name: deploy
48.   taskRef:
49.     name: echo
50.     params:
51.       - name: message
52.         value: "Deploying $(params.branch) branch of $(params.repo-url) ..."
53.   runAfter:
54.     - build
55.
```

Copied

Apply it to the cluster:

```
1. 1
1. kubectl apply -f pipeline.yaml
```

Copied Executed

Step 11: Run the cd-pipeline

Run the pipeline using the Tekton CLI:

```
1. 1
2. 2
3. 3
4. 4

1. tkn pipeline start cd-pipeline \
2. --showlog \
3. -p repo-url="https://github.com/ibm-developer-skills-network/wtecc-CICD_PracticeCode.git" \
4. -p branch="main"
```

Copied Executed

The output will look like this:

```
1. 1
2. 2
3. 3
4. 4
5. 5
6. 6
7. 7
8. 8
9. 9
10. 10
11. 11

1. PipelineRun started: cd-pipeline-run-wvfzx
2. Waiting for logs to be available...
3. [clone : checkout] Cloning into 'wtecc-CICD_PracticeCode' ...
4.
5. [[lint : echo-message] Calling Flake8 linter...]
6.
7. [tests : echo-message] Running unit tests with PyUnit...
8.
9. [build : echo-message] Building image for https://github.com/ibm-developer-skills-network/wtecc-CICD_PracticeCode.git ...
10.
11. [deploy : echo-message] Deploying main branch of https://github.com/ibm-developer-skills-network/wtecc-CICD_PracticeCode.git ...
```

Copied

Conclusion

Congratulations! You are now able to create a Tekton pipeline and pass parameters to a pipeline.

In this lab, you learned how to create a base pipeline, specify and pass parameteres to a task and pipeline. You learned how to modify your pipeline to reference the task and configure its parameters. You also learned how to pass additional parameters to a pipeline and how to run it to echo and clone a Git repository.

Next Steps

You will learn and use GitHub Triggers in the next lab.

Author(s)

Tapas Mandal
[John I. Rofrano](#)