


Partial-update decoding: recompute only active tokens, reuse cached deltas

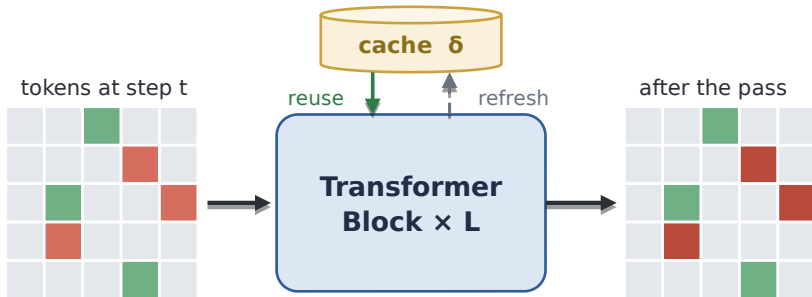

At each step t :

active = $U_t \cup U_{t-1} \rightarrow$ recomputed

inactive $\rightarrow$ reuse cached δ
(FFN/attn)

every N -th step: full refresh of δ

Decoding steps $t = 1 \dots 32$ (refresh interval $N = 3$ shown)



 U_t recompute

 U_{t-1} recompute

 inactive reuse cached δ