HTML

Day ①

HTML → Hyper Text Markup Language

↳ **Structure & formating**

* Used to convert normal text to formated text


---

* To display someting on a webpage, we use **HTML elements**.


↳ Standard elements that browser recognizes.

---

* To create elements we use **HTML Tags**

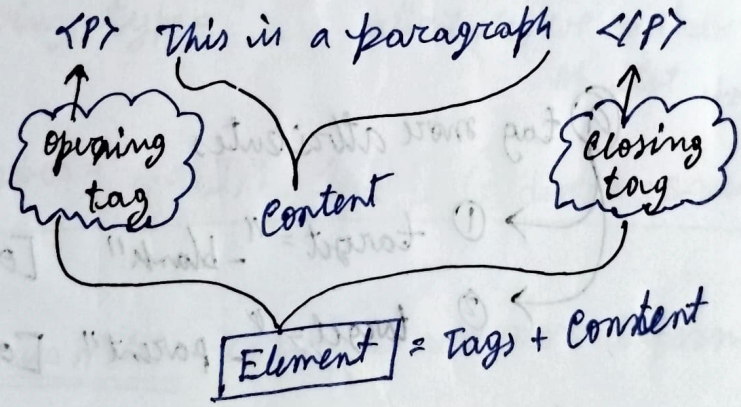

HTML Boilerplate Code → Standard formal or skeleton of writing HTML code.

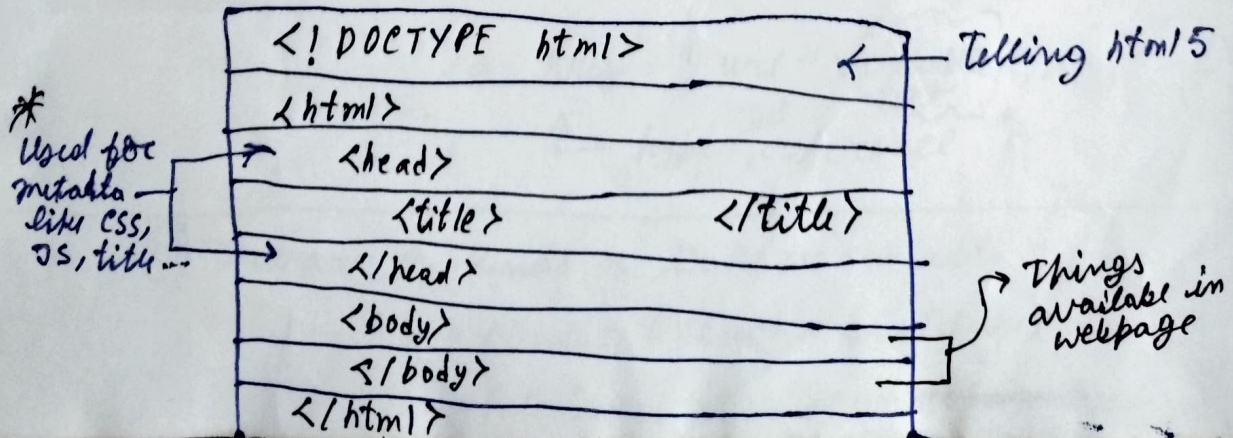

<P> → HTML element represent a paragraph.

No next line or Extra spaces here

<h1> to <h6> → Six levels of section heading.

Day ②

Lists in HTML

unordered list
or
ordered list

→

Using type = "..." attribute, we can use different types of list indexing.

types = A, a, I, i, 1 [ol] # disc ●, square ■, circle ○, none [ul]

Attributes in HTML → used to add more information to the tag.

<html lang = "en">, <ol type = "A">

lang = Attribute, "en" = Value

Anchor Element → used to add links to web page.

 clickable text

href = hypertext reference

There are 2 kinds of links we can add.

- → Absolute (direct internet links)
- → Relative (files like, home page link...)

Tags → open [br, hr, img]
Tags → close [p, div]

notes

* Indentation means proper spacing.
* NTML is not case sensitive.
* Use MDN for more knowledge.
* use   tags for contents in center.

(a) tag more attributes

① target = "_blank" [opens in OP]

② target = "_parent" [opens in same page]



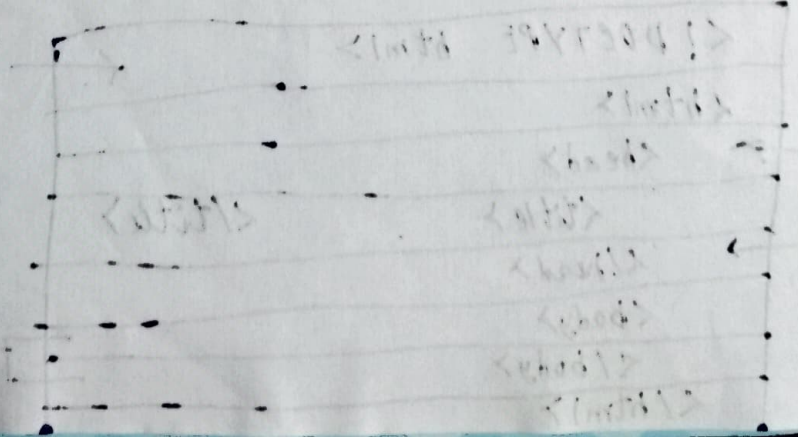


Image Element → used to add image in page.

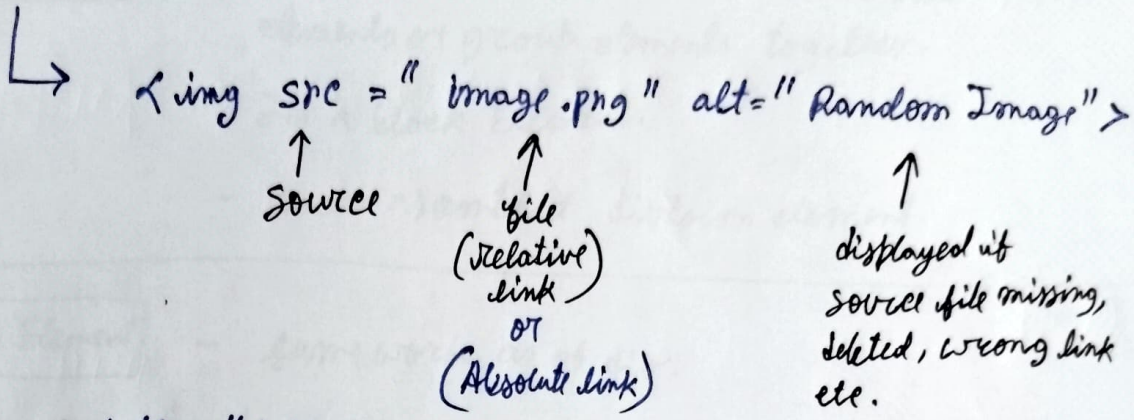


title = " hovering text " , height = " " , width = " "

Br Tag → used to add next line (line breaks)

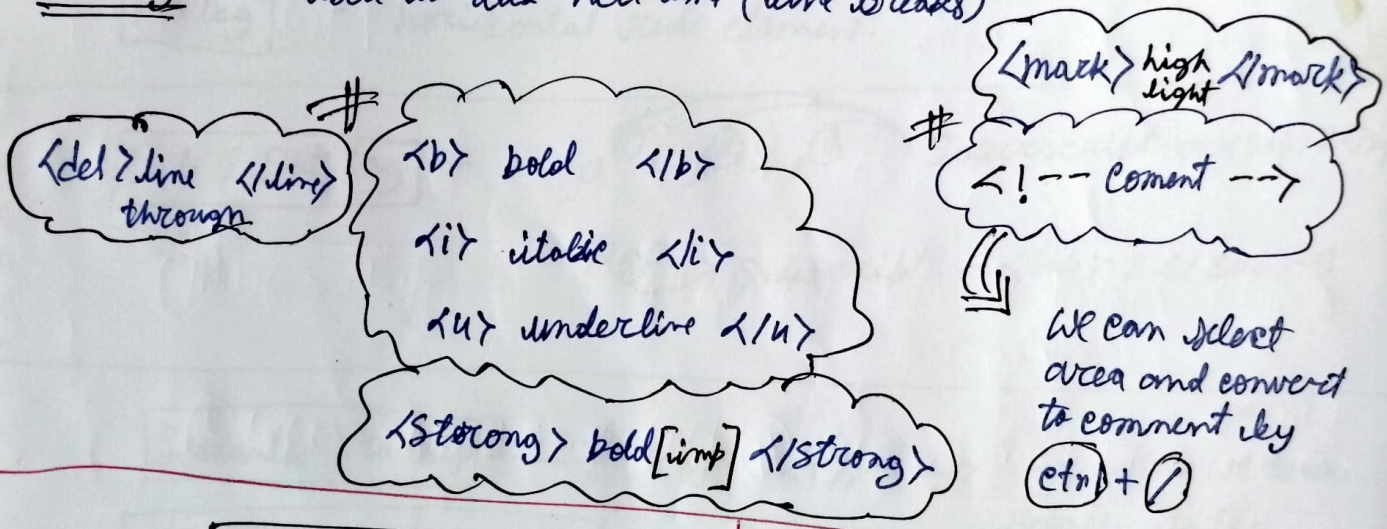

Block Element

- Takes up the whole width available.
- Start from new line.




Ex: <h1> ,

Inline Element

Day (3)

- Takes up only necessary width.
- Dont start from new line.



Ex: <a> , <img>

Div Element – Div is a container used to hold other HTML elements or group elements together.

- Its a block Element.
- Known as content division element.

Span Element – Same work as of div.

- but its an inline element.

HR Tag – horizontal rule element.

Sub & Sup tag –

$a^{2} = b^{2} + c^{2}$ → Superscript a ²

H_2O → Subscript H₂O

Semantic Markup → <h1>, <P>, <img> from the we... relates to the meaning of contat

Non Semantic Markup → , <Span>

Semantic Markup

<header> </header>

<main> </main>

<footer> </footer>

<nav> </nav>

<article> </article>

<section> </section>

<aside> </aside>

→ Used to group related contents

for unrelated content

HTML Entities

→ An HTML entity is a piece of text (string) that begins with ampersand (&) and ends with semicolon (;).

→ Used to display reserved words (which would otherwise be interpreted as HTML code), and invisible characters (like non breaking spaces)

→ Can also be used in place of chars. that are difficult to type.

→ browsers interprets them & renders correct char.

Exp:
& → &
< → <
> → >
" → "
— →   (Non breaking space)

Emmet → Set of related plugins used by developers for convinient

Some imp emmits

! + enter	⇒ Boiler plate code
*	⇒ multiplication
>	⇒ for child parents rel"
+	⇒ sibling rel"

ul > li*5 → enter

```
<ul>
  <li> </li>
  :
  <5 times>
</ul>
```

nav>ul>li + enter

```
<nav>
  <ull>
    <li> <li>
  </ul>
</nav>
```

div+p+i + enter

  →

Tables in HTML

Day (9)

```
<table>
    <caption> ---- </caption>
    <tr>                    → used to create a row
        <th> ---- </th>     → Table header
        <th> ---- </th>
    </tr>
    <tr>
        <td> ---- </td>     → Table data
        <td> ---- </td>
    </tr>
</table>
```

* border = "black" → for Borders (CSS Part)


Table Semantics →

```
<thead>  </thead>  |  <tbody>  </tbody>  |  <tfoot>  </tfoot>
```

Table Attributes

- rowspan = " "
- colspan = " "

} used to create cells which span over multiple rows & columns.

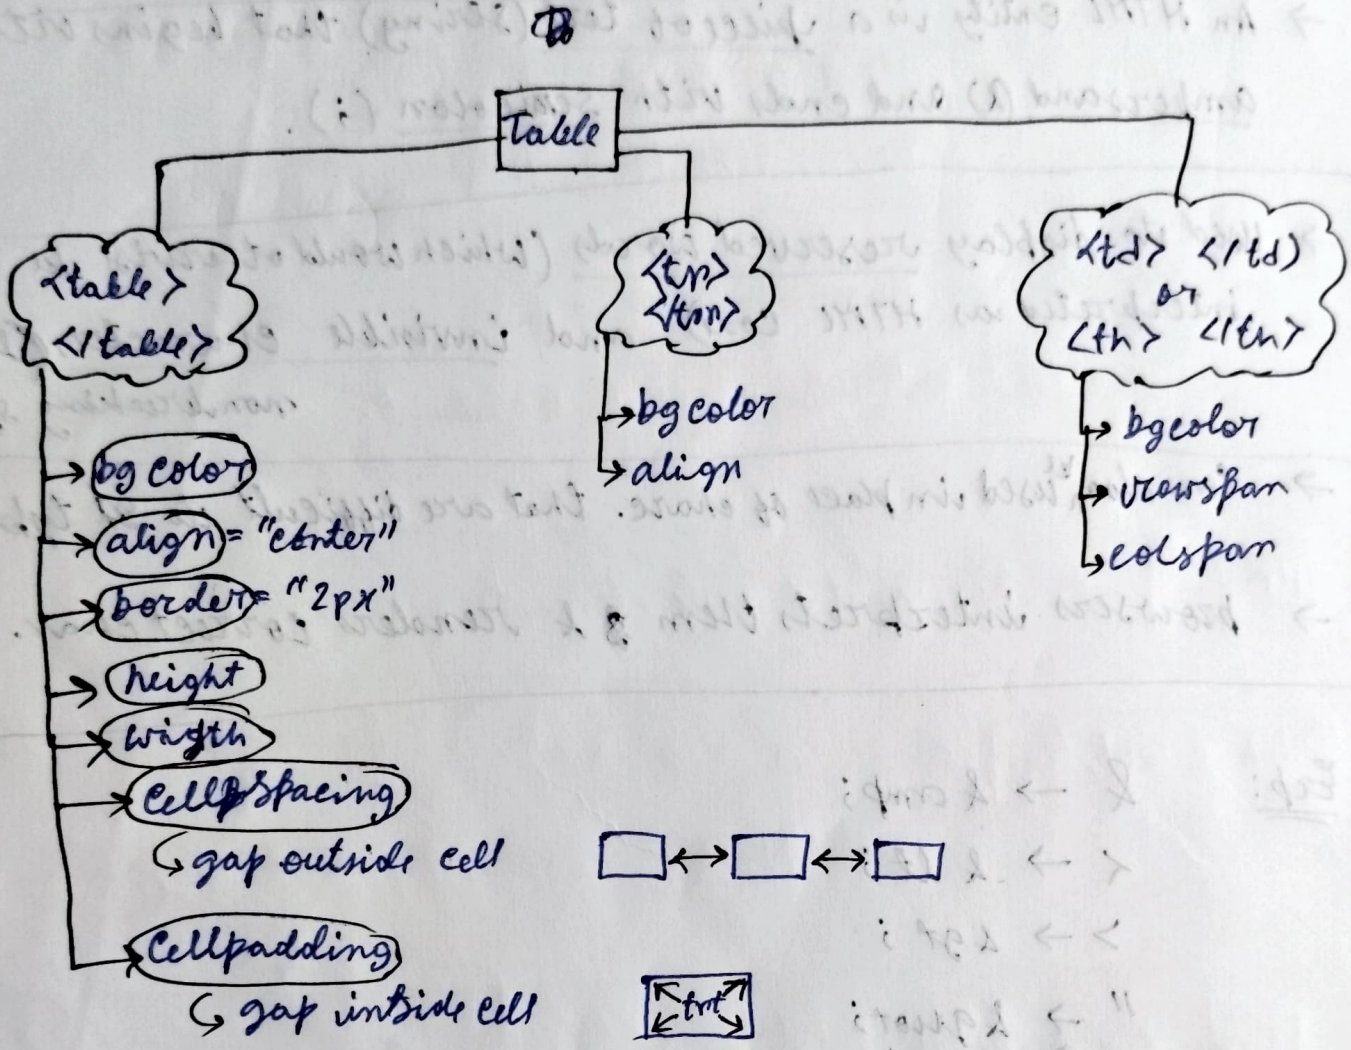
Table
<table>
</table>
bg color
align = "center"
border = "2px"
height
width
cellspacing
gap outside cell
cellpadding
gap inside cell
<tr>
</tr>
bg color
align
<td> </td>
or
<th> </th>
bgcolor
rowspan
colspan
tr

Forms in HTML – used to collect data

```
<form>
    form content
</form>
```

Action Attributes

⊛ used to define what action needs to be performed when a form is submitted or where the form should be sent. (Action Attribute)

Eg: `<form action = "/action.php" >`

Input Element

- used to create multiple form controls.
- there are multiple types of inputs that can be created using type attribute.

`<input type = " " >`

→ Attributes

→ text, password, number, time, color, date, email files, image, url

---

⊛ `<input type = "text" placeholder = "Enter Name" >`

---

label Element – represents a caption for an item in a interface. (forming a connection)


```
<form>
    username
    <input type "text" >
</form
```

This is basic

```
<label>
    username:
    <input ..... >
</label>
```

Know if you touch in username it'll redirect to the box

right approach

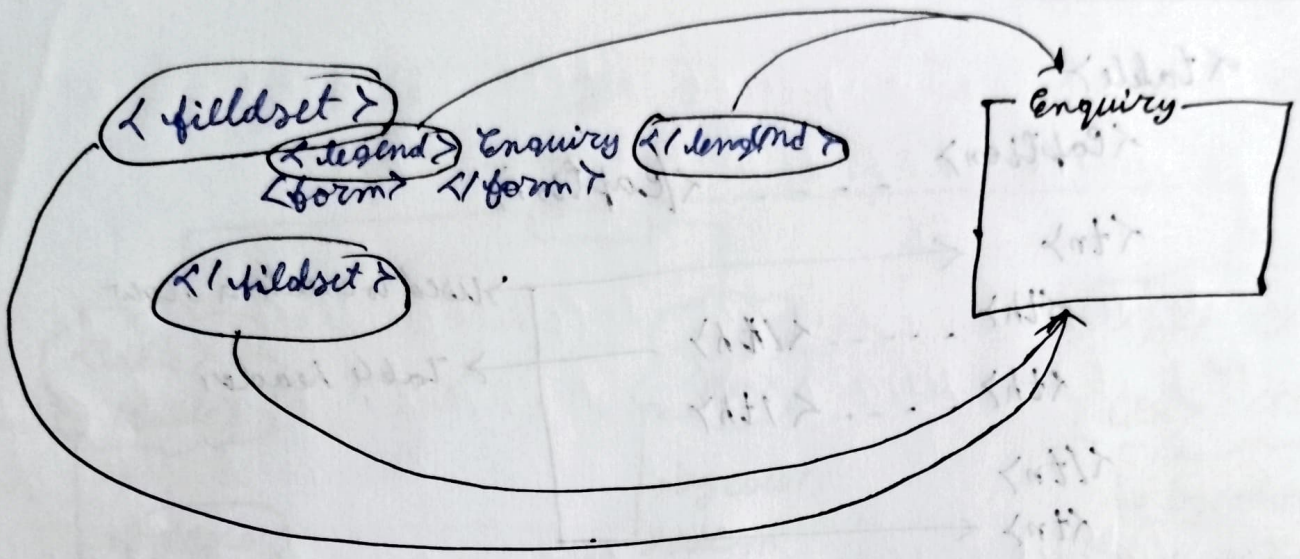
<fildset>
<legend> Enquiry </legend>
<form> </form>
</fildset>
Enquiry

label classical Approach

<input type="text" id="username" placeholder="Usernam

same value

<label for="username"> Enter Your Name: </label>

id is an unique attribute, so that here same username cant have multiple user

Button Element

<button> Submit </button>

Button type Attributes

- type="Submit"
- type="Button"
- type="Reset"

Button using Input element

<input type="Submit" value="Click Me">

type="Button"

Name Attribute

name of the form control. Submitted with the form as part of a name/value pair.

```
<input type="text" placeholder="Enter Name" id="Username"
name="username"/>
```

used to access or refer the entered value in input section

Checkbox in input type Attribute

```
<label for="age"> I am 18+ </label>
<input type="checkbox" id="Age" name="age">
```

you can also add "checked" at last for by default already checked

---

Radio Button

#for store

```
<label for="apple"> Select the Apple </label>
<input type="radio" id="apple" name="fruit" value="apple">
```

value="apple"

```
<same for Banana>
<  "  "  Mango>
"
"
```

for radio (select only one) make all names same

Select Element - for dropdown

```
<label for="profession">Choose your profession</label>
<select name="profession" id="profession">
    <option value="stud">Student</option>
    <option value="dev">Developer</option>
</select>
```

use "selected" for preselect an option

Range

```
<label for="volume">Select Volume</label>
<input type="range" id="volume" min="0" max="100"
    name="vol">
```

use value="" for a default value

use step="" attribute for increase/decrease by a fix number

Text

```
<label for="feedback">Please give your feedback :</label>
<textarea id="feedback" name="fb" placeholder="Write
    here"></textarea>
```