


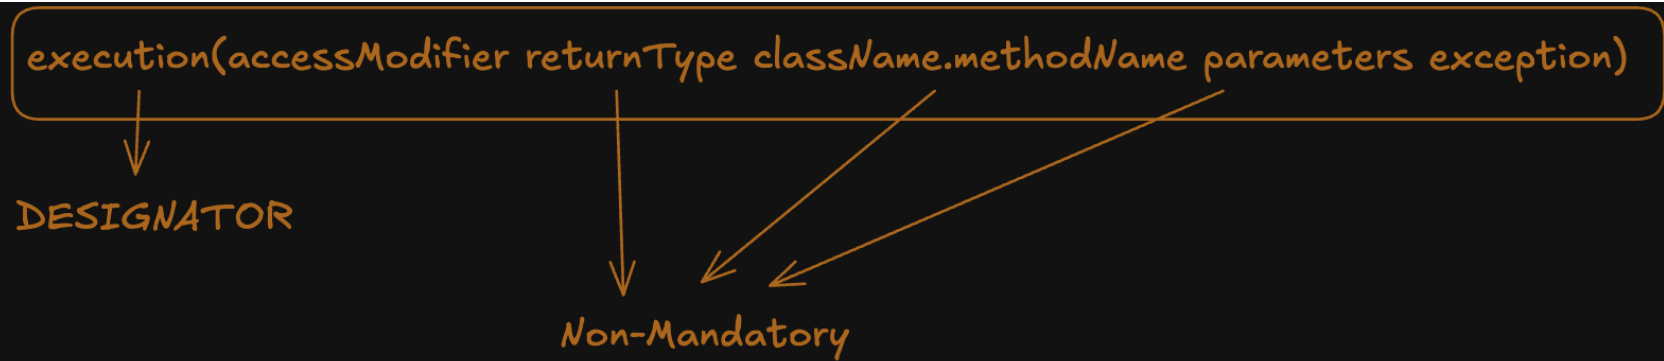

Wildcards : (*, ..)

execution -> Method level
Within --> Class level

@annotation --> Method level

bean

@within → class level
@target → class level
target → method level
args → method level
@args → method level
this → method level

```
@Service 3 usages
public class StudentService {

    public Student createStudent(Student student) {
        System.out.println("Student saved");
        return student;
    }

    public String getStudent(String s) { 1 usage
        System.out.println(s);
        return s;
    }
}
```

```
@Before("@within(org.springframework.stereotype.Service)")
public void logBeforeMethod() {
    System.out.println("Method Intercepted");
}
```

```
@Before("@target(org.springframework.stereotype.Service)")
public void logBeforeMethod() {
    System.out.println("Method Intercepted");
}
```

```
public class BaseService { no usages 1 inheritor

    public void saveStudent() { no usages
        System.out.println("Saving Student");
    }
}
```

↑ inherits


```
@Service
public class StudentService extends BaseService {

}
```

studentService.saveStudent();


```
@Before("@within(org.springframework.stereotype.Service)")
public void logBeforeMethod() {
    System.out.println("Method Intercepted");
}
```

```
@Before("@target(org.springframework.stereotype.Service)")
public void logBeforeMethod() {
    System.out.println("Method Intercepted");
}
```

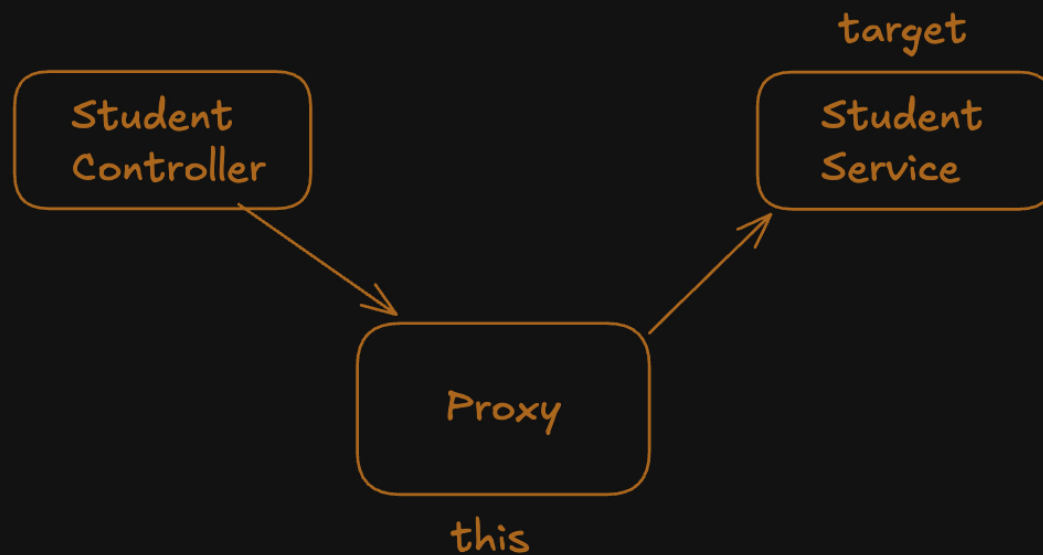

CGLIB Proxy (Default)
JDK Dynamic Proxy

CGLIB Proxy (Default)
JDK Dynamic Proxy

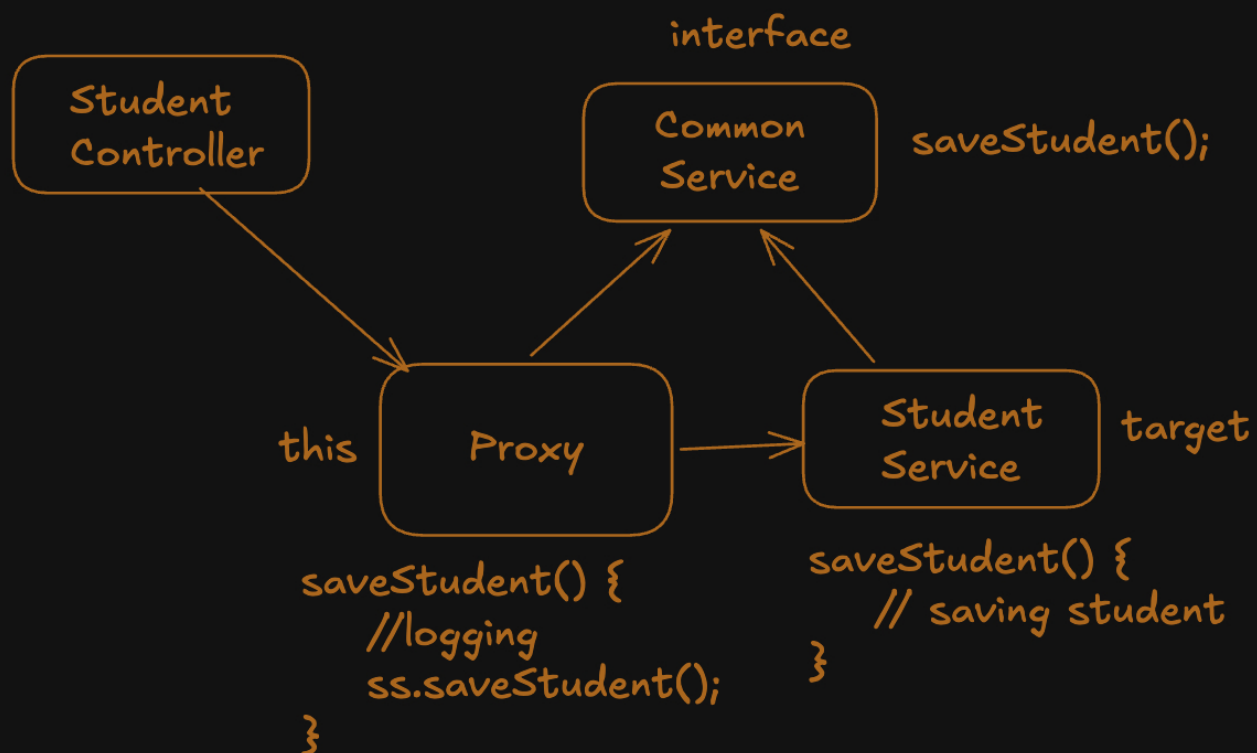

CGLIB Proxy

