
19 August 2026 11:39

Pass by value

```c
int main()
{
    int num1 = 25, num2 = 50;
    swap(num1,num2);
    return 0;
}
void swap(int n1, int n2)
{
    int temp = n1;
    n1 = n2;
    n2 = temp;
}
```

pass by values


swap was done on the copy

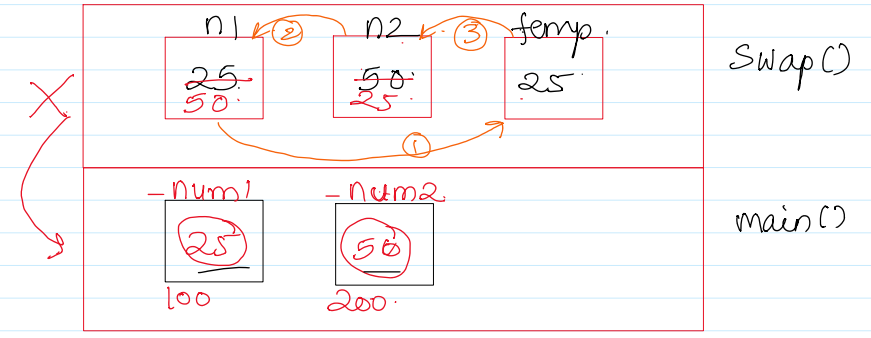

Pass by Address

```c
swap_by_address(&num1,&num2);
    return 0;
}

void swap_by_address(int *ptr1,int *ptr2)
{
    int temp = *ptr1;
    *ptr1 = *ptr2;
    *ptr2 = temp;
}
```

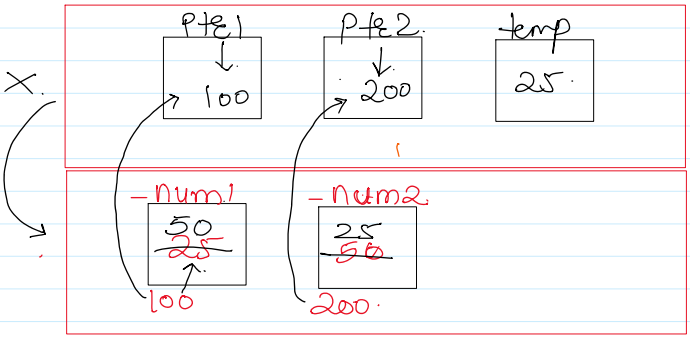

① int temp = *ptr1;
temp = value at ptr1;
= value at 100;
temp = 25;

② *ptr1 = *ptr2;
value at ptr1 = value at ptr2;
value at 100 = value at 200;
value at 100 = 50;

③ *ptr2 = temp;
value at ptr2 = temp;
value at 200 = 25;