

```c
// Passing structure to a function
#include<stdio.h>
struct employee
{
    int emp_id;
    char name[20];
    float salary;
};
void accept_data(struct employee e1);
void print_data(struct employee e1);
int main()
{
    struct employee e1;
    accept_data(e1);
    print_data(e1);
    return 0;
}
void accept_data(struct employee e1)
{
    printf("Enter the employee info :");
    printf("Enter the emp id :");
    scanf("%d",&e1.emp_id);
    printf("Enter the name :");
    scanf("%s",&e1.name);
    printf("Enter the salary :");
    scanf("%f",&e1.salary);
}
void print_data(struct employee e1)
{
    printf("Employee info :\n");
    printf("Empid = %d  name  = %s  salary = %.2f
\n",e1.emp_id,e1.name,e1.salary);
}
```

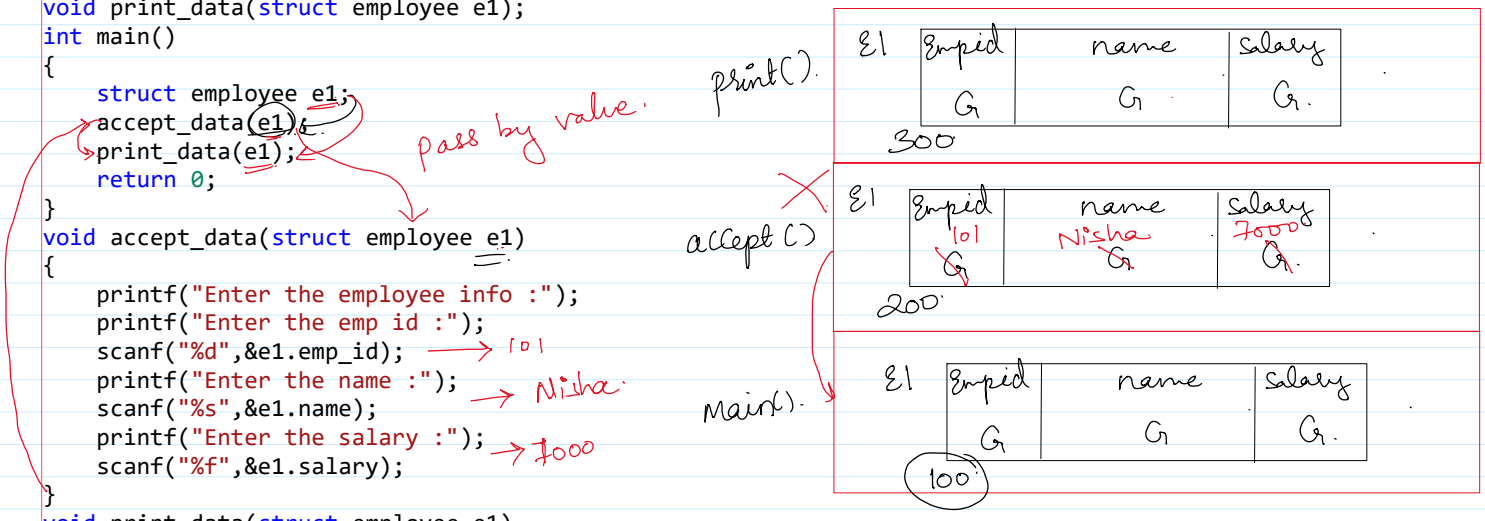


```c
Int main()
{
    struct Employee e1;
   accept_data_by_address(&e1);
   Print_data(e1);


}

void accept_data_by_address(struct employee *ptr)
{
    printf("Enter the employee info :\n");
    printf("Enter the emp id :");
    scanf("%d",&ptr->emp_id);
    printf("Enter the name :");
    scanf("%s",&ptr->name);
```

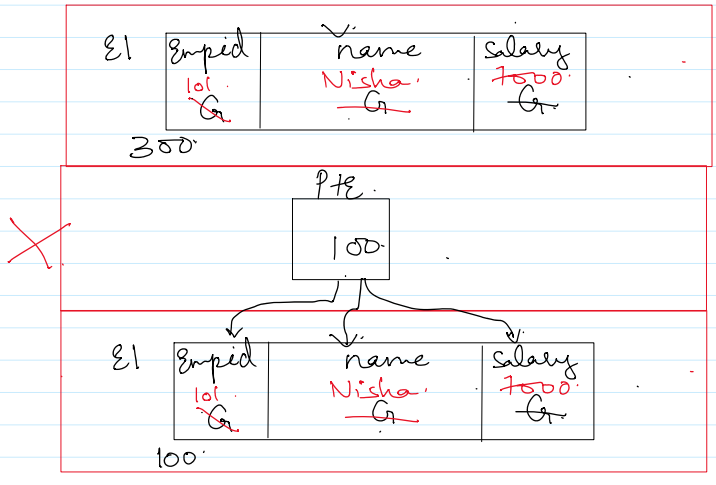

```
    printf("Enter the emp id :");
    scanf("%d",&ptr->emp_id);
    printf("Enter the name :");
    scanf("%s",&ptr->name);
    printf("Enter the salary :");
    scanf("%f",&ptr->salary);
}

void print_data(struct employee e1)
{
    printf("Employee info :\n");
    printf("Empid = %d  name  = %s  salary = %.2f
\n",e1.emp_id,e1.name,e1.salary);
}
```



When we want to make the changes into the variable through the function, pass the structure variable by address.
When we want to access or print the variable, we can pass it by value.